




D-Sub Connector
High Density
Solder pin angled .350"
with through hole

Directive 2002/95/EC
„RoHS“
Compliant

(click on the schematic(s) for a more detailed view)

Socket connector

Plug connector

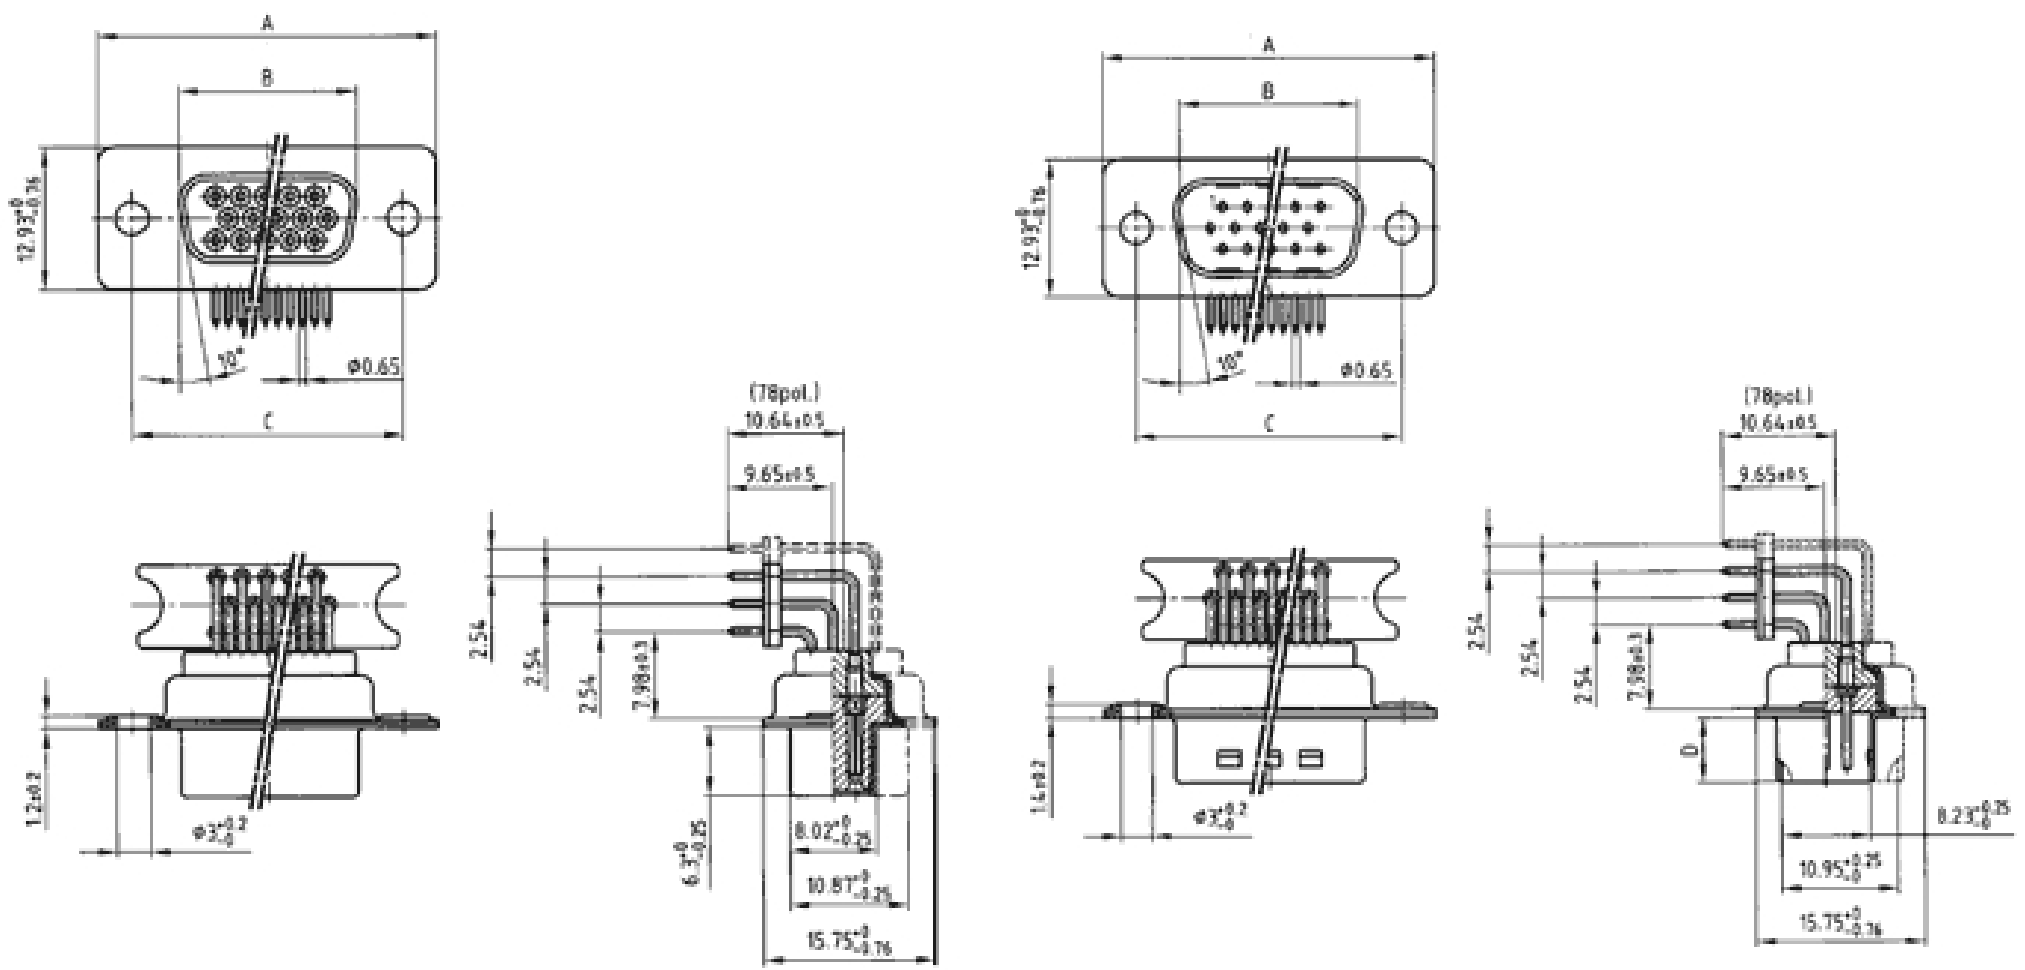

Socket connector:

No. of pos.	A -0,76	B-0,25	C
15	31,19	16,46	25,00 ^{+0,12} _{-0,13}
26	39,52	24,79	33,30 ^{+0,15} _{-0,10}
44	53,42	38,50	47,04 ^{+0,13}
62	69,70	54,96	63,50 ^{+0,13}
78	67,31	52,55	61,10 ^{+0,14} _{-0,11}

Plug connector:

No. of pos.	A -0,76	B+0,25	C	D -0,30
15	31,19	16,79	25,00 ^{+0,12} _{-0,13}	6,12
26	39,52	25,12	33,30 ^{+0,15} _{-0,10}	6,12
44	53,42	38,84	47,04 ^{+0,13}	5,99
62	69,70	55,30	63,50 ^{+0,13}	5,99
78	67,31	52,68	61,10 ^{+0,14} _{-0,11}	5,99

Part Numbers

No.of Pos.	Socket connector tin plated
	UNC 4 - 40 / M 3
15	164 A 17889 X
26	164 A 17899 X
44	164 A 17909 X
62	164 A 17919 X
78	164 A 17929 X

No.of Pos.	Plug connector tin -plated with ground indent
	UNC 4 - 40 / M 3
15	163 A 17479 X
26	163 A 17489 X
44	163 A 17499 X
62	163 A 17509 X
78	163 A 17519 X

