

## isc Silicon PNP Power Transistors


**2N6437**

### DESCRIPTION

- Collector-Emitter Sustaining Voltage-  
:  $V_{CEO(SUS)} = -100V(\text{Min})$
- High DC Current Gain-  
:  $hFE = 20-80 @ I_C = -10A$
- Low Saturation Voltage-  
:  $V_{CE(sat)} = -1.0V(\text{Max}) @ I_C = -10A$
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

### APPLICATIONS

- Designed for use in industrial-military power amplifier and switching circuit applications.

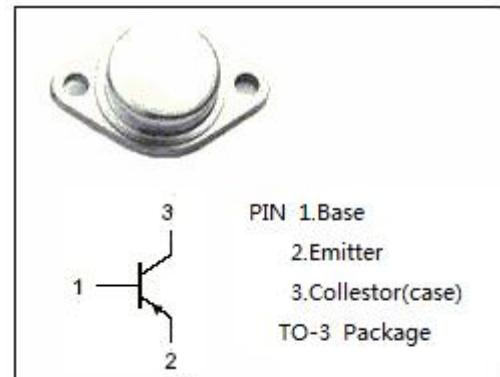


### ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-120	V
$V_{CEO}$	Collector-Emitter Voltage	-100	V
$V_{EBO}$	Emitter-Base Voltage	-6	V
$I_C$	Collector Current-Continuous	-25	A
$I_{CM}$	Collector Current-Peak	-50	A
$I_B$	Base Current-Continuous	-10	A
$P_c$	Collector Power Dissipation $@T_c=25^\circ\text{C}$	200	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-65~150	$^\circ\text{C}$

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance,Junction to Case	0.875	$^\circ\text{C}/\text{W}$

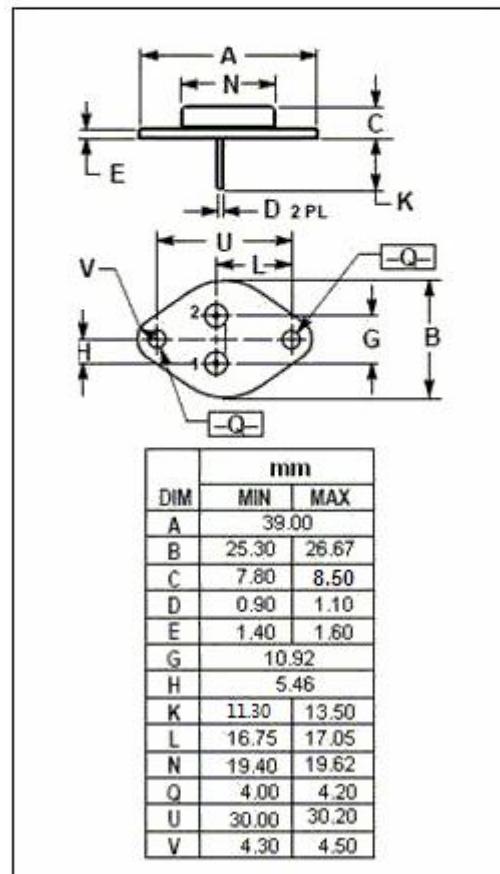

**isc Silicon PNP Power Transistors****2N6437****ELECTRICAL CHARACTERISTICS****T<sub>c</sub>=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V <sub>CEO(sus)</sub>	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = -50mA ; I <sub>B</sub> = 0	-100		V
V <sub>CE(sat)-1</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -10A; I <sub>B</sub> = -1A		-1.0	V
V <sub>CE(sat)-2</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -25A; I <sub>B</sub> = -2.5A		-1.8	V
V <sub>BE(sat)-1</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = -10A; I <sub>B</sub> = -1A		-1.8	V
V <sub>BE(sat)-2</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = -25A; I <sub>B</sub> = -2.5A		-2.5	V
I <sub>CEO</sub>	Collector Cutoff Current	V <sub>CE</sub> = -50V; I <sub>B</sub> = 0		-50	µ A
I <sub>CBO</sub>	Collector Cutoff Current	V <sub>CB</sub> = -120V; I <sub>E</sub> = 0		-10	µ A
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = -6V; I <sub>C</sub> = 0		-0.1	mA
h <sub>FE-1</sub>	DC Current Gain	I <sub>C</sub> = -0.5A ; V <sub>CE</sub> = -2V	30		
h <sub>FE-2</sub>	DC Current Gain	I <sub>C</sub> = -10A ; V <sub>CE</sub> = -2V	20	80	
h <sub>FE-3</sub>	DC Current Gain	I <sub>C</sub> = -25A ; V <sub>CE</sub> = -2V	12		
f <sub>T</sub>	Current-Gain—Bandwidth Product	I <sub>C</sub> = -1A ; V <sub>CE</sub> = -10V ; f <sub>test</sub> = 10MHz	40		MHz
C <sub>OB</sub>	Output Capacitance	I <sub>E</sub> = 0; V <sub>CB</sub> = -10V ; f <sub>test</sub> = 0.1MHz		700	pF

**NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.