


## isc Thyristors

## BT151-800R

### APPLICATIONS

- It is suitable to fit all modes of control found in applications such as overvoltage crowbar protection, motor control circuits in power tools and kitchen aids, in-rush current limiting circuits, capacitive discharge ignition, voltage regulation circuits etc.
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

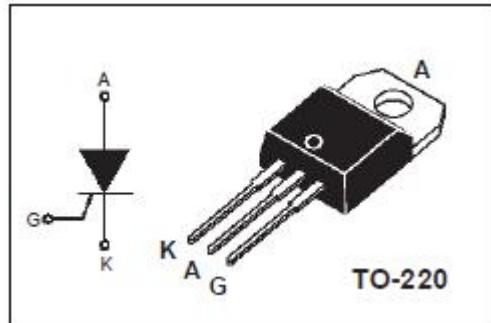

### ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER		MIN	UNIT
$V_{DRM}$	Repetitive peak off-state voltage		800	V
$V_{RRM}$	Repetitive peak reverse voltage		800	V
$I_{T(AV)}$	Average on-stage current		7.5	A
$I_{T(RMS)}$	RMS on-state current		12	A
$I_{TSM}$	Surge non-repetitive on-state current	$T_p=10\text{ms}$	100	A
$P_{G(AV)}$	Average gate power dissipation	over any 20 ms period	0.5	W
$T_j$	Operating junction temperature		110	$^\circ\text{C}$
$T_{stg}$	Storage temperature		-40~150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_c=25^\circ\text{C}$ unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$I_{RRM}$	Repetitive peak reverse current	$V_{RM}=V_{RRM}, R_{GK}= 220\Omega$ ,	$T_j=25^\circ\text{C}$	5	$\mu\text{A}$
			$T_j=125^\circ\text{C}$	0.5	mA
$I_{DRM}$	Repetitive peak off-state current	$V_{DM}=V_{DRM}, R_{GK}= 220\Omega$	$T_j=25^\circ\text{C}$	5	$\mu\text{A}$
			$T_j=125^\circ\text{C}$	0.5	mA
$V_{TM}$	On-state voltage	$I_{TM}= 23\text{A}$		1.75	V
$I_{GT}$	Gate-trigger current	$V_D = 12\text{ V}; I_T = 0.1\text{ A}$		15	mA
$V_{GT}$	Gate-trigger voltage	$V_D = 12\text{ V}; I_T = 0.1\text{ A}$		1.5	V
$R_{th(j-c)}$	Thermal resistance	Junction to case		1.3	$^\circ\text{C/W}$