INDUCTORS

Inductors for power circuits Wound ferrite HPL series(for automotive)



公TDK

AEC-Q200

HPL8012060F1 type



FEATURES

- O Achieved high-reliability inductors without joints
- O Adoption of ferrites made of LowLoss material and low-RDC by frame forming
- O Magnetic flux cancellation realizes low EMI
- Operating temperature range: –55 to +155°C (including self-temperature rise)
- Compliant with AEC-Q200

APPLICATION

O ADAS - Level5 For CPU/GPU power line

PART NUMBER CONSTRUCTION

HPL		8012060		F1		R22		Μ		RD3P	
Series	s name	LxWxH di	mensions	Inte	rnal	Induc	tance	Induc	tance	Inte	rnal
Ochec	manne	8.0x12.0x6.0 mm		code		(nH)		toler	ance	co	de

CHARACTERISTICS SPECIFICATION TABLE

L		Measuring frequency	DC resista	nce	Rated current*			Part No.		
					Isat 1		Isat 2		Itemp	
(nH) To	olerance	(kHz)	(mΩ)max.	(mΩ)typ.	(A)25deg.C	(A)125deg.C	(A)25deg.C	(A)125deg.C	(A)typ.	
220 ±2	20%	100	0.55	0.50	75.0	60.0	78.0	62.5	45.0	HPL8012060F1R22MRD3P
330 ±2	20%	100	0.55	0.50	47.0	38.0	49.0	39.5	45.0	HPL8012060F1R33MRD3P

* Rated current: smaller value of either lsat or Itemp.

Isat 1: When based on the inductance change rate (20% below the initial value)


Isat 2: When based on the inductance change rate (30% below the initial value)

Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

Measurement equipment

Measurement item	Product No.	Manufacturer
L	4294A	Keysight Technologies
DC resistance	3541	HIOKI
Rated current Isat	3260B	Wayne Kerr Electronics

* Equivalent measurement equipment may be used.




(1/4) 20230313

INDUCTORS

HPL8012060F1 type

L FREQUENCY CHARACTERISTICS

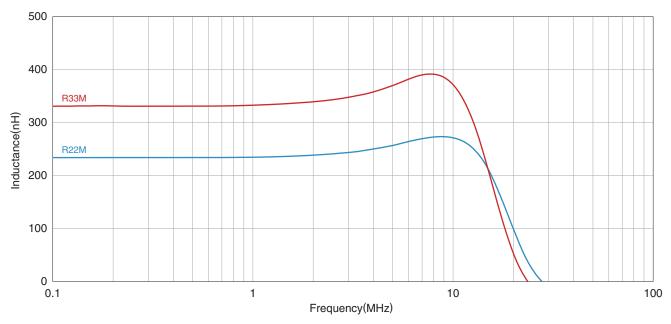


Measurement equipment

Product No.	Manufacturer
4294A	Keysight Technologies
* Equivalent measurement equipment may be used	

Equivalent measurement equipment may be used.

L VS. DC BIAS CHARACTERISTICS

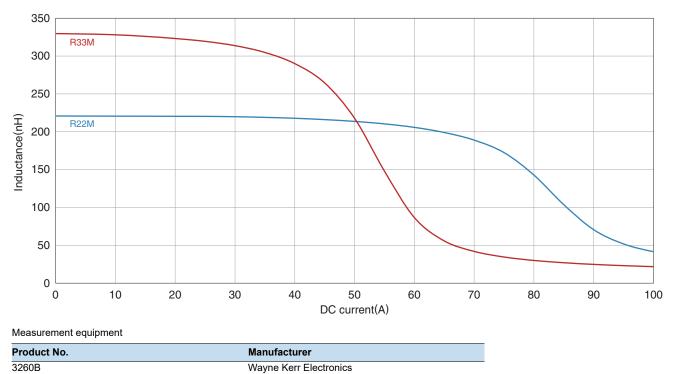



* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.


HPL8012060F1 type

SHAPE & DIMENSIONS






PACKAGING STYLE



□ TAPE DIMENSIONS



150°

1.75±0.1 11.5±0.1 Sprocket 1.5+0 4±0. 0.5 2±0.1 hole 24±0.3 £ Cavity ĸ 16±0.1 А Dimensions in mm в Туре Α κ

HPL8012060F1 (8.5) (12.5)(6.3)


PACKAGE QUANTITY

Package quantity 500 pcs/reel

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating	Storage	Individual
temperature range *	temperature range **	weight
-55 to +155 °C	-55 to +155 °C	2.6 g

* Operating temperature range includes self-temperature rise. ** The storage temperature range is for after the assembly.



180°C

Time

60 to 120s

5s max

10 to 30s

RECOMMENDED REFLOW PROFILE

RECOMMENDED LAND PATTERN

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

(3/4)

INDUCTORS

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products

REMINDERS

The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).

If the storage period elapses, the soldering of the terminal electrodes may deteriorate.

- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- O Do not use products that have received any excessive mechanical shock such as by being dropped.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- O Do not expose the products to magnets or magnetic fields.
- The performance of the product may deteriorate if coating materials are used, thus please assess the situation beforehand by taking this factor into consideration.
- O Do not use for a purpose outside of the contents regulated in the delivery specifications.
- O The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment

- (7) Transportation control equipment
- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment

(13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.