


VOLTAGE RANGE: 600V

CURRENT: 0.4 A






Features

- Glass passivated device
- Ideal for surface mounted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

Mechanical Data

- Case: SOD-123FL
plastic body over passivated junction
- Terminals : Plated axial leads,
- solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight: 0.0007 ounce, 0.02 grams



SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55
All Dimensions in mm			

Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Limits	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	600	V
Average Rectified Forward Current 50Hz Half Sine Wave Resistive Load	I_O	0.4 0.3	A A
R.M.S. Forward Current	$I_{F(RMS)}$	0.628	A
Surge Forward Current 50Hz Half Sine Wave, 1 cycle, Non-repetitive	I_{FSM}		A
Operating Junction Temperature Range	T_{jw}	-40 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 ~ +150	$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Peak Reverse Current $T_j = 25^\circ\text{C}$, $V_{RM} = V_{RRM}$	I_{RM}	—	—	10	μA
Peak Forward Voltage $T_j = 25^\circ\text{C}$, $I_{FM} = 0.4\text{A}$	V_{FM}	—	—	1.32	V
Reverse Recovery Time $I_{FM} = 0.4\text{A}$, $-di/dt = 50\text{ A}/\mu\text{s}$, $T_a = 25^\circ\text{C}$	trr	—	—	40	ns
Thermal Resistance	Junction to Lead	—	—	70	$^\circ\text{C}/\text{W}$
	Junction to Ambient *1	—	—	300	$^\circ\text{C}/\text{W}$



FIG.1

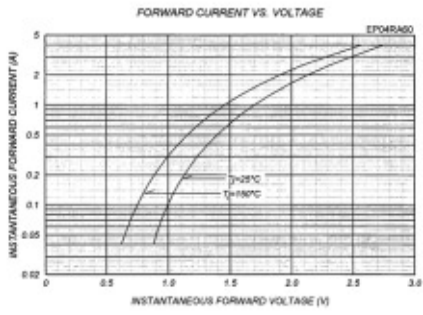


FIG.2

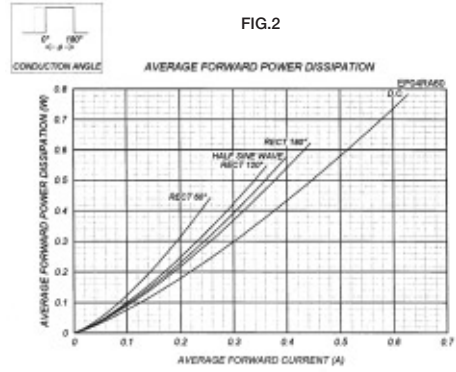


FIG.3

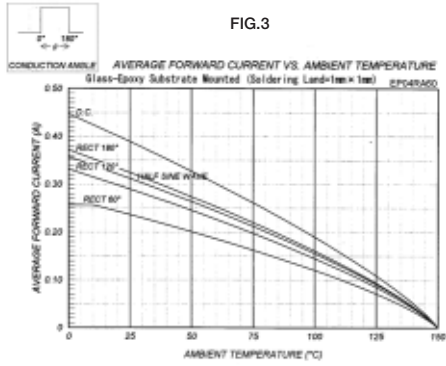


FIG.4

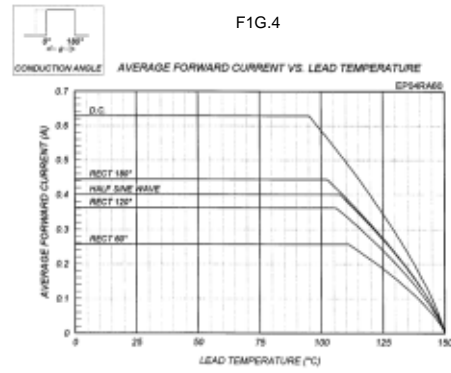


FIG.5

