


High photos/throughs (H1)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
3.5	2.5	1.0	1.9
4.0	3.0	1.0	1.9
4.5	3.5	1.0	1.9
5.0	3.0	2.0	1.9
5.5	3.5	2.0	1.9
6.0	4.0	2.0	1.9
6.5	4.5	2.0	1.9



ASSEMBLY

Ordering Information

S G -XX X XXX XX XX X X

PRITCH
05-0.5mm
08-0.8mm

F-Female
M-Male

NO. of pins
008-100pin




The female or Male seat height
0/11 or H2

10-10mm
20-20mm
30-30mm
35-35mm
40-40mm
45-45mm

Contact Plating
G2-Gold finish
G3-Gold
G4-G22u" Gold
G5-25u" Gold
G6-30u" Gold
G7-35u" Gold
G8-40u" Gold
G9-45u" Gold

Boas
0-Without boas
1-With boas

Colour
0-Black
1-Black

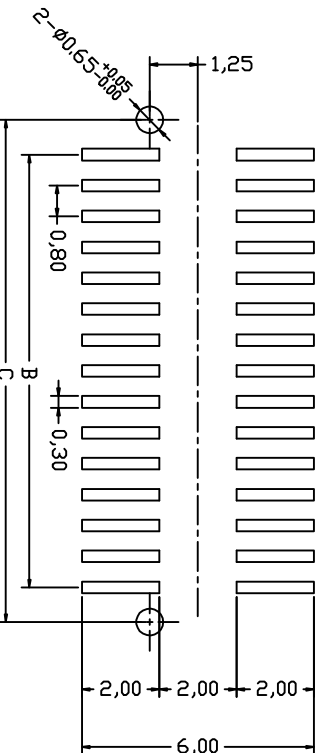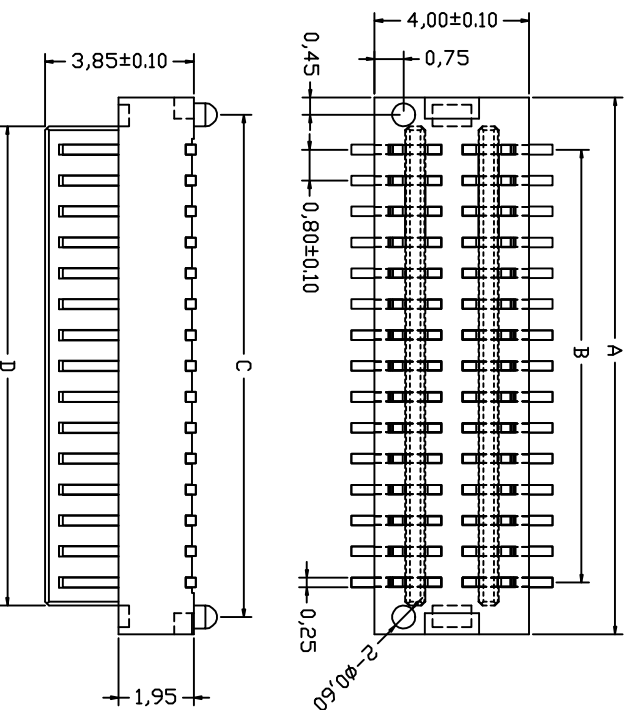

PCB PATTEN

Electrical:
 Vlotag Rating:50V AC(rms)/DC
 Current Rating:0.5A AC(rms)/DC
 Contact Resistance:50mΩ Max
 Insulation Resistance:100MΩ min
 Dielectric Withstanding Voltage:200V
 AC r. m. s
 Operating Temperature:-30℃~+90℃
 Housing:High Temperature Plastic
 Material:High Temperature Plastic
 Housing:High Temperature Plastic
 UL94V-0
 Terminal:Copper Alloy
 Material:PA9T
 Contact:phosphor Bronze, Gold Plating:

NO. of Contacts	Dimension(mm)				
	A±0.10	B±0.10	C±0.10	D±0.10	E±0.10
8	5.10	2.40	4.20	3.60	
10	5.90	3.20	5.00	4.40	
12	6.70	4.00	5.80	5.20	
14	7.50	4.80	6.60	6.00	
16	8.30	5.60	7.40	6.80	
18	9.10	6.40	8.20	7.60	
20	9.90	7.20	9.00	8.40	
22	10.70	8.00	9.80	9.20	
24	11.50	8.80	10.60	10.00	
26	12.30	9.60	11.40	10.80	
28	13.10	10.40	12.20	11.60	
30	13.90	11.20	13.00	12.40	
32	14.70	12.00	13.80	13.20	
34	15.50	12.80	14.60	14.00	
36	16.30	13.60	15.40	14.80	
38	17.10	14.40	16.20	15.60	
40	17.90	15.20	17.00	16.40	
42	18.70	16.00	17.80	17.20	
44	19.50	16.80	18.60	18.00	
46	20.30	17.60	19.40	18.80	
48	21.10	18.40	20.20	19.60	
50	21.90	19.20	21.00	20.40	
52	22.70	20.00	21.80	21.20	
54	23.50	20.80	22.60	22.00	
56	24.30	21.60	23.40	22.80	
58	25.10	22.40	24.20	23.60	
60	25.90	23.20	25.00	24.40	
62	26.70	24.00	25.80	25.20	
64	27.50	24.80	26.60	26.00	
66	28.30	25.60	27.40	26.80	
68	29.10	26.40	28.20	27.60	
70	29.90	27.20	29.00	28.40	
72	30.70	28.00	29.80	29.20	
74	31.50	28.80	30.60	30.00	
76	32.30	29.60	31.40	30.80	
78	33.10	30.40	32.20	31.60	
80	33.90	31.20	33.00	32.40	
82	34.70	32.00	33.80	33.20	
84	35.50	32.80	34.60	34.00	
86	36.30	33.60	35.40	34.80	
88	37.10	34.40	36.20	35.60	
90	37.90	35.20	37.00	36.40	
92	38.70	36.00	37.80	37.20	
94	39.50	36.80	38.60	38.00	
96	40.30	37.60	39.40	38.80	
98	41.10	38.40	40.20	39.60	
100	41.90	39.20	41.00	40.40	

单位	M	M	尺寸公差	
日期	14.08.30	0 0 0	±0.05	
比例	1:1	角度公差	±0.10	
绘制		0 0	±0.20	
校对		版本	±1'	
审核		视角	±0.5'	
		图号	A	
		包装规格		
		物料编号	SG-08 M XXX XX XX X X	
		品名	0.8mm BOARD TO BOARD 公差 双排 立式式	
		卷册	1000PCS/R	
		图号		
		审核	xx001	

深圳市山谷道电子有限公司

电话: 0755-27759859
 传真: 0755-27759850