

# MBR1060CT/FCT/CS

## 10 AMPERES SCHOTTKY BARRIER RECTIFIERS

**VOLTAGE** 60 Volt **CURRENT** 10 Ampere

### FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Low power loss, high efficiency.
- High current capability
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- Lead free in compliance with EU RoHS 2011/65/EU directive

### MECHANICAL DATA

Device Weight : 0.07 ounces (1.96grams) - TO -220AB  
 0.06 ounces (1.74grams) - ITO -220AB  
 0.01 ounces ( 0.3grams) - TO -252

- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.

Mounting Torque : Recommended 4~5 kg-cm.

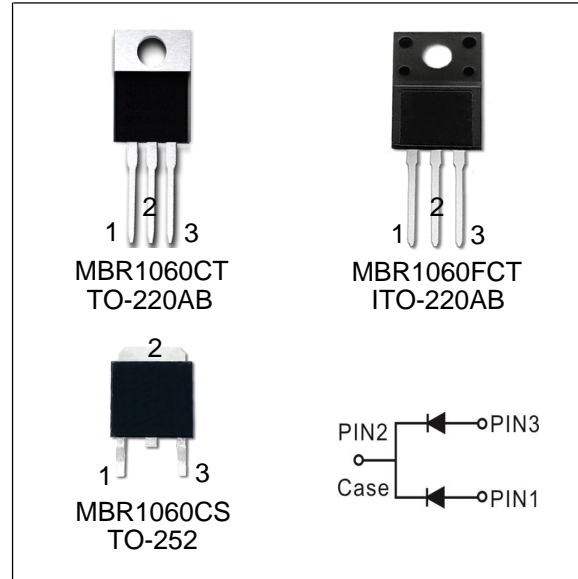

MARK: ACXXX

### MAXIMUM RATINGS( $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	60	V
Maximum average forward rectified current	$I_{F(AV)}$	5 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	190	A
Typical junction capacitance ( $V_R=4\text{V}$ , $f=1\text{MHz}$ )	$C_J$	140	pF
Typical thermal resistance per diode	$R_{\theta JC}$	2.0	$^{\circ}\text{C/W}$
Operating junction temperature range	$T_J$	-40 to + 150	$^{\circ}\text{C}$
Storage temperature range	$T_{STG}$	-40 to + 150	$^{\circ}\text{C}$

Note : 1. Mounted on infinite heatsink.

### ELECTRICAL CHARACTERISTICS( $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage per diode	$V_{BR}$	$I_R=0.1\text{mA}$	60	-	-	V
Instantaneous forward voltage per diode	$V_F$	$I_F=5\text{A}$ $T_J=25^{\circ}\text{C}$	-	0.65	0.69	V
		$I_F=5\text{A}$ $T_J=125^{\circ}\text{C}$	-	0.61	0.65	V
Reverse current per diode	$I_R$	$V_R=60\text{V}$ $T_J=25^{\circ}\text{C}$	-	2	50	$\mu\text{A}$
		$V_R=60\text{V}$ $T_J=125^{\circ}\text{C}$	-	-	50	$\text{mA}$

# MBR1060CT/FCT/CS

## RATING AND CHARACTERISTIC CURVES

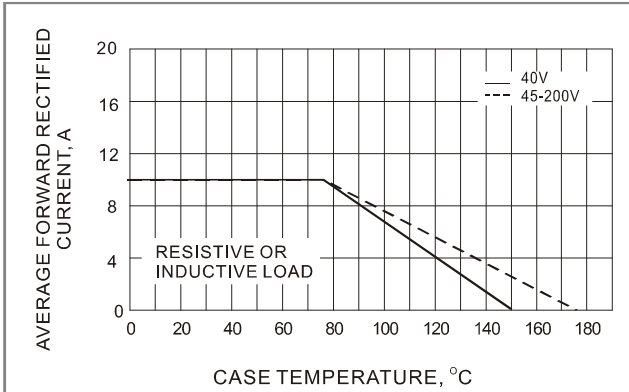


Fig.1- FORWARD CURRENT DERATING CURVE

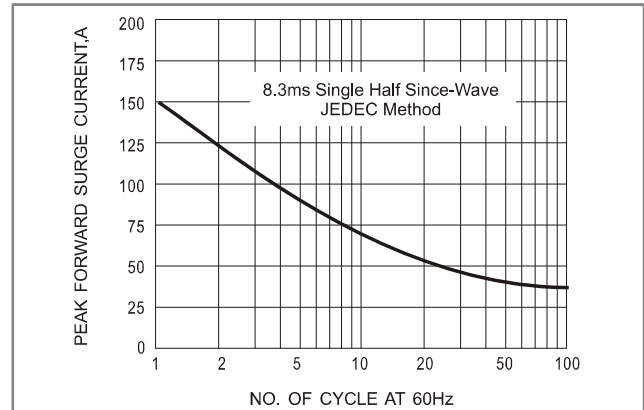


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

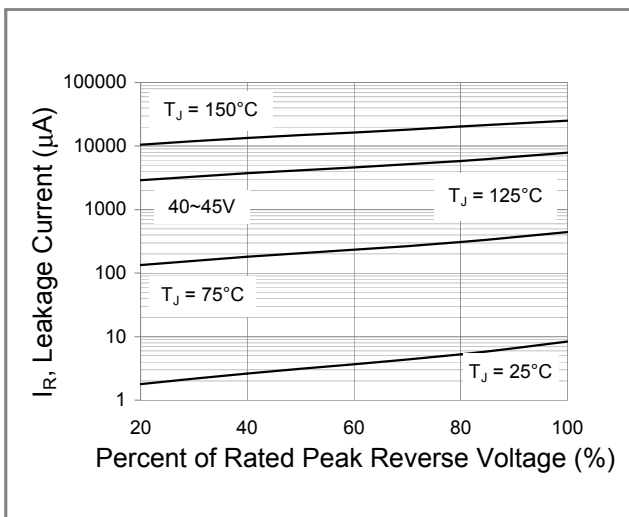


Fig.3- TYPICAL REVERSE CHARACTERISTICS

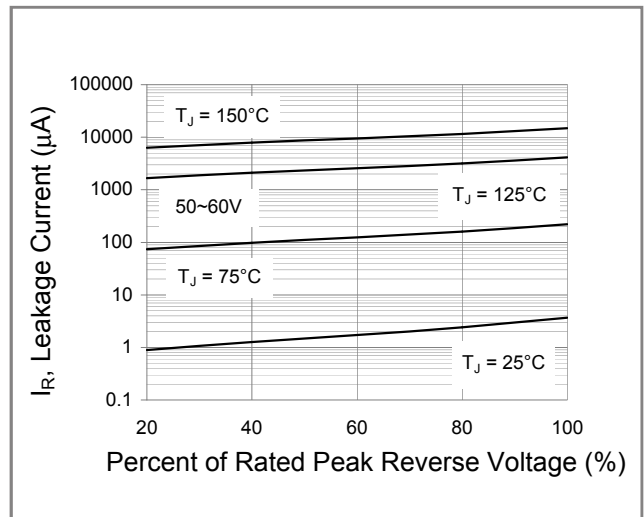


Fig.4- TYPICAL REVERSE CHARACTERISTICS

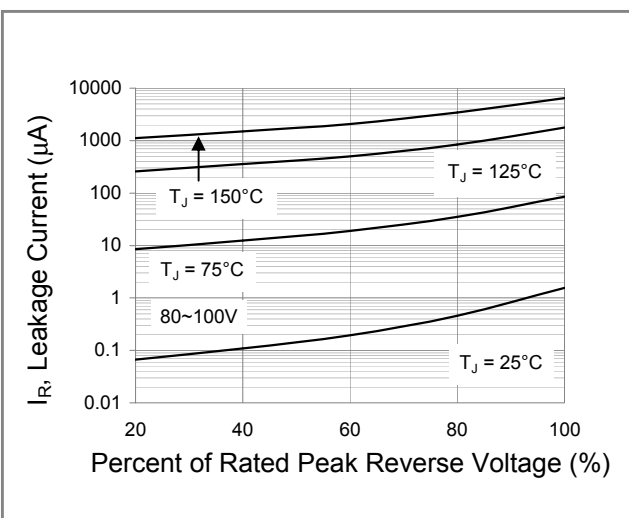


Fig.5- TYPICAL REVERSE CHARACTERISTICS

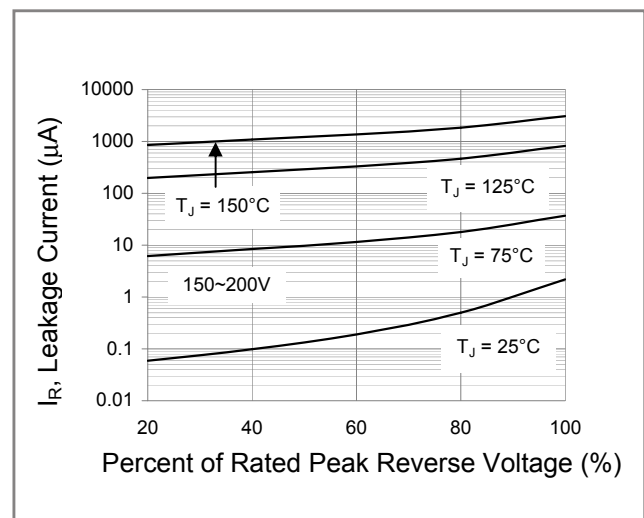
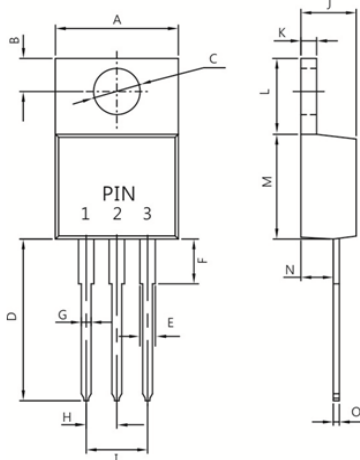



Fig.6- TYPICAL REVERSE CHARACTERISTICS

# MBR1060CT/FCT/CS

**TO-220AB**


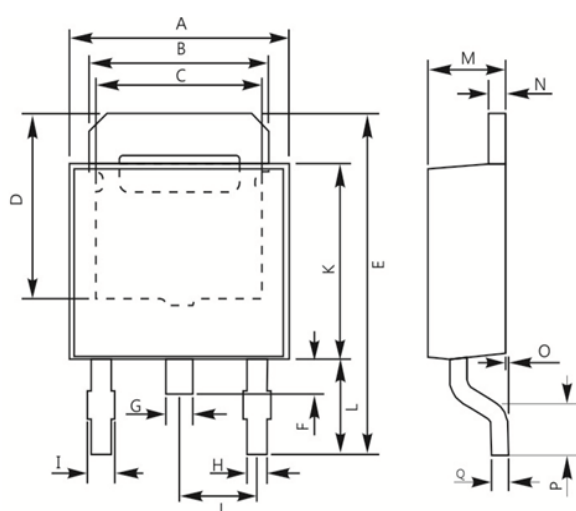
Dim.	Min.	Max.
A	----	10.50
B	2.50	3.50
C	3.50	4.10
D	13.10	13.90
E	1.15	1.49
F	----	6.35
G	0.65	0.95
H	2.29	2.79
I	4.80	5.30
J	4.40	4.80
K	1.14	1.40
L	5.84	6.86
M	8.50	9.60
N	2.03	2.92
O	0.30	0.64

All Dimensions in millimeter

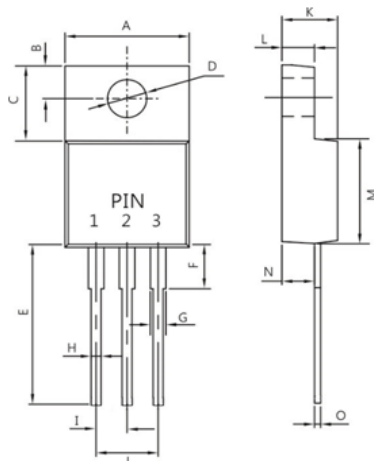**ITO-220AB**


Dim.	Min.	Max.
A	----	10.50
B	2.60	3.00
C	6.70	7.10
D	2.90	3.50
E	13.10	13.90
F	----	4.00
G	1.11	1.45
H	0.40	0.80
I	2.40	2.80
J	5.00	5.40
K	4.30	4.70
L	2.90	3.30
M	8.20	9.00
N	2.50	2.90
O	0.40	0.80

All Dimensions in millimeter

**TO-252**


Dim.	Min.	Max.
A	6.40	6.80
B	5.20	5.50
C	3.80	----
D	4.75	----
E	9.40	10.20
F	0.80	1.20
G	0.70	0.90
H	0.50	0.70
I	0.60	0.90
J	2.30	Ref.
K	5.40	5.80
L	2.40	3.00
M	2.20	2.40
N	0.45	0.55
O	----	0.15
P	1.40	1.77
Q	0.508	Typ.

All Dimensions in millimeter