
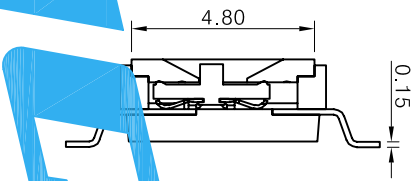


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

**RoHS**

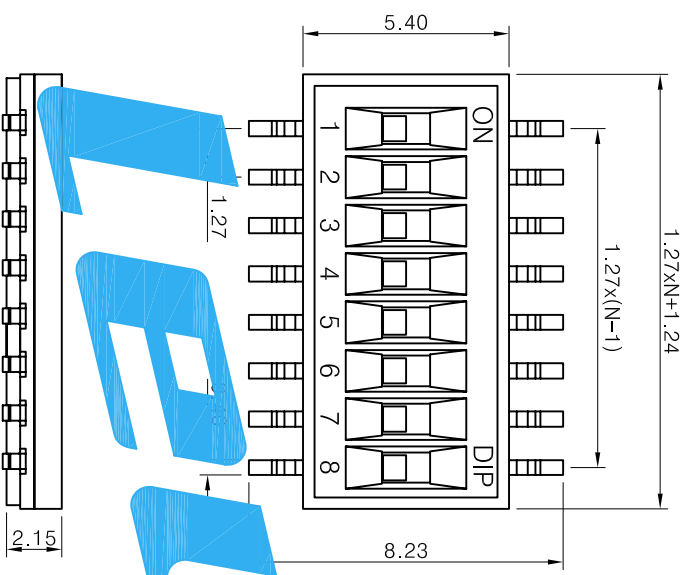

**SPECIFICATIONS:**

**MECHANICAL:**  
 Operation Force: 8N Max  
 Operation Temperature: -25°C to +70°C  
 Storage Temperature: -40°C to +85°C

**ELECTRICAL:**

Electrical Life: 2000 operations Cycles per switch 24 V/DC, 25mA  
 Nonswitching Rating: 100mA 50V/DC  
 Switching Rating: 25mA 24V/DC  
 Contact Resistance: (a) 50mΩ max. at initial  
 (b) 100mΩ Min, after life test

Insulation Resistance: 1000MΩ/Min, at 500V/DC  
 Circuit: Single pole single throw

**MATERIALS:**  
 Contact Material: Phosphor Bronze  
 Contact Plating: Gold Tin Bronze  
 Insulator Material: Polyester(UL94V-0) Standard: PBT

Part Number:

**460 NN 3 X 3 3010**

Number Contact: \_\_\_\_\_

01-12

Contact Plated: \_\_\_\_\_

0-Tin 1-Gold flash

E		Units	mm	Scale	3:1	Drawing By	Date			LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522	
D		Tolerance Unless		Otherwise Specified		Reviewed By	Date	Http://www.leyconn.com		TEL: +86(755)26078616 FAX: 26070522	
C		X ~ ±0.30		.XX ~ ±0.25		Luli-Liu		2013/06/01		1 of 1	
B		X ~ ±0.25		.XXX ~ ±0.20		Approval By		Date		Title	
A		RELEASED		01/06/13		Darren-Zhang		2013/06/01		1.27 Switch Straight SMT Type	
REV		DESCRIPTION:		Date		Angle ~ ± 3°		Third Angle Projection		Part No.	
1		2		3		4		5		6	
7		8		9		10		11		12	