
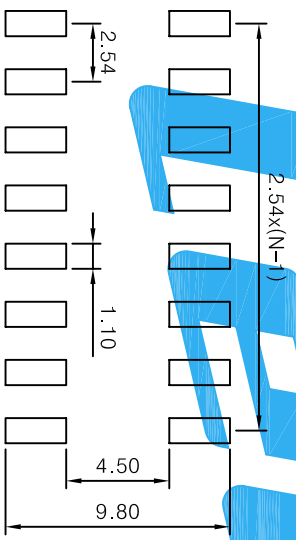

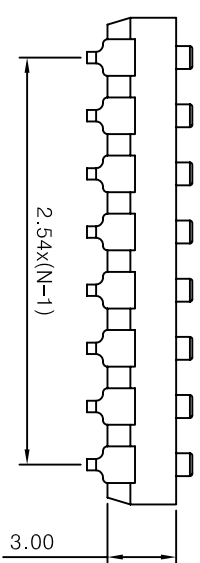


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

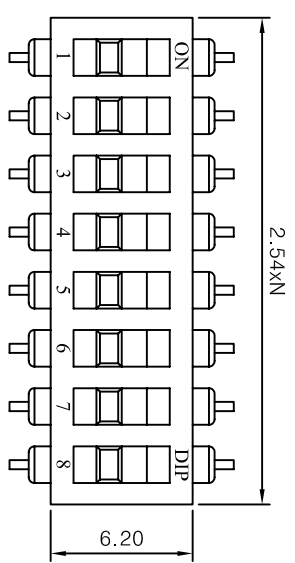

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

SPECIFICATIONS:
MECHANICAL:
 Operation Force: 8N Max
 Operation Temperature: -25°C to +70°C
 Storage Temperature: -40°C to +85°C
ELECTRICAL:
 Electrical Life: 2000 operations Cycles perswitch 24 V/DC, 25mA
 Nonswitching Rating: 100mA 50V/DC
 Switching Rating :25mA 24V/DC
 Contact Resistance : (a) 50mΩ max.at initial
 (b) 100mΩMin, after life test
 Insulation Resistance: 1 000MΩMin, at 500V/DC
 Circuit: Single pole single throw

MATERIALS:
 Contact Material: Phosphor Bronze
 Contact Plating: Gold Tin Bronze
 Insulator Material: Polyester(UL94V-0) Standard:PBT

Part Number:

460 NN 3 X X 1 0 X 0

Number Contact: _____
 02-12
 Contact Plated: _____
 0-Tin 1-Gold flash
Packaging Options:
 1-Tube Packaging
 2-Tape & Reel Packaging
Insulator:
 1-Red 2-Blue 3-Black

E		Units	mm	Scale	3:1	Drawing By	Date			LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522	
D		Tolerance Unless		Otherwise Specified		Revised By	Date	Http://www.leyconn.com		TEL: +86(755)26078616 FAX: 26070522	
C		X ~ ±0.30		.XX ~ ±0.25		Luli-Liu		1 of 1		Switchs Straight SMT Type	
B		X ~ ±0.25		.XXX ~ ±0.20		Approval By		Third Angle Projection		Part No. 460NN3XX10X0	
A		X ~ ±0.20		.XXX ~ ±0.20		Date		Part No.		REV / A	
F		Date		Angle ~ ± 3°		Darren-Zhang		2013/06/01		REV / A	
1		2		3		4		5		6	
7		8		9		10		11		12	