



This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

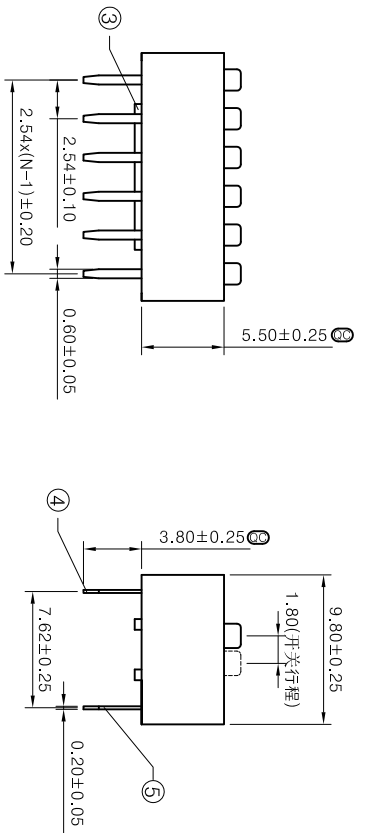

⑤	CY0021H00010	拨码开关短端子 黄铜 Au1u	NMPCS
④	CY0020L00010	拨码开关长端子 磷铜 Au1u	NMPCS
③	SW02NN1100X	底座 2.54 NMP 黑色 PBT	1PCS
②	SW13NN0100X	平拨式手柄 NMP 本色 PBT	NMPCS
①	SW11NNX110X	平拨式上盖 NMP 颜色跟据要求 PBT	1PCS
序号	物料编码	规格描述	用量

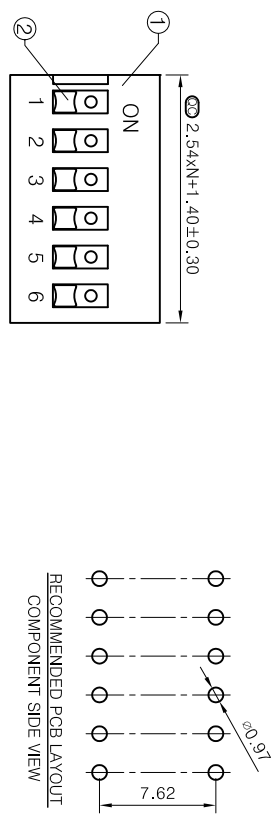

Part Number: **460 NN 1 X X 1 0 1 0**

Series Number: **03-12**

Number Contact: **1-Tube Packaging**

Trial & Mounting Style: **Contact Plated:**
 1-Straight DIP Type
Insulator:
 1-Gold flash
 1-Red 2-Blue
 A-Dark Red (GF30)

Pitch: (Unit:mm) **1-2.54**

SPECIFICATIONS:

MECHANICAL:
 Operation force: 8N Max
 Operation temperature: -25°C to +70°C
 Storage temperature: -40°C to +85°C

ELECTRICAL:
 Electrical life: 2000 operations Cycles per switch 24 V/DC, 25mA
 Non-switching rating: 100mA 50V/DC
 Switching rating :25mA 24V/DC
 Contact resistance : (a)50mΩ max. at initial
 (b) 100mΩMin. after life test

Insulation resistance: 1000MΩMin. at 500V/DC
 Circuit: single pole single throw

MATERIALS:
 Contact material: phosphor bronze
 Contact plating: gold over 50u" Ni
 Insulator material: Polyester(UL94V-0) Standard:PBT

Ⓢ Important Dimensions

E		Units	mm	Scale	2:1	Drawing By		Date
D		Tolerance Unless		Otherwise Specified		Hui-Men		2015/09/05
C		X ~ ±0.30		.XX ~ ±0.25		Reviewed By		Date
B		X ~ ±0.25		.XXX ~ ±0.20		Nick-Yin		2015/09/05
A		Date		Angle ~ ±3°		Approval By		Date
REV		DESCRIPTION.		Date		Kirby-Xiao		2015/09/05
1		2		3		4		5
6		7		8		F		

LEYCOMM
 LEYCONN ELECTRONICS CO.,LTD.
 深圳市联益康电子有限公司
 Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
 Title Switch Straight DIP Type H5.50
 Part No. 460NN1XX1010
 REV A