

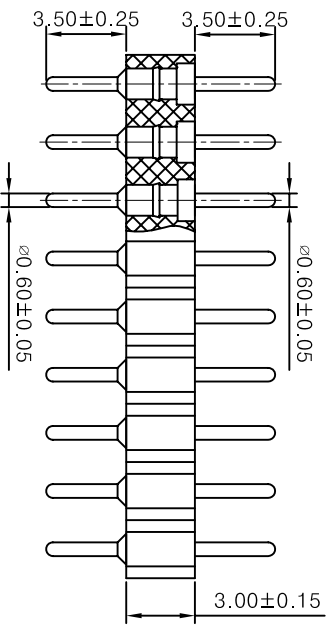
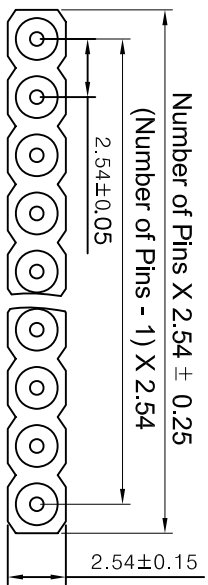


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

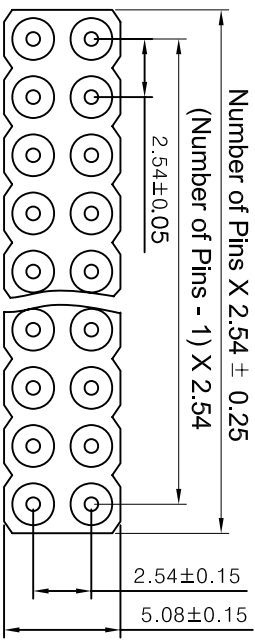

Technical Specs:
 Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Contact: Brass CuZn36Pb3 (C360000)
 Rated current: 3 A
 Contact resistance: max 10m Ω
 Dielectric strength: min 1,000 V RMS

Part Number:

131 NN X 3 1 X 961

Pitch: _____
 1 - 2.54mm (0.100in)
Number of Position: _____
 01 ~ 80 PIN
No of Row: _____
 1 - Single row 2 - Double Row
Insulator Height: _____
 3 - 2.80 & 3.00mm
Tail & Mounting Style: _____
 1 - Straight solder pin

PIN Code: _____
Plating Code: _____
 (For PIN Connectors)
 0 - Tin
 1 - Gold Flash 1u"
 3 - 0.075um Gold 3u"
 5 - 0.125um Gold 5u"
 6 - 0.25um Gold 10u"
 7 - 0.375um Gold 15u"
 8 - 0.75um Gold 30u"

ISSUED

Leyconn

CONFIDENTIAL

2011-11-25

E	Units	mm	Scale	3:1	Drawing By	Date	
D	Tolerance Unless		Drawing By				Date
C	Otherwise Specified		Reviewed By		Date		
B	.X ~ ±0.30		Approval By		Date		
A	.XX ~ ±0.25		Third Angle Projection				
REV	RELEASED		Part No.		REV A		
	DESCRIPTION:		131NNX31X961				

Leyconn

LEYCONN ELECTRONICS CO.,LTD.

深圳市联益康电子有限公司

TEL: +86(755)26078616 FAX: 26070522

2.54mm PIN Connectors

H=3.00mm DIP Type