
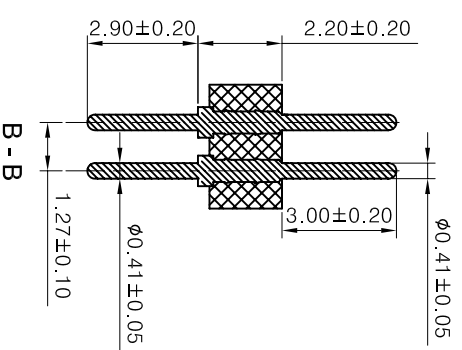
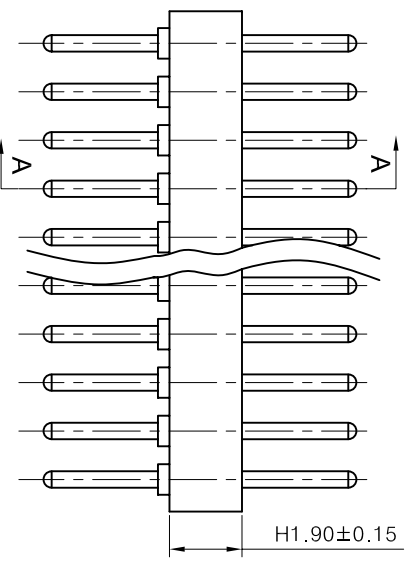
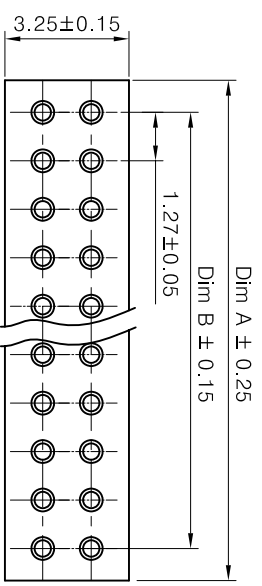
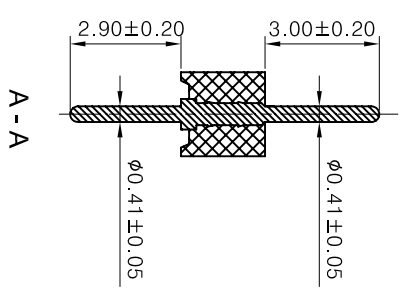
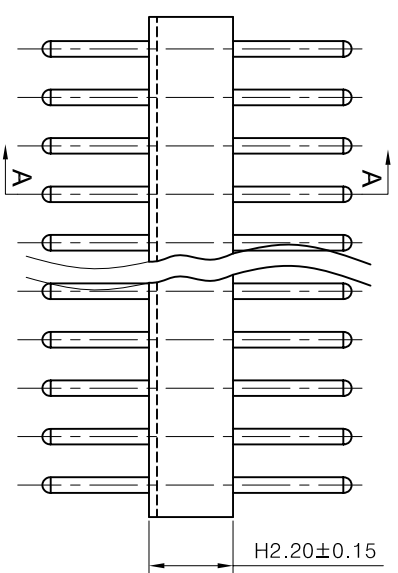


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

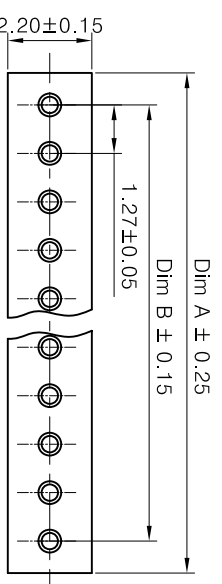

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Contact: Brass CuZn36Pb3 (C360000)
 Rated current: 1 A
 Contact resistance: max 10 mΩ
 Dielectric strength: min 300 V RMS
 Pin Part Number: P903X000000



▽N=No. of contacts / per row

P位	(1-50)
Dim A	1.27*N+0.41
Dim B	1.27*(N-1)

Part Number:

135 NN X 2 1 X 903

Pitch: _____
 5-1.27mm (0.050in)
 Pin number: _____
 of each row: _____
 01 ~ 50 PIN
 Number of Rows: _____
 1-Single Row 2-Double Row
 Insulator Height: _____
 2 - 1.90 & 2.20mm
 Tail & Mounting Style: _____
 1-Straight solder

PIN Code:

- (For PIN Connectors)
- 0 - Tin
 - 1 - Gold Flash 1u"
 - 3 - 0.075um Gold 3u"
 - 5 - 0.125um Gold 5u"
 - 6 - 0.25um Gold 10u"
 - 7 - 0.375um Gold 15u"
 - 8 - 0.75um Gold 30u"

Units mm Scale 5:1

Tolerance Unless Otherwise Specified

X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ±3°

Drawing By Kirby-Xiao Date 2013/12/18

Reviewed By Luli-Liu Date 2013/12/18

Approval By Darren-Zhang Date 2013/12/18

LEYCONN

Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
 深圳市联益康电子有限公司

TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1

Third Angle Projection

Title 1.27mm PIN Connector
 H=2.2mm/H=1.90mm DIP Type

Part No. 135NNX21X903

REV B

1	2	3	4	5	6	7	8
REV	DESCRIPTION:	Date	Angle	Date	Part No.	REV	B
A	RELEASED	06/12/11	.XXX ~ ±0.20	Approval By	135NNX21X903	1.27mm PIN Connector	
B	Modified sizes, pls check with ▽, details as shown.	18/12/13	X ~ ±0.30	Reviewed By		H=2.2mm/H=1.90mm DIP Type	
C			Otherwise Specified	Kirby-Xiao			
D			Tolerance Unless	Date			
E			Units mm	2013/12/18			