

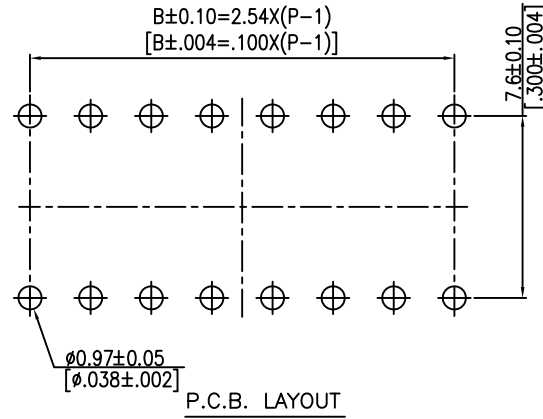
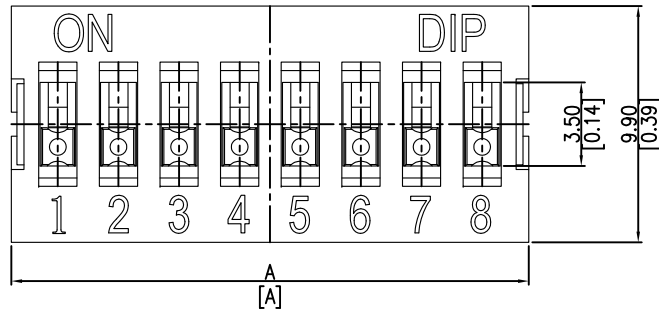



- NOTE:**
1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
 2. GENERAL TOLERANCES: 10mm OVER - ± 0.20 mm.
10mm BELOW - ± 0.10 mm.
 3. MATERIAL: SEE PAGE 3 OF 3.
 4. This product is lead Free.

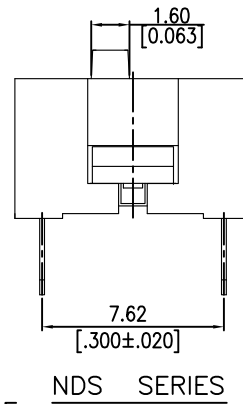

NDS(R)-12-V	12	31.84[1.254]	27.94[1.100]
NDS(R)-10-V	10	26.76[1.054]	22.86[.900]
NDS(R)-09-V	9	24.22[.954]	20.32[.800]
NDS(R)-08-V	8	21.68[.854]	17.78[.700]
NDS(R)-07-V	7	19.14[.754]	15.24[.600]
NDS(R)-06-V	6	16.60[.654]	12.70[.500]
NDS(R)-05-V	5	14.06[.554]	10.16[.400]
NDS(R)-04-V	4	11.52[.454]	7.62[.300]
NDS(R)-03-V	3	8.98[.354]	5.08[.200]
NDS(R)-02-V	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC (TYP.)			
(1,2,3,4,5,6,7,8,9,10,12, POS AVAIL)			

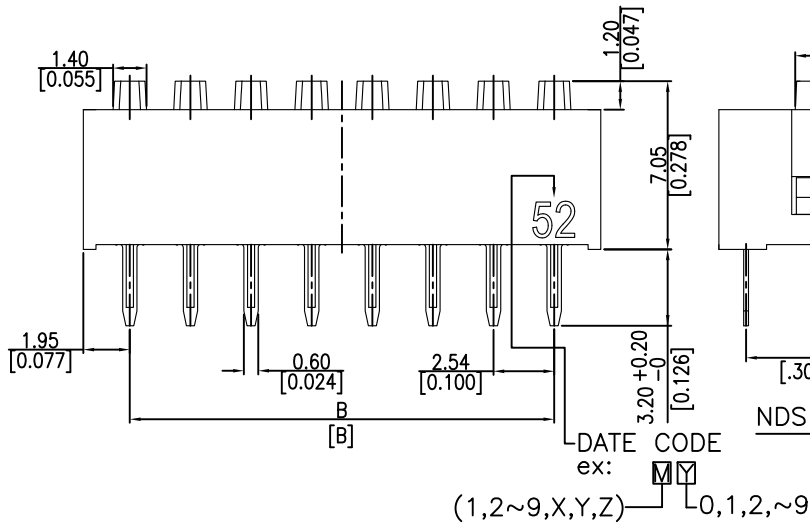

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED
LINEAR: ± 0.30 ANGULAR: $\pm 3^\circ$

SIGNATURES

DATE

TITLE

DRAWN

Eric

2013.07.26

DIP SWITCH

CHK'D

Andy

2013.07.26

NO.

NDS-[][]-V

REVISIONS

A



SCALE

5/1

APPV'D

Rex

2013.07.26