



> Description

The ER series is a well established product range designed specifically for use on railway rolling stock. Units are available in single and dual output versions with input ranges to cover all those typically found in rail applications. Housed in a rugged 3U Eurocassette, the ER series is suitable for both rack and bulkhead mounting and is available with either a heatsink or cold wall mounting plate. The range is fully compliant with the current national and international railway standards and norms.

> Input Specifications

The following input voltages versions are available as standard:

110V	(66.0 - 137.5V)	dc	(Suffix A)
72V	(43.2 - 90.0V)	dc	(Suffix D)
52V	(31.2 - 65.0V)	dc	(Suffix C)
36V	(21.0 - 50.4V)	dc	(Suffix F)
24V	(16.8 - 33.6V)	dc	(Suffix B)

Other ranges are available to order



Parameter	Detail
Input Ripple	To RIA 13 and EN50155
Input Protection	Reverse polarity protection; surges and transients to RIA 12, EN50155
Inrush Current	Limited to typically 6x nominal current (after 0.1ms)
Efficiency	80% to 90% dependant on input / output voltage
Hold up time	10ms to EN50155 Class S2
Input fuse	20mm cartridge style mounted on rear panel (except 24Vdc input version)

> Output Specifications

Parameter	Detail
Maximum Output Power	150W (limited to 125W for 24V input or 5V output)
Output Versions	Single and dual output
Output Voltage	Can be specified from 5V to 48V
Setting Tolerance	±0.5% at 50% load, 15°C to 25°C
Minimum Load	Zero for all outputs
Line Regulation	±0.2% all outputs
Load Regulation	±0.5% all outputs
Remote Sensing	Compensates for up to 250mV drop in each line (single output only)
Temperature Coefficient	<0.02% / °C
Output Ripple	<1% Pk-Pk of Output Voltage
Output Noise	<1% Pk-Pk superimposed (up to 20MHz)
Response Time	1.0ms to within 2% (for a 20% - 90% load change)
Indicators	Green LED for each output
Output Protection	Output and signal lines protected against indirect transients to RIA 12, EN50155
Current limit	Operates at minimum 105% of nominal load. Auto recovery.
Primary Protection	Operates at approximately 115% of rated output power for dual units.
Thermal Protection	Shuts down PSU if safe internal temperature is exceeded. Auto recovery.
Isolation (tested at dc equivalent voltage)	Input to Output 2.0kV ac Input to Case 1.0kV ac Output to Case 1.0kV ac Output to Output 200V ac

Part number	Output 1		Output 2	
	Vdc	A	Vdc	A
ER 0500	5	25.0		
ER 1200	12	12.0		
ER 1500	15	10.0		
ER 2400	24	6.0		
ER3000	30	5.0		
ER 0512	5	15.0	12	6.0
ER1212	12	6.0	12	6.0
ER1515	15	5.0	15	5.0
ER 2424	24	3.0	24	3.0
ER 1205	12	10.0	5	5.0
ER2412	24	4.0	12	4.5

Option	Operation	Code
Input Fuse	Fitted on PCB	B
Input Fuse	Not fitted	Z
Current sharing	For parallel operation of two or more supplies using one interconnection. Sharing better than 80 / 40% on main output	S
Input Fail	Operates when input falls below minimum. (Active high or Active low)	I or J
Output Fail	Operates when U1 output falls below 96% of nominal value. (Active high or Active low)	K or L
Over-voltage	Limits voltages of U1 to safe level under fault conditions	P
Inhibit	TTL high to inhibit	V
Enable	Link to U1 return to enable	W





> Environmental Details

Option	Detail	Code
Extended temperature range	-40°C to +71°C	T

Parameter	Detail
Operating Temperature	-25°C to +71°C (no derating)
Storage Temperature	-40°C to +85°C
Cooling	Convection
Relative Humidity	95% max.
Shock & Vibration	EN50155 (EN61373), RIA 20
Environmental Protection	IP54



M2 mounting plate option


> Applicable Norms

Parameter	Detail
EMC	RIA 12, 18; EN50155 (2007), EN50121-3-2 (2006)
Other	RIA 13, 18, 20; EN50155 (2007)

> Mechanical Characteristics

Option	Detail	Code
Connector retaining clips	2 per fitted to secure mating DIN connector	H
Cold wall plate	Drawing 289-901	M1
Cold wall plate	Drawing 289-902	M2
Front panel	Front panel and rack mounting plate Drawing 289-908	Q4 + M3
Connections	Cables (halogen free cable)	Q6

Parameter	Detail
Construction	Euro cassette - suitable for either rack or bulkhead mounting
Dimensions	Length = 168.5mm Width = 16TE - heat sink version = 9TE - cold wall mount Height = 3U
Weight	1.3kg heat sink version. 0.9kg cold wall mount version.
Connections	DIN 41612H15 Class 1. Retaining clips option. Cable connection option
Fixings	Four slotted M6 holes in heat sink Cold wall mount options

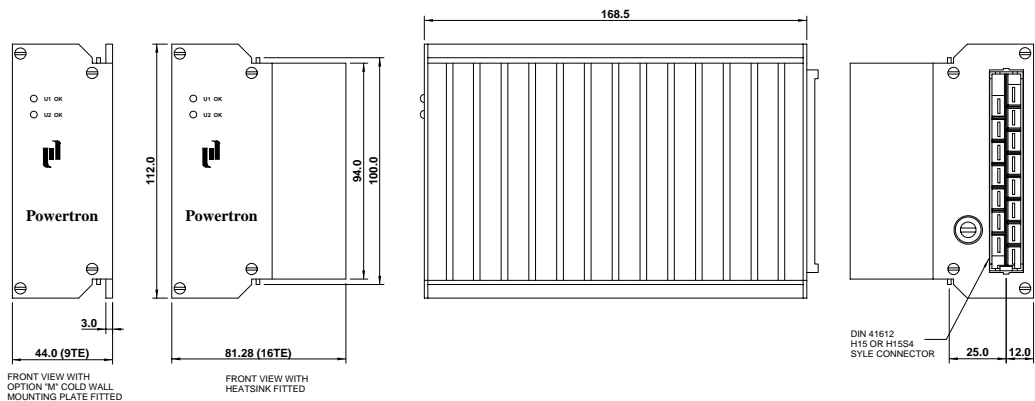

PIN No.	SINGLE O/P	DUAL O/P
4	U1 +	U1 +
6	U1 +	U1 +
8	U1 -	U1 -
10	U1 -	U1 -
12	U1 sense +	U2 +
14	U1 sense -	U2 -
16	Not connected	Not connected
18	Inhibit	Inhibit
20	Power/Output fail	Power/Output fail
22	Current Share	Current Share
24	Earth	Earth
26	Vin +	Vin +
28	Vin +	Vin +
30	Vin -	Vin -
32	Vin -	Vin -