

QS-Series Snap-in Panel Mount LED Indicators



QS SERIES

Snap-in Panel Mount LED Indicators

Features and Specifications

FEATURES

- 6mm, 8mm, 10mm and 12mmØ cut-out sizes
- Front panel snap-in mounting requires no additional hardware
- Coloured diffused flat lenses
- Available colours: Red, Green, Yellow, Blue, Orange, White (clear)
- Voltage range: 2VDC – 220VAC
- Terminations: solder lug/faston, 6mm (2.0 x 0.5mm), 8mm, 10mm, 12mm (2.8 x 0.8mm) or wires (200mm standard length)
- Standard intensity diffused LEDs or high brightness LEDs for daylight viewing
- Bi-colour LED option
- UL496 recognised component

OPTICAL SPECIFICATIONS

Colour	Intensity Std LED (mcd)	Forward Voltage (V)	Intensity High Brightness (mcd)	Forward Voltage (V)	Voltage	Operating Voltage (min to max)	Operating Current (typical all types)
Red	25	2.0	6000	2.2	2VDC (no resistor)	1.8 to 2.5VDC	20mA*
Green	20	2.2	1200	3.3	12VDC	10.8 to 13.2VDC	20mA
Yellow	20	2.1	380	2.0	24VDC	21.6 to 26.4VDC	20mA
Blue	800	3.3	1600	3.3	28VDC	25.2 to 30.8VDC	20mA
Orange	30	2.0	4100	2.2	110VAC	99 to 110VAC	6mA
White (clear)	1200	3.3	2500	3.3	220VAC	207 to 253VAC	3mA

*Customer to supply resistor for desired operating current

TECHNICAL CHARACTERISTICS

- Max reverse voltage: 5V
- Viewing angle: 30° (standard LED), 45° (high brightness LED)
- Life expectancy: 100,000 hours
- Operating temperature range: -30° to +85°C
- Storage temperature: -40° to +100°C
- Panel thickness (preferable): 0.8mm(0.031") – 1.6mm(0.062")

MATERIALS

- Lens: Polycarbonate (UL94V-0)
- Body moulding: Polycarbonate (UL94V-0)
- Solder lug/faston terminals: Gold (flash)/Silver (flash), Brass
- Wires: 6mm, 8mm = 24AWG, 10mm, 12mm = 22AWG
- All wires PVC (UL1061)



QS SERIES


Snap-in Panel Mount LED Indicators

Technical Drawings


6mmØ



SOLDER LUG/FASTON




WIRES




8mmØ



SOLDER LUG/FASTON




WIRES

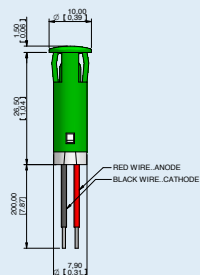


10mmØ



SOLDER LUG/FASTON




WIRES

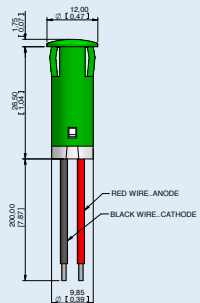


12mmØ



SOLDER LUG/FASTON




WIRES



QS SERIES

Snap-in Panel Mount LED Indicators

Order Overview

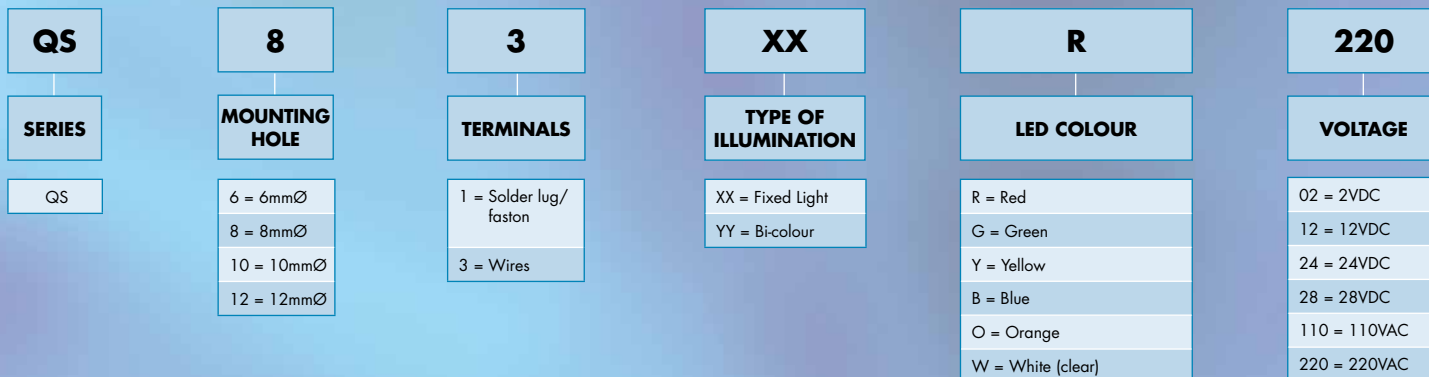

TECHNICAL CHARACTERISTICS

- Gold faston terminal denotes Anode (+), silver terminal denotes Cathode (-)
- Standard wire length is 200mm, red wire denotes Anode (+), black wire denotes Cathode (-). For other wires lengths consult APEM (6mm and 8mm use 24AWG, 10mm and 12mm use 22AWG)
- For LED's with alternative voltages consult APEM
- Bi-colour LEDs, by connecting the gold faston (+) one colour is produced, by reversing the supply voltage another colour is produced – Bi-colours are available up to 28VDC. [AC products not available]
- Take care if soldering to the faston terminals
- All 110VAC and 220VAC LED indicators will be supplied with high brightness LEDs
- For resistorless versions (02) please pay attention to the forward voltage
- Flashing LEDs are available as a special option

Apem指示灯 QS系列 : APEM型号 :

QS83XXHG110 ; QS63XXG24 ; QS123XXW24 ; QS81XXHO110 ;
QS63XXW12 ; QS81XXG24 ; QS123XXR12 ; QS123XXHG220 ; QS61XXW24 ;
QS81XXG12 ; QS61XXY12 ; QS103XXHG110 ; QS103XXHO110 ;
QS103XXHR220 ; QS83XXHG220 ; QS103XXR12 ; QS123XXHB220 ;
QS61XXW12 ; QS63XXW24 ; QS103XXHW220 ; QS63XXR24 ;
QS83XXHY110 ; QS103XXW24 ; QS101XXO24 ; QS123XXHO220 ;
QS123XXW12 ; QS63XXY12 ; QS83XXHW220 ; QS103XXW12 ; QS81XXB24 ;
QS61XXR12 ; QS63XXY24 ; QS83XXHR220 ; QS103XXHY110 ; QS121XXHG220 ;
QS81XXR12 ; QS83XXY24 ; QS121XXO12 ; QS81XXHW220 ; QS101XXO12 ;
QS81XXY12 ; QS101XXHW220 ; QS121XXO24 ; QS81XXW12 ; QS123XXHW110 ;
QS83XXHY220 ; QS101XXHG110 ; QS123XXHY220 ; QS63XXB24 ;
QS61XXB12 ; QS81XXW24 ; QS81XXR24 ; QS83XXHO220 ; QS121XXHY110 ;
QS81XXHW110 ; QS103XXHB110 ; QS81XXHR110 ; QS103XXHG220 ;
QS121XXG24 ; QS121XXHW220 ; QS81XXB12 ; QS81XXO12 ;
QS121XXHY220 ; QS103XXHB220 ; QS81XXO24 ; QS101XXG24 ;
QS83XXG12 ; QS83XXHB220 ; QS101XXG12 ; QS83XXG24 ;
QS101XXHY110 ; QS121XXG12 ; QS121XXY24 ; QS63XXR12 ;
QS81XXHG110 ; QS101XXB24 ; QS121XXHG110 ; QS83XXB24 ;
QS81XXHB110 ; QS83XXB12 ; QS121XXB24 ; QS101XXY24 ;
QS121XXHW110 ; QS123XXHY110 ; QS81XXHY220 ;
QS101XXY12 ; QS103XXHO220 ; QS121XXB12 ; QS101XXB12 ;
QS121XXHR110 ; QS121XXY12 ; QS121XXHO220 ; QS121XXR12 ;
QS123XXHG110 ; QS101XXHG220 ; QS63XXG12 ; QS123XXHB110 ;
QS81XXHR220 ; QS101XXHB220 ; QS101XXR12;

cnr@tooye.net

www.tooye.net

shunto@126.com

+86-13511058122