




# S10A THRU S10M

SURFACE MOUNT GENERAL RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 10.0 Amperes

## DO-214AB/SMC

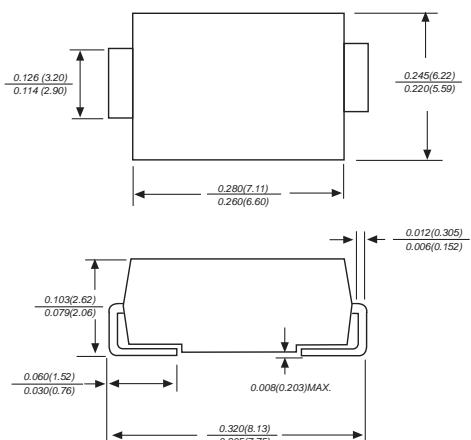

Dimensions in inches and (millimeters)

## FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds at terminals

## MECHANICAL DATA

**Case:** JEDEC DO-214AB molded plastic body

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.007 ounce, 0.25grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	S10A	S10B	S10D	S10G	S10J	S10K	S10M	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V <sub>Dc</sub>	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at T <sub>L</sub> =75°C	I <sub>(AV)</sub>					10.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>					200.0			Amps
Maximum instantaneous forward voltage at 10.0A	V <sub>F</sub>				1.2				Volts
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =100°C	I <sub>R</sub>				10.0				µA
Typical junction capacitance (NOTE 1)	C <sub>J</sub>				60.0				pF
Typical thermal resistance (NOTE 2)	R <sub>θJA</sub>				10.0				°C/W
Operating junction and storage temperature range	T <sub>J,T<sub>STG</sub></sub>				-55 to +150				°C

\*Pulse test: Pulse width 200 µsec, Duty cycle 2%

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.


# S10A THRU S10M

Figure 1  
Typical Forward Characteristics

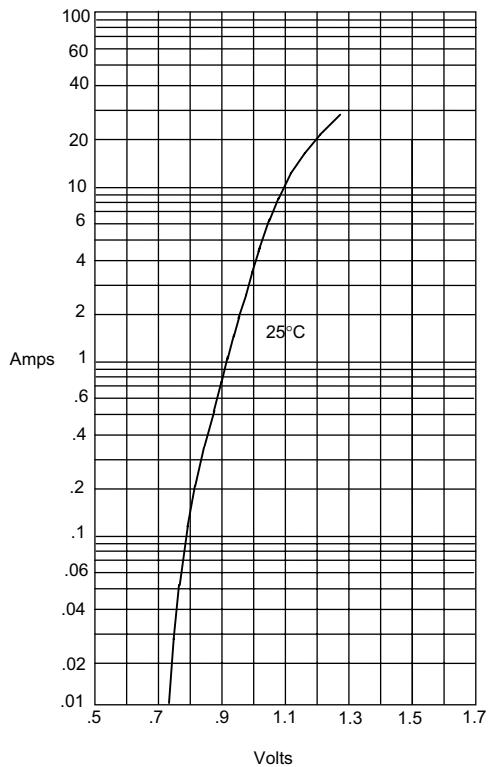


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

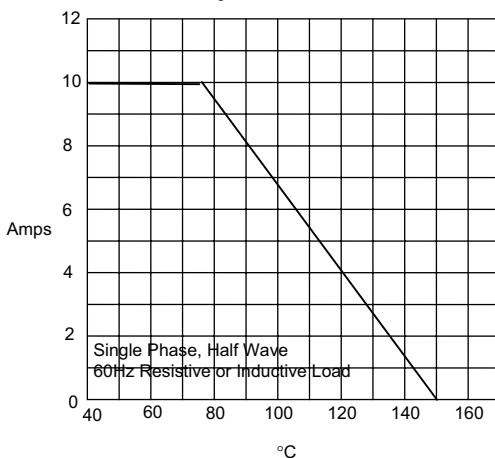

Average Forward Rectified Current - Amperes versus  
Case Temperature - °C

Figure 3  
Junction Capacitance

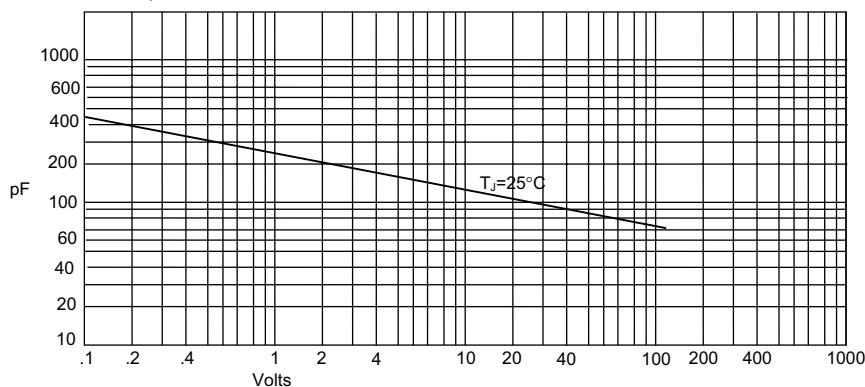


Junction Capacitance - pF versus  
Reverse Voltage - Volts


The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

## S10A THRU S10M

Figure 4  
Typical Reverse Characteristics

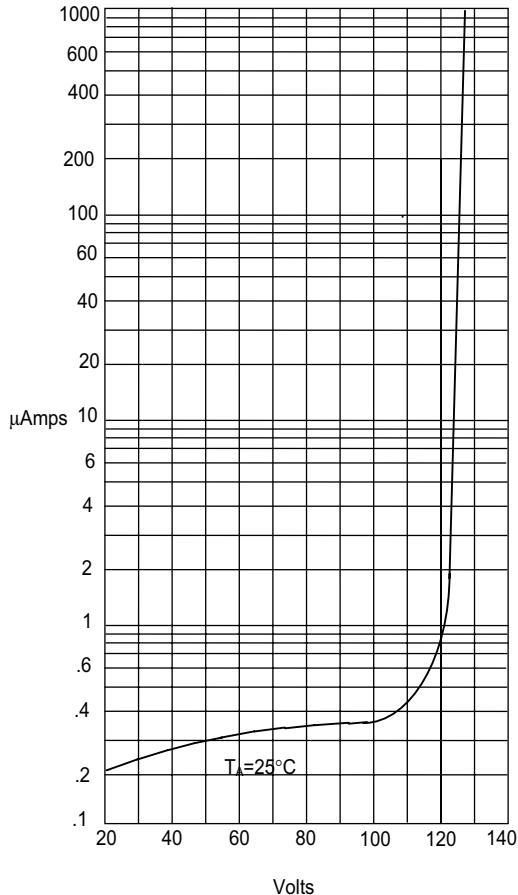

Instantaneous Reverse Leakage Current - MicroAmperes versus  
Percent Of Rated Peak Reverse Voltage - Volts

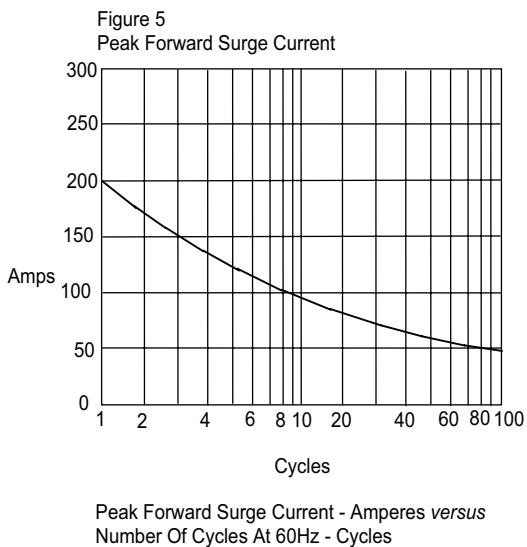

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles

The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!