



受控文件



Nut Torque: 5 ~ 14Nm  
 Operating Pressure: 300gf ±100gf  
 Operating Stroke: 0.6mm±0.3  
 Protection Grade: IP67  
 Function: OFF-(ON)  
 Shell: Brass, Ni Plating  
 Button: Brass, Ni Plating  
 Rating: 500mA 12V DC  
 Contact Resistance: 50mΩ MAX.  
 Insulation Resistance: 100MΩ MIN.  
 Dielectric Strength: 250VAC 50Hz 1Am of 1 minute  
 Dielectrical life: 100,000 cycles  
 Mechanical life :500,000 cycles  
 Operating Temperature: -20°C~85°C  
 Safety Approval:

CUT-OUT

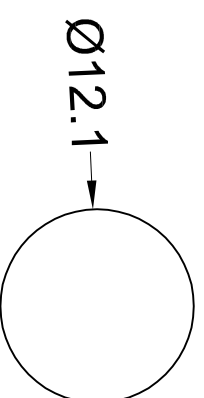

**德崧 DASUNG** 东莞市德崧电子有限公司  
 DASUNG (DONGGUAN) ELECTRONICS CO.,LTD

公差 TOLERANCES		.XX± 0.3	角度 ANGLE ±1°	单位	DIMENSION UNIT	mm.
版本 VERSION	A0	比例尺 SCALE	1:1	日期 DATE	品名 TITLE	图号 DRAWING NO
核准 APPROVED BY		核对 CHECKED BY		绘图 DATE	PBM-12Q11-FS-N-NN-B8-S	PBM-12Q11-FS-N-NN-B8-S_A0
日期 DATE	2016.05.25	ECN NO.		陈汉文		
变更说明 CHANGE DESCRIPTION	新发行					
版本 VER	A 0					