

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

# User's Manual

## 78K0/LC3

### 8-Bit Single-Chip Microcontrollers

---

***μ*PD78F0400**

***μ*PD78F0410**

***μ*PD78F0401**

***μ*PD78F0411**

***μ*PD78F0402**

***μ*PD78F0412**

***μ*PD78F0403**

***μ*PD78F0413**

The 78K0/LC3 has an on-chip debug function.

Do not use this product for mass production because its reliability cannot be guaranteed after the on-chip debug function has been used, due to issues with respect to the number of times the flash memory can be rewritten. NEC Electronics does not accept complaints concerning this product.

[MEMO]

**① VOLTAGE APPLICATION WAVEFORM AT INPUT PIN**

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between  $V_{IL}$  (MAX) and  $V_{IH}$  (MIN) due to noise, etc., the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between  $V_{IL}$  (MAX) and  $V_{IH}$  (MIN).

**② HANDLING OF UNUSED INPUT PINS**

Unconnected CMOS device inputs can be cause of malfunction. If an input pin is unconnected, it is possible that an internal input level may be generated due to noise, etc., causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using pull-up or pull-down circuitry. Each unused pin should be connected to  $V_{DD}$  or GND via a resistor if there is a possibility that it will be an output pin. All handling related to unused pins must be judged separately for each device and according to related specifications governing the device.

**③ PRECAUTION AGAINST ESD**

A strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it when it has occurred. Environmental control must be adequate. When it is dry, a humidifier should be used. It is recommended to avoid using insulators that easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors should be grounded. The operator should be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with mounted semiconductor devices.

**④ STATUS BEFORE INITIALIZATION**

Power-on does not necessarily define the initial status of a MOS device. Immediately after the power source is turned ON, devices with reset functions have not yet been initialized. Hence, power-on does not guarantee output pin levels, I/O settings or contents of registers. A device is not initialized until the reset signal is received. A reset operation must be executed immediately after power-on for devices with reset functions.

**⑤ POWER ON/OFF SEQUENCE**

In the case of a device that uses different power supplies for the internal operation and external interface, as a rule, switch on the external power supply after switching on the internal power supply. When switching the power supply off, as a rule, switch off the external power supply and then the internal power supply. Use of the reverse power on/off sequences may result in the application of an overvoltage to the internal elements of the device, causing malfunction and degradation of internal elements due to the passage of an abnormal current.

The correct power on/off sequence must be judged separately for each device and according to related specifications governing the device.

**⑥ INPUT OF SIGNAL DURING POWER OFF STATE**

Do not input signals or an I/O pull-up power supply while the device is not powered. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Input of signals during the power off state must be judged separately for each device and according to related specifications governing the device.

**EEPROM is a trademark of NEC Electronics Corporation.**

**SuperFlash is a registered trademark of Silicon Storage Technology, Inc. in several countries including the United States and Japan.**

Caution: This product uses SuperFlash® technology licensed from Silicon Storage Technology, Inc.

- **The information in this document is current as of June, 2007. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**

- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.

- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.

- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.

- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.

- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

(1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.

(2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

M8E 02.11-1

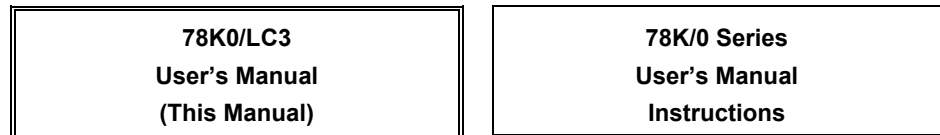
## INTRODUCTION

**Readers** This manual is intended for user engineers who wish to understand the functions of the 78K0/LC3 and design and develop application systems and programs for these devices. The target products are as follows.

78K0/LC3:  $\mu$ PD78F0400, 78F0401, 78F0402, 78F0403  
 $\mu$ PD78F0410, 78F0411, 78F0412, 78F0413

**Purpose** This manual is intended to give users an understanding of the functions described in the **Organization** below.

**Organization** The 78K0/LC3 manual is separated into two parts: this manual and the instructions edition (common to the 78K0 microcontrollers).



- Pin functions
- Internal block functions
- Interrupts
- Other on-chip peripheral functions
- Electrical specifications
- CPU functions
- Instruction set
- Explanation of each instruction

**How to Read This Manual** It is assumed that the readers of this manual have general knowledge of electrical engineering, logic circuits, and microcontrollers.

- To gain a general understanding of functions:  
→ Read this manual in the order of the **CONTENTS**.
- How to interpret the register format:  
→ For a bit number enclosed in angle brackets, the bit name is defined as a reserved word in the RA78K0, and is defined as an sfr variable using the #pragma sfr directive in the CC78K0.
- To know details of the 78K0 microcontroller instructions:  
→ Refer to the separate document **78K/0 Series Instructions User's Manual (U12326E)**.

**Conventions**

Data significance:	Higher digits on the left and lower digits on the right
Active low representations:	$\overline{xxx}$ (overscore over pin and signal name)
<b>Note:</b>	Footnote for item marked with <b>Note</b> in the text
<b>Caution:</b>	Information requiring particular attention
<b>Remark:</b>	Supplementary information
Numerical representations:	Binary        ... xxxx or xxxxB
	Decimal        ... xxxx
	Hexadecimal    ... xxxxH

**Related Documents**      The related documents indicated in this publication may include preliminary versions. However, preliminary versions are not marked as such.

**Documents Related to Devices**

Document Name	Document No.
78K0/LC3 User's Manual	This manual
78K/0 Series Instructions User's Manual	U12326E

**Documents Related to Flash Memory Programming**

Document Name	Document No.
PG-FP4 Flash Memory Programmer User's Manual	U15260E
PG-FPL3 Flash Memory Programmer User's Manual	U17454E

**Other Documents**

Document Name	Document No.
SEMICONDUCTOR SELECTION GUIDE – Products and Packages –	X13769X
Semiconductor Device Mount Manual	<b>Note</b>
Quality Grades on NEC Semiconductor Devices	C11531E
NEC Semiconductor Device Reliability/Quality Control System	C10983E
Guide to Prevent Damage for Semiconductor Devices by Electrostatic Discharge (ESD)	C11892E

**Note** See the “Semiconductor Device Mount Manual” website (<http://www.necel.com/pkg/en/mount/index.html>).

**Caution** The related documents listed above are subject to change without notice. Be sure to use the latest version of each document when designing.



# CONTENTS

<b>CHAPTER 1 OUTLINE</b> .....	<b>14</b>
<b>1.1 Features</b> .....	<b>14</b>
<b>1.2 Applications</b> .....	<b>15</b>
<b>1.3 Ordering Information</b> .....	<b>15</b>
<b>1.4 Pin Configuration (Top View)</b> .....	<b>16</b>
<b>1.5 78K0/Lx3 Microcontroller Series Lineup</b> .....	<b>19</b>
<b>1.6 Block Diagram</b> .....	<b>23</b>
<b>1.7 Outline of Functions</b> .....	<b>24</b>
<b>CHAPTER 2 PIN FUNCTIONS</b> .....	<b>27</b>
<b>2.1 Pin Function List</b> .....	<b>27</b>
<b>2.2 Description of Pin Functions</b> .....	<b>31</b>
2.2.1 P12, P13 (port 1) .....	31
2.2.2 P20 to P25 (port 2).....	31
2.2.3 P31 to P34 (port 3).....	32
2.2.4 P40 (port 4).....	33
2.2.5 P100, P101 (port 10).....	33
2.2.6 P112, P113 (port 11).....	33
2.2.7 P120 to P124 (port 12).....	34
2.2.8 P140 to P143 (port 14).....	34
2.2.9 P150 to P153 (port 15).....	35
2.2.10 AV <sub>REF</sub> ( $\mu$ PD78F041x only) .....	35
2.2.11 AV <sub>SS</sub> ( $\mu$ PD78F041x only) .....	35
2.2.12 COM0 to COM7 .....	35
2.2.13 $\overline{V_{LC0}}$ to $\overline{V_{LC3}}$ .....	35
2.2.14 RESET .....	35
2.2.15 REGC .....	36
2.2.16 V <sub>DD</sub> .....	36
2.2.17 V <sub>SS</sub> .....	36
2.2.18 FLMD0 .....	36
<b>2.3 Pin I/O Circuits and Recommended Connection of Unused Pins</b> .....	<b>37</b>
<b>CHAPTER 3 CPU ARCHITECTURE</b> .....	<b>41</b>
<b>3.1 Memory Space</b> .....	<b>41</b>
3.1.1 Internal program memory space .....	47
3.1.2 Internal data memory space .....	49
3.1.3 Special function register (SFR) area .....	49
3.1.4 Data memory addressing .....	50
<b>3.2 Processor Registers</b> .....	<b>54</b>
3.2.1 Control registers.....	54
3.2.2 General-purpose registers .....	58
3.2.3 Special function registers (SFRs).....	59
<b>3.3 Instruction Address Addressing</b> .....	<b>64</b>

3.3.1	Relative addressing .....	64
3.3.2	Immediate addressing .....	65
3.3.3	Table indirect addressing .....	66
3.3.4	Register addressing .....	66
<b>3.4</b>	<b>Operand Address Addressing .....</b>	<b>67</b>
3.4.1	Implied addressing .....	67
3.4.2	Register addressing .....	68
3.4.3	Direct addressing .....	69
3.4.4	Short direct addressing .....	70
3.4.5	Special function register (SFR) addressing .....	71
3.4.6	Register indirect addressing .....	72
3.4.7	Based addressing .....	73
3.4.8	Based indexed addressing .....	74
3.4.9	Stack addressing .....	75
<b>CHAPTER 4</b>	<b>PORT FUNCTIONS .....</b>	<b>76</b>
<b>4.1</b>	<b>Port Functions .....</b>	<b>76</b>
<b>4.2</b>	<b>Port Configuration .....</b>	<b>78</b>
4.2.1	Port 1 .....	79
4.2.2	Port 2 .....	81
4.2.3	Port 3 .....	83
4.2.4	Port 4 .....	85
4.2.5	Port 10 .....	86
4.2.6	Port 11 .....	87
4.2.7	Port 12 .....	89
4.2.8	Port 14 .....	93
4.2.9	Port 15 .....	94
<b>4.3</b>	<b>Registers Controlling Port Function .....</b>	<b>95</b>
<b>4.4</b>	<b>Port Function Operations .....</b>	<b>102</b>
4.4.1	Writing to I/O port .....	102
4.4.2	Reading from I/O port .....	102
4.4.3	Operations on I/O port .....	102
<b>4.5</b>	<b>Settings of PFALL, PF2, PF1, ISC, Port Mode Register, and Output Latch When Using Alternate Function .....</b>	<b>103</b>
<b>CHAPTER 5</b>	<b>CLOCK GENERATOR .....</b>	<b>106</b>
<b>5.1</b>	<b>Functions of Clock Generator .....</b>	<b>106</b>
<b>5.2</b>	<b>Configuration of Clock Generator .....</b>	<b>107</b>
<b>5.3</b>	<b>Registers Controlling Clock Generator .....</b>	<b>109</b>
<b>5.4</b>	<b>System Clock Oscillator .....</b>	<b>120</b>
5.4.1	X1 oscillator .....	120
5.4.2	XT1 oscillator .....	120
5.4.3	When subsystem clock is not used .....	123
5.4.4	Internal high-speed oscillator .....	123
5.4.5	Internal low-speed oscillator .....	123
5.4.6	Prescaler .....	123
<b>5.5</b>	<b>Clock Generator Operation .....</b>	<b>124</b>
<b>5.6</b>	<b>Controlling Clock .....</b>	<b>127</b>

5.6.1	Example of controlling high-speed system clock .....	127
5.6.2	Example of controlling internal high-speed oscillation clock .....	129
5.6.3	Example of controlling subsystem clock .....	131
5.6.4	Example of controlling internal low-speed oscillation clock.....	133
5.6.5	Clocks supplied to CPU and peripheral hardware .....	133
5.6.6	CPU clock status transition diagram .....	134
5.6.7	Condition before changing CPU clock and processing after changing CPU clock .....	139
5.6.8	Time required for switchover of CPU clock and main system clock.....	140
5.6.9	Conditions before clock oscillation is stopped.....	141
5.6.10	Peripheral hardware and source clocks .....	142
<b>CHAPTER 6 16-BIT TIMER/EVENT COUNTER 00.....</b>		<b>143</b>
<b>6.1</b>	<b>Functions of 16-Bit Timer/Event Counter 00 .....</b>	<b>143</b>
<b>6.2</b>	<b>Configuration of 16-Bit Timer/Event Counter 00.....</b>	<b>144</b>
<b>6.3</b>	<b>Registers Controlling 16-Bit Timer/Event Counter 00 .....</b>	<b>149</b>
<b>6.4</b>	<b>Operation of 16-Bit Timer/Event Counter 00 .....</b>	<b>158</b>
6.4.1	Interval timer operation .....	158
6.4.2	Square wave output operation .....	161
6.4.3	External event counter operation .....	164
6.4.4	Operation in clear & start mode entered by TI000 pin valid edge input.....	168
6.4.5	Free-running timer operation .....	181
6.4.6	PPG output operation .....	190
6.4.7	One-shot pulse output operation.....	193
6.4.8	Pulse width measurement operation.....	198
6.4.9	External 24-bit event counter operation .....	206
6.4.10	Cautions for external 24-bit event counter .....	210
<b>6.5</b>	<b>Special Use of TM00 .....</b>	<b>212</b>
6.5.1	Rewriting CR010 during TM00 operation .....	212
6.5.2	Setting LVS00 and LVR00 .....	212
<b>6.6</b>	<b>Cautions for 16-Bit Timer/Event Counter 00 .....</b>	<b>214</b>
<b>CHAPTER 7 8-BIT TIMER/EVENT COUNTERS 50, 51, AND 52 .....</b>		<b>218</b>
<b>7.1</b>	<b>Functions of 8-Bit Timer/Event Counters 50, 51, and 52 .....</b>	<b>218</b>
<b>7.2</b>	<b>Configuration of 8-Bit Timer/Event Counters 50, 51, and 52 .....</b>	<b>218</b>
<b>7.3</b>	<b>Registers Controlling 8-Bit Timer/Event Counters 50, 51, and 52 .....</b>	<b>222</b>
<b>7.4</b>	<b>Operations of 8-Bit Timer/Event Counters 50, 51, and 52.....</b>	<b>229</b>
7.4.1	Operation as interval timer.....	229
7.4.2	Operation as external event counter (TM52 only).....	231
<b>7.5</b>	<b>Cautions for 8-Bit Timer/Event Counters 50, 51, and 52.....</b>	<b>232</b>
<b>CHAPTER 8 8-BIT TIMERS H0, H1 AND H2.....</b>		<b>234</b>
<b>8.1</b>	<b>Functions of 8-Bit Timers H0, H1, and H2 .....</b>	<b>234</b>
<b>8.2</b>	<b>Configuration of 8-Bit Timers H0, H1, and H2.....</b>	<b>234</b>
<b>8.3</b>	<b>Registers Controlling 8-Bit Timers H0, H1, and H2 .....</b>	<b>239</b>
<b>8.4</b>	<b>Operation of 8-Bit Timers H0, H1 and H2.....</b>	<b>246</b>
8.4.1	Operation as interval timer/square-wave output .....	246
8.4.2	Operation as PWM output.....	249

8.4.3 Carrier generator operation (8-bit timer H1 only).....	255
<b>CHAPTER 9 REAL-TIME COUNTER.....</b>	<b>262</b>
<b>9.1 Functions of Real-Time Counter.....</b>	<b>262</b>
<b>9.2 Configuration of Real-Time Counter .....</b>	<b>262</b>
<b>9.3 Registers Controlling Real-Time Counter.....</b>	<b>264</b>
<b>9.4 Real-Time Counter Operation .....</b>	<b>276</b>
9.4.1 Starting operation of real-time counter.....	276
9.4.2 Reading/writing real-time counter.....	277
9.4.3 Setting alarm of real-time counter .....	279
<b>CHAPTER 10 WATCHDOG TIMER.....</b>	<b>280</b>
<b>10.1 Functions of Watchdog Timer.....</b>	<b>280</b>
<b>10.2 Configuration of Watchdog Timer .....</b>	<b>281</b>
<b>10.3 Register Controlling Watchdog Timer.....</b>	<b>282</b>
<b>10.4 Operation of Watchdog Timer.....</b>	<b>283</b>
10.4.1 Controlling operation of watchdog timer.....	283
10.4.2 Setting overflow time of watchdog timer.....	284
10.4.3 Setting window open period of watchdog timer .....	285
<b>CHAPTER 11 BUZZER OUTPUT CONTROLLER.....</b>	<b>287</b>
<b>11.1 Functions of Buzzer Output Controller.....</b>	<b>287</b>
<b>11.2 Configuration of Buzzer Output Controller .....</b>	<b>288</b>
<b>11.3 Registers Controlling Buzzer Output Controller.....</b>	<b>288</b>
<b>11.4 Operations of Buzzer Output Controller .....</b>	<b>290</b>
<b>CHAPTER 12 10-BIT SUCCESSIVE APPROXIMATION TYPE A/D CONVERTER</b> <b>(<math>\mu</math>PD78F041x only).....</b>	<b>291</b>
<b>12.1 Function of 10-Bit Successive Approximation Type A/D Converter.....</b>	<b>291</b>
<b>12.2 Configuration of 10-Bit Successive Approximation Type A/D Converter .....</b>	<b>292</b>
<b>12.3 Registers Used in 10-Bit Successive Approximation Type A/D Converter .....</b>	<b>294</b>
<b>12.4 10-Bit Successive Approximation Type A/D Converter Operations .....</b>	<b>302</b>
12.4.1 Basic operations of A/D converter.....	302
12.4.2 Input voltage and conversion results.....	304
12.4.3 A/D converter operation mode .....	305
<b>12.5 How to Read A/D Converter Characteristics Table.....</b>	<b>307</b>
<b>12.6 Cautions for 10-Bit Successive Approximation Type A/D Converter .....</b>	<b>309</b>
<b>CHAPTER 13 SERIAL INTERFACE UART0.....</b>	<b>313</b>
<b>13.1 Functions of Serial Interface UART0.....</b>	<b>313</b>
<b>13.2 Configuration of Serial Interface UART0 .....</b>	<b>314</b>
<b>13.3 Registers Controlling Serial Interface UART0.....</b>	<b>317</b>
<b>13.4 Operation of Serial Interface UART0 .....</b>	<b>323</b>
13.4.1 Operation stop mode.....	323
13.4.2 Asynchronous serial interface (UART) mode .....	324
13.4.3 Dedicated baud rate generator.....	330

13.4.4	Calculation of baud rate .....	331
<b>CHAPTER 14</b>	<b>SERIAL INTERFACE UART6.....</b>	<b>335</b>
14.1	Functions of Serial Interface UART6.....	335
14.2	Configuration of Serial Interface UART6 .....	339
14.3	Registers Controlling Serial Interface UART6.....	342
14.4	Operation of Serial Interface UART6.....	353
14.4.1	Operation stop mode .....	353
14.4.2	Asynchronous serial interface (UART) mode .....	354
14.4.3	Dedicated baud rate generator .....	368
14.4.4	Calculation of baud rate .....	370
<b>CHAPTER 15</b>	<b>LCD CONTROLLER/DRIVER.....</b>	<b>376</b>
15.1	Functions of LCD Controller/Driver .....	376
15.2	Configuration of LCD Controller/Driver .....	378
15.3	Registers Controlling LCD Controller/Driver .....	380
15.4	Setting LCD Controller/Driver .....	385
15.5	LCD Display Data Memory .....	386
15.6	Common and Segment Signals .....	387
15.7	Display Modes .....	393
15.7.1	Static display example .....	393
15.7.2	Two-time-slice display example .....	396
15.7.3	Three-time-slice display example.....	399
15.7.4	Four-time-slice display example .....	403
15.8	Supplying LCD Drive Voltages $V_{LC0}$ , $V_{LC1}$ , $V_{LC2}$ and $V_{LC3}$ .....	406
15.8.1	Internal resistance division method.....	406
15.8.2	External resistance division method.....	408
<b>CHAPTER 16</b>	<b>MANCHESTER CODE GENERATOR.....</b>	<b>410</b>
16.1	Functions of Manchester Code Generator .....	410
16.2	Configuration of Manchester Code Generator.....	410
16.3	Registers Controlling Manchester Code Generator .....	413
16.4	Operation of Manchester Code Generator .....	416
16.4.1	Operation stop mode .....	416
16.4.2	Manchester code generator mode .....	417
16.4.3	Bit sequential buffer mode .....	426
<b>CHAPTER 17</b>	<b>INTERRUPT FUNCTIONS .....</b>	<b>435</b>
17.1	Interrupt Function Types .....	435
17.2	Interrupt Sources and Configuration .....	435
17.3	Registers Controlling Interrupt Functions .....	440
17.4	Interrupt Servicing Operations .....	447
17.4.1	Maskable interrupt acknowledgment.....	447
17.4.2	Software interrupt request acknowledgment.....	449
17.4.3	Multiple interrupt servicing .....	450
17.4.4	Interrupt request hold.....	453

<b>CHAPTER 18 KEY INTERRUPT FUNCTION .....</b>	<b>454</b>
<b>18.1 Functions of Key Interrupt .....</b>	<b>454</b>
<b>18.2 Configuration of Key Interrupt.....</b>	<b>454</b>
<b>18.3 Register Controlling Key Interrupt .....</b>	<b>455</b>
<b>CHAPTER 19 STANDBY FUNCTION .....</b>	<b>456</b>
<b>19.1 Standby Function and Configuration .....</b>	<b>456</b>
19.1.1 Standby function .....	456
19.1.2 Registers controlling standby function.....	457
<b>19.2 Standby Function Operation .....</b>	<b>459</b>
19.2.1 HALT mode.....	459
19.2.2 STOP mode .....	464
<b>CHAPTER 20 RESET FUNCTION.....</b>	<b>470</b>
<b>20.1 Register for Confirming Reset Source .....</b>	<b>478</b>
<b>CHAPTER 21 POWER-ON-CLEAR CIRCUIT.....</b>	<b>479</b>
<b>21.1 Functions of Power-on-Clear Circuit.....</b>	<b>479</b>
<b>21.2 Configuration of Power-on-Clear Circuit .....</b>	<b>480</b>
<b>21.3 Operation of Power-on-Clear Circuit.....</b>	<b>480</b>
<b>21.4 Cautions for Power-on-Clear Circuit .....</b>	<b>483</b>
<b>CHAPTER 22 LOW-VOLTAGE DETECTOR .....</b>	<b>485</b>
<b>22.1 Functions of Low-Voltage Detector.....</b>	<b>485</b>
<b>22.2 Configuration of Low-Voltage Detector .....</b>	<b>486</b>
<b>22.3 Registers Controlling Low-Voltage Detector.....</b>	<b>486</b>
<b>22.4 Operation of Low-Voltage Detector .....</b>	<b>489</b>
22.4.1 When used as reset .....	490
22.4.2 When used as interrupt.....	495
<b>22.5 Cautions for Low-Voltage Detector .....</b>	<b>500</b>
<b>CHAPTER 23 OPTION BYTE.....</b>	<b>503</b>
<b>23.1 Functions of Option Bytes .....</b>	<b>503</b>
<b>23.2 Format of Option Byte .....</b>	<b>505</b>
<b>CHAPTER 24 FLASH MEMORY.....</b>	<b>508</b>
<b>24.1 Internal Memory Size Switching Register.....</b>	<b>508</b>
<b>24.2 Writing with Flash memory programmer .....</b>	<b>509</b>
<b>24.3 Programming Environment.....</b>	<b>511</b>
<b>24.4 Communication Mode.....</b>	<b>511</b>
<b>24.5 Connection of Pins on Board.....</b>	<b>513</b>
24.5.1 FLMD0 pin .....	513
24.5.2 Serial interface pins.....	513
24.5.3 $\overline{\text{RESET}}$ pin .....	515
24.5.4 Port pins.....	515

24.5.5 REGC pin.....	515
24.5.6 Other signal pins.....	516
24.5.7 Power supply.....	516
<b>24.6 Programming Method.....</b>	<b>517</b>
24.6.1 Controlling flash memory.....	517
24.6.2 Flash memory programming mode.....	517
24.6.3 Selecting communication mode.....	518
24.6.4 Communication commands.....	519
<b>24.7 Security Settings.....</b>	<b>520</b>
<b>24.8 Flash Memory Programming by Self-Programming (Under Development).....</b>	<b>522</b>
24.8.1 Boot swap function.....	524
<b>CHAPTER 25 ON-CHIP DEBUG FUNCTION.....</b>	<b>526</b>
<b>25.1 Connecting QB-78K0MINI to 78K0/LC3.....</b>	<b>526</b>
<b>25.2 On-Chip Debug Security ID.....</b>	<b>527</b>
<b>CHAPTER 26 INSTRUCTION SET.....</b>	<b>528</b>
<b>26.1 Conventions Used in Operation List.....</b>	<b>528</b>
26.1.1 Operand identifiers and specification methods.....	528
26.1.2 Description of operation column.....	529
26.1.3 Description of flag operation column.....	529
<b>26.2 Operation List.....</b>	<b>530</b>
<b>26.3 Instructions Listed by Addressing Type.....</b>	<b>538</b>
<b>CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS).....</b>	<b>541</b>
<b>CHAPTER 28 PACKAGE DRAWINGS.....</b>	<b>559</b>
<b>CHAPTER 29 CAUTIONS FOR WAIT.....</b>	<b>560</b>
<b>29.1 Cautions for Wait.....</b>	<b>560</b>
<b>29.2 Peripheral Hardware That Generates Wait.....</b>	<b>561</b>

## CHAPTER 1 OUTLINE

### 1.1 Features

- Minimum instruction execution time can be changed from high speed (0.2  $\mu$ s: @ 10 MHz operation with high-speed system clock) to ultra low-speed (122  $\mu$ s: @ 32.768 kHz operation with subsystem clock)
- General-purpose register: 8 bits  $\times$  32 registers (8 bits  $\times$  8 registers  $\times$  4 banks)
- ROM, RAM capacities

Part Number	Item	Program Memory (ROM)	Data Memory	
			Internal High-Speed RAM <sup>Note</sup>	LCD Display RAM
$\mu$ PD78F0400, 78F0410	Flash memory <sup>Note</sup>	8 KB	512 bytes	22 $\times$ 4 bits (with 4 com)
$\mu$ PD78F0401, 78F0411		16 KB	768 bytes	18 $\times$ 8 bits (with 8 com)
$\mu$ PD78F0402, 78F0412		24 KB	1 KB	
$\mu$ PD78F0403, 78F0413		32 KB		

**Note** The internal flash memory and internal high-speed RAM capacities can be changed using the internal memory size switching register (IMS).

- On-chip single-power-supply flash memory
- Self-programming (with boot swap function)
- On-chip debug function
- On-chip power-on-clear (POC) circuit and low-voltage detector (LVI)
- On-chip watchdog timer (operable with internal low-speed oscillation clock)
- LCD controller/driver (external resistance division and internal resistance division are switchable)
  - Segment signals: 22, Common signals: 4 (with 4com)
  - Segment signals: 18, Common signals: 8 (with 8com)
- On-chip key interrupt function: 3 channels
- On-chip buzzer output controller
- I/O ports: 30
- Timer: 9 channels
  - 16-bit timer/event counter: 1 channel
  - 8-bit timer/event counter: 3 channels
  - 8-bit timer: 3 channels
  - Real-time counter (RTC): 1 channel
  - Watchdog timer: 1 channel
- Serial interface: 2 channels
  - UART (LIN (Local Interconnect Network)-bus supported): 1 channel
  - UART: 1 channel
- 10-bit successive approximation type A/D converter: 6 channels ( $\mu$ PD78F041x only)
- Manchester code generator
- Power supply voltage:  $V_{DD} = 1.8$  to 5.5 V
- Operating ambient temperature:  $T_A = -40$  to  $+85^\circ\text{C}$



## 1.2 Applications

Digital cameras, AV equipments, household electrical appliances, utility meters, health care equipments, and measurement equipment, etc.

## 1.3 Ordering Information

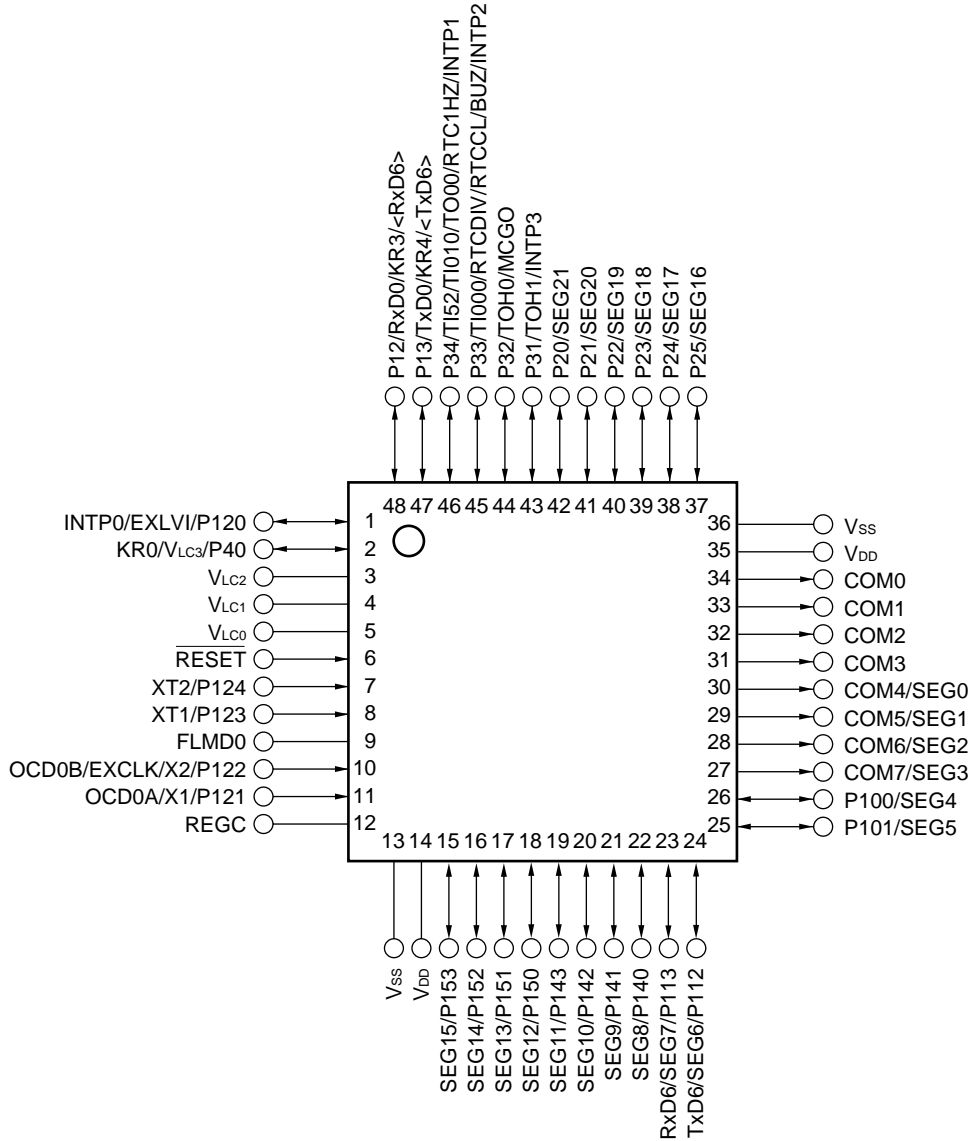
- **Flash memory version (Lead-free products)**

Part Number	Package
$\mu$ PD78F0400GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0401GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0402GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0403GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0410GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0411GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0412GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)
$\mu$ PD78F0413GA-GAM-AX	48-pin plastic LQFP (fine pitch) (7 × 7)

### 1.4 Pin Configuration (Top View)

(1)  $\mu$ PD78F0400, 78F0401, 78F0402, 78F0403

- 48-pin plastic LQFP (fine pitch) (7 × 7)




- Cautions**
1. Connect the REGC pin to V<sub>SS</sub> via a capacitor (0.47 to 1  $\mu$ F: recommended).
  2. Only the bottom side pins (pin numbers 23 and 24) correspond to the UART6 pins (RxD6 and TxD6) when writing by a flash memory programmer. Writing cannot be performed by the top side pins (pin numbers 48 and 47).
  3. Make V<sub>DD</sub> (pin number 14) and V<sub>DD</sub> (pin number 35), V<sub>SS</sub> (pin number 13) and V<sub>SS</sub> (pin number 36) the same potential.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

(2)  $\mu$ PD78F0410, 78F0411, 78F0412, 78F0413

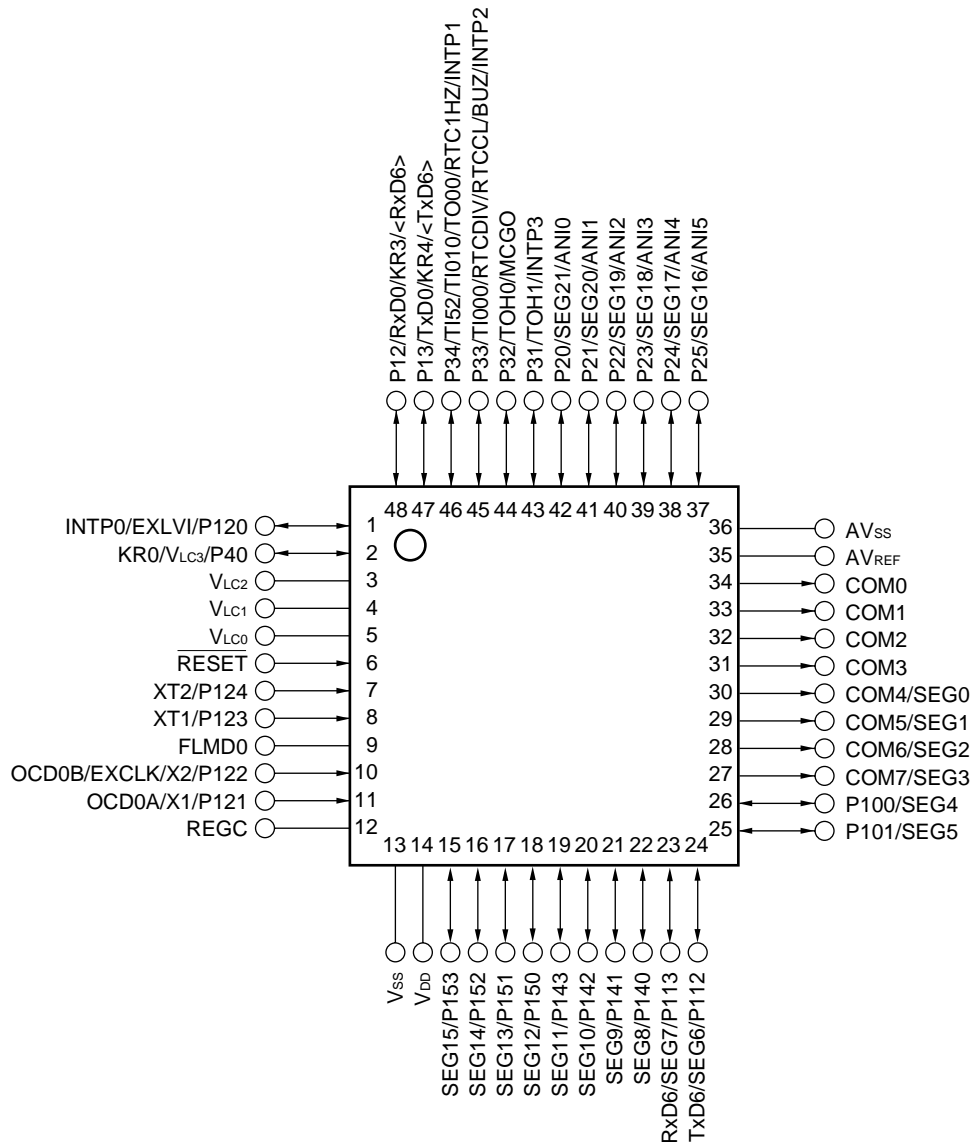- 48-pin plastic LQFP (fine pitch) (7 × 7)



- Cautions**
1. Connect the AVss pin to Vss.
  2. Connect the REGC pin to Vss via a capacitor (0.47 to 1  $\mu$ F: recommended).
  3. ANI0/P20 to ANI5/P25 are set in the analog input mode after release of reset.
  4. Only the bottom side pins (pin numbers 23 and 24) correspond to the UART6 pins (RxD6 and TxD6) when writing by a flash memory programmer. Writing cannot be performed by the top side pins (pin numbers 48 and 47).

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

**Pin Identification**

ANI0 to ANI5 <sup>Note</sup> :	Analog input	P150 to P153:	Port 15
AV <sub>REF</sub> <sup>Note</sup> :	Analog reference voltage	REGC	Regulator capacitance
AV <sub>SS</sub> <sup>Note</sup> :	Analog ground	<u>RESET</u> :	Reset
BUZ:	Buzzer output	RxD0, RxD6:	Receive data
COM0 to COM7:	Common output	RTC1HZ:	Real-time counter correction clock (1 Hz) output
EXCLK:	External clock input (main system clock)	RTCCL:	Real-time counter clock (32.768 kHz original oscillation) output
EXLVI:	External potential input for low-voltage detector	RTCDIV:	Real-time counter clock (32.768 kHz divided frequency) output
FLMD0:	Flash programming mode	SEG0 to SEG21:	Segment output
INTP0 to INTP3:	External interrupt input	TI000, TI010:	Timer input
KR0, KR3, KR4:	Key return	TO00:	Timer output
MCGO:	Manchester code generator output	TOH0, TOH1:	Timer output
OCD0A, OCD0B:	On chip debug input/output	TxD0, TxD6:	Transmit data
P12, P13:	Port 1	V <sub>DD</sub> :	Power supply
P20 to P25:	Port 2	V <sub>SS</sub> :	Ground
P31 to P34:	Port 3	V <sub>LC0</sub> to V <sub>LC3</sub> :	LCD power supply
P40:	Port 4	X1, X2:	Crystal oscillator (main system clock)
P100, P101:	Port 10	XT1, XT2:	Crystal oscillator (subsystem clock)
P112, P113:	Port 11		
P120 to P124:	Port 12		
P140 to P143:	Port 14		

**Note**  $\mu$ PD78F041x only.

## 1.5 78K0/Lx3 Microcontroller Series Lineup

ROM	RAM	78K0/LC3	78K0/LD3	78K0/LE3	78K0/LF3
		48 Pins	52 Pins	64 Pins	80 Pins
60 KB	2 KB	–	–	$\mu$ PD78F0465 $\mu$ PD78F0455 $\mu$ PD78F0445	$\mu$ PD78F0495 $\mu$ PD78F0485 $\mu$ PD78F0475
48 KB	2 KB	–	–	$\mu$ PD78F0464 $\mu$ PD78F0454 $\mu$ PD78F0444	$\mu$ PD78F0494 $\mu$ PD78F0484 $\mu$ PD78F0474
32 KB	1 KB	$\mu$ PD78F0413 $\mu$ PD78F0403	$\mu$ PD78F0433 $\mu$ PD78F0423	$\mu$ PD78F0463 $\mu$ PD78F0453 $\mu$ PD78F0443	$\mu$ PD78F0493 $\mu$ PD78F0483 $\mu$ PD78F0473
24 KB	1 KB	$\mu$ PD78F0412 $\mu$ PD78F0402	$\mu$ PD78F0432 $\mu$ PD78F0422	$\mu$ PD78F0462 $\mu$ PD78F0452 $\mu$ PD78F0442	$\mu$ PD78F0492 $\mu$ PD78F0482 $\mu$ PD78F0472
16 KB	768 B	$\mu$ PD78F0411 $\mu$ PD78F0401	$\mu$ PD78F0431 $\mu$ PD78F0421	$\mu$ PD78F0461 $\mu$ PD78F0451 $\mu$ PD78F0441	$\mu$ PD78F0491 $\mu$ PD78F0481 $\mu$ PD78F0471
8 KB	512 B	$\mu$ PD78F0410 $\mu$ PD78F0400	$\mu$ PD78F0430 $\mu$ PD78F0420	–	–

The list of functions in the 78K0/Lx3 Microcontrollers is shown below. (1/3)

Part Number		78K0/LC3								78K0/LD3								
		μPD78F040x				μPD78F041x				μPD78F042x				μPD78F043x				
Item		48 Pins								52 Pins								
		8	16	24	32	8	16	24	32	8	16	24	32	8	16	24	32	
Flash memory (KB)		8	16	24	32	8	16	24	32	8	16	24	32	8	16	24	32	
RAM (KB)		0.5	0.75	1	1	0.5	0.75	1	1	0.5	0.75	1	1	0.5	0.75	1	1	
Power supply voltage		V <sub>DD</sub> = 1.8 to 5.5 V																
Regulator		Provided																
Minimum instruction execution time		0.2 μs (10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V)/ 0.4 μs (5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V)																
Clock	Main	High-speed system clock																
		10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V/5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V																
	Internal high-speed oscillation clock																	
	8 MHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V																	
Subclock		32.768 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V																
Internal low-speed oscillation clock		240 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V																
Port	Total	30								34								
Timer	16 bits (TM0)		1 ch															
	8 bits (TM5)		3 ch															
	8 bits (TMH)		3 ch															
	RTC		1 ch															
	WDT		1 ch															
Serial interface	3-wire CSI		-								1 ch <sup>Note 1</sup>							
	UART		1 ch								1 ch <sup>Note 1</sup>							
	UART supporting LIN-bus		1 ch <sup>Note 2</sup>								1 ch <sup>Note 3</sup>							
LCD	Type		External resistance division and internal resistance division are switchable.															
	Segment signal		22 (18) <sup>Note 4</sup>								24 (20) <sup>Note 4</sup>							
	Common signal		4 (8) <sup>Note 4</sup>															
10-bit successive approximation type A/D		-				6 ch				-				6 ch				
16-bit ΔΣ type A/D		-																
Interrupt	External		5															
	Internal		17				18				19				20			
Key interrupt		3 ch								5 ch								
Reset	RESET pin		Provided															
	POC		1.59 V ±0.15 V (Time for rising up to 1.8 V : 3.6 ms (MAX.))															
	LVI		The detection level of the supply voltage is selectable in 16 steps.															
	WDT		Provided															
Clock output		-																
Buzzer output		Provided																
Remote controller receiver		-								Provided								
MCG		Provided																
On-chip debug function		Provided																
Operating ambient temperature		T <sub>A</sub> = -40 to +85°C																

**Notes** 1. Since 3-wire CSI and UART are used as alternate-function pins, they must be assigned to either of the functions for use.

2. The LIN-bus supporting UART pins can be changed to the UART pins (pin numbers 47 and 48).

3. The LIN-bus supporting UART pins can be changed to the 3-wire CSI/UART pins (pin numbers 50 and 51).

4. The values in parentheses are the number of signal outputs when 8com is used.

Part Number		78K0/LE3														
		μPD78F044x					μPD78F045x					μPD78F046x				
Item		64 Pins														
Flash memory (KB)		16	24	32	48	60	16	24	32	48	60	16	24	32	48	60
RAM (KB)		0.75	1	1	2	2	0.75	1	1	2	2	0.75	1	1	2	2
Power supply voltage		V <sub>DD</sub> = 1.8 to 5.5 V														
Regulator		Provided														
Minimum instruction execution time		0.2 μs (10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V)/ 0.4 μs (5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V)														
Clock	Main	High-speed system clock														
		10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V/5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V														
	Internal high-speed oscillation clock															
	8 MHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V															
Subclock		32.768 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V														
Internal low-speed oscillation clock		240 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V														
Port	Total		46													
	Timer	16 bits (TM0)		1 ch												
8 bits (TM5)		3 ch														
8 bits (TMH)		3 ch														
RTC		1 ch														
WDT		1 ch														
Serial interface	3-wire CSI/UART <sup>Note1</sup>		1 ch													
	UART supporting LIN-bus <sup>Note2</sup>		1 ch													
LCD	Type		External resistance division and internal resistance division are switchable.													
	Segment signal		32 (28) <sup>Note 3</sup>									24 (20) <sup>Note 3</sup>				
	Common signal		4 (8) <sup>Note 3</sup>													
10-bit successive approximation type A/D		-					8 ch									
16-bit ΔΣ type A/D		-										3 ch				
Interrupt	External		6													
	Internal		19					20					21			
Key interrupt		5 ch														
Reset	RESET pin		Provided													
	POC		1.59 V ±0.15 V (Time for rising up to 1.8 V : 3.6 ms (MAX.))													
	LVI		The detection level of the supply voltage is selectable in 16 steps.													
	WDT		Provided													
Clock output		-														
Buzzer output		Provided														
Remote controller receiver		Provided														
MCG		Provided														
On-chip debug function		Provided														
Operating ambient temperature		T <sub>A</sub> = -40 to +85°C														

- Notes**
- Select either of the functions of these alternate-function pins.
  - The LIN-bus supporting UART pins can be changed to the 3-wire CSI/UART pins (pin numbers 62 and 63).
  - The values in parentheses are the number of signal outputs when 8com is used.

Part Number		78K0/LF3														
Item		$\mu$ PD78F047x					$\mu$ PD78F048x					$\mu$ PD78F049x				
		80 Pins														
Flash memory (KB)		16	24	32	48	60	16	24	32	48	60	16	24	32	48	60
RAM (KB)		0.75	1	1	2	2	0.75	1	1	2	2	0.75	1	1	2	2
Power supply voltage		V <sub>DD</sub> = 1.8 to 5.5 V														
Regulator		Provided														
Minimum instruction execution time		0.2 $\mu$ s (10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V)/ 0.4 $\mu$ s (5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V)														
Clock	Main	High-speed system clock 10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V/5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V														
		Internal high-speed oscillation clock 8 MHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V														
	Subclock 32.768 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V															
	Internal low-speed oscillation clock 240 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V															
Port	Total	62														
Timer	16 bits (TM0) 1 ch															
	8 bits (TM5) 3 ch															
	8 bits (TMH) 3 ch															
	RTC 1 ch															
	WDT 1 ch															
Serial interface	3-wire CSI/UART <sup>Note1</sup> 1 ch															
	Automatic transmit/receive 3-wire CSI 1 ch															
	UART supporting LIN-bus <sup>Note2</sup> 1 ch															
LCD	Type External resistance division and internal resistance division are switchable.															
	Segment signal 40 (36) <sup>Note3</sup>					32 (28) <sup>Note3</sup>										
	Common signal 4 (8) <sup>Note3</sup>															
10-bit successive approximation type A/D		-					8 ch									
16-bit $\Delta\Sigma$ type A/D		-					3 ch									
Interrupt	External 7															
	Internal 20					21					22					
Key interrupt		8 ch														
Reset	RESET pin Provided															
	POC 1.59 V $\pm$ 0.15 V (Time for rising up to 1.8 V : 3.6 ms (MAX.))															
	LVI The detection level of the supply voltage is selectable in 16 steps.															
	WDT Provided															
Clock output/ Buzzer output		Provided														
Remote controller receiver		Provided														
MCG		Provided														
On-chip debug function		Provided														
Operating ambient temperature		T <sub>A</sub> = -40 to +85°C														


**Notes 1.** Select either of the functions of these alternate-function pins.

**2.** The LIN-bus supporting UART pins can be changed to the Automatic transmit/receive 3-wire CSI/UART pins (pin numbers 75 and 76).

**3.** The values in parentheses are the number of signal outputs when 8com is used.



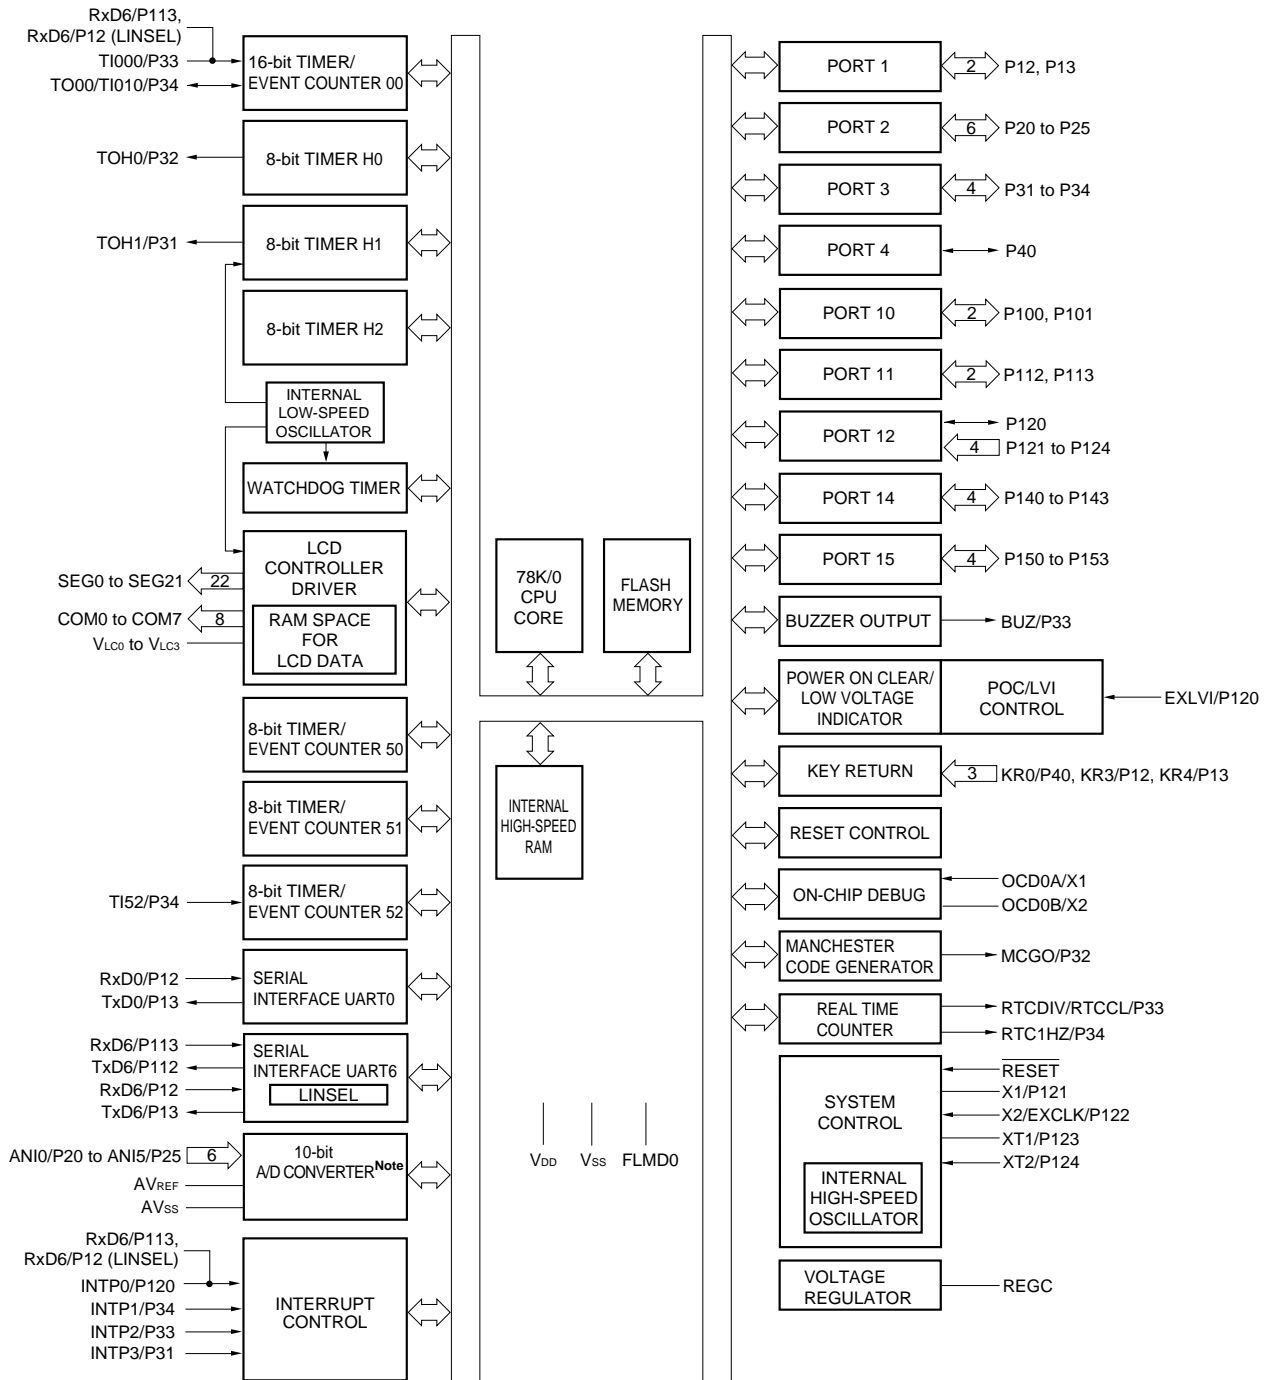1.6 Block Diagram



Note  $\mu$ PD78F041x only.

1.7 Outline of Functions

(1/2)

Item		$\mu$ PD78F0400 $\mu$ PD78F0410	$\mu$ PD78F0401 $\mu$ PD78F0411	$\mu$ PD78F0402 $\mu$ PD78F0412	$\mu$ PD78F0403 $\mu$ PD78F0413
Internal memory	Flash memory (self-programming supported) <sup>Note</sup>	8 KB	16 KB	24 KB	32 KB
	High-speed RAM <sup>Note</sup>	512 bytes	768 bytes	1 KB	
	LCD display RAM	22 × 4 bits (with 4 com) or 18 × 8 bits (with 8 com)			
Memory space		64 KB			
Main system clock (oscillation frequency)	High-speed system clock	X1 (crystal/ceramic) oscillation, external main system clock input (EXCLK) 2 to 10 MHz: V <sub>DD</sub> = 2.7 to 5.5 V, 2 to 5 MHz: V <sub>DD</sub> = 1.8 to 5.5 V			
	Internal high-speed oscillation clock	Internal oscillation 8 MHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V			
Subsystem clock (oscillation frequency)		XT1 (crystal) oscillation 32.768 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V			
Internal low-speed oscillation clock (for TMH1, WDT)		Internal oscillation 240 kHz (TYP.): V <sub>DD</sub> = 1.8 to 5.5 V			
General-purpose registers		8 bits × 32 registers (8 bits × 8 registers × 4 banks)			
Minimum instruction execution time		0.2 $\mu$ s (high-speed system clock: @ f <sub>XH</sub> = 10 MHz operation)			
		0.25 $\mu$ s (internal high-speed oscillation clock: @ f <sub>RH</sub> = 8 MHz (TYP.) operation)			
		122 $\mu$ s (subsystem clock: @ f <sub>SUB</sub> = 32.768 kHz operation)			
Instruction set		<ul style="list-style-type: none"> <li>8-bit operation and 16-bit operation</li> <li>Bit manipulate (set, reset, test, and Boolean operation)</li> <li>BCD adjust, etc.</li> </ul>			
I/O ports		Total: 30 CMOS I/O: 26 CMOS input: 4			
Timers		<ul style="list-style-type: none"> <li>16-bit timer/event counter: 1 channels</li> <li>8-bit timer/event counter: 3 channels</li> <li>8-bit timer: 3 channels (out of which 2 channels can perform PWM output)</li> <li>Real-time counter: 1 channel</li> <li>Watchdog timer: 1 channel</li> </ul>			
		Timer outputs	3 (PWM output: 2 and PPG output: 1)		
		RTC outputs	2 <ul style="list-style-type: none"> <li>1 Hz (Subsystem clock: f<sub>SUB</sub> = 32.768 kHz)</li> <li>512 Hz or 16.384 kHz or 32.768 kHz (Subsystem clock: f<sub>SUB</sub> = 32.768 kHz)</li> </ul>		
Buzzer output		<ul style="list-style-type: none"> <li>1.22 kHz, 2.44 kHz, 4.88 kHz, 9.77 MHz</li> </ul> (peripheral hardware clock: @ f <sub>PRS</sub> = 10 MHz operation)			

**Note** The internal flash memory capacity and internal high-speed RAM capacity can be changed using the internal memory size switching register (IMS).

Item	$\mu$ PD78F0400 $\mu$ PD78F0410	$\mu$ PD78F0401 $\mu$ PD78F0411	$\mu$ PD78F0402 $\mu$ PD78F0412	$\mu$ PD78F0403 $\mu$ PD78F0413
10-bit successive approximation type A/D converter	<ul style="list-style-type: none"> <li><math>\mu</math>PD78F040x: None</li> <li><math>\mu</math>PD78F041x: 6 channels</li> </ul>			
Serial interface	<ul style="list-style-type: none"> <li>UART supporting LIN-bus<sup>Note 1</sup>: 1 channel</li> <li>UART: 1 channel</li> </ul>			
LCD controller/driver	<ul style="list-style-type: none"> <li>External resistance division and internal resistance division are switchable.</li> <li>Segment signal outputs: 22 (18)<sup>Note 2</sup></li> <li>Common signal outputs: 4 (8)<sup>Note 2</sup></li> </ul>			
Manchester code generator	Provided			
Vectored interrupt sources	Internal	<ul style="list-style-type: none"> <li><math>\mu</math>PD78F040x: 17</li> <li><math>\mu</math>PD78F041x: 18</li> </ul>		
	External	5		
Key interrupt	Key interrupt (INTKR) occurs by detecting falling edge of key input pins (KR0, KR3, KR4).			
Reset	<ul style="list-style-type: none"> <li>Reset using <math>\overline{\text{RESET}}</math> pin</li> <li>Internal reset by watchdog timer</li> <li>Internal reset by power-on-clear</li> <li>Internal reset by low-voltage detector</li> </ul>			
On-chip debug function	Provided			
Power supply voltage	$V_{DD} = 1.8$ to $5.5$ V			
Operating ambient temperature	$T_A = -40$ to $+85^\circ\text{C}$			
Package	48-pin plastic LQFP (fine pitch) (7 × 7)			

**Notes 1.** The LIN-bus supporting UART pins can be changed to the UART pins (pin numbers 47 and 48).

**2.** The values in parentheses are the number of signal outputs when 8com is used.

An outline of the timer is shown below.

		16-Bit Timer/ Event Counters 00	8-Bit Timer/ Event Counters 50, 51, and 52			8-Bit Timers H0, H1, and H2			Real-time Counter	Watchdog Timer
		TM00	TM50	TM51	TM52	TMH0	TMH1	TMH2		
Function	Interval timer	1 channel	1 channel	1 channel	1 channel	1 channel	1 channel	1 channel	1 channel Note 1	–
	External event counter	1 channel Note 2	–	–	1 channel Note 2	–	–	– Note 2	–	–
	PPG output	1 output	–	–	–	–	–	–	–	–
	PWM output	–	–	–	–	1 output	1 output	–	–	–
	Pulse width measurement	2 inputs	–	–	–	–	–	–	–	–
	Square-wave output	1 output	–	–	–	1 output	1 output	–	–	–
	Carrier generator	–	–	– Note 3	–	–	1 output Note 3	–	–	–
	Calendar function	–	–	–	–	–	–	–	1 channel Note 1	–
	RTC output	–	–	–	–	–	–	–	2 outputs Note 4	–
	Watchdog timer	–	–	–	–	–	–	–	–	1 channel
Interrupt source		2	1	1	1	1	1	1	1	–

- Notes**
1. In the real-time counter, the Interval timer function and calendar function can be used simultaneously.
  2. TM52 and TM00 can be connected in cascade to be used as a 24-bit counter. Also, the external event input of TM52 can be input enable-controlled via TMH2.
  3. TM51 and TMH1 can be used in combination as a carrier generator mode.
  4. A 1 Hz output can be used as one output and a 512 Hz, 16.384 kHz, or 32.768 kHz output can be used as one output.

## CHAPTER 2 PIN FUNCTIONS

### 2.1 Pin Function List

There are three types of pin I/O buffer power supplies:  $AV_{REF}$ <sup>Note</sup>,  $V_{LCO}$ , and  $V_{DD}$ . The relationship between these power supplies and the pins is shown below.

**Table 2-1. Pin I/O Buffer Power Supplies**

Power Supply	Corresponding Pins
$AV_{REF}$ <sup>Note</sup>	P20 to P25
$V_{LCO}$	COM0 to COM7, SEG0 to SEG21, $V_{LCO}$ to $V_{LC3}$
$V_{DD}$	Pins other than above

**Note**  $\mu$ PD78F041x only. The power supply is  $V_{DD}$  with  $\mu$ PD78F040x.

#### (1) Port pins

(1/2)

Function Name	I/O	Function	After Reset	Alternate Function
P12	I/O	Port 1. 2-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	RxD0/KR3/<RxD6>
P13				TxD0/KR4/<TxD6>
P20	I/O	Port 2. 6-bit I/O port. Input/output can be specified in 1-bit units.	Digital input port	SEG21/ANI0 <sup>Note</sup>
P21				SEG20/ANI1 <sup>Note</sup>
P22				SEG19/ANI2 <sup>Note</sup>
P23				SEG18/ANI3 <sup>Note</sup>
P24				SEG17/ANI4 <sup>Note</sup>
P25				SEG16/ANI5 <sup>Note</sup>
P31	I/O	Port 3. 4-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	TOH1/INTP3
P32				TOH0/MCGO
P33				TI000/RTCDIV/ RTCCL/BUZ/INTP2
P34				TI52/TI010/TO00/ RTC1HZ/INTP1
P40	I/O	Port 4. 1-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	$V_{LC3}$ /KR0

**Note**  $\mu$ PD78F041x only.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

(1) Port pins

(2/2)

Function Name	I/O	Function	After Reset	Alternate Function
P100, P101	I/O	Port 10. 2-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG4, SEG5
P112	I/O	Port 11. 2-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG6/TxD6
P113				SEG7/RxD6
P120	I/O	Port 12. 1-bit I/O port and 4-bit input port. Only for P120, use of an on-chip pull-up resistor can be specified by a software setting.	Input port	INTP0/EXLVI
P121				X1/OCD0A
P122				X2/EXCLK/OCD0B
P123				XT1
P124				XT2
P140 to P143	I/O	Port 14. 4-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG8 to SEG11
P150 to P153	I/O	Port 15. 4-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG12 to SEG15

(2) Non-port pins

(1/2)

Function Name	I/O	Function	After Reset	Alternate Function		
ANI0 <sup>Note</sup>	Input	10-bit successive approximation type A/D converter analog input.	Digital input port	P20/SEG21		
ANI1 <sup>Note</sup>				P21/SEG20		
ANI2 <sup>Note</sup>				P22/SEG19		
ANI3 <sup>Note</sup>				P23/SEG18		
ANI4 <sup>Note</sup>				P24/SEG17		
ANI5 <sup>Note</sup>				P25/SEG16		
AV <sub>REF</sub> <sup>Note</sup>	Input	10-bit successive approximation type A/D converter reference voltage input, positive power supply for port 2	–	–		
AV <sub>SS</sub> <sup>Note</sup>	–	A/D converter ground potential. Make the same potential as V <sub>SS</sub> .	–	–		
SEG0 to SEG3	Output	LCD controller/driver segment signal outputs	Output	COM4 to COM7		
SEG4, SEG5			Input port	P100, P101		
SEG6				P112/TxD6		
SEG7				P113/RxD6		
SEG8 to SEG11				P114 to P143		
SEG12 to SEG15				P150 to P153		
SEG16			Digital input port	P25/ANI5 <sup>Note</sup>		
SEG17				P24/ANI4 <sup>Note</sup>		
SEG18				P23/ANI3 <sup>Note</sup>		
SEG19				P22/ANI2 <sup>Note</sup>		
SEG20				P21/ANI1 <sup>Note</sup>		
SEG21				P20/ANI0 <sup>Note</sup>		
COM0 to COM3			Output	LCD controller/driver common signal outputs	Output	–
COM4 to COM7						SEG0 to SEG3
V <sub>LC0</sub> to V <sub>LC2</sub>	–	LCD drive voltage	–	–		
V <sub>LC3</sub>			Input port	P40/KR0		
BUZ	Output	Buzzer output	Input port	P33/TI000/RTCDIV/ RTCCL/INTP2		
INTP0	Input	External interrupt request input for which the valid edge (rising edge, falling edge, or both rising and falling edges) can be specified	Input port	P120/EXLVI		
INTP1				P34/TI52/TI010/ TO00/RTC1HZ		
INTP2				P33/TI000/RTCDIV/ RTCCL/BUZ		
INTP3				P31/TOH1		
KR0	Input	Key interrupt input	Input port	P40/V <sub>LC3</sub>		
KR3				P12/RxD0/<RxD6>		
KR4				P13/TxD0/<TxD6>		
MCGO	Output	Manchester code output	Input port	P32/TOH0		

**Note**  $\mu$ PD78F041x only.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

(2) Non-port pins

(2/2)

Function Name	I/O	Function	After Reset	Alternate Function
RESET	Input	System reset input	–	–
RTCDIV	Output	Real-time counter clock (32 kHz divided frequency) output	Input port	P33/TI000/RTCCL /BUZ/INTP2
RTCCL	Output	Real-time counter clock (32 kHz original oscillation) output	Input port	P33/TI000/RTCDIV /BUZ/INTP2
RTC1HZ	Output	Real-time counter clock (1 Hz) output	Input port	P34/TI52/TI010/ TO00/INTP1
RxD0	Input	Serial data input to asynchronous serial interface	Input port	P12/KR3/<RxD6>
RxD6				P113/SEG7
<RxD6>				P12/RxD0/KR3
TI000	Input	External count clock input to 16-bit timer/event counter 00 Capture trigger input to capture registers (CR000, CR010) of 16-bit timer/event counter 00	Input port	P33/RTCDIV/ RTCCL/BUZ/ INTP2
TI010		Capture trigger input to capture register (CR000) of 16-bit timer/event counter 00		P34/TI52/TO00/ RTC1HZ/INTP1
TI52	Input	External count clock input to 8-bit timer/event counter 52	Input port	P34/TI010/TO00/ RTC1HZ/INTP1
TO00	Output	16-bit timer/event counter 00 output	Input port	P34/TI52/TI010/ RTC1HZ/INTP1
TOH0	Output	8-bit timer H0 output	Input port	P32/MCGO
TOH1		8-bit timer H1 output		P31/INTP3
TxD0	Output	Serial data output from asynchronous serial interface	Input port	P13/KR4/<TxD6>
TxD6				P112/SEG6
<TxD6>				P13/TxD0/KR4
EXLVI	Input	Potential input for external low-voltage detection	Input port	P120/INTP0
X1	Input	Connecting resonator for main system clock	Input port	P121/OCD0A
X2				–
EXCLK	Input	External clock input for main system clock	Input port	P122/X2/OCD0B
XT1	Input	Connecting resonator for subsystem clock	Input port	P123
XT2				–
V <sub>DD</sub>	–	Positive power supply	–	–
V <sub>SS</sub>	–	Ground potential	–	–
FLMD0	–	Flash memory programming mode setting	–	–
OCD0A	Input	On-chip debug mode setting connection	Input port	P121/X1
OCD0B				–

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).



## 2.2 Description of Pin Functions

### 2.2.1 P12, P13 (port 1)

P12 and P13 function as a 2-bit I/O port. These pins also function as pins for key interrupt and serial interface data I/O. P13 can be selected to function as pins, using port function register 1 (PF1) (see Figure 4-19).

The following operation modes can be specified in 1-bit units.

#### (1) Port mode

P12 and P13 function as a 2-bit I/O port. P12 and P13 can be set to input or output port in 1-bit units using port mode register 1 (PM1). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 1 (PU1).

#### (2) Control mode

P12 and P13 function as key interrupt and serial interface data I/O.

##### (a) KR3, KR4

These are key interrupt input pins.

##### (b) RxD0, RxD6

These are the serial data input pins of the asynchronous serial interface.

##### (c) TxD0, TxD6

These are the serial data output pins of the asynchronous serial interface.

### 2.2.2 P20 to P25 (port 2)

P20 to P25 function as a 6-bit I/O port. These pins also function as pins for segment signal output pins for the LCD controller/driver, 10-bit successive approximation type A/D converter analog input ( $\mu$ PD78F041x only). Either I/O port function or segment signal output function can be selected using port function register 2 (PF2).

The following operation modes can be specified in 1-bit units.

#### (1) Port mode

P20 to P25 function as a 6-bit I/O port. P20 to P25 can be set to input or output port in 1-bit units using port mode register 2 (PM2).

#### (2) Control mode

P20 to P25 function as segment signal output for the LCD controller/driver and 10-bit successive approximation type A/D converter analog input ( $\mu$ PD78F041x only).

##### (a) SEG16 to SEG21

These pins are the segment signal output pins for the LCD controller/driver.

##### (b) ANI0 to ANI5 ( $\mu$ PD78F041x only)

These are 10-bit successive approximation type A/D converter analog input pins. When using these pins as analog input pins, see (5) **ANI0/SEG21/P20 to ANI5/SEG16/P25 pins** in **12.6 Cautions for 10-bit successive approximation type A/D Converter**.

**Caution** P20 to P25 are set in the digital input mode after release of reset.

### 2.2.3 P31 to P34 (port 3)

P31 to P34 function as a 4-bit I/O port. These pins also function as pins for external interrupt request input, timer I/O, buzzer output, real-time counter output, and manchester code output.

The following operation modes can be specified in 1-bit units.

#### (1) Port mode

P31 to P34 function as a 4-bit I/O port. P31 to P34 can be set to input or output port in 1-bit units using port mode register 3 (PM3). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 3 (PU3).

#### (2) Control mode

P31 to P34 function as external interrupt request input, timer I/O, buzzer output, real-time counter output, and manchester code output.

##### (a) INTP1 to INTP3

These are the external interrupt request input pins for which the valid edge (rising edge, falling edge, or both rising and falling edges) can be specified.

##### (b) TO00, TOH0, TOH1

These are timer output pin.

##### (c) TI000

This is a pin for inputting an external count clock to 16-bit timer/event counters 00 and is also for inputting a capture trigger signal to the capture registers (CR000 or CR010) of 16-bit timer/event counters 00.

##### (d) TI010

This is a pin for inputting a capture trigger signal to the capture register (CR000) of 16-bit timer/event counters 00.

##### (e) TI52

This is the pin for inputting an external count clock to 8-bit timer/event counter 52.

##### (f) BUZ

This is a buzzer output pin.

##### (g) RTCDIV

This is a real-time counter clock (32 kHz, divided) output pin.

##### (h) RTCCL

This is a real-time counter clock (32 kHz, original oscillation) output pin.

##### (i) RTC1HZ

This is a real-time counter correction clock (1 Hz) output pin.

##### (j) MCGO

This is a Manchester code output pin.

### 2.2.4 P40 (port 4)

P40 functions as a 1-bit I/O port. These pins also function as pins for key interrupt input and power supply voltage for driving the LCD.

The following operation modes can be specified in 1-bit units.

#### (1) Port mode

P40 functions as a 1-bit I/O port. P40 can be set to input port or output port in 1-bit units using port mode register 4 (PM4). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 4 (PU4).

#### (2) Control mode

P40 functions as key interrupt input and power supply voltage for driving the LCD.

##### (a) KR0

This is the key interrupt input pins.

##### (b) V<sub>LC3</sub>

This is the power supply voltage pins for driving the LCD.

### 2.2.5 P100, P101 (port 10)

P100 and P101 function as a 2-bit I/O port. These pins also function as segment signal output pins for the LCD controller/driver. Either I/O port function or segment signal output function can be selected using port function register ALL (PFALL).

#### (1) Port mode

P100 and P101 function as a 2-bit I/O port. P100 and P101 can be set to input or output port in 1-bit units using port mode register 10 (PM10). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 10 (PU10).

#### (2) Control mode

P100 and P101 function as segment signal output for the LCD controller/driver.

##### (a) SEG4, SEG5

These pins are the segment signal output pins for the LCD controller/driver.

### 2.2.6 P112, P113 (port 11)

P112 and P113 function as a 2-bit I/O port. These pins also function as pins for segment signal output pins for the LCD controller/driver and serial interface data I/O. Either I/O port function (other than segment signal output) or segment signal output function can be selected using port function register ALL (PFALL).

#### (1) Port mode

P112 and P113 function as a 2-bit I/O port. P112 and P113 can be set to input or output port in 1-bit units using port mode register 11 (PM11). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 11 (PU11).

#### (2) Control mode

P112 and P113 function as segment signal output for the LCD controller/driver and serial interface data I/O.

**(a) SEG6, SEG7**

These pins are the segment signal output pins for the LCD controller/driver.

**(b) RxD6**

This is a serial data input pin of serial interface UART6.

**(c) TxD6**

This is a serial data output pin of serial interface UART6.

**2.2.7 P120 to P124 (port 12)**

P120 functions as a 1-bit I/O port. P121 to P124 function as a 4-bit input port. These pins also function as pins for external interrupt request input, potential input for external low-voltage detection, resonator for main system clock connection, resonator for subsystem clock connection, and external clock input. The following operation modes can be specified in 1-bit units.

**(1) Port mode**

P120 functions as a 1-bit I/O port and P121 to P124 function as a 4-bit I/O port. Only for P120, can be set to input or output port using port mode register 12 (PM12). Only for P120, use of an on-chip pull-up resistor can be specified by pull-up resistor option register 12 (PU12).

**(2) Control mode**

P120 to P124 function as external interrupt request input, potential input for external low-voltage detection, resonator for main system clock connection, resonator for subsystem clock connection, and external clock input.

**(a) INTP0**

This functions as an external interrupt request input (INTP0) for which the valid edge (rising edge, falling edge, or both rising and falling edges) can be specified.

**(b) EXLVI**

This is a potential input pin for external low-voltage detection.

**(c) X1, X2**

These are the pins for connecting a resonator for main system clock.

**(d) EXCLK**

This is an external clock input pin for main system clock.

**(e) XT1, XT2**

These are the pins for connecting a resonator for subsystem clock.

**Remark** X1 and X2 can be used as on-chip debug mode setting pins (OCD0A, OCD0B) when the on-chip debug function is used. For detail, see **CHAPTER 25 ON-CHIP DEBUG FUNCTION**.

**2.2.8 P140 to P143 (port 14)**

P140 to P143 function as a 4-bit I/O port. These pins also function as pins for segment signal output pins for the LCD controller/driver. Either I/O port function or segment signal output function can be selected using port function register ALL (PFALL).

**(1) Port mode**

P140 to P143 function as a 4-bit I/O port. P140 to P143 can be set to input or output port in 1-bit units using port mode register 14 (PM14). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 14 (PU14).

**(2) Control mode**

P140 to P143 function as segment signal output pins for the LCD controller/driver.

**(a) SEG8 to SEG11**

These pins are the segment signal output pins for the LCD controller/driver.

**2.2.9 P150 to P153 (port 15)**

P150 to P153 function as a 4-bit I/O port. These pins also function as pins for segment signal output pins for the LCD controller/driver. Either I/O port function or segment signal output function can be selected using port function register ALL (PFALL).

**(1) Port mode**

P150 to P153 function as a 4-bit I/O port. P150 to P153 can be set to input or output port in 1-bit units using port mode register 15 (PM15). Use of an on-chip pull-up resistor can be specified by pull-up resistor option register 15 (PU15).

**(2) Control mode**

P150 to P153 function as segment signal output for the LCD controller/driver.

**(a) SEG12 to SEG15**

These pins are the segment signal output pins for the LCD controller/driver.

**2.2.10 AV<sub>REF</sub> ( $\mu$ PD78F041x only)**

This is the 10-bit successive approximation type A/D converter reference voltage input pin and the positive power supply pin of port 2.

When the A/D converter is not used, connect this pin directly to V<sub>DD</sub><sup>Note</sup>.

**Note** When one or more of the pins of port 2 is used as the digital port pins or for segment output, make AV<sub>REF</sub> the same potential as V<sub>DD</sub>.

**2.2.11 AV<sub>SS</sub> ( $\mu$ PD78F041x only)**

This is the A/D converter ground potential pin. Even when the A/D converter is not used, always use this pin with the same potential as the V<sub>SS</sub> pin.

**2.2.12 COM0 to COM7**

These pins are the common signal output pins for the LCD controller/driver.

**2.2.13 V<sub>LC0</sub> to V<sub>LC3</sub>**


These pins are the power supply voltage pins for driving the LCD.

**2.2.14  $\overline{\text{RESET}}$** 

This is the active-low system reset input pin.

### 2.2.15 REGC

This is the pin for connecting regulator output (2.4 V) stabilization capacitance for internal operation. Connect this pin to V<sub>SS</sub> via a capacitor (0.47 to 1  $\mu$ F: recommended).



**Caution** Keep the wiring length as short as possible in the area enclosed by the broken lines in the above figures.

### 2.2.16 V<sub>DD</sub>

This is the positive power supply pin.

### 2.2.17 V<sub>SS</sub>

This is the ground potential pin.

### 2.2.18 FLMD0

This is a pin for setting flash memory programming mode.

Connect FLMD0 to V<sub>SS</sub> in the normal operation mode.

In flash memory programming mode, connect this pin to the flash memory programmer.

### 2.3 Pin I/O Circuits and Recommended Connection of Unused Pins

Table 2-2 shows the types of pin I/O circuits and the recommended connections of unused pins. See **Figure 2-1** for the configuration of the I/O circuit of each type.

**Table 2-2. Pin I/O Circuit Types (1/2)**

Pin Name	I/O Circuit Type	I/O	Recommended Connection of Unused Pins
P12/RxD0/KR3/<RxD6>	5-AH	I/O	Input: Independently connect to V <sub>DD</sub> or V <sub>SS</sub> via a resistor. Output: Leave open.
P13/TxD0/KR4/<TxD6>			
P20/SEG21/ANI0 <sup>Notes 1, 2</sup> to P25/SEG16/ANI5 <sup>Notes 1, 2</sup>	17-R		<Analog setting> Connect to AV <sub>REF</sub> or AV <sub>SS</sub> . <Digital setting> Input: Independently connect to AV <sub>REF</sub> or AV <sub>SS</sub> via a resistor. <sup>Note 3</sup> Output: Leave open. <Segment setting> Leave open.
P31/TOH1/INTP3	5-AH		Input: Independently connect to V <sub>DD</sub> or V <sub>SS</sub> via a resistor. Output: Leave open.
P32/TOH0/MCGO	5-AG		
P33/TI000/RTCDIV/ RTCCL/BUZ/INTP2	5-AH		
P34/TI52/TI010/TO00/ RTC1HZ/INTP1			
P40/V <sub>LC3</sub> /KR0	5-AO		Input: Independently connect to V <sub>DD</sub> or V <sub>SS</sub> via a resistor. Output: Leave open.
P100/SEG4, P101/SEG5	17-P		<Port setting> Input: Independently connect to V <sub>DD</sub> or V <sub>SS</sub> via a resistor. Output: Leave open. <Segment setting> Leave open.
P112/SEG6/TxD6	17-P		<Port setting>
P113/SEG7/RxD6	17-Q		Input: Independently connect to V <sub>DD</sub> or V <sub>SS</sub> via a resistor. Output: Leave open. <Segment setting> Leave open.

- Notes**
1. ANIx is provided to the  $\mu$ PD78F041x only.
  2. P20/SEG21/ANI0 to P25/SEG16/ANI5 are set in the digital input mode after release of reset.
  3. With  $\mu$ PD78F040x, independently connect to V<sub>DD</sub> or V<sub>SS</sub> via a resistor.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

Table 2-2. Pin I/O Circuit Types (2/2)

Pin Name	I/O Circuit Type	I/O	Recommended Connection of Unused Pins
P120/INTP0/EXLVI	5-AH	I/O	Input: Independently connect to $V_{DD}$ or $V_{SS}$ via a resistor. Output: Leave open.
P121/X1/OCD0A <sup>Note 1</sup>	37-A	Input	Independently connect to $V_{DD}$ or $V_{SS}$ via a resistor.
P122/X2/EXCLK/ OCD0B <sup>Note 1</sup>			
P123/XT1 <sup>Note 1</sup>			
P124/XT2 <sup>Note 1</sup>			
P140/SEG8 to P143/SEG11	17-P	I/O	<Port setting> Input: Independently connect to $V_{DD}$ or $V_{SS}$ via a resistor. Output: Leave open. <Segment setting> Leave open.
P150/SEG12 to P153/SEG15			
COM0 to COM3	18-E	Output	Leave open.
COM4/SEG0 to COM7/SEG3	18-F		
$V_{LC0}$ to $V_{LC2}$	–	–	
RESET	2	Input	Connect directly or via a resistor to $V_{DD}$ .
FLMD0	38		Connect to $V_{SS}$ . <sup>Note 3</sup>
$AV_{REF}$ <sup>Note 2</sup>	–	–	Connect directly to $V_{DD}$ . <sup>Note 4</sup>
$AV_{SS}$ <sup>Note 2</sup>			Connect directly to $V_{SS}$ .

- Notes**
1. Use recommended connection above in I/O port mode (see **Figure 5-2 Format of Clock Operation Mode Select Register (OSCCTL)**) when these pins are not used.
  2.  $\mu$ PD78F041x only.
  3. FLMD0 is a pin used when writing data to flash memory. When rewriting flash memory data on-board or performing on-chip debugging, connect this pin to  $V_{SS}$  via a resistor (10 k $\Omega$ : recommended).
  4. When using port 2 as a digital port or for segment output, set it to the same potential as that of  $V_{DD}$ .



Figure 2-1. Pin I/O Circuit List (1/2)


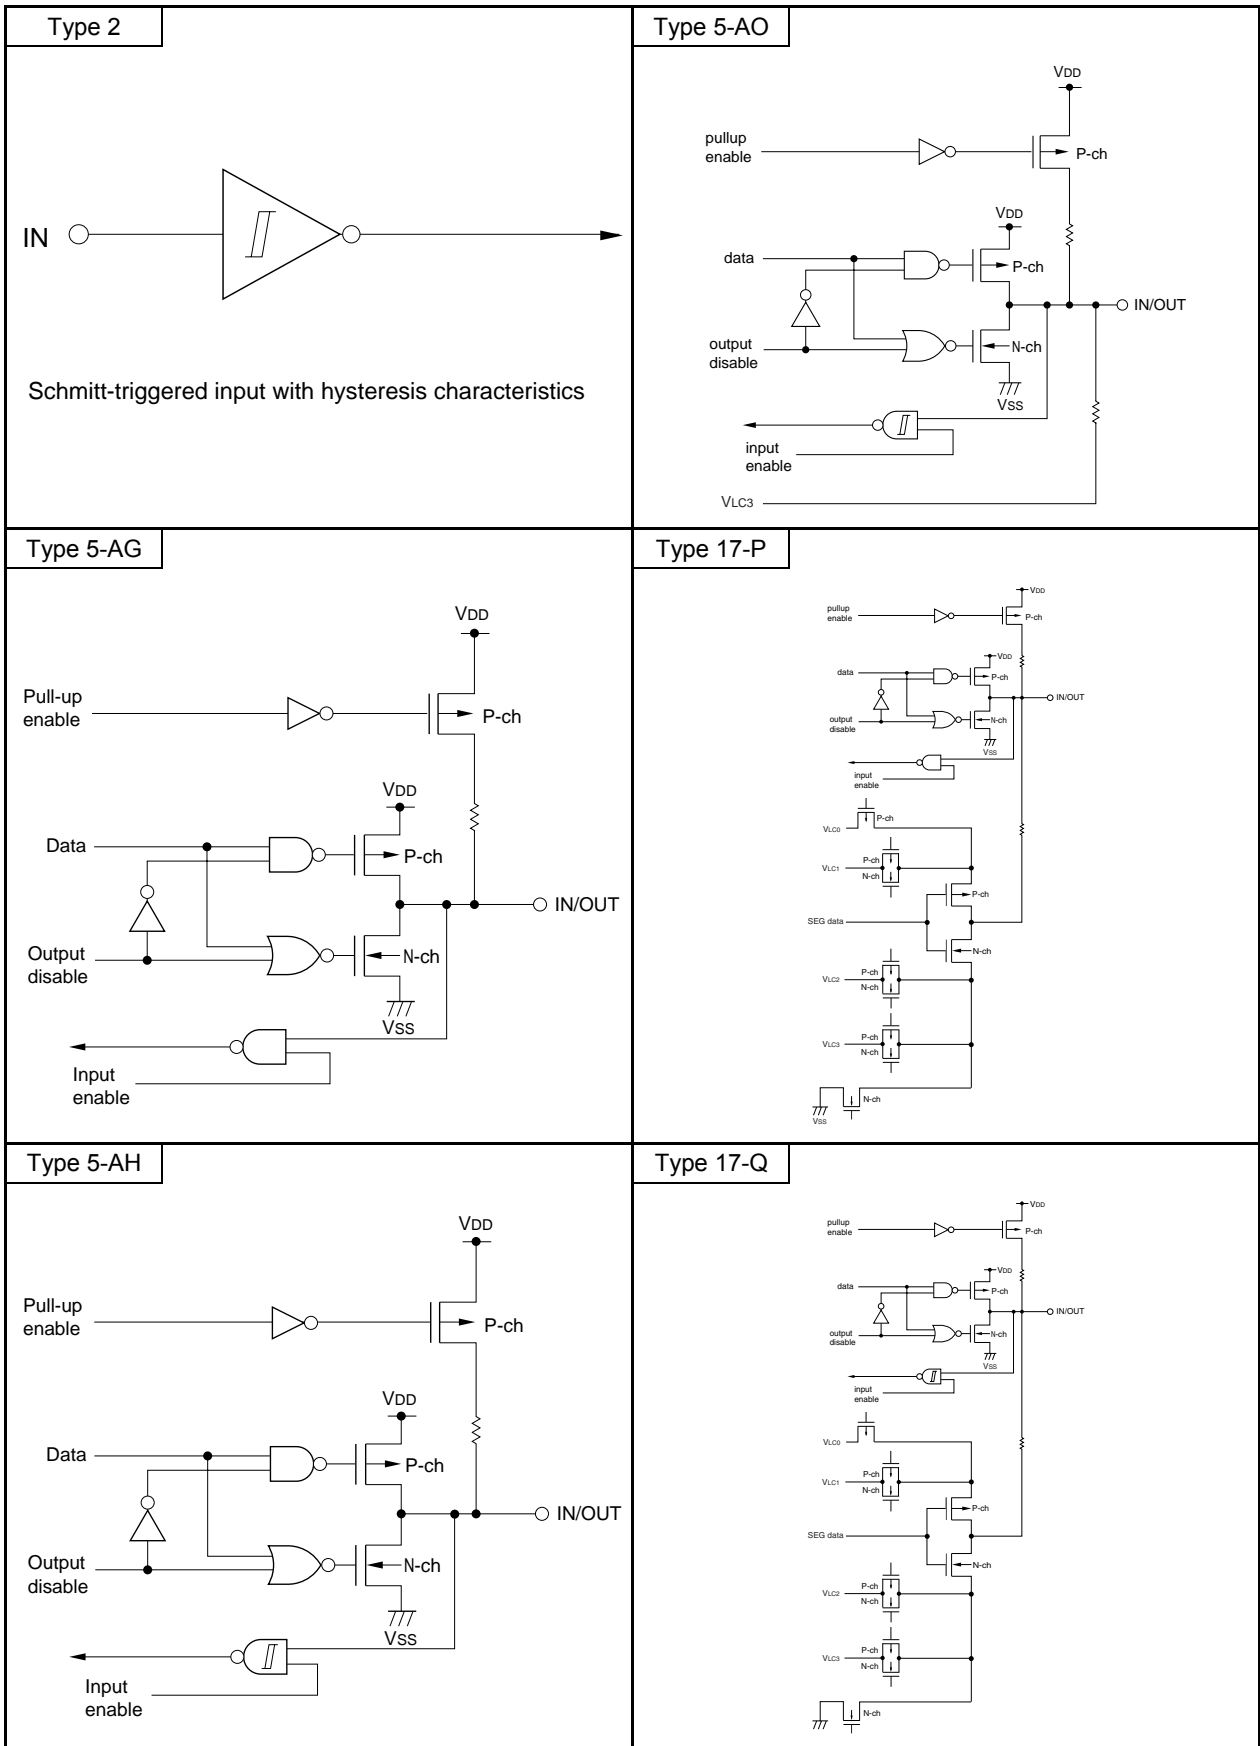


Figure 2-1. Pin I/O Circuit List (2/2)

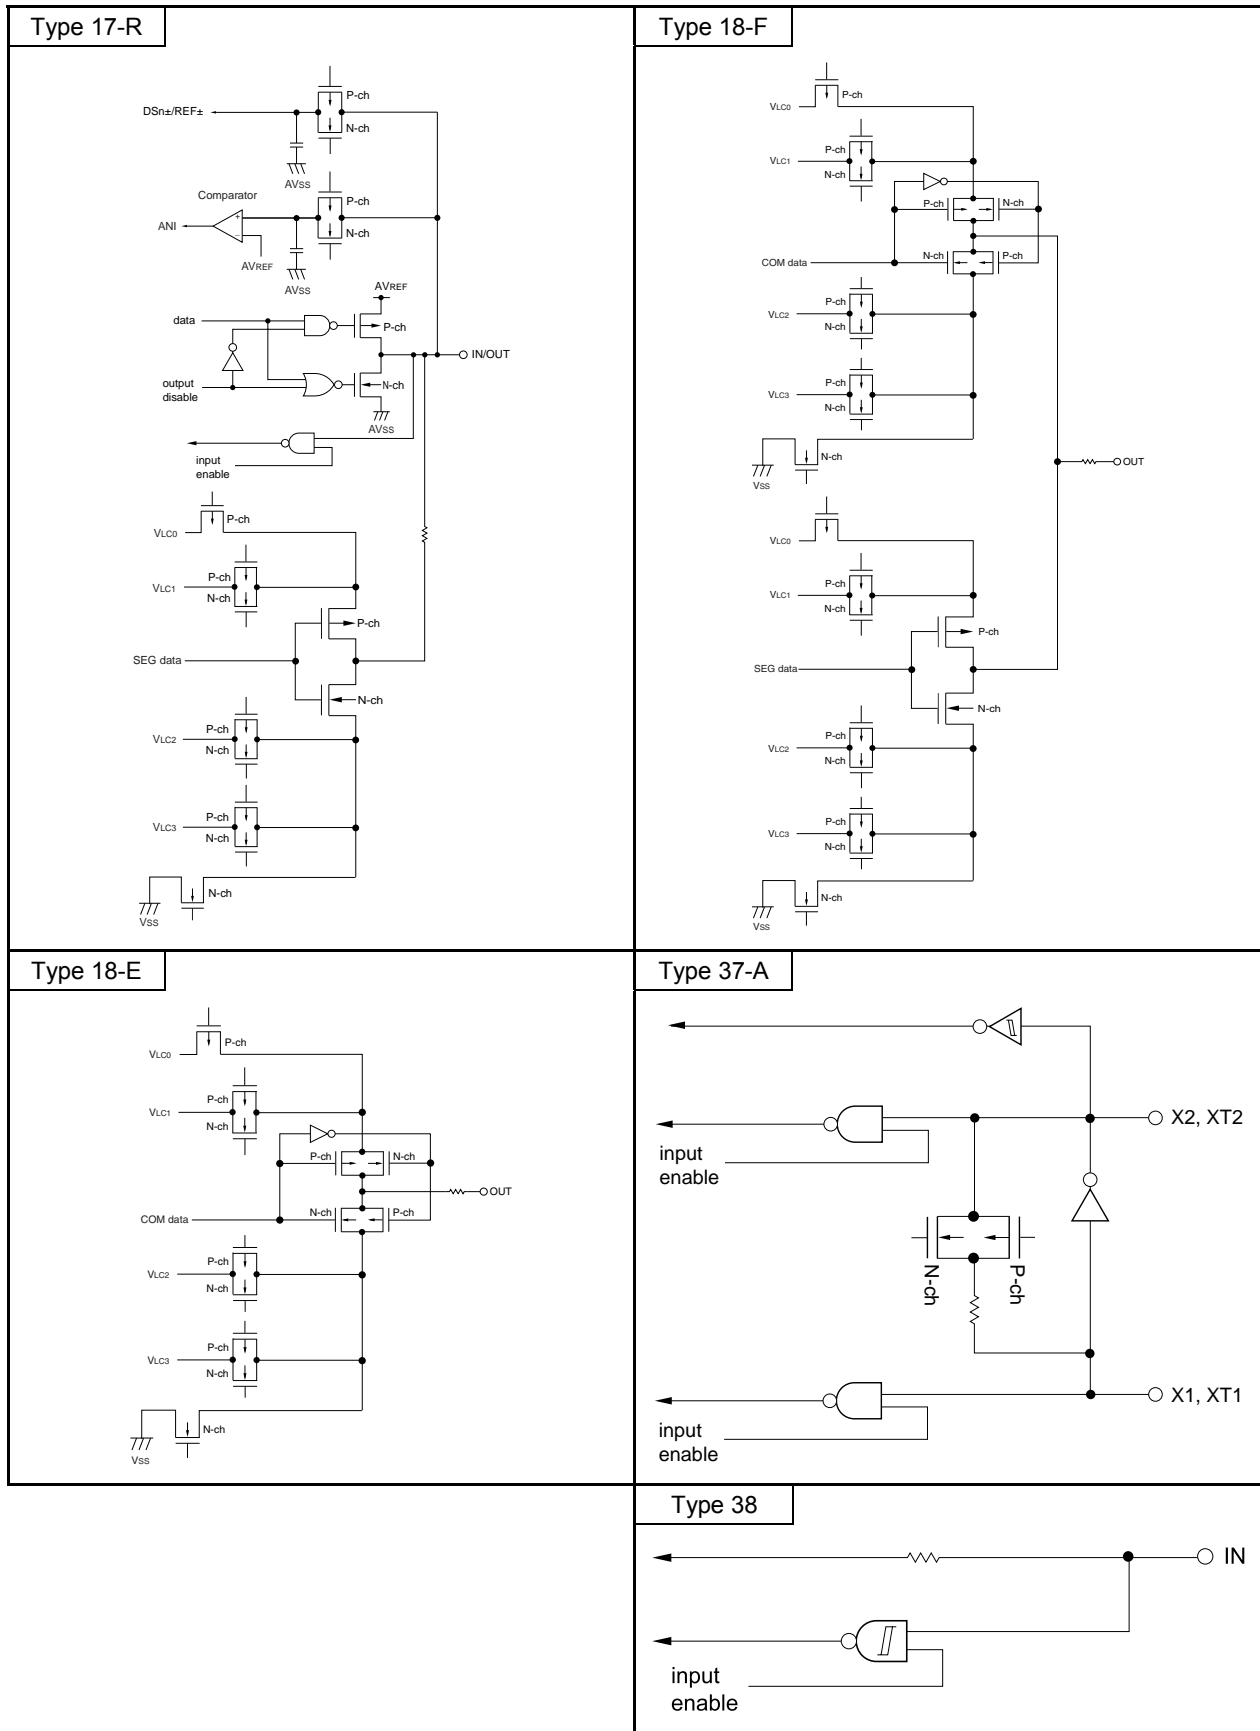

## CHAPTER 3 CPU ARCHITECTURE

### 3.1 Memory Space


Each products in the 78K0/LC3 can access a 64 KB memory space. Figures 3-1 to 3-4 show the memory maps.

**Caution** Regardless of the internal memory capacity, the initial values of the internal memory size switching register (IMS) of all products in the 78K0/LC3 are fixed (IMS = CFH). Therefore, set the value corresponding to each product as indicated below.

**Table 3-1. Set Values of Internal Memory Size Switching Register (IMS)**

Flash Memory Version (78K0/LC3)	IMS	ROM Capacity	Internal High-Speed RAM Capacity
$\mu$ PD78F0400, 78F0410	42H	8 KB	512 bytes
$\mu$ PD78F0401, 78F0411	04H	16 KB	768 bytes
$\mu$ PD78F0402, 78F0412	C6H	24 KB	1 KB
$\mu$ PD78F0403, 78F0413	C8H	32 KB	

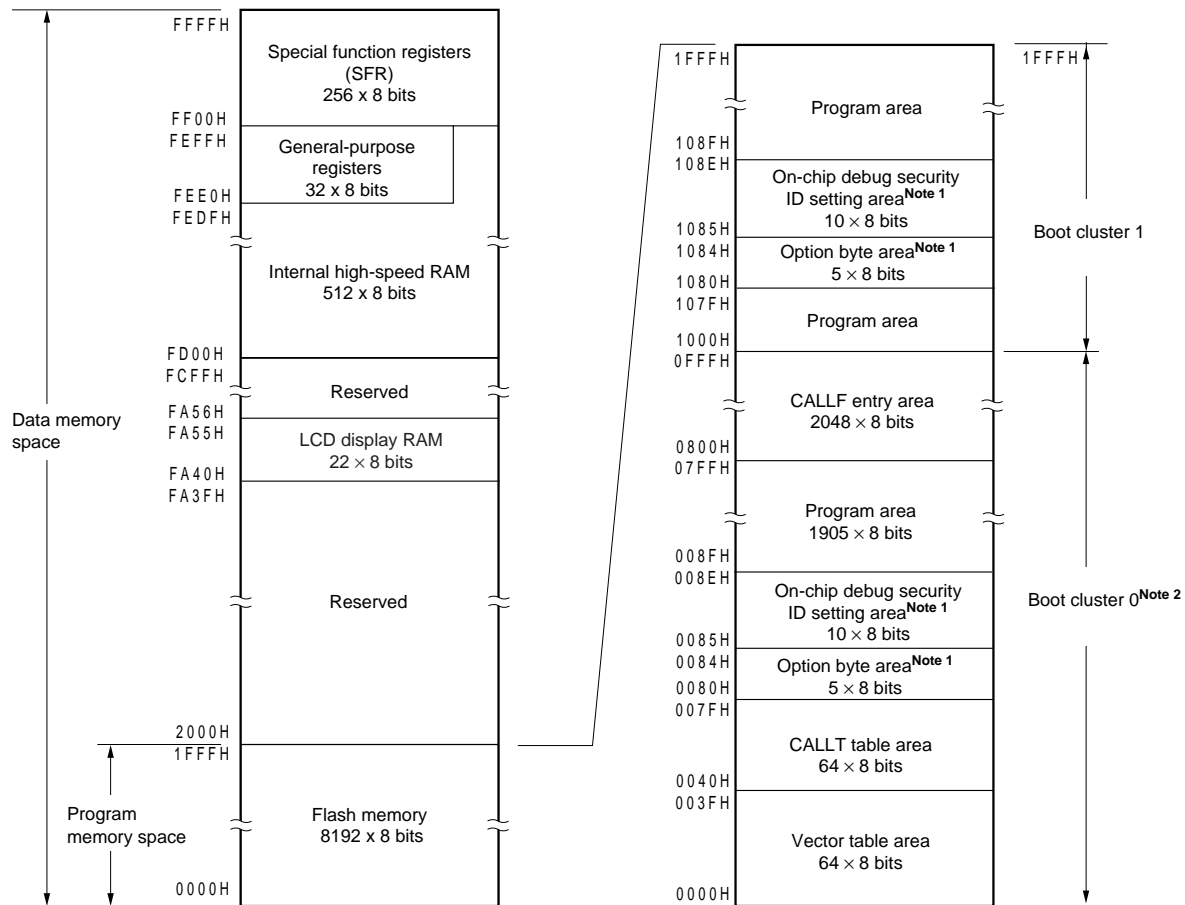Figure 3-1. Memory Map ( $\mu$ PD78F0400, 78F0410)



- Notes**
- When boot swap is not used: Set the option bytes to 0080H to 0084H, and the on-chip debug security IDs to 0085H to 008EH.  
When boot swap is used: Set the option bytes to 0080H to 0084H and 1080H to 1084H, and the on-chip debug security IDs to 0085H to 008EH and 1085H to 108EH.
  - Writing boot cluster 0 can be prohibited depending on the setting of security (see **24.7 Security Setting**).

**Remark** The flash memory is divided into blocks (one block = 1 KB). For the address values and block numbers, see **Table 3-2 Correspondence Between Address Values and Block Numbers in Flash Memory**.


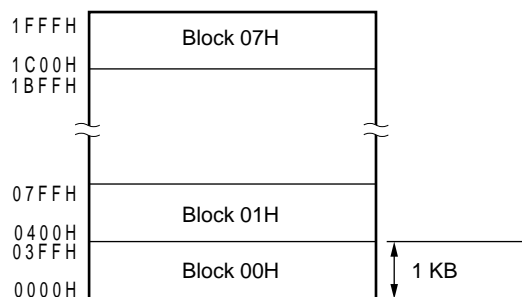


Figure 3-2. Memory Map ( $\mu$ PD78F0401, 78F0411)

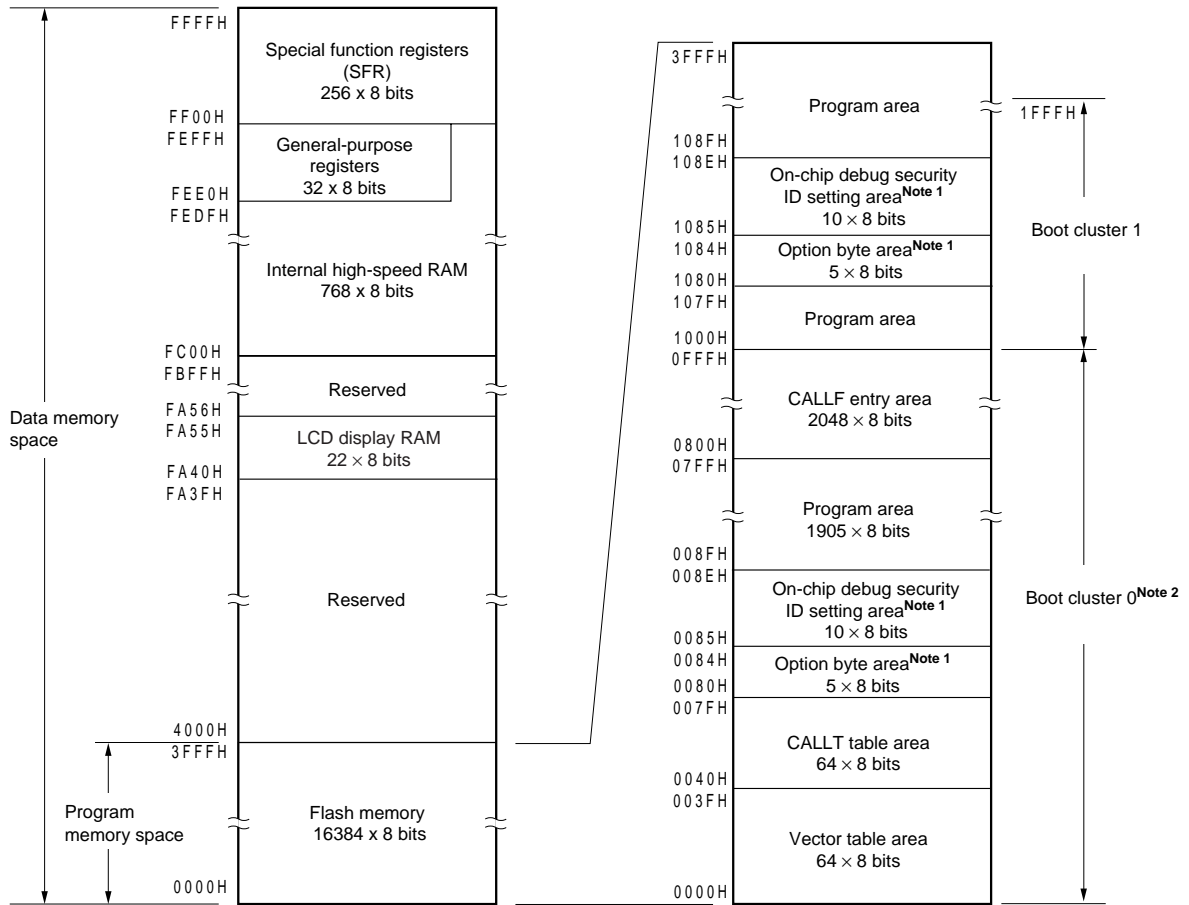

- Notes**
- When boot swap is not used: Set the option bytes to 0080H to 0084H, and the on-chip debug security IDs to 0085H to 008EH.  
When boot swap is used: Set the option bytes to 0080H to 0084H and 1080H to 1084H, and the on-chip debug security IDs to 0085H to 008EH and 1085H to 108EH.
  - Writing boot cluster 0 can be prohibited depending on the setting of security (see **24.7 Security Setting**).

**Remark** The flash memory is divided into blocks (one block = 1 KB). For the address values and block numbers, see **Table 3-2 Correspondence Between Address Values and Block Numbers in Flash Memory**.


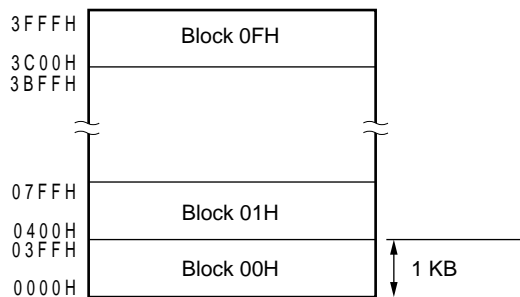


Figure 3-3. Memory Map ( $\mu$ PD78F0402, 78F0412)

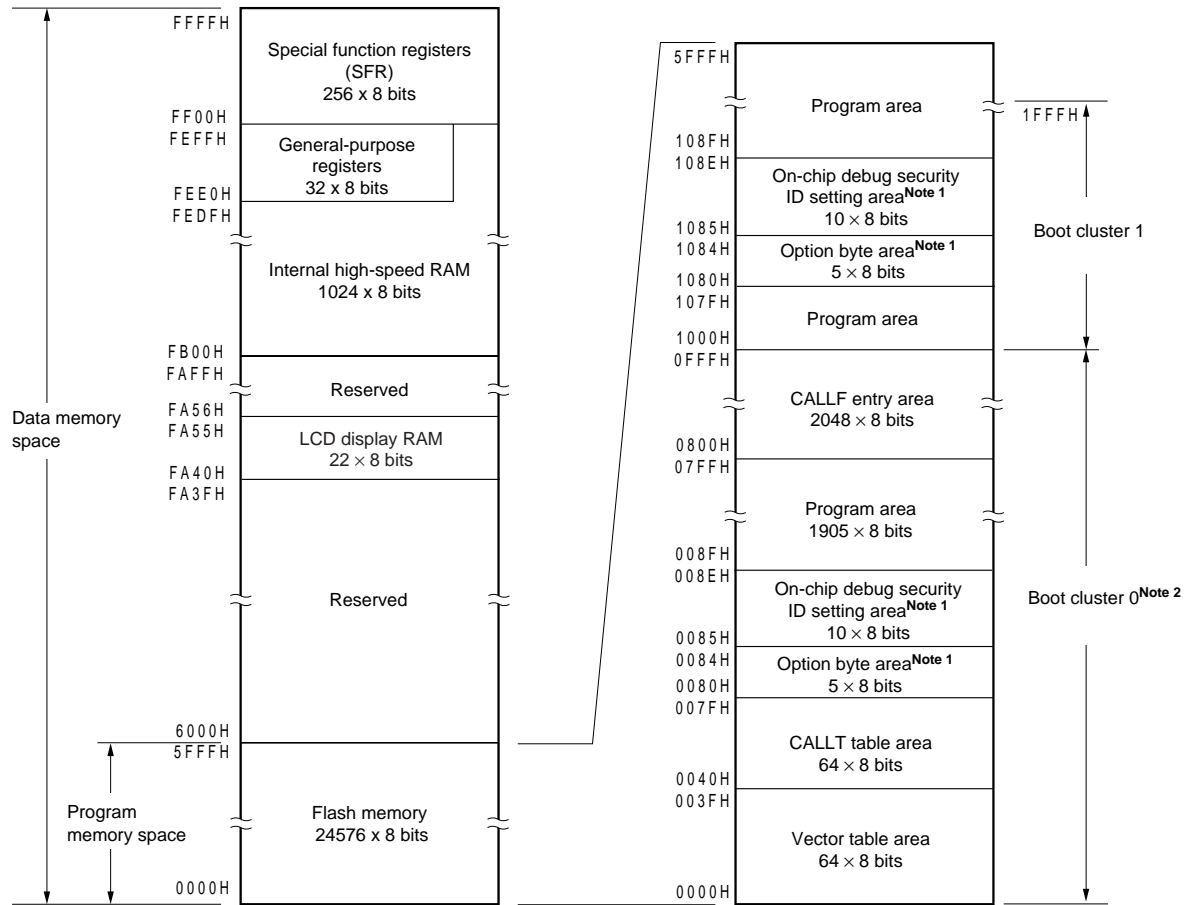

- Notes**
- When boot swap is not used: Set the option bytes to 0080H to 0084H, and the on-chip debug security IDs to 0085H to 008EH.  
When boot swap is used: Set the option bytes to 0080H to 0084H and 1080H to 1084H, and the on-chip debug security IDs to 0085H to 008EH and 1085H to 108EH.
  - Writing boot cluster 0 can be prohibited depending on the setting of security (see **24.7 Security Setting**).

**Remark** The flash memory is divided into blocks (one block = 1 KB). For the address values and block numbers, see **Table 3-2 Correspondence Between Address Values and Block Numbers in Flash Memory**.



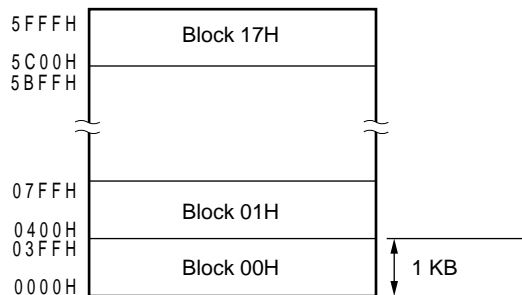


Figure 3-4. Memory Map ( $\mu$ PD78F0403, 78F0413)

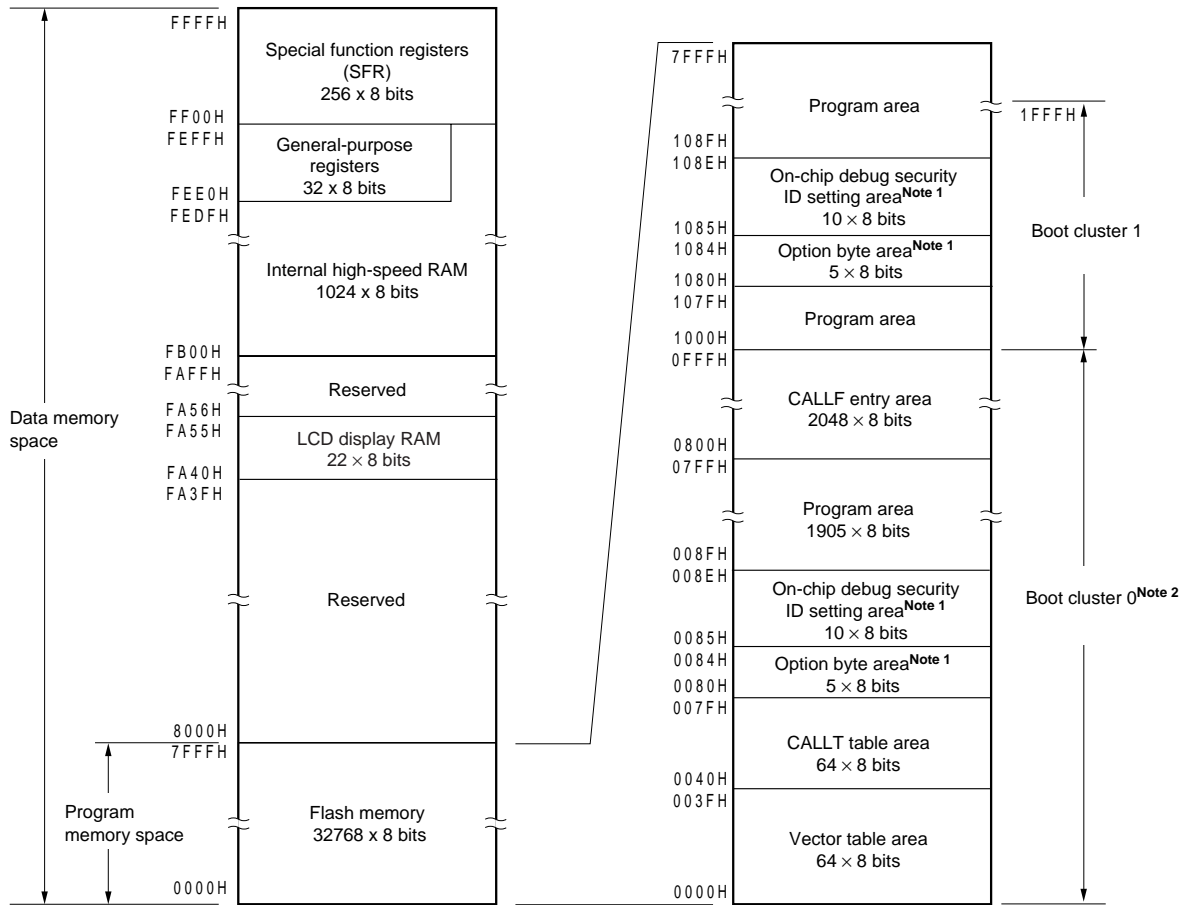

- Notes**
- When boot swap is not used: Set the option bytes to 0080H to 0084H, and the on-chip debug security IDs to 0085H to 008EH.  
When boot swap is used: Set the option bytes to 0080H to 0084H and 1080H to 1084H, and the on-chip debug security IDs to 0085H to 008EH and 1085H to 108EH.
  - Writing boot cluster 0 can be prohibited depending on the setting of security (see **24.7 Security Setting**).

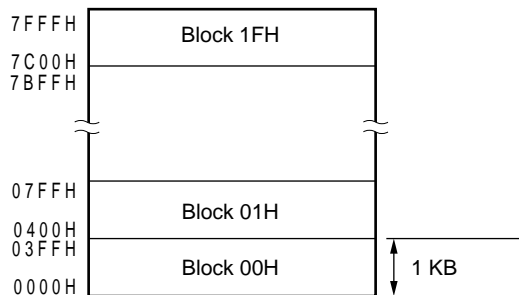**Remark** The flash memory is divided into blocks (one block = 1 KB). For the address values and block numbers, see **Table 3-2 Correspondence Between Address Values and Block Numbers in Flash Memory**.



Correspondence between the address values and block numbers in the flash memory are shown below.

**Table 3-2. Correspondence Between Address Values and Block Numbers in Flash Memory**

Address Value	Block Number	Address Value	Block Number
0000H to 03FFH	00H	4000H to 43FFH	10H
0400H to 07FFH	01H	4400H to 47FFH	11H
0800H to 0BFFH	02H	4800H to 4BFFH	12H
0C00H to 0FFFH	03H	4C00H to 4FFFH	13H
1000H to 13FFH	04H	5000H to 53FFH	14H
1400H to 17FFH	05H	5400H to 57FFH	15H
1800H to 1BFFH	06H	5800H to 5BFFH	16H
1C00H to 1FFFH	07H	5C00H to 5FFFH	17H
2000H to 23FFH	08H	6000H to 63FFH	18H
2400H to 27FFH	09H	6400H to 67FFH	19H
2800H to 2BFFH	0AH	6800H to 6BFFH	1AH
2C00H to 2FFFH	0BH	6C00H to 6FFFH	1BH
3000H to 33FFH	0CH	7000H to 73FFH	1CH
3400H to 37FFH	0DH	7400H to 77FFH	1DH
3800H to 3BFFH	0EH	7800H to 7BFFH	1EH
3C00H to 3FFFH	0FH	7C00H to 7FFFH	1FH

**Remark**  $\mu$ PD78F0400, 78F0410: Block numbers 00H to 07H  
 $\mu$ PD78F0401, 78F0411: Block numbers 00H to 0FH  
 $\mu$ PD78F0402, 78F0412: Block numbers 00H to 17H  
 $\mu$ PD78F0403, 78F0413: Block numbers 00H to 1FH



### 3.1.1 Internal program memory space

The internal program memory space stores the program and table data. Normally, it is addressed with the program counter (PC).

78K0/LC3 products incorporate internal ROM (flash memory), as shown below.

**Table 3-3. Internal ROM Capacity**

Part Number	Internal ROM	
	Structure	Capacity
$\mu$ PD78F0400, 78F0410	Flash memory	8192 $\times$ 8 bits (0000H to 1FFFH)
$\mu$ PD78F0401, 78F0411		16384 $\times$ 8 bits (0000H to 3FFFH)
$\mu$ PD78F0402, 78F0412		24576 $\times$ 8 bits (0000H to 5FFFH)
$\mu$ PD78F0403, 78F0413		32768 $\times$ 8 bits (0000H to 7FFFH)

The internal program memory space is divided into the following areas.

#### (1) Vector table area

The 64-byte area 0000H to 003FH is reserved as a vector table area. The program start addresses for branch upon reset or generation of each interrupt request are stored in the vector table area.

Of the 16-bit address, the lower 8 bits are stored at even addresses and the higher 8 bits are stored at odd addresses.

**Table 3-4. Vector Table**

Vector Table Address	Interrupt Source	Vector Table Address	Interrupt Source
0000H	RESET input, POC, LVI, WDT	0020H	INTTM000
0004H	INTLVI	0022H	INTTM010
0006H	INTP0	0024H <sup>Note 1</sup>	INTAD <sup>Note</sup>
0008H	INTP1	0026H	INTSR0
000AH	INTP2	0028H	INTRTC
000CH	INTP3	002AH	INTTM51
0012H	INTSRE6	002CH	INTKR
0014H	INTSR6	002EH	INTRTCI
0016H	INTST6	0032H	INTTM52
0018H	INTST0	0034H	INTTMH2
001AH	INTTMH1	0036H	INTMCG
001CH	INTTMH0	003EH	BRK
001EH	INTTM50		

**Note**  $\mu$ PD78F041x only.

**(2) CALLT instruction table area**

The 64-byte area 0040H to 007FH can store the subroutine entry address of a 1-byte call instruction (CALLT).

**(3) Option byte area**

A 5-byte area of 0080H to 0084H and 1080H to 1084H can be used as an option byte area. Set the option byte at 0080H to 0084H when the boot swap is not used, and at 0080H to 0084H and 1080H to 1084H when the boot swap is used. For details, see **CHAPTER 23 OPTION BYTE**.

**(4) CALLF instruction entry area**

The area 0800H to 0FFFH can perform a direct subroutine call with a 2-byte call instruction (CALLF).

**(5) On-chip debug security ID setting area**

A 10-byte area of 0085H to 008EH and 1085H to 108EH can be used as an on-chip debug security ID setting area. Set the on-chip debug security ID of 10 bytes at 0085H to 008EH when the boot swap is not used and at 0085H to 008EH and 1085H to 108EH when the boot swap is used. For details, see **CHAPTER 25 ON-CHIP DEBUG FUNCTION**.

### 3.1.2 Internal data memory space

78K0/LC3 products incorporate the following RAMs.

#### (1) Internal high-speed RAM

**Table 3-5. Internal High-Speed RAM Capacity**

Part Number	Internal High-Speed RAM
$\mu$ PD78F0400, 78F0410	512 $\times$ 8 bits (FD00H to FEFFH)
$\mu$ PD78F0401, 78F0411	768 $\times$ 8 bits (FC00H to FEFFH)
$\mu$ PD78F0402, 78F0412	1024 $\times$ 8 bits (FB00H to FEFFH)
$\mu$ PD78F0403, 78F0413	

This area cannot be used as a program area in which instructions are written and executed.

The internal high-speed RAM can also be used as a stack memory.

#### (2) LCD display RAM

LCD display RAM (22  $\times$  8 bits (FA40H to FA55H)) is incorporated in the LCD controller/driver (see **15.5 LCD Display Data Memory**).

### 3.1.3 Special function register (SFR) area

On-chip peripheral hardware special function registers (SFRs) are allocated in the area FF00H to FFFFH (see **Table 3-6 Special Function Register List** in **3.2.3 Special function registers (SFRs)**).

**Caution** Do not access addresses to which SFRs are not assigned.

### 3.1.4 Data memory addressing

Addressing refers to the method of specifying the address of the instruction to be executed next or the address of the register or memory relevant to the execution of instructions.

Several addressing modes are provided for addressing the memory relevant to the execution of instructions for the 78K0/LC3, based on operability and other considerations. For areas containing data memory in particular, special addressing methods designed for the functions of special function registers (SFR) and general-purpose registers are available for use. Figures 3-5 to 3-8 show correspondence between data memory and addressing. For details of each addressing mode, see 3.4 **Operand Address Addressing**.

**Figure 3-5. Correspondence Between Data Memory and Addressing ( $\mu$ PD78F0400, 78F0410)**

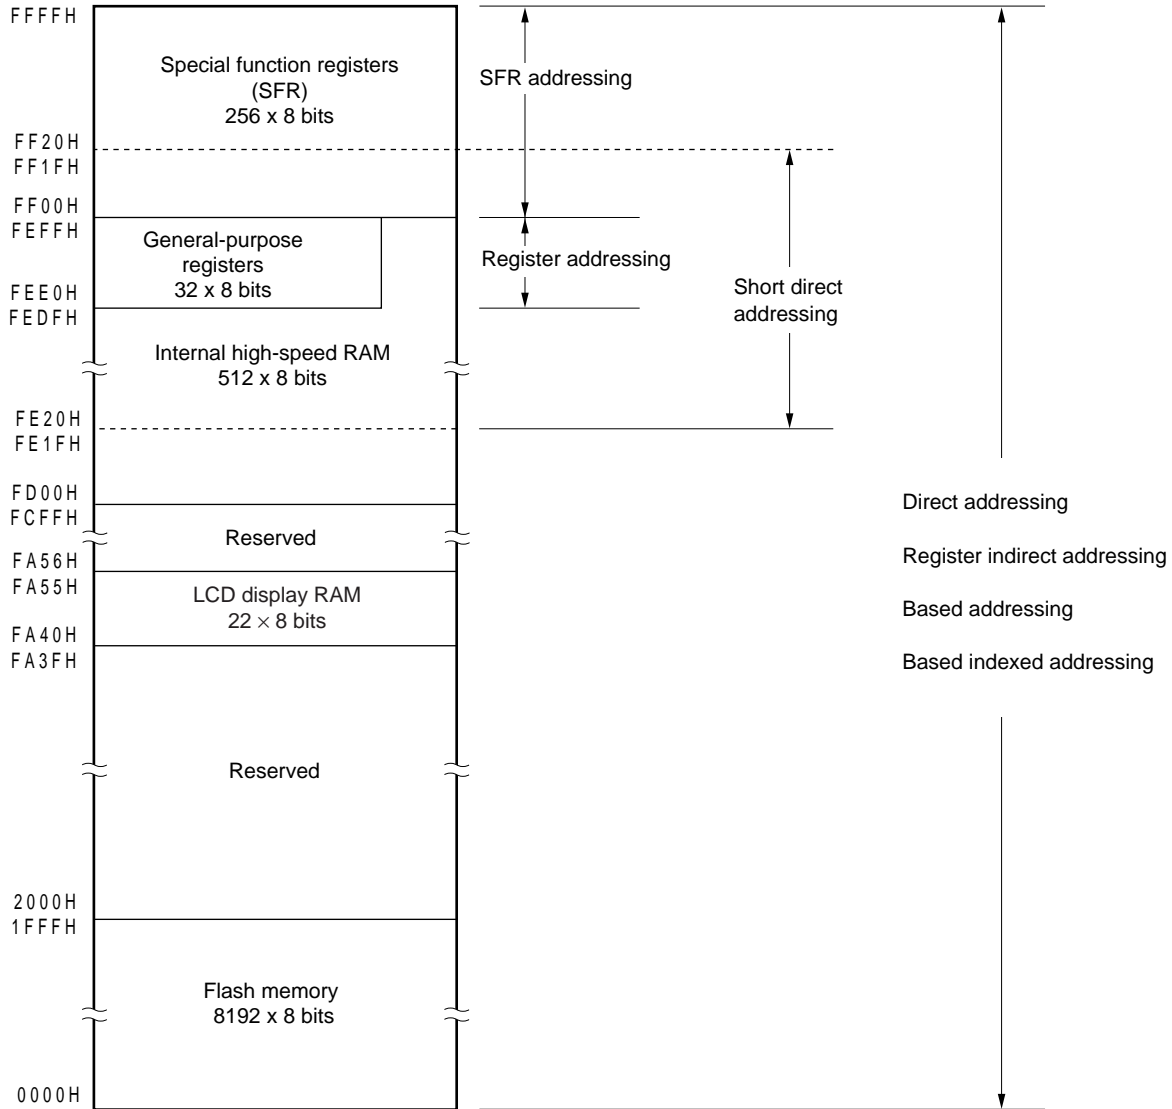


Figure 3-6. Correspondence Between Data Memory and Addressing ( $\mu$ PD78F0401, 78F0411)

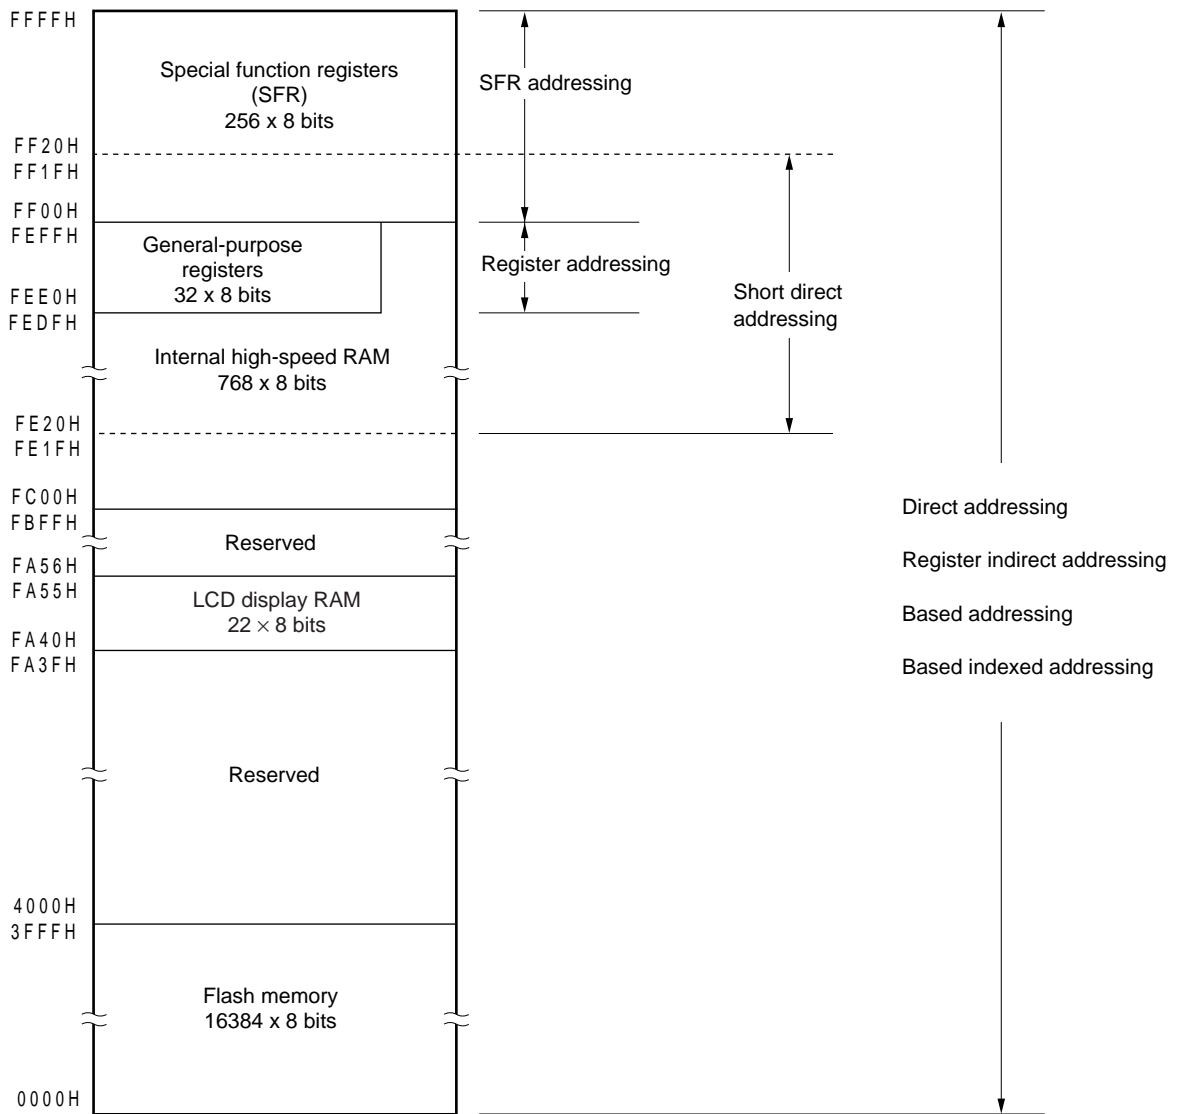


Figure 3-7. Correspondence Between Data Memory and Addressing ( $\mu$ PD78F0402, 78F0412)


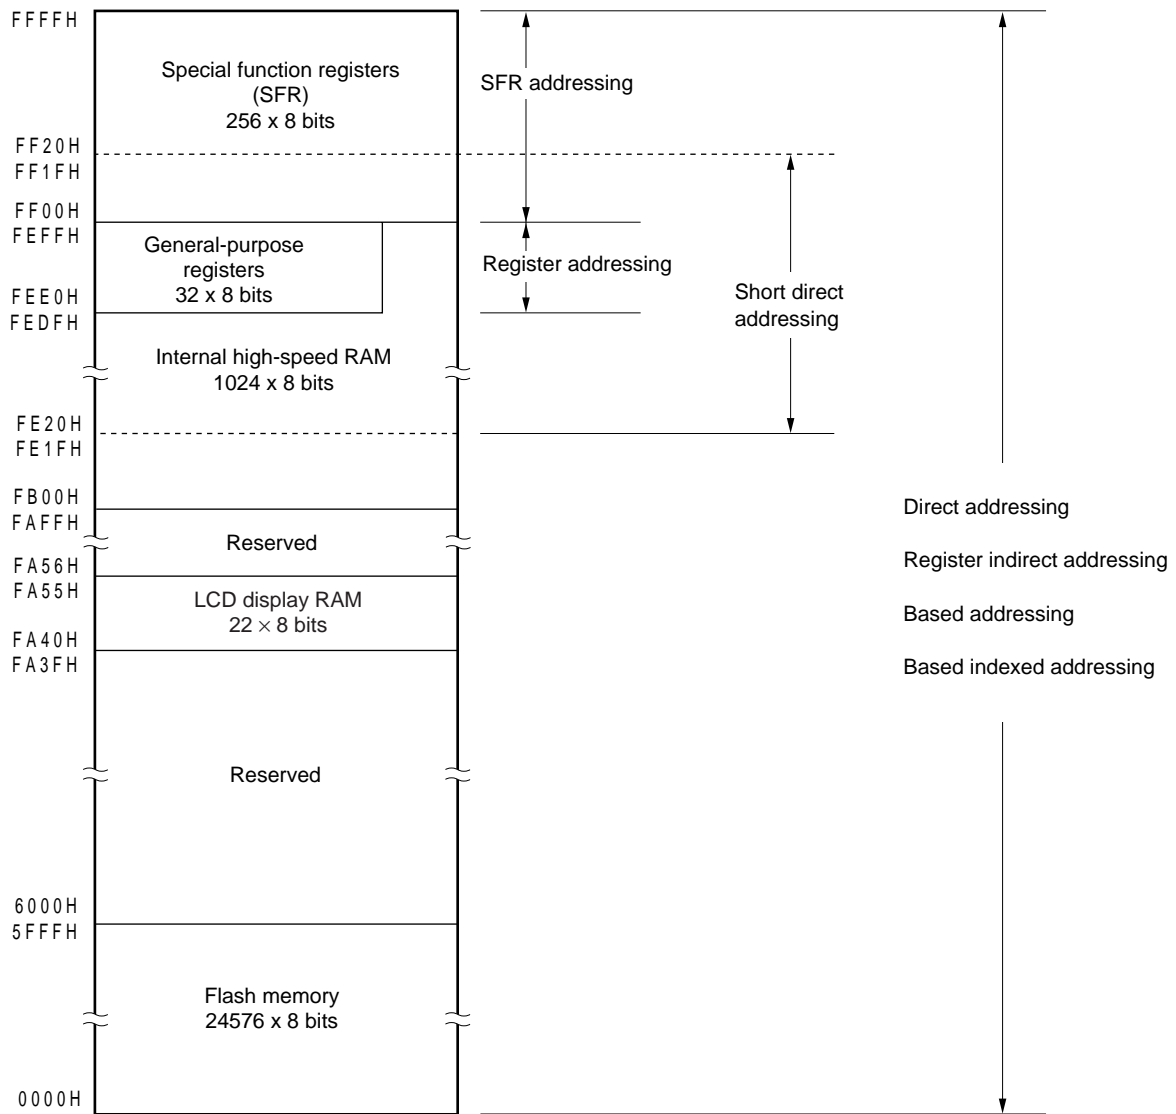


Figure 3-8. Correspondence Between Data Memory and Addressing ( $\mu$ PD78F0403, 78F0413)

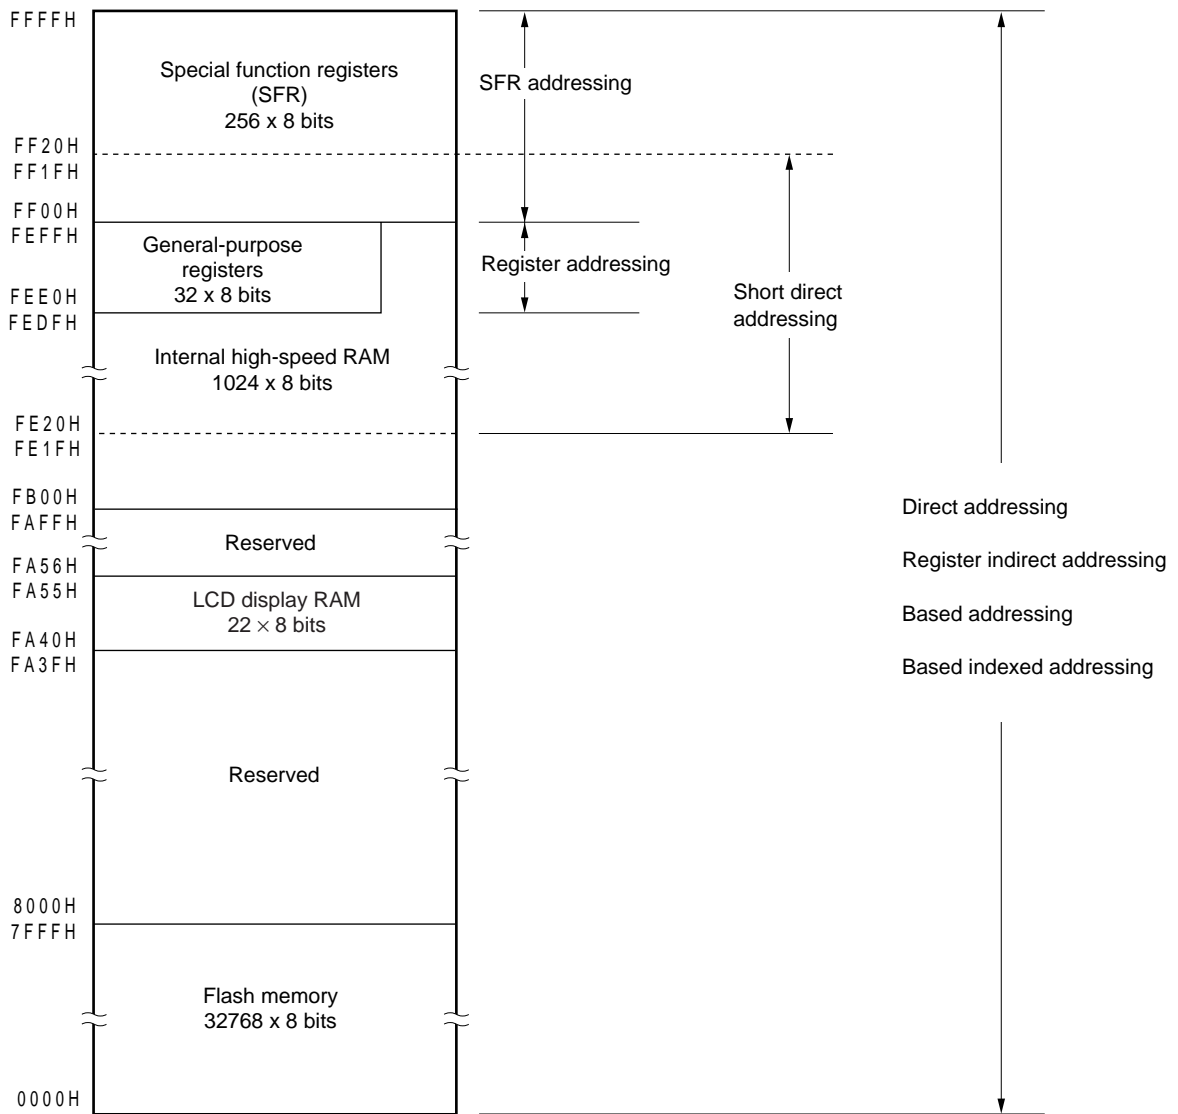

### 3.2 Processor Registers

The 78K0/LC3 products incorporate the following processor registers.


#### 3.2.1 Control registers

The control registers control the program sequence, statuses and stack memory. The control registers consist of a program counter (PC), a program status word (PSW) and a stack pointer (SP).

##### (1) Program counter (PC)

The program counter is a 16-bit register that holds the address information of the next program to be executed. In normal operation, PC is automatically incremented according to the number of bytes of the instruction to be fetched. When a branch instruction is executed, immediate data and register contents are set. Reset signal generation sets the reset vector table values at addresses 0000H and 0001H to the program counter.


**Figure 3-9. Format of Program Counter**



##### (2) Program status word (PSW)

The program status word is an 8-bit register consisting of various flags set/reset by instruction execution. Program status word contents are stored in the stack area upon interrupt request generation or PUSH PSW instruction execution and are restored upon execution of the RETB, RETI and POP PSW instructions. Reset signal generation sets PSW to 02H.

**Figure 3-10. Format of Program Status Word**



##### (a) Interrupt enable flag (IE)

This flag controls the interrupt request acknowledge operations of the CPU. When 0, the IE flag is set to the interrupt disabled (DI) state, and all maskable interrupt requests are disabled. When 1, the IE flag is set to the interrupt enabled (EI) state and interrupt request acknowledgment is controlled with an in-service priority flag (ISP), an interrupt mask flag for various interrupt sources, and a priority specification flag. The IE flag is reset (0) upon DI instruction execution or interrupt acknowledgment and is set (1) upon EI instruction execution.



**(b) Zero flag (Z)**

When the operation result is zero, this flag is set (1). It is reset (0) in all other cases.

**(c) Register bank select flags (RBS0 and RBS1)**

These are 2-bit flags to select one of the four register banks.

In these flags, the 2-bit information that indicates the register bank selected by SEL RBn instruction execution is stored.

**(d) Auxiliary carry flag (AC)**

If the operation result has a carry from bit 3 or a borrow at bit 3, this flag is set (1). It is reset (0) in all other cases.

**(e) In-service priority flag (ISP)**

This flag manages the priority of acknowledgeable maskable vectored interrupts. When this flag is 0, low-level vectored interrupt requests specified by a priority specification flag register (PR0L, PR0H, PR1L, PR1H) (see 17.3 (3) **Priority specification flag registers (PR0L, PR0H, PR1L, PR1H)**) can not be acknowledged. Actual request acknowledgment is controlled by the interrupt enable flag (IE).


**(f) Carry flag (CY)**

This flag stores overflow and underflow upon add/subtract instruction execution. It stores the shift-out value upon rotate instruction execution and functions as a bit accumulator during bit operation instruction execution.

**(3) Stack pointer (SP)**

This is a 16-bit register to hold the start address of the memory stack area. Only the internal high-speed RAM area can be set as the stack area.

**Figure 3-11. Format of Stack Pointer**




The SP is decremented ahead of write (save) to the stack memory and is incremented after read (restored) from the stack memory.

Each stack operation saves/restores data as shown in Figures 3-12 and 3-13.


**Caution** Since reset signal generation makes the SP contents undefined, be sure to initialize the SP before using the stack.

Figure 3-12. Data to Be Saved to Stack Memory

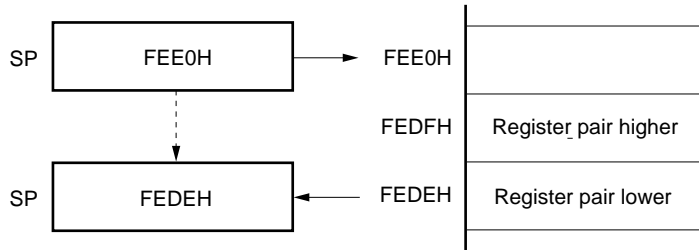(a) PUSH rp instruction (when SP = FEE0H)



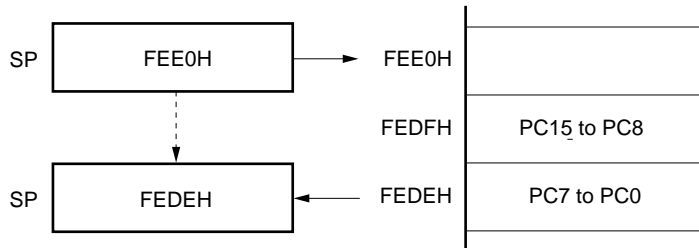(b) CALL, CALLF, CALLT instructions (when SP = FEE0H)



(c) Interrupt, BRK instructions (when SP = FEE0H)


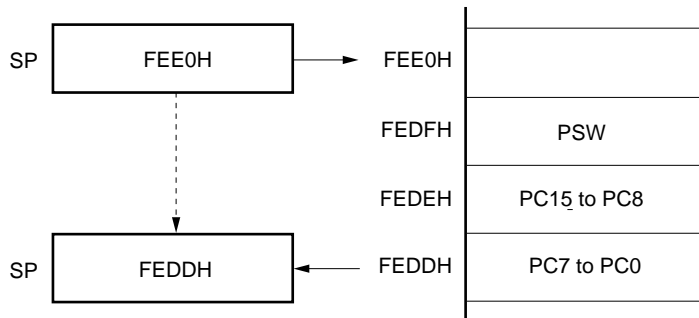


Figure 3-13. Data to Be Restored from Stack Memory

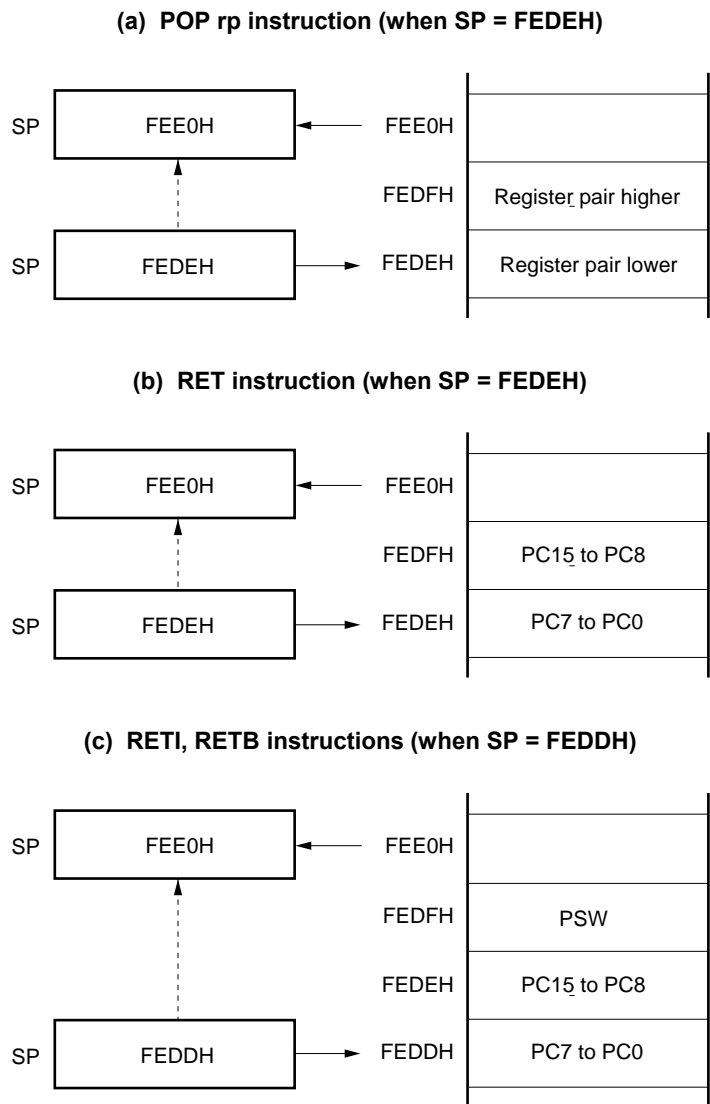

### 3.2.2 General-purpose registers


General-purpose registers are mapped at particular addresses (FEE0H to FEFFH) of the data memory. The general-purpose registers consists of 4 banks, each bank consisting of eight 8-bit registers (X, A, C, B, E, D, L, and H).

Each register can be used as an 8-bit register, and two 8-bit registers can also be used in a pair as a 16-bit register (AX, BC, DE, and HL).

These registers can be described in terms of function names (X, A, C, B, E, D, L, H, AX, BC, DE, and HL) and absolute names (R0 to R7 and RP0 to RP3).

Register banks to be used for instruction execution are set by the CPU control instruction (SEL RBn). Because of the 4-register bank configuration, an efficient program can be created by switching between a register for normal processing and a register for interrupts for each bank.

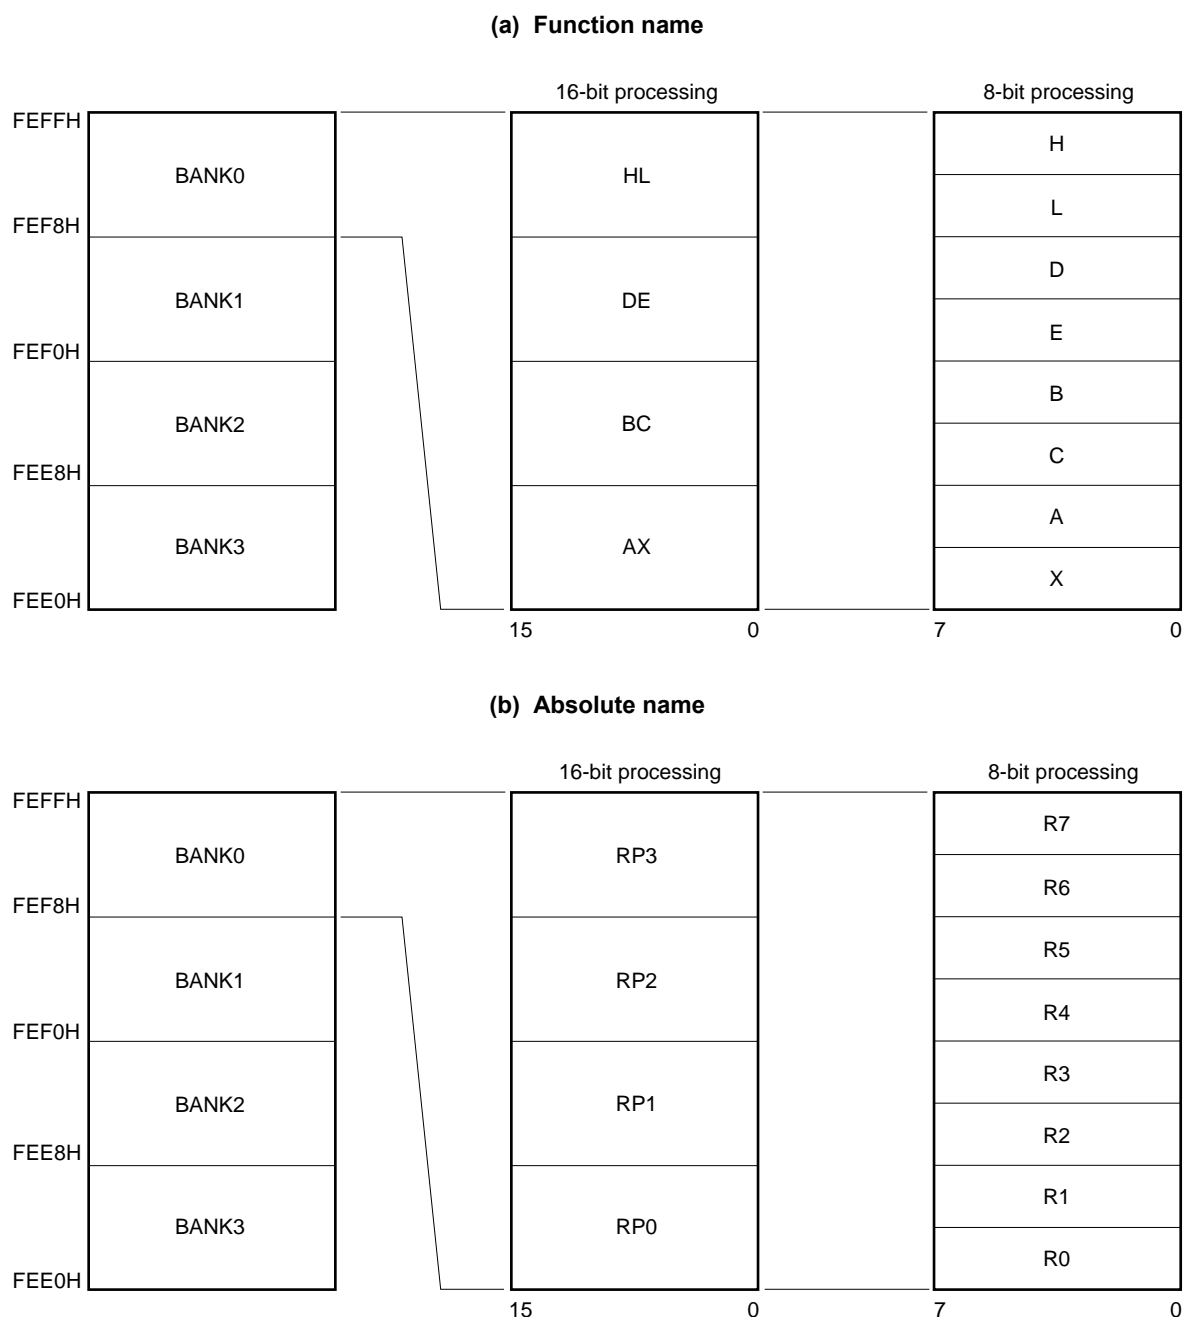Figure 3-14. Configuration of General-Purpose Registers



### 3.2.3 Special function registers (SFRs)

Unlike a general-purpose register, each special function register has a special function.

SFRs are allocated to the FF00H to FFFFH areas in the CPU, and are allocated to the 00H to 03H areas of LCDCTL in the LCD controller/driver.

Special function registers can be manipulated like general-purpose registers, using operation, transfer, and bit manipulation instructions. The manipulatable bit units, 1, 8, and 16, depend on the special function register type.

Each manipulation bit unit can be specified as follows.

- 1-bit manipulation  
Describe the symbol reserved by the assembler for the 1-bit manipulation instruction operand (sfr.bit).  
This manipulation can also be specified with an address.
- 8-bit manipulation  
Describe the symbol reserved by the assembler for the 8-bit manipulation instruction operand (sfr).  
This manipulation can also be specified with an address.
- 16-bit manipulation  
Describe the symbol reserved by the assembler for the 16-bit manipulation instruction operand (sfrp).  
When specifying an address, describe an even address.

Table 3-6 gives a list of the special function registers. The meanings of items in the table are as follows.

- Symbol  
Symbol indicating the address of a special function register. It is a reserved word in the RA78K0, and is defined as an sfr variable using the #pragma sfr directive in the CC78K0. When using the RA78K0, ID78K0-QB, and SM+, symbols can be written as an instruction operand.
- R/W  
Indicates whether the corresponding special function register can be read or written.  
R/W: Read/write enable  
R: Read only  
W: Write only
- Manipulatable bit units  
Indicates the manipulatable bit unit (1, 8, or 16). “–” indicates a bit unit for which manipulation is not possible.
- After reset  
Indicates each register status upon reset signal generation.

Table 3-6. Special Function Register List (1/4)

Address	Special Function Register (SFR) Name	Symbol	R/W	Manipulatable Bit Unit			After Reset
				1 Bit	8 Bits	16 Bits	
FF00H	Receive buffer register 6	RXB6	R	–	√	–	FFH
FF01H	Port register 1	P1	R/W	√	√	–	00H
FF02H	Port register 2	P2	R/W	√	√	–	00H
FF03H	Port register 3	P3	R/W	√	√	–	00H
FF04H	Port register 4	P4	R/W	√	√	–	00H
FF05H	Transmit buffer register 6	TXB6	R/W	–	√	–	FFH
FF06H	A/D conversion result register <sup>Note</sup>	ADCR	R	–	–	√	0000H
FF07H	A/D conversion result register (H) <sup>Note</sup>	ADCRH	R	–	√	–	00H
FF0AH	Port register 10	P10	R/W	√	√	–	00H
FF0BH	Port register 11	P11	R/W	√	√	–	00H
FF0CH	Port register 12	P12	R/W	√	√	–	00H
FF0EH	Port register 14	P14	R/W	√	√	–	00H
FF0FH	Port register 15	P15	R/W	√	√	–	00H
FF10H	16-bit timer counter 00	TM00	R	–	–	√	0000H
FF11H							
FF12H	16-bit timer capture/compare register 000	CR000	R/W	–	–	√	0000H
FF13H							
FF14H	16-bit timer capture/compare register 010	CR010	R/W	–	–	√	0000H
FF15H							
FF16H	8-bit timer counter 50	TM50	R	–	√	–	00H
FF17H	8-bit timer compare register 50	CR50	R/W	–	√	–	00H
FF18H	8-bit timer H compare register 00	CMP00	R/W	–	√	–	00H
FF19H	8-bit timer H compare register 10	CMP10	R/W	–	√	–	00H
FF1AH	8-bit timer H compare register 01	CMP01	R/W	–	√	–	00H
FF1BH	8-bit timer H compare register 11	CMP11	R/W	–	√	–	00H
FF20H	Port function register 1	PF1	R/W	√	√	–	00H
FF21H	Port mode register 1	PM1	R/W	√	√	–	FFH
FF22H	Port mode register 2	PM2	R/W	√	√	–	FFH
FF23H	Port mode register 3	PM3	R/W	√	√	–	FFH
FF24H	Port mode register 4	PM4	R/W	√	√	–	FFH
FF2AH	Port mode register 10	PM10	R/W	√	√	–	FFH
FF2BH	Port mode register 11	PM11	R/W	√	√	–	FFH
FF2CH	Port mode register 12	PM12	R/W	√	√	–	FFH
FF2EH	Port mode register 14	PM14	R/W	√	√	–	FFH
FF2FH	Port mode register 15	PM15	R/W	√	√	–	FFH
FF30H	Internal high-speed oscillation trimming register	HIOTRM	R/W	–	√	–	10H
FF31H	Pull-up resistor option register 1	PU1	R/W	√	√	–	00H
FF33H	Pull-up resistor option register 3	PU3	R/W	√	√	–	00H
FF34H	Pull-up resistor option register 4	PU4	R/W	√	√	–	00H
FF3AH	Pull-up resistor option register 10	PU10	R/W	√	√	–	00H
FF3BH	Pull-up resistor option register 11	PU11	R/W	√	√	–	00H

**Note**  $\mu$ PD78F041x only.

Table 3-6. Special Function Register List (2/4)

Address	Special Function Register (SFR) Name	Symbol	R/W	Manipulatable Bit Unit			After Reset
				1 Bit	8 Bits	16 Bits	
FF3CH	Pull-up resistor option register 12	PU12	R/W	√	√	–	00H
FF3EH	Pull-up resistor option register 14	PU14	R/W	√	√	–	00H
FF3FH	Pull-up resistor option register 15	PU15	R/W	√	√	–	00H
FF40H	Clock output selection register	CKS	R/W	√	√	–	00H
FF41H	8-bit timer compare register 51	CR51	R/W	–	√	–	00H
FF42H	8-bit timer H mode register 2	TMHMD2	R/W	√	√	–	00H
FF43H	8-bit timer mode control register 51	TMC51	R/W	√	√	–	00H
FF44H	8-bit timer H compare register 02	CMP02	R/W	–	√	–	00H
FF45H	8-bit timer H compare register 12	CMP12	R/W	–	√	–	00H
FF47H	MCG status register	MC0STR	R	√	√	–	00H
FF48H	External interrupt rising edge enable register	EGP	R/W	√	√	–	00H
FF49H	External interrupt falling edge enable register	EGN	R/W	√	√	–	00H
FF4AH	MCG transmit buffer register	MC0TX	R/W	–	√	–	FFH
FF4BH	MCG transmit bit count specification register	MC0BIT	R/W	–	√	–	07H
FF4CH	MCG control register 0	MC0CTL0	R/W	√	√	–	10H
FF4DH	MCG control register 1	MC0CTL1	R/W	–	√	–	00H
FF4EH	MCG control register 2	MC0CTL2	R/W	–	√	–	1FH
FF4FH	Input switch control register	ISC	R/W	√	√	–	00H
FF50H	Asynchronous serial interface operation mode register 6	ASIM6	R/W	√	√	–	01H
FF51H	8-bit timer counter 52	TM52	R	–	√	–	00H
FF53H	Asynchronous serial interface reception error status register 6	ASIS6	R	–	√	–	00H
FF54H	Real-time counter clock selection register	RTCCL	R/W	√	√	–	00H
FF55H	Asynchronous serial interface transmission status register 6	ASIF6	R	–	√	–	00H
FF56H	Clock selection register 6	CKSR6	R/W	–	√	–	00H
FF57H	Baud rate generator control register 6	BRGC6	R/W	–	√	–	FFH
FF58H	Asynchronous serial interface control register 6	ASICL6	R/W	√	√	–	16H
FF59H	8-bit timer compare register 52	CR52	R/W	–	√	–	00H
FF5BH	Timer clock selection register 52	TCL52	R/W	√	√	–	00H
FF5CH	8-bit timer mode control register 52	TMC52	R/W	√	√	–	00H
FF60H FF61H	Sub-count register	RSUBC	R	–	–	√	0000H
FF62H	Second count register	SEC	R/W	–	√	–	00H
FF63H	Minute count register	MIN	R/W	–	√	–	00H
FF64H	Hour count register	HOUR	R/W	–	√	–	12H
FF65H	Week count register	WEEK	R/W	–	√	–	00H

Table 3-6. Special Function Register List (3/4)

Address	Special Function Register (SFR) Name	Symbol	R/W	Manipulatable Bit Unit			After Reset
				1 Bit	8 Bits	16 Bits	
FF66H	Day count register	DAY	R/W	–	√	–	01H
FF67H	Month count register	MONTH	R/W	–	√	–	01H
FF68H	Year count register	YEAR	R/W	–	√	–	00H
FF69H	8-bit timer H mode register 0	TMHMD0	R/W	√	√	–	00H
FF6AH	Timer clock selection register 50	TCL50	R/W	√	√	–	00H
FF6BH	8-bit timer mode control register 50	TMC50	R/W	√	√	–	00H
FF6CH	8-bit timer H mode register 1	TMHMD1	R/W	√	√	–	00H
FF6DH	8-bit timer H carrier control register 1	TMCYC1	R/W	√	√	–	00H
FF6EH	Key return mode register	KRM	R/W	√	√	–	00H
FF6FH	8-bit timer counter 51	TM51	R	–	√	–	00H
FF70H	Asynchronous serial interface operation mode register 0	ASIM0	R/W	√	√	–	01H
FF71H	Baud rate generator control register 0	BRGC0	R/W	–	√	–	1FH
FF72H	Receive buffer register 0	RXB0	R	–	√	–	FFH
FF73H	Asynchronous serial interface reception error status register 0	ASIS0	R	–	√	–	00H
FF74H	Transmit shift register 0	TXS0	W	–	√	–	FFH
FF82H	Clock error correction register	SUBCUD	R/W	√	√	–	00H
FF86H	Alarm minute register	ALARMWM	R/W	–	√	–	00H
FF87H	Alarm hour register	ALARMWH	R/W	–	√	–	12H
FF88H	Alarm week register	ALARMWW	R/W	–	√	–	00H
FF89H	Real-time counter control register 0	RTCC0	R/W	√	√	–	00H
FF8AH	Real-time counter control register 1	RTCC1	R/W	√	√	–	00H
FF8BH	Real-time counter control register 2	RTCC2	R/W	√	√	–	00H
FF8CH	Timer clock selection register 51	TCL51	R/W	√	√	–	00H
FF8DH	A/D converter mode register <sup>Note 1</sup>	ADM	R/W	√	√	–	00H
FF8EH	Analog input channel specification register <sup>Note 1</sup>	ADS	R/W	√	√	–	00H
FF8FH	A/D port configuration register 0 <sup>Note 1</sup>	ADPC0	R/W	√	√	–	08H
FF99H	Watchdog timer enable register	WDTE	R/W	–	√	–	Note 2 1AH/9AH
FF9FH	Clock operation mode select register	OSCCTL	R/W	√	√	–	00H
FFA0H	Internal oscillation mode register	RCM	R/W	√	√	–	80H <sup>Note 3</sup>
FFA1H	Main clock mode register	MCM	R/W	√	√	–	00H
FFA2H	Main OSC control register	MOC	R/W	√	√	–	80H
FFA3H	Oscillation stabilization time counter status register	OSTC	R	√	√	–	00H
FFA4H	Oscillation stabilization time select register	OSTS	R/W	–	√	–	05H
FFACH	Reset control flag register	RESF	R	–	√	–	00H <sup>Note 4</sup>

**Notes 1.**  $\mu$ PD78F041x only.

2. The reset value of WDTE is determined by the setting of the option byte.

3. The value of this register is 00H immediately after a reset release but automatically changes to 80H after oscillation accuracy stabilization of high-speed internal oscillator has been waited.

4. The reset value of RESF varies depending on the reset source.



Table 3-6. Special Function Register List (4/4)

Address	Special Function Register (SFR) Name	Symbol	R/W	Manipulatable Bit Unit			After Reset	
				1 Bit	8 Bits	16 Bits		
FFB0H	LCD mode register	LCDMD	R/W	√	√	–	00H	
FFB1H	LCD display mode register	LCDM	R/W	√	√	–	00H	
FFB2H	LCD clock control register 0	LCDC0	R/W	√	√	–	00H	
FFB5H	Port function register 2	PF2	R/W	√	√	–	00H	
FFB6H	Port function register ALL	PFALL	R/W	√	√	–	00H	
FFBAH	16-bit timer mode control register 00	TMC00	R/W	√	√	–	00H	
FFBBH	Prescaler mode register 00	PRM00	R/W	√	√	–	00H	
FFBCH	Capture/compare control register 00	CRC00	R/W	√	√	–	00H	
FFBDH	16-bit timer output control register 00	TOC00	R/W	√	√	–	00H	
FFBEH	Low-voltage detection register	LVIM	R/W	√	√	–	00H <sup>Note 1</sup>	
FFBFH	Low-voltage detection level selection register	LVIS	R/W	√	√	–	00H <sup>Note 1</sup>	
FFE0H	Interrupt request flag register 0L	IF0	IF0L	R/W	√	√	√	00H
FFE1H	Interrupt request flag register 0H		IF0H	R/W	√	√		00H
FFE2H	Interrupt request flag register 1L	IF1	IF1L	R/W	√	√	√	00H
FFE3H	Interrupt request flag register 1H		IF1H	R/W	√	√		00H
FFE4H	Interrupt mask flag register 0L	MK0	MK0L	R/W	√	√	√	FFH
FFE5H	Interrupt mask flag register 0H		MK0H	R/W	√	√		FFH
FFE6H	Interrupt mask flag register 1L	MK1	MK1L	R/W	√	√	√	FFH
FFE7H	Interrupt mask flag register 1H		MK1H	R/W	√	√		FFH
FFE8H	Priority specification flag register 0L	PR0	PR0L	R/W	√	√	√	FFH
FFE9H	Priority specification flag register 0H		PR0H	R/W	√	√		FFH
FFEAH	Priority specification flag register 1L	PR1	PR1L	R/W	√	√	√	FFH
FFEBH	Priority specification flag register 1H		PR1H	R/W	√	√		FFH
FFF0H	Internal memory size switching register <sup>Note 2</sup>	IMS		R/W	–	√	–	CFH
FFFBH	Processor clock control register	PCC		R/W	√	√	–	01H

- Notes 1.** The reset values of LVIM and LVIS vary depending on the reset source.
- 2.** Regardless of the internal memory capacity, the initial values of the internal memory size switching register (IMS) of all products in the 78K0/LC3 are fixed (IMS = CFH). Therefore, set the value corresponding to each product as indicated below.

Flash Memory Version (78K0/LC3)	IMS	ROM Capacity	Internal High-Speed RAM Capacity
μPD78F0400, 78F0410	42H	8 KB	512 bytes
μPD78F0401, 78F0411	04H	16 KB	768 bytes
μPD78F0402, 78F0412	C6H	24 KB	1 KB
μPD78F0403, 78F0413	C8H	32 KB	

### 3.3 Instruction Address Addressing

An instruction address is determined by contents of the program counter (PC), and is normally incremented (+1 for each byte) automatically according to the number of bytes of an instruction to be fetched each time another instruction is executed. When a branch instruction is executed, the branch destination information is set to PC and branched by the following addressing (for details of instructions, refer to the **78K/0 Series Instructions User's Manual (U12326E)**).

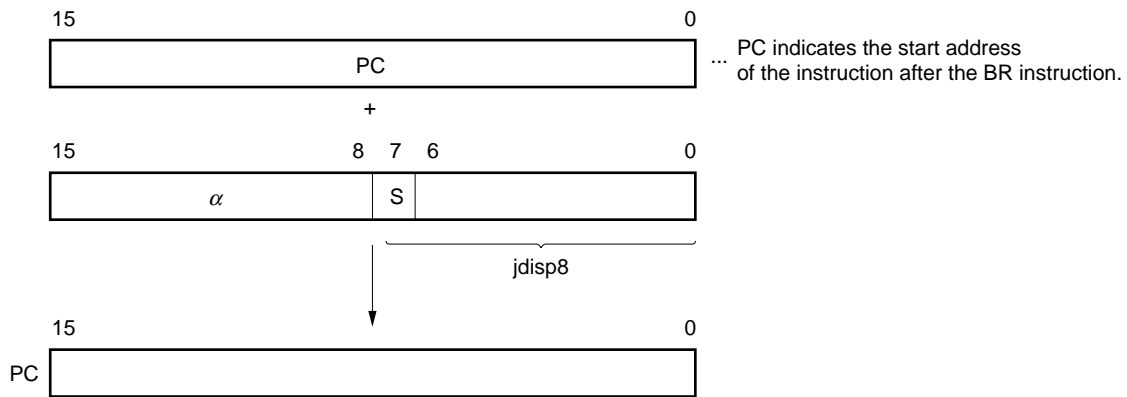
#### 3.3.1 Relative addressing

**[Function]**

The value obtained by adding 8-bit immediate data (displacement value: *jdisp8*) of an instruction code to the start address of the following instruction is transferred to the program counter (PC) and branched. The displacement value is treated as signed two's complement data (–128 to +127) and bit 7 becomes a sign bit. In other words, relative addressing consists of relative branching from the start address of the following instruction to the –128 to +127 range.

This function is carried out when the BR \$addr16 instruction or a conditional branch instruction is executed.

**[Illustration]**



When S = 0, all bits of  $\alpha$  are 0.  
 When S = 1, all bits of  $\alpha$  are 1.


### 3.3.2 Immediate addressing

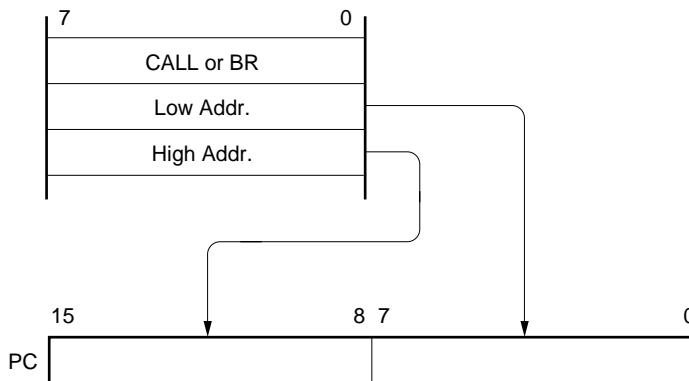**[Function]**


Immediate data in the instruction word is transferred to the program counter (PC) and branched. This function is carried out when the CALL !addr16 or BR !addr16 or CALLF !addr11 instruction is executed. CALL !addr16 and BR !addr16 instructions can be branched to the entire memory space. The CALLF !addr11 instruction is branched to the 0800H to 0FFFH area.

**[Illustration]**

In the case of CALL !addr16 and BR !addr16 instructions



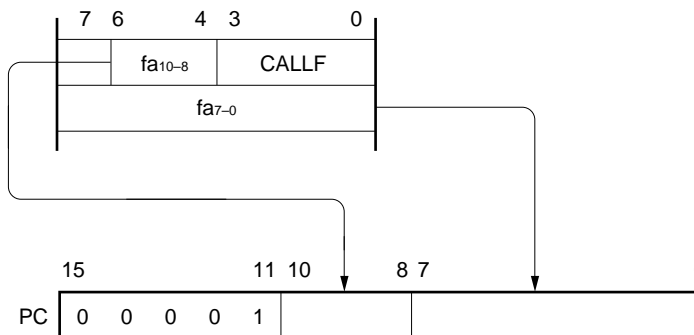In the case of CALLF !addr11 instruction



3.3.3 Table indirect addressing


[Function]

Table contents (branch destination address) of the particular location to be addressed by bits 1 to 5 of the immediate data of an operation code are transferred to the program counter (PC) and branched.

This function is carried out when the CALLT [addr5] instruction is executed.

This instruction references the address stored in the memory table from 40H to 7FH, and allows branching to the entire memory space.

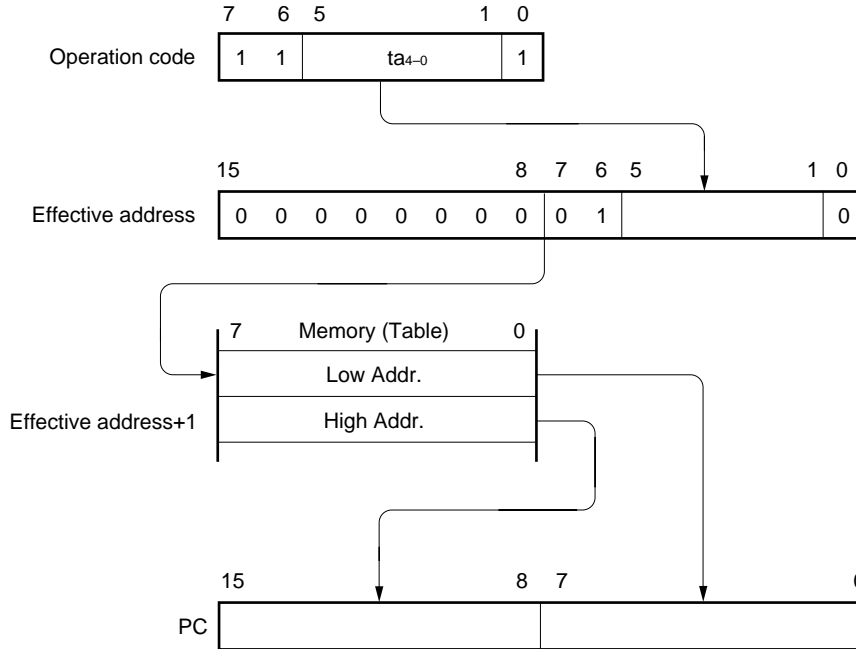[Illustration]




3.3.4 Register addressing

[Function]

Register pair (AX) contents to be specified with an instruction word are transferred to the program counter (PC) and branched.

This function is carried out when the BR AX instruction is executed.

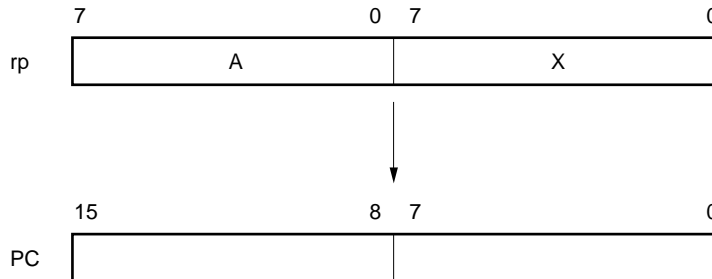[Illustration]



### 3.4 Operand Address Addressing

The following methods are available to specify the register and memory (addressing) to undergo manipulation during instruction execution.

#### 3.4.1 Implied addressing

##### [Function]

The register that functions as an accumulator (A and AX) among the general-purpose registers is automatically (implicitly) addressed.

Of the 78K0/LC3 instruction words, the following instructions employ implied addressing.

Instruction	Register to Be Specified by Implied Addressing
MULU	A register for multiplicand and AX register for product storage
DIVUW	AX register for dividend and quotient storage
ADJBA/ADJBS	A register for storage of numeric values that become decimal correction targets
ROR4/ROL4	A register for storage of digit data that undergoes digit rotation

##### [Operand format]

Because implied addressing can be automatically determined with an instruction, no particular operand format is necessary.

##### [Description example]

In the case of MULU X

With an 8-bit × 8-bit multiply instruction, the product of the A register and X register is stored in AX. In this example, the A and AX registers are specified by implied addressing.

### 3.4.2 Register addressing

**[Function]**

The general-purpose register to be specified is accessed as an operand with the register bank select flags (RBS0 to RBS1) and the register specify codes of an operation code.

Register addressing is carried out when an instruction with the following operand format is executed. When an 8-bit register is specified, one of the eight registers is specified with 3 bits in the operation code.

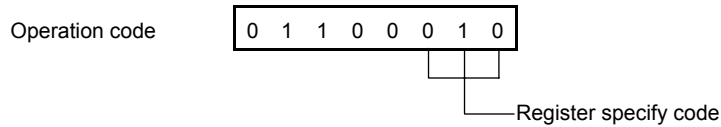
**[Operand format]**

Identifier	Description
r	X, A, C, B, E, D, L, H
rp	AX, BC, DE, HL


'r' and 'rp' can be described by absolute names (R0 to R7 and RP0 to RP3) as well as function names (X, A, C, B, E, D, L, H, AX, BC, DE, and HL).

**[Description example]**

MOV A, C; when selecting C register as r



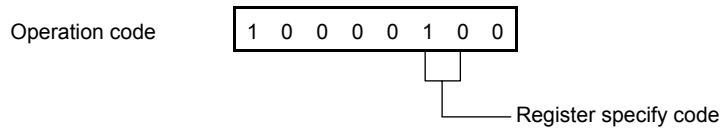INCW DE; when selecting DE register pair as rp



### 3.4.3 Direct addressing

**[Function]**

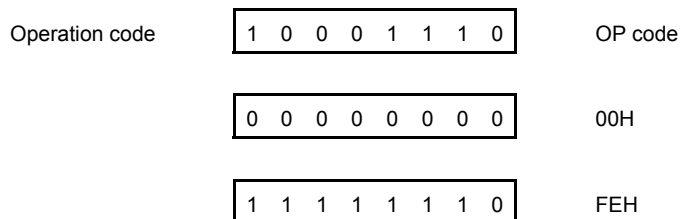
The memory to be manipulated is directly addressed with immediate data in an instruction word becoming an operand address.

**[Operand format]**


Identifier	Description
addr16	Label or 16-bit immediate data

**[Description example]**

MOV A, !0FE00H; when setting !addr16 to FE00H



**[Illustration]**

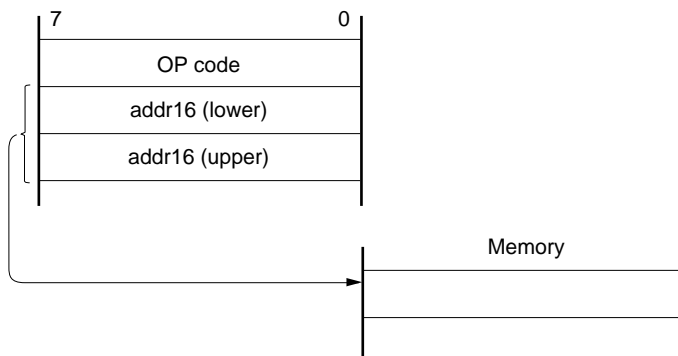

### 3.4.4 Short direct addressing

**[Function]**

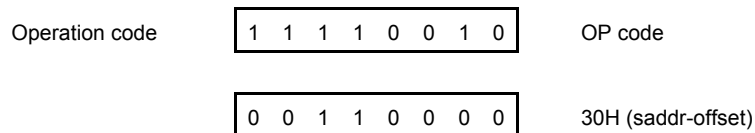
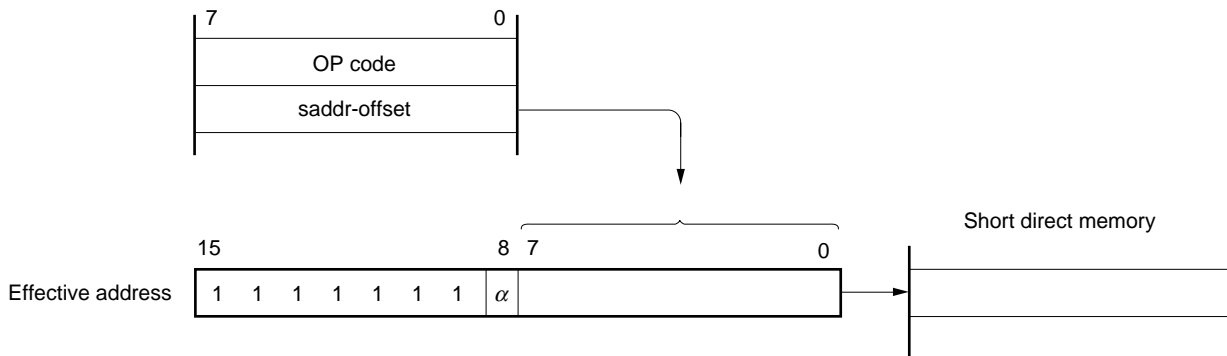
The memory to be manipulated in the fixed space is directly addressed with 8-bit data in an instruction word. This addressing is applied to the 256-byte space FE20H to FF1FH. Internal high-speed RAM and special function registers (SFRs) are mapped at FE20H to FEFFH and FF00H to FF1FH, respectively. The SFR area (FF00H to FF1FH) where short direct addressing is applied is a part of the overall SFR area. Ports that are frequently accessed in a program and compare and capture registers of the timer/event counter are mapped in this area, allowing SFRs to be manipulated with a small number of bytes and clocks. When 8-bit immediate data is at 20H to FFH, bit 8 of an effective address is set to 0. When it is at 00H to 1FH, bit 8 is set to 1. See the **[Illustration]** shown below.

**[Operand format]**

Identifier	Description
saddr	Immediate data that indicate label or FE20H to FF1FH
saddrp	Immediate data that indicate label or FE20H to FF1FH (even address only)

**[Description example]**

MOV 0FE30H, A ; When transferring the value of A register to the saddr (FE30H)

**[Illustration]**

When 8-bit immediate data is 20H to FFH,  $\alpha = 0$

When 8-bit immediate data is 00H to 1FH,  $\alpha = 1$



### 3.4.5 Special function register (SFR) addressing

**[Function]**

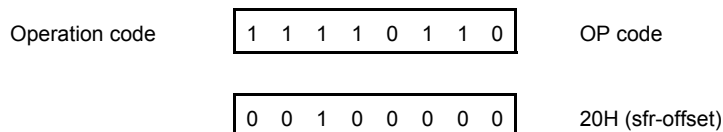
A memory-mapped special function register (SFR) is addressed with 8-bit immediate data in an instruction word. This addressing is applied to the 240-byte spaces FF00H to FFCFH and FFE0H to FFFFH. However, the SFRs mapped at FF00H to FF1FH can be accessed with short direct addressing.

**[Operand format]**


Identifier	Description
sfr	Special function register name
sfrp	16-bit manipulatable special function register name (even address only)

**[Description example]**

MOV PM0, A; when selecting PM0 (FF20H) as sfr



**[Illustration]**

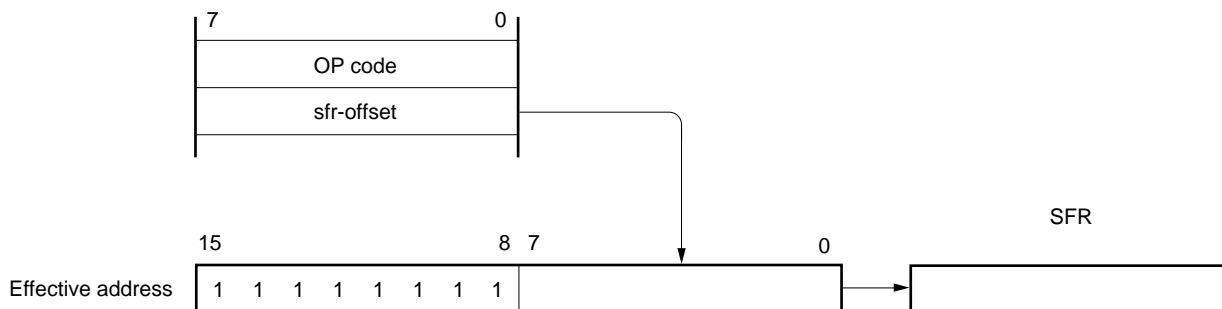

### 3.4.6 Register indirect addressing

**[Function]**


Register pair contents specified by a register pair specify code in an instruction word and by a register bank select flag (RBS0 and RBS1) serve as an operand address for addressing the memory. This addressing can be carried out for all of the memory spaces.

**[Operand format]**


Identifier	Description
-	[DE], [HL]

**[Description example]**

MOV A, [DE]; when selecting [DE] as register pair



**[Illustration]**

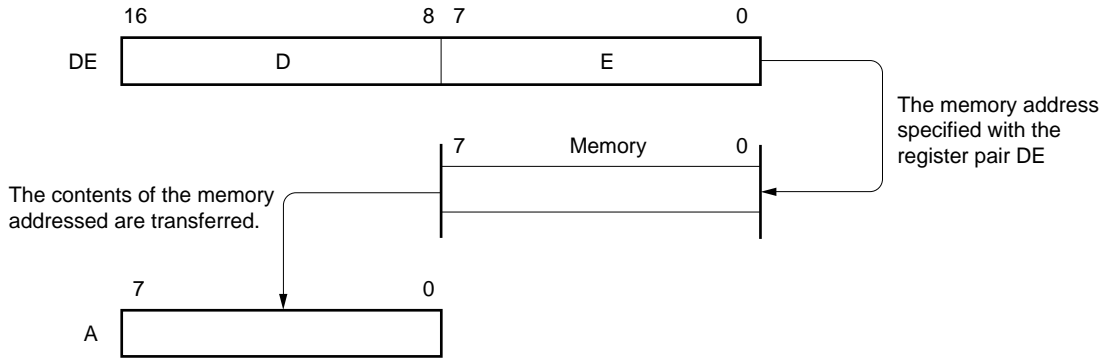

### 3.4.7 Based addressing

**[Function]**

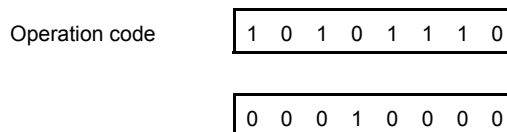
8-bit immediate data is added as offset data to the contents of the base register, that is, the HL register pair in the register bank specified by the register bank select flag (RBS0 and RBS1), and the sum is used to address the memory. Addition is performed by expanding the offset data as a positive number to 16 bits. A carry from the 16th bit is ignored. This addressing can be carried out for all of the memory spaces.

**[Operand format]**


Identifier	Description
-	[HL + byte]

**[Description example]**

MOV A, [HL + 10H]; when setting byte to 10H



**[Illustration]**

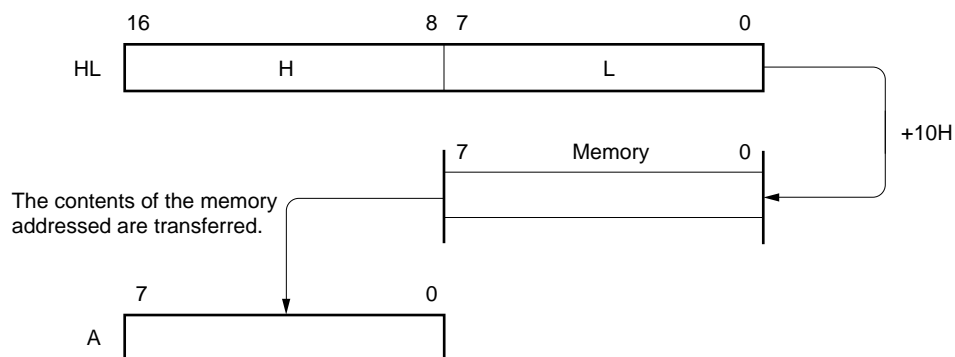

3.4.8 Based indexed addressing

[Function]

The B or C register contents specified in an instruction word are added to the contents of the base register, that is, the HL register pair in the register bank specified by the register bank select flag (RBS0 and RBS1), and the sum is used to address the memory. Addition is performed by expanding the B or C register contents as a positive number to 16 bits. A carry from the 16th bit is ignored. This addressing can be carried out for all of the memory spaces.

[Operand format]

Identifier	Description
-	[HL + B], [HL + C]


[Description example]

MOV A, [HL +B]; when selecting B register

Operation code 

1	0	1	0	1	0	1	1
---	---	---	---	---	---	---	---

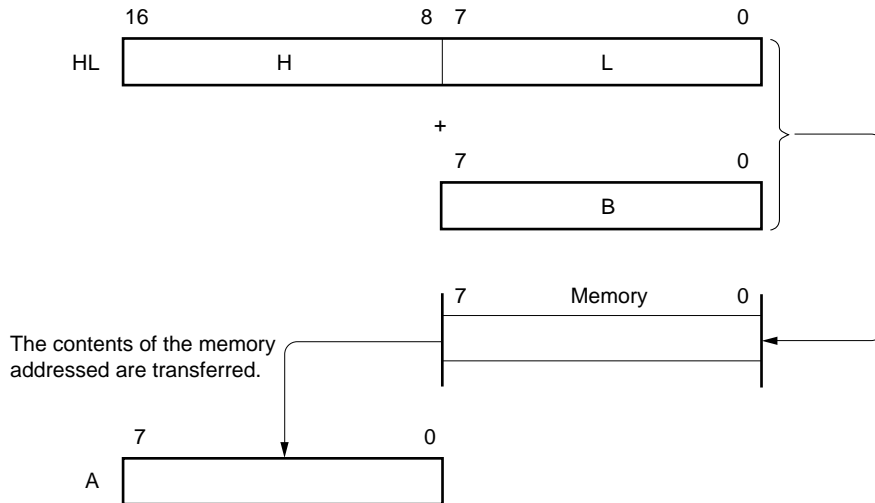[Illustration]



3.4.9 Stack addressing

**[Function]**

The stack area is indirectly addressed with the stack pointer (SP) contents.

This addressing method is automatically employed when the PUSH, POP, subroutine call and return instructions are executed or the register is saved/reset upon generation of an interrupt request.

With stack addressing, only the internal high-speed RAM area can be accessed.

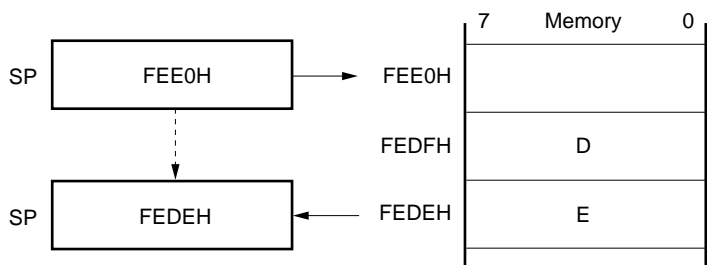
**[Description example]**

PUSH DE; when saving DE register

Operation code 

1	0	1	1	0	1	0	1
---	---	---	---	---	---	---	---

**[Illustration]**



## CHAPTER 4 PORT FUNCTIONS

### 4.1 Port Functions

There are two types of pin I/O buffer power supplies:  $AV_{REF}^{\text{Note}}$  and  $V_{DD}$ . The relationship between these power supplies and the pins is shown below.

**Table 4-1. Pin I/O Buffer Power Supplies**

Power Supply	Corresponding Pins
$AV_{REF}^{\text{Note}}$	P20 to P25
$V_{DD}$	Port pins other than P20 to P25

**Note**  $\mu\text{PD78F041x}$  only. The power supply is  $V_{DD}$  with  $\mu\text{PD78F040x}$ .

78K0/LC3 products are provided with the ports shown in Figure 4-1, which enable variety of control operations. The functions of each port are shown in Table 4-2.

In addition to the function as digital I/O ports, these ports have several alternate functions. For details of the alternate functions, see **CHAPTER 2 PIN FUNCTIONS**.

**Figure 4-1. Port Types**

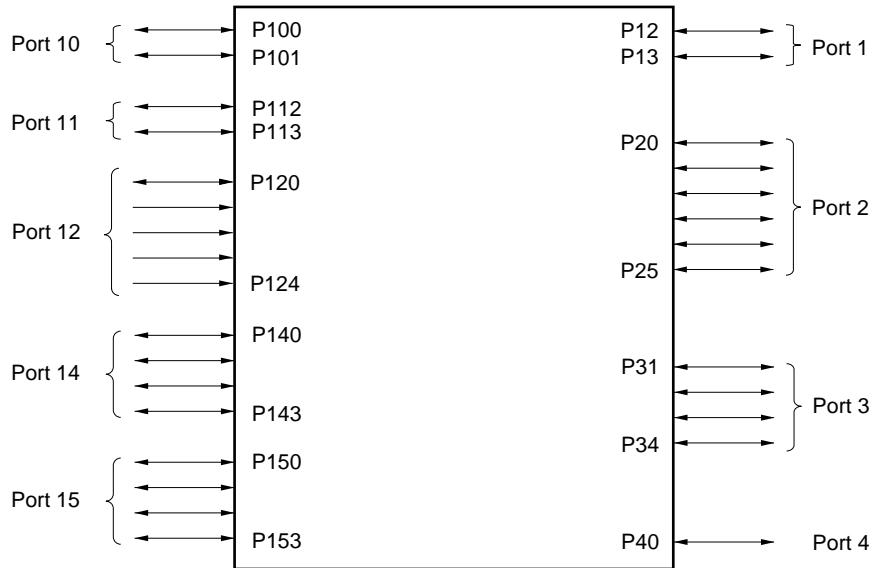


Table 4-2. Port Functions

Function Name	I/O	Function	After Reset	Alternate Function
P12	I/O	Port 1. 2-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	RxD0/KR3/<RxD6>
P13				TxD0/KR4/<TxD6>
P20	I/O	Port 2. 6-bit I/O port. Input/output can be specified in 1-bit units.	Digital input port	SEG21/ANI0 <sup>Note</sup>
P21				SEG20/ANI1 <sup>Note</sup>
P22				SEG19/ANI2 <sup>Note</sup>
P23				SEG18/ANI3 <sup>Note</sup>
P24				SEG17/ANI4 <sup>Note</sup>
P25				SEG16/ANI5 <sup>Note</sup>
P31	I/O	Port 3. 4-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	TOH1/INTP3
P32				TOH0/MCGO
P33				TI000/RTCDIV/ RTCCL/BUZ/INTP2
P34				TI52/TI010/TO00/ RTC1HZ/INTP1
P40	I/O	Port 4. 1-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	V <sub>LC3</sub> /KR0
P100, P101	I/O	Port 10. 2-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG4, SEG5
P112	I/O	Port 11. 2-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG6/TxD6
P113				SEG7/RxD6
P120	I/O	Port 12. 1-bit I/O port and 4-bit input port. Only for P120, use of an on-chip pull-up resistor can be specified by a software setting.	Input port	INTP0/EXLV1
P121				X1/OCD0A
P122				X2/EXCLK/OCD0B
P123				XT1
P124				XT2
P140 to P143	I/O	Port 14. 4-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG8 to SEG11
P150 to P153	I/O	Port 15. 4-bit I/O port. Input/output can be specified in 1-bit units. Use of an on-chip pull-up resistor can be specified by a software setting.	Input port	SEG12 to SEG15

**Note**  $\mu$ PD78F041x only.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

## 4.2 Port Configuration

Ports include the following hardware.

**Table 4-3. Port Configuration**

Item	Configuration
Control registers	Port mode register (PM1 to PM4, PM10 to PM12, PM14, PM15) Port register (P1 to P4, P10 to P12, P14, P15) Pull-up resistor option register (PU1, PU3, PU4, PU10 to PU12, PU14, PU15) Port function register 1 (PF1) Port function register 2 (PF2) Port function register ALL (PFALL) A/D port configuration register 0 (ADPC0) <sup>Note</sup>
Port	Total: 30
Pull-up resistor	Total: 20

**Note**  $\mu$ PD78F041x only



4.2.1 Port 1


Port 1 is a 2-bit I/O port with an output latch. Port 1 can be set to the input mode or output mode in 1-bit units using port mode register 1 (PM1). When the P12 and P13 pins are used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 1 (PU1).

This port can also be used for key interrupt input and serial interface data I/O.

Reset signal generation sets port 1 to input mode.


Figures 4-2 and 4-3 show block diagrams of port 1.

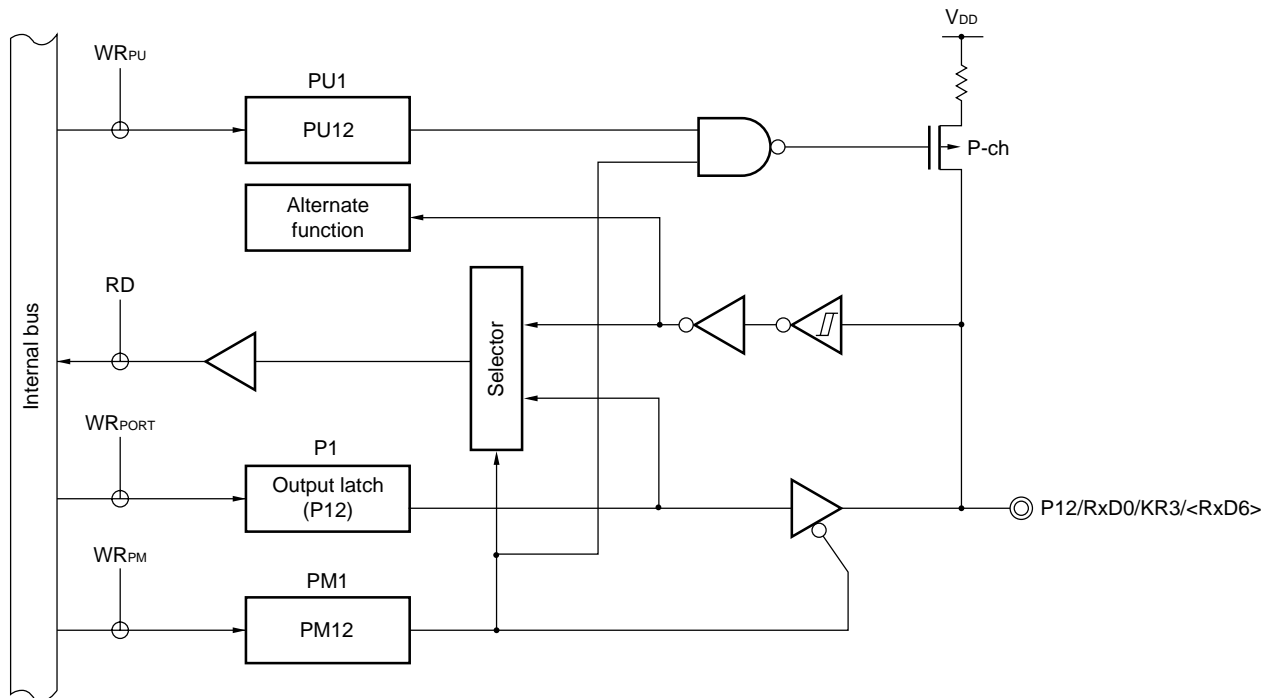Figure 4-2. Block Diagram of P12



- P1: Port register 1
- PU1: Pull-up resistor option register 1
- PM1: Port mode register 1
- RD: Read signal
- WR<sub>xx</sub>: Write signal

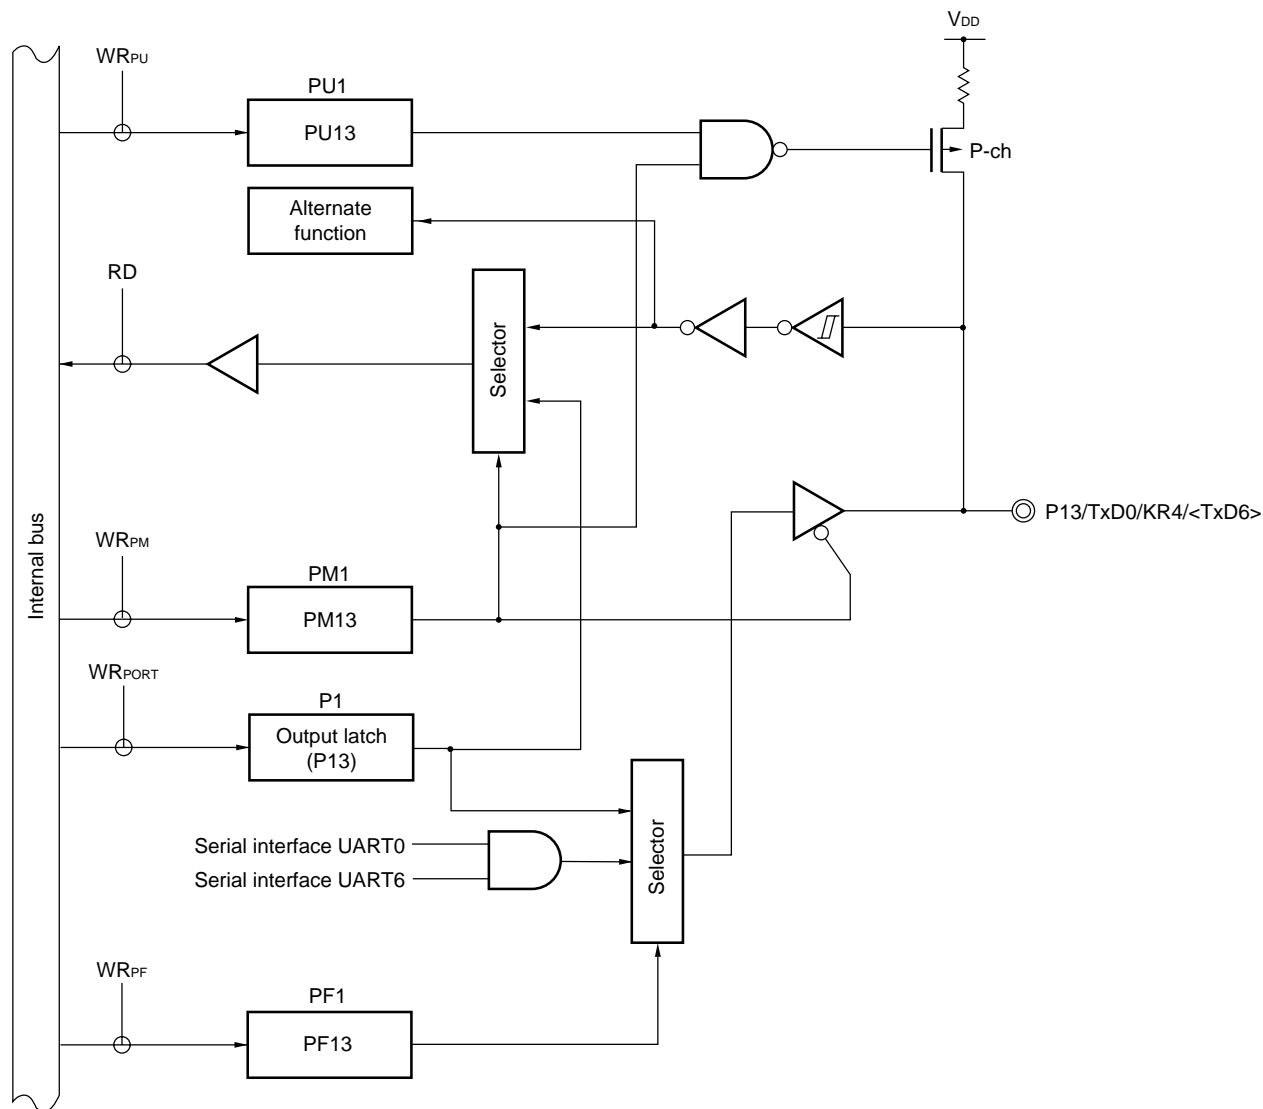Figure 4-3. Block Diagram of P13



- P1: Port register 1
- PU1: Pull-up resistor option register 1
- PM1: Port mode register 1
- RD: Read signal
- WR<sub>xx</sub>: Write signal

**4.2.2 Port 2**

Port 2 is a 6-bit I/O port with an output latch. Port 2 can be set to the input mode or output mode in 1-bit units using port mode register 2 (PM2).

This port can also be used for 10-bit successive approximation type A/D converter analog input ( $\mu$ PD78F041x only) and segment output.

To use P20/SEG21/ANI0<sup>Note</sup> to P25/SEG16/ANI5<sup>Note</sup> as digital input pins, set them to port function (other than segment output) by using the port function register 2 (PF2), to digital I/O by using ADPC0, and to input mode by using PM2. Use these pins starting from the lower bit.

To use P20/SEG21/ANI0<sup>Note</sup> to P25/SEG16/ANI5<sup>Note</sup> as digital output pins, set them to port function (other than segment output) by using the port function register 2 (PF2), to digital I/O by using ADPC0, and to output mode by using PM2. Use these pins starting from the lower bit.

Reset signal generation sets port 1 to input mode.


Figure 4-4 shows block diagrams of port 2.

**Table 4-4. Setting Functions of P20/SEG21/ANI0<sup>Note</sup> to P25/SEG16/ANI5<sup>Note</sup> Pins**

PF2	ADPC0 <sup>Note</sup>	PM2	ADS	P20/SEG21/ANI0 <sup>Note</sup> to P25/SEG16/ANI5 <sup>Note</sup>
Digital/Analog selection	Analog input selection	Input mode	Does not select ANI.	Analog input (not to be converted)
			Selects ANI.	Analog input (to be converted by successive approximation type A/D converter)
		Output mode	–	Setting prohibited
	Digital I/O selection	Input mode	–	Digital input
Output mode		–	Digital output	
SEG output selection	–	–	–	Segment output

**Note**  $\mu$ PD78F041x only.

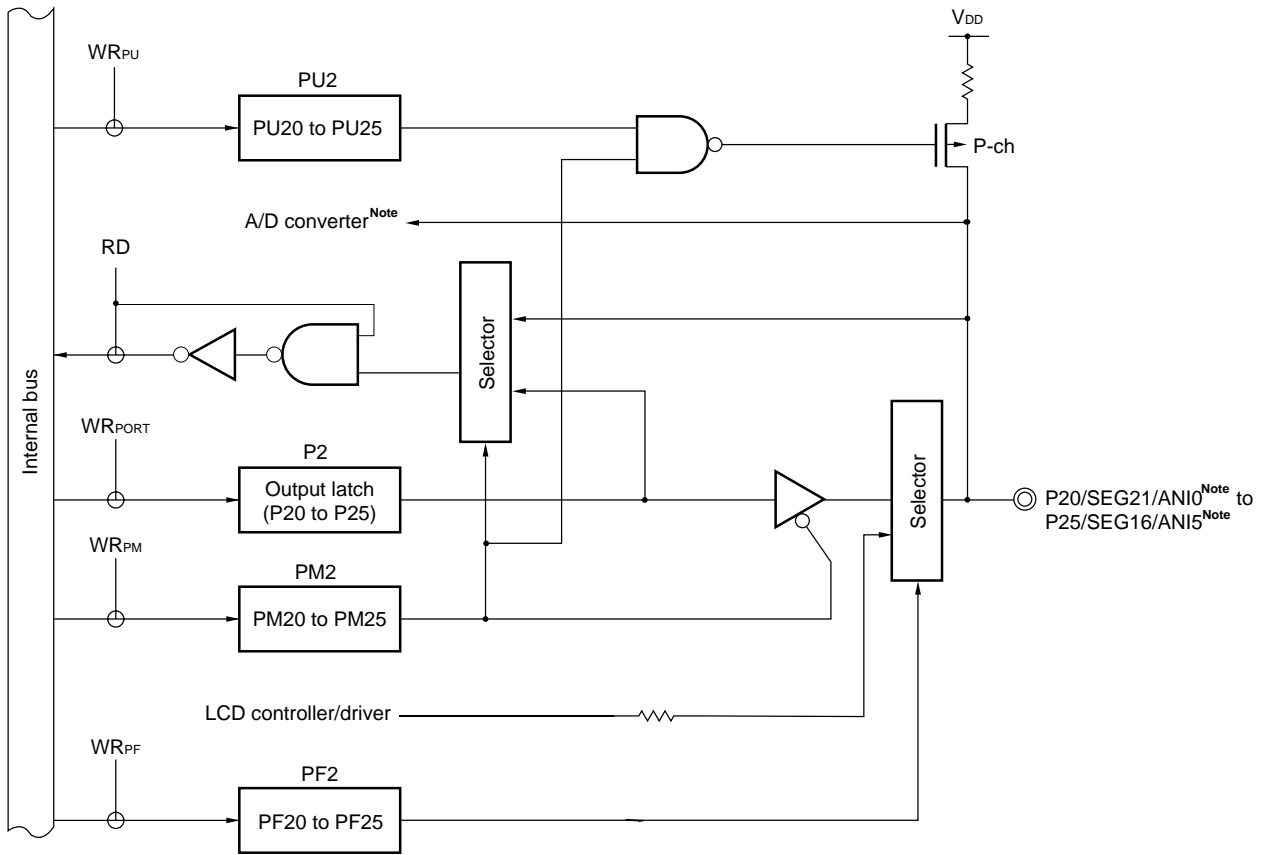Figure 4-4. Block Diagram of P20 to P25



**Note**  $\mu$ PD78F041x only.

- P2: Port register 2
- PU2: Pull-up resistor option register 2
- PM2: Port mode register 2
- PF2: Port function register 2
- RD: Read signal
- WR<sub>xx</sub>: Write signal

4.2.3 Port 3


Port 3 is a 4-bit I/O port with an output latch. Port 3 can be set to the input mode or output mode in 1-bit units using port mode register 3 (PM3). When the P31 to P34 pins are used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 3 (PU3).

This port can also be used for external interrupt request input, timer I/O, manchester code generator output, real-time counter output, and buzzer output.

Reset signal generation sets port 3 to input mode.


Figures 4-5 and 4-6 show block diagrams of port 3.

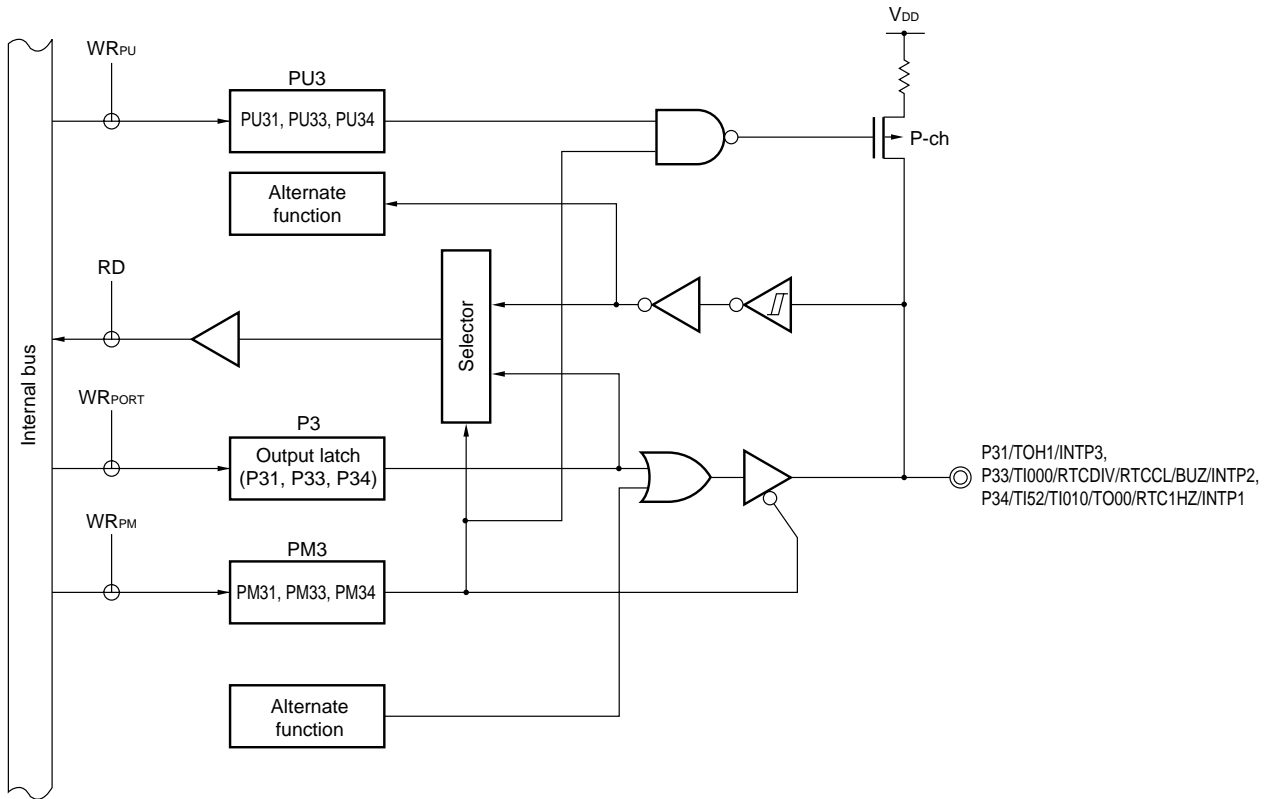Figure 4-5. Block Diagram of P31, P33, P34



- P3: Port register 3
- PU3: Pull-up resistor option register 3
- PM3: Port mode register 3
- RD: Read signal
- WR<sub>xx</sub>: Write signal

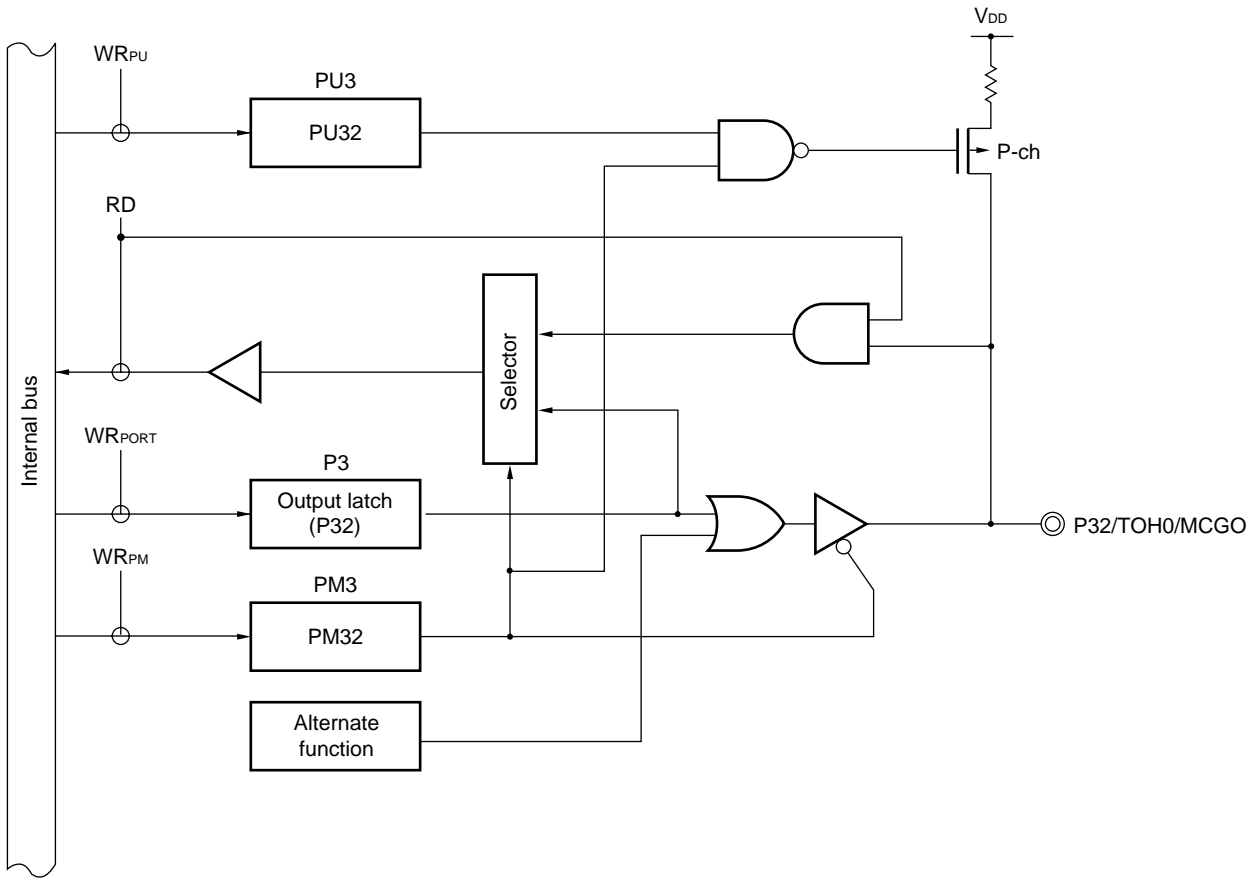Figure 4-6. Block Diagram of P32



- P3: Port register 3
- PU3: Pull-up resistor option register 3
- PM3: Port mode register 3
- RD: Read signal
- WR<sub>xx</sub>: Write signal

4.2.4 Port 4


Port 4 is a 1-bit I/O port with an output latch. Port 4 can be set to the input mode or output mode in 1-bit units using port mode register 4 (PM4). When the P40 pin is used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 4 (PU4).

This port can also be used for power supply voltage pins for driving the LCD and key interrupt input pin.

Reset signal generation sets port 4 to input mode.

Figures 4-7 show a block diagram of port 4.

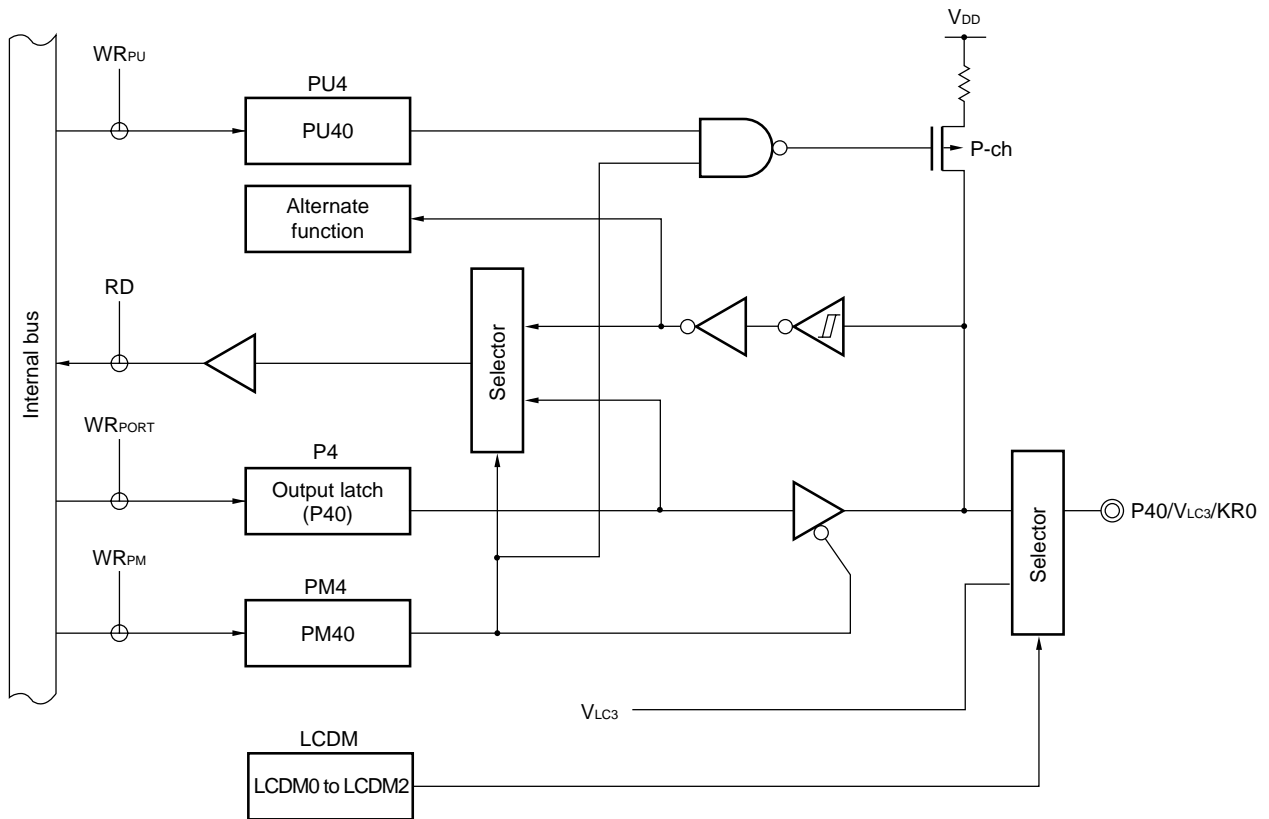Figure 4-7. Block Diagram of P40



- P4: Port register 4
- PU4: Pull-up resistor option register 4
- PM4: Port mode register 4
- LCDM: LCD display mode register
- RD: Read signal
- WR<sub>xx</sub>: Write signal

4.2.5 Port 10


Port 10 is a 2-bit I/O port with an output latch. Port 10 can be set to the input mode or output mode in 1-bit units using port mode register 10 (PM10). When the P100 and P101 pins are used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 10 (PU10).

This port can also be used for segment output.

Reset signal generation sets port 10 to input mode.

Figure 4-8 shows a block diagram of port 10.

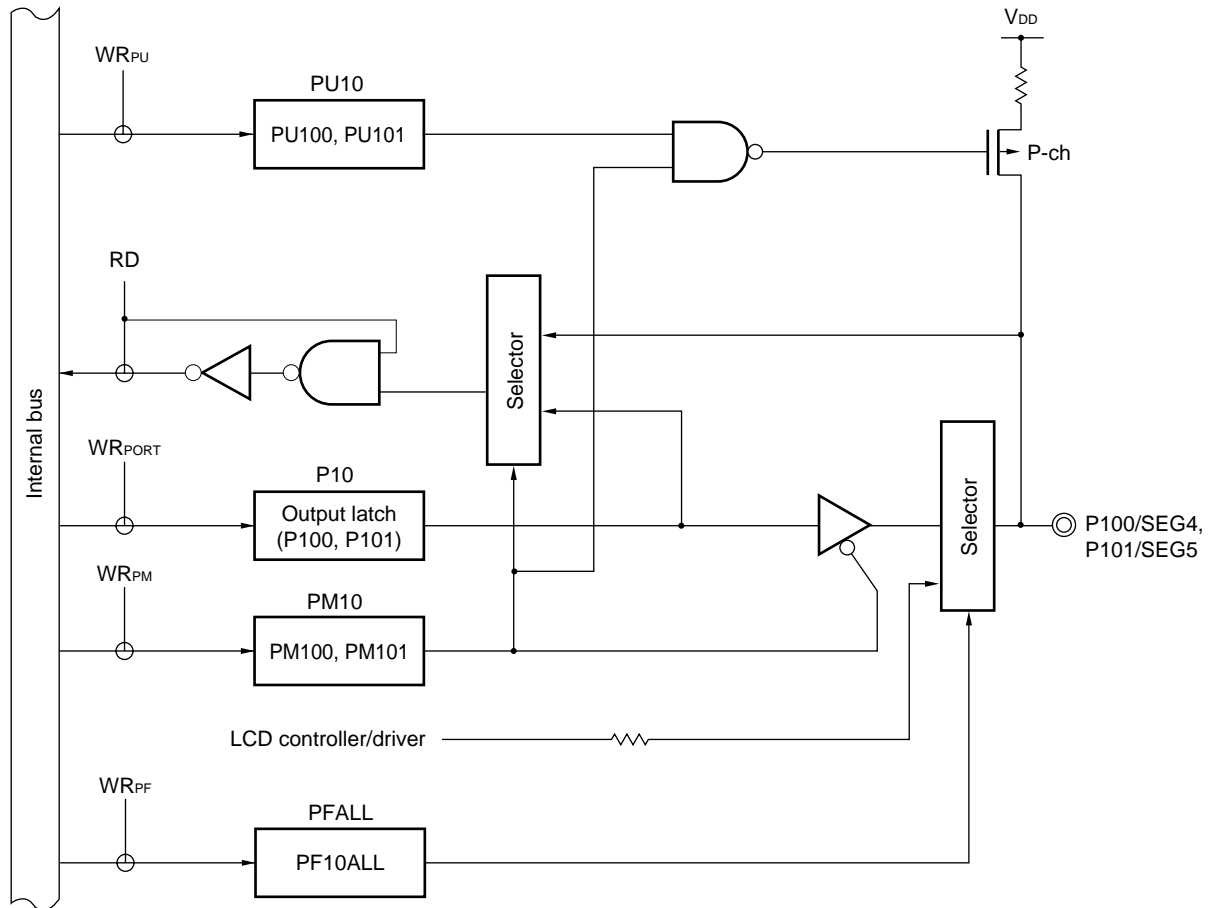Figure 4-8. Block Diagram of P100, P101



- P10: Port register 10
- PU10: Pull-up resistor option register 10
- PM10: Port mode register 10
- PFALL: Port function register ALL
- RD: Read signal
- WR<sub>xx</sub>: Write signal



4.2.6 Port 11


Port 11 is a 2-bit I/O port with an output latch. Port 11 can be set to the input mode or output mode in 1-bit units using port mode register 11 (PM11). When the P112, P113 pins are used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 11 (PU11).

This port can also be used for segment output and serial interface data I/O.

Reset signal generation sets port 11 to input mode.


Figures 4-9 and 4-10 show a block diagram of port 11.

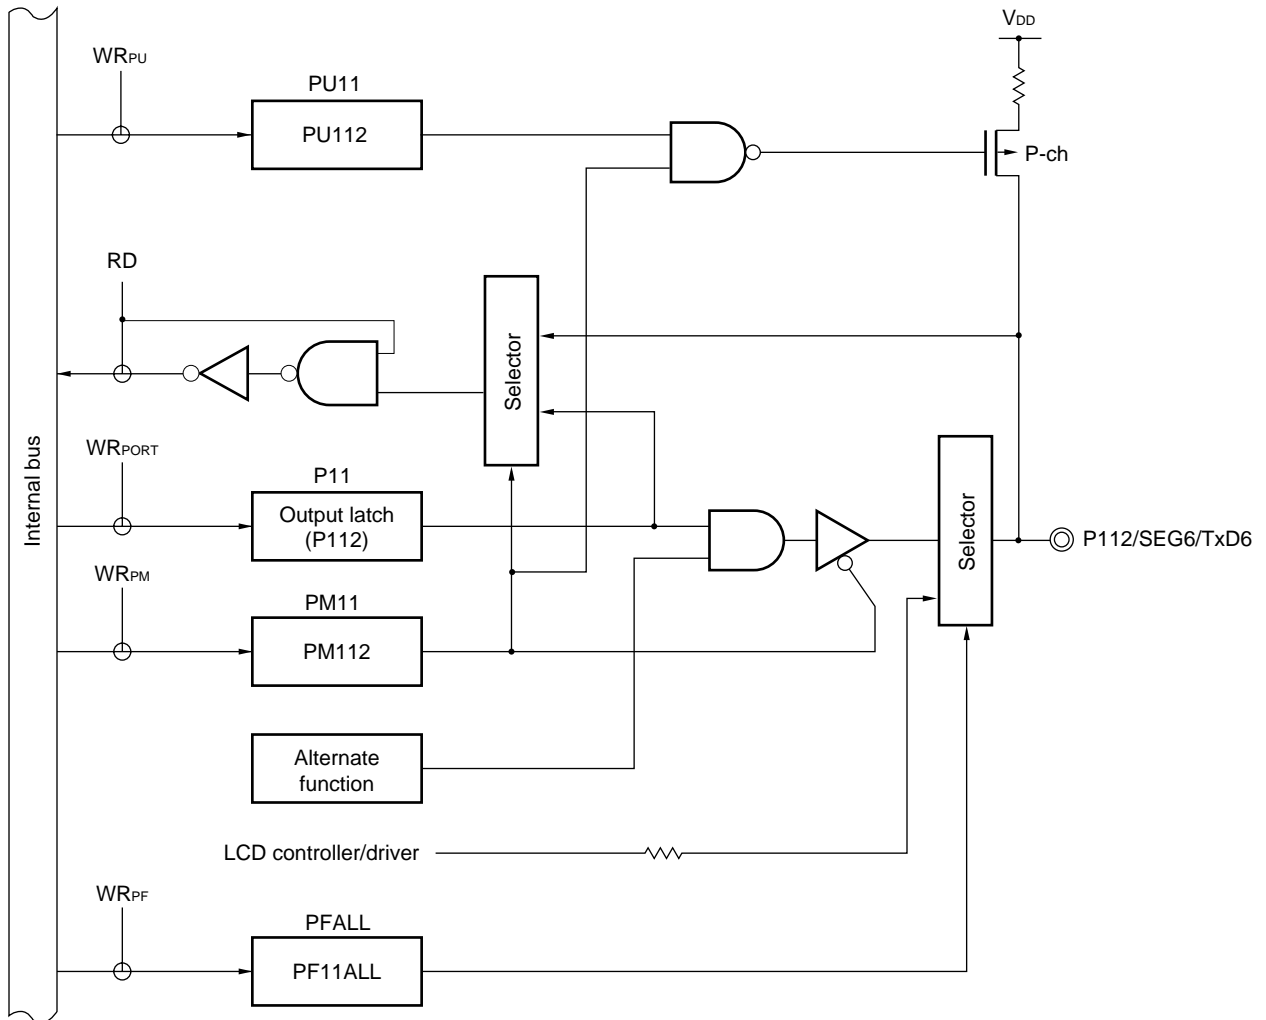Figure 4-9. Block Diagram of P112



- P11: Port register 11
- PU11: Pull-up resistor option register 11
- PM11: Port mode register 11
- PFALL: Port function register ALL
- RD: Read signal
- WR<sub>xx</sub>: Write signal

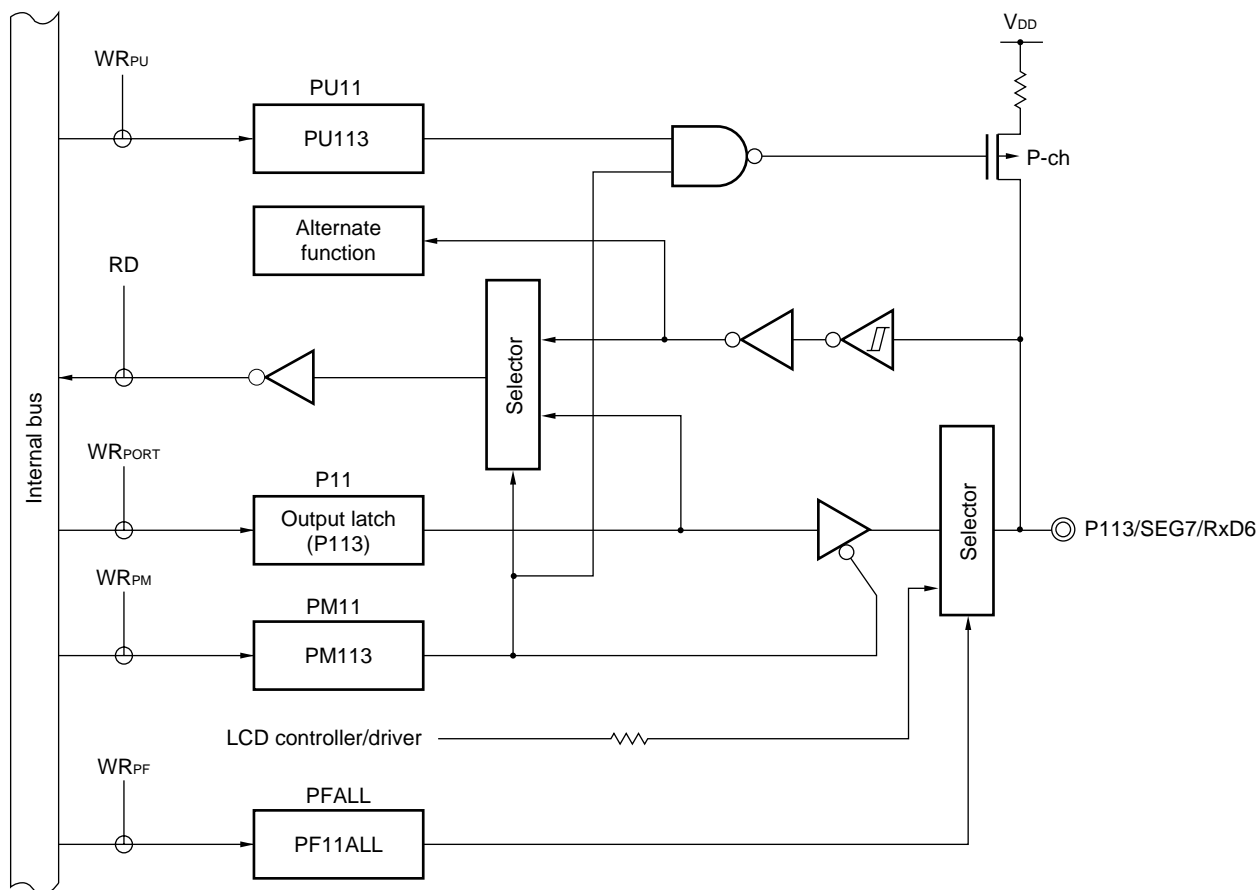Figure 4-10. Block Diagram of P113



- P11: Port register 11
- PU11: Pull-up resistor option register 11
- PM11: Port mode register 11
- PFALL: Port function register ALL
- RD: Read signal
- WR<sub>xx</sub>: Write signal

#### 4.2.7 Port 12

Port 12 is a 1-bit I/O port with an output latch and a 4-bit input port. Only P120 can be set to the input mode or output mode in 1-bit units using port mode register 12 (PM12). When used as an input port only for P120, use of an on-chip pull-up resistor can be specified by pull-up resistor option register 12 (PU12).

This port can also be used as pins for external interrupt request input, potential input for external low-voltage detection, connecting resonator for main system clock, connecting resonator for subsystem clock, and external clock input for main system clock.


Reset signal generation sets port 12 to input mode.

Figures 4-11 to 4-13 show block diagrams of port 12.

**Caution** When using the P121 to P124 pins to connect a resonator for the main system clock (X1, X2) or subsystem clock (XT1, XT2), or to input an external clock for the main system clock (EXCLK), the X1 oscillation mode, XT1 oscillation mode, or external clock input mode must be set by using the clock operation mode select register (OSCCTL) (for details, see 5.3 (1) Clock operation mode select register (OSCCTL) and (3) Setting of operation mode for subsystem clock pin). The reset value of OSCCTL is 00H (all of the P121 to P124 pins are input port pins).


**Remark** P121 and P122 can be used as on-chip debug mode setting pins (OCD0A, OCD0B) when the on-chip debug function is used. For detail, see **CHAPTER 25 ON-CHIP DEBUG FUNCTION**.

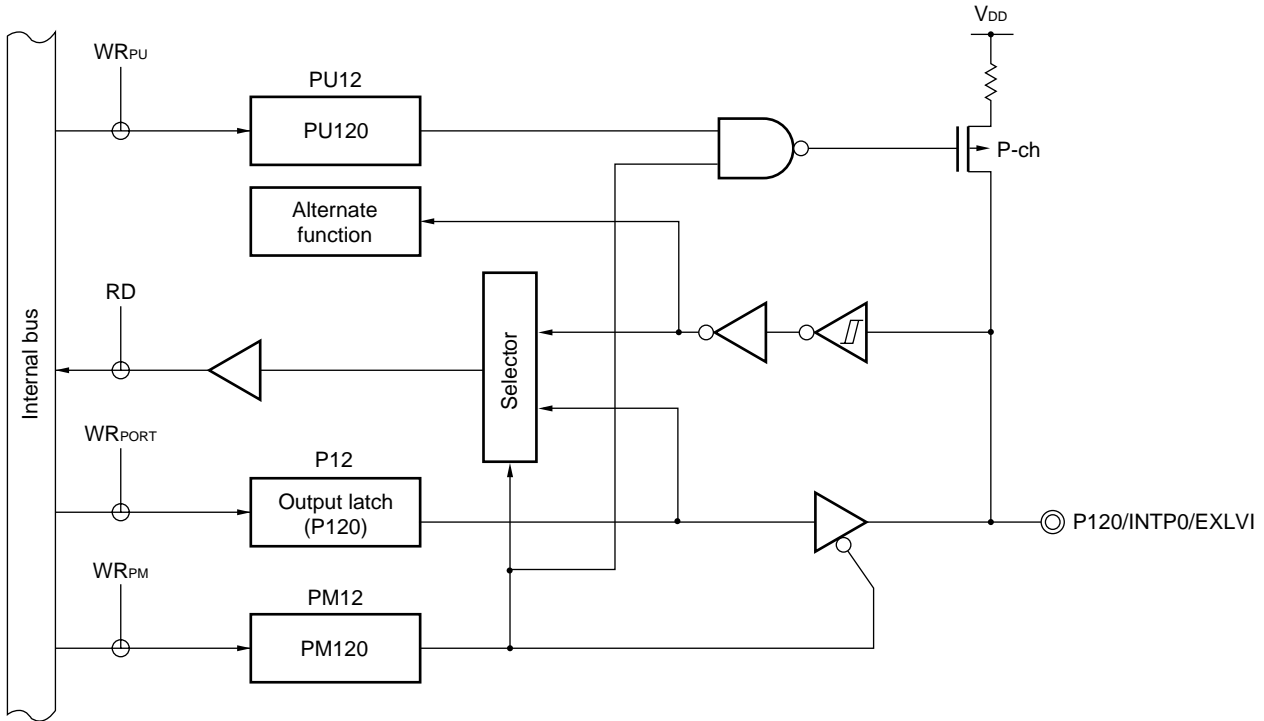Figure 4-11. Block Diagram of P120



- P12: Port register 12
- PU12: Pull-up resistor option register 12
- PM12: Port mode register 12
- RD: Read signal
- WR<sub>xx</sub>: Write signal

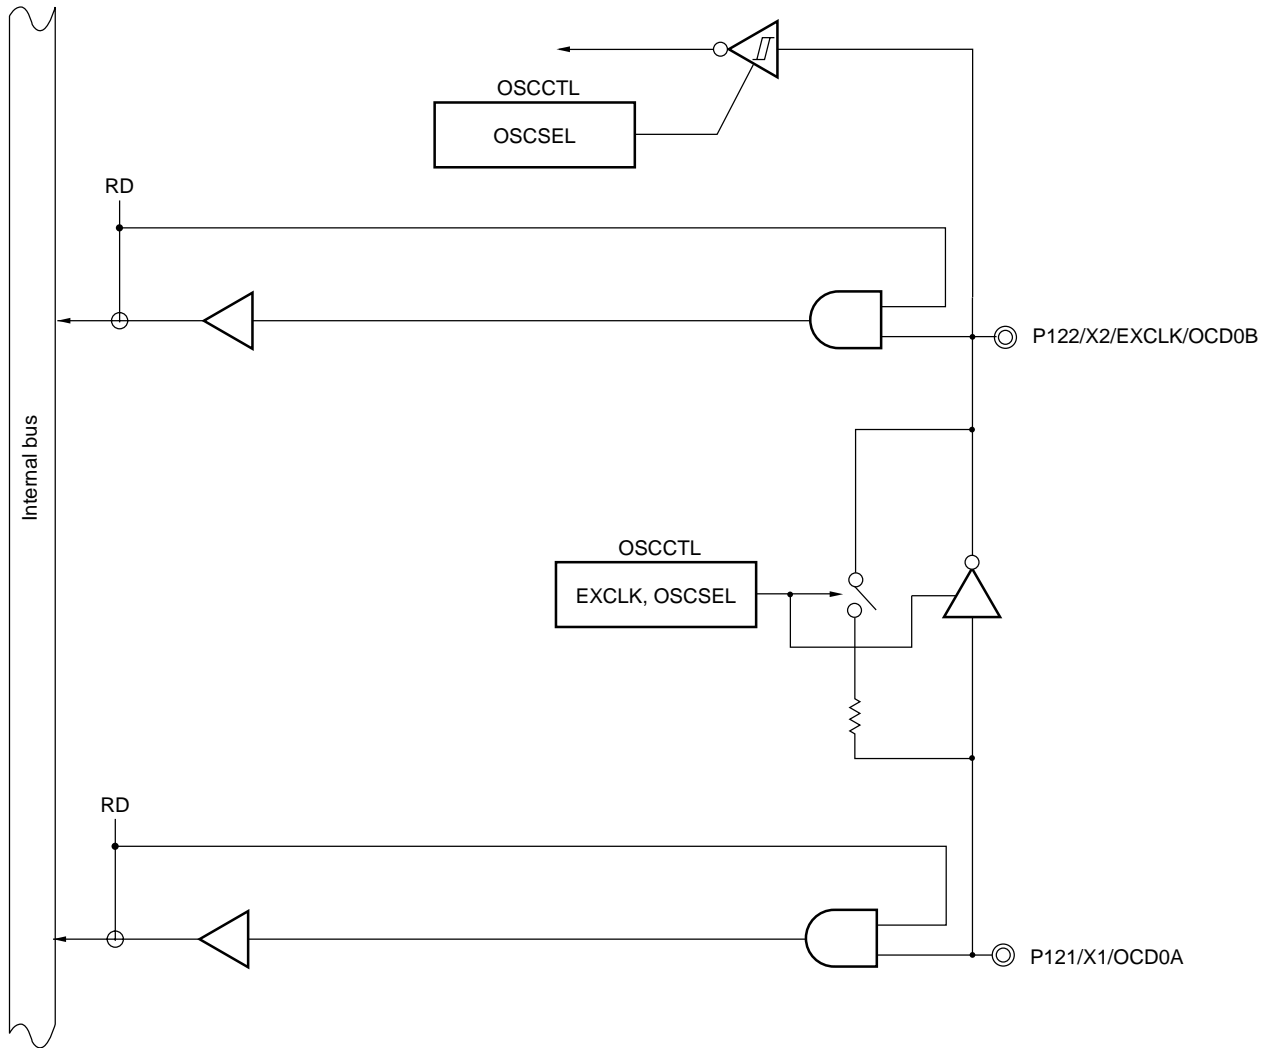
Figure 4-12. Block Diagram of P121 and P122



OSCCTL: Clock operation mode select register

RD: Read signal

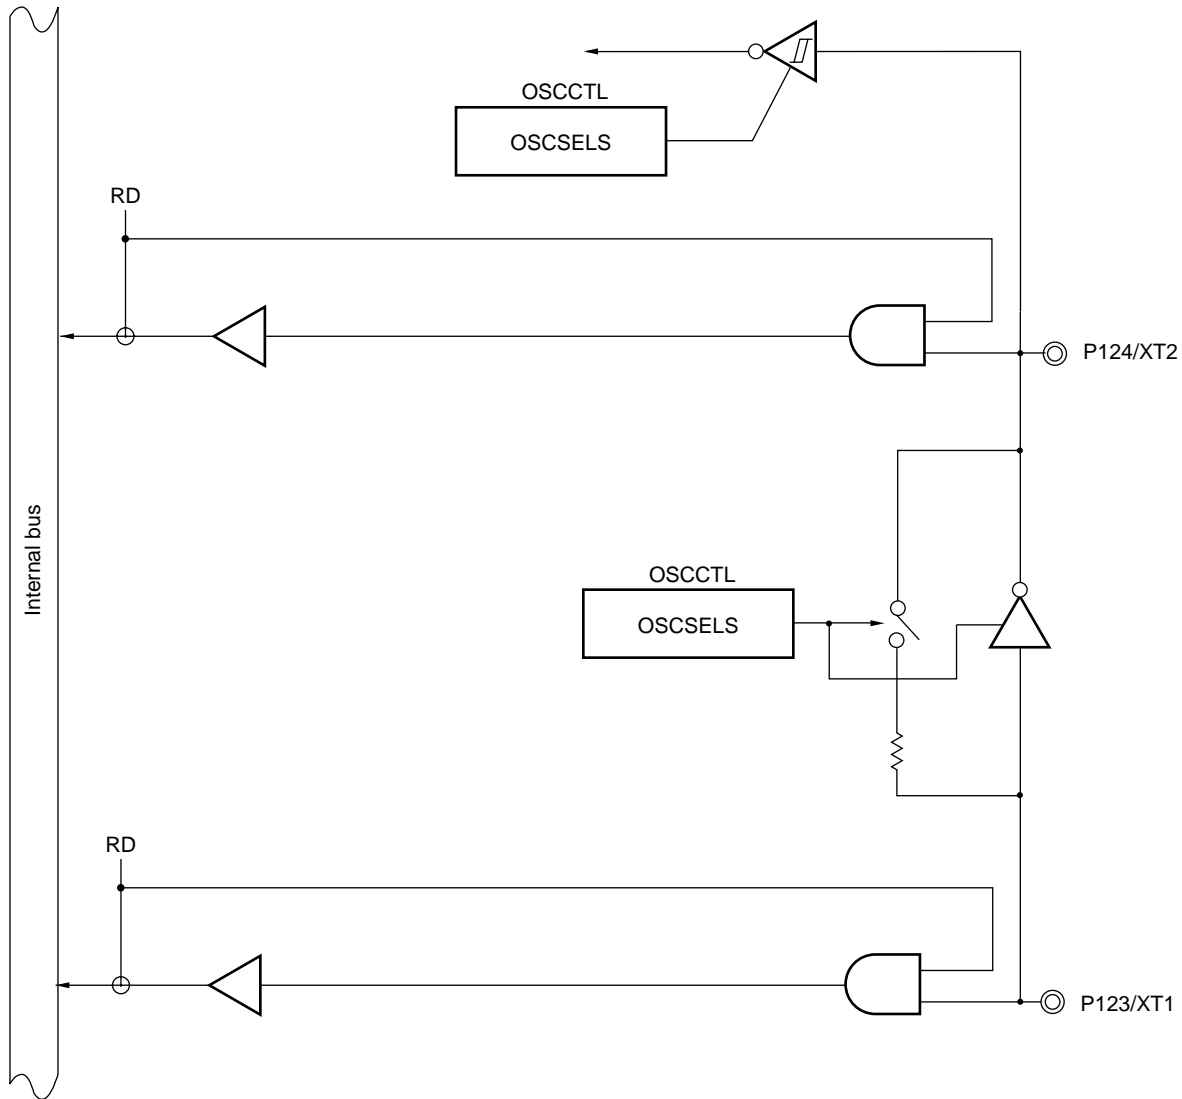Figure 4-13. Block Diagram of P123 and P124



OSCCTL: Clock operation mode select register  
 RD: Read signal

### 4.2.8 Port 14


Port 14 is a 4-bit I/O port with an output latch. Port 14 can be set to the input mode or output mode in 1-bit units using port mode register 14 (PM14). When the P140 to P143 pins are used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 14 (PU14).

This port can also be used for segment output.

Reset signal generation sets port 14 to input mode.

Figure 4-14 shows a block diagram of port 14.

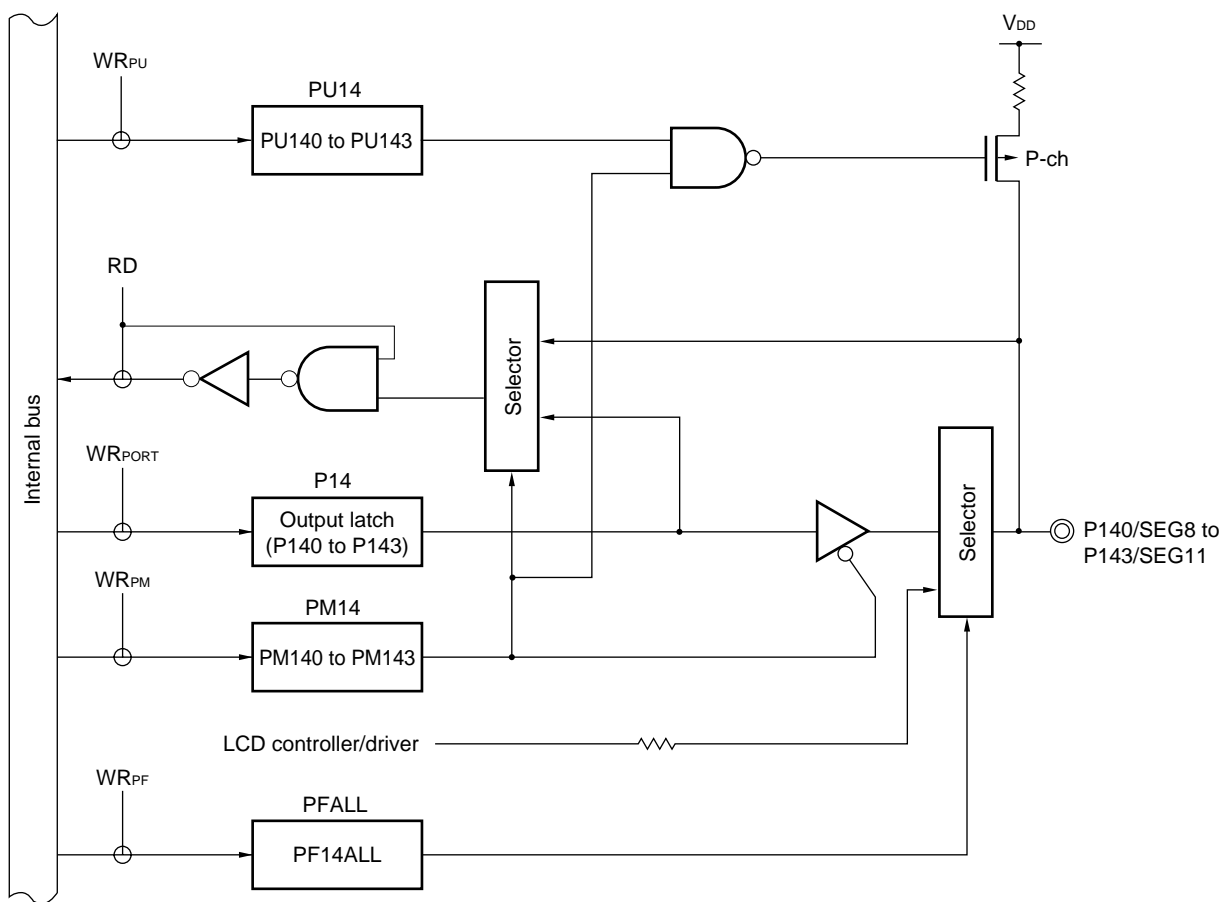**Figure 4-14. Block Diagram of P140 to P143**



- P14: Port register 14
- PU14: Pull-up resistor option register 14
- PM14: Port mode register 14
- PFALL: Port function register ALL
- RD: Read signal
- WR<sub>xx</sub>: Write signal

4.2.9 Port 15


Port 15 is a 4-bit I/O port with an output latch. Port 15 can be set to the input mode or output mode in 1-bit units using port mode register 15 (PM15). When the P150 to P153 pins are used as an input port, use of an on-chip pull-up resistor can be specified in 1-bit units by pull-up resistor option register 15 (PU15).

This port can also be used for segment output.

Reset signal generation sets port 15 to input mode.

Figure 4-15 shows a block diagram of port 15.

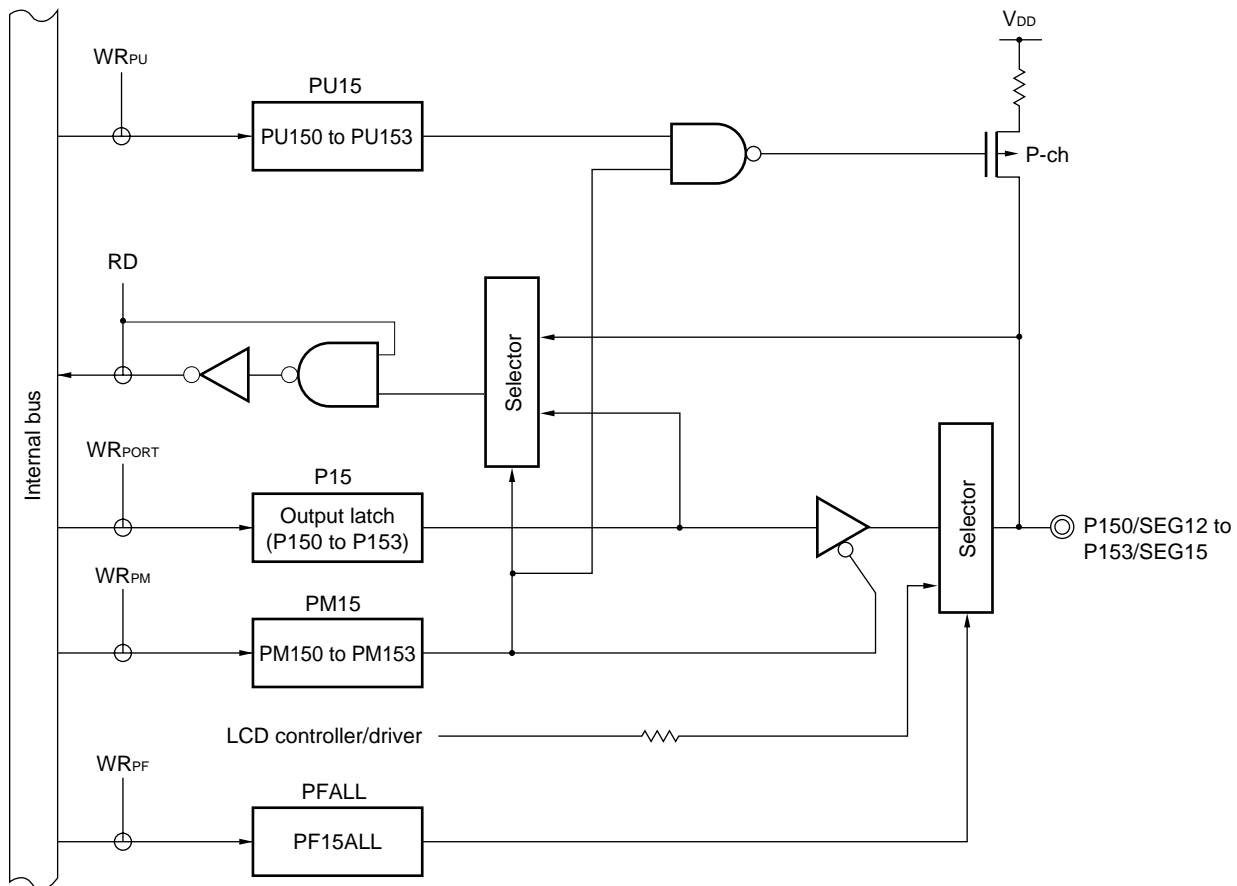Figure 4-15. Block Diagram of P150 to P153



- P15: Port register 15
- PU15: Pull-up resistor option register 15
- PM15: Port mode register 15
- PFALL: Port function register ALL
- RD: Read signal
- WR<sub>xx</sub>: Write signal



### 4.3 Registers Controlling Port Function

Port functions are controlled by the following seven types of registers.

- Port mode registers (PM1 to PM4, PM10 to PM12, PM14, PM15)
- Port registers (P1 to P4, P10 to P12, P14, P15)
- Pull-up resistor option registers (PU1, PU3, PU4, PU10 to PU12, PU14, PU15)
- Port function register 1 (PF1)
- Port function register 2 (PF2)
- Port function register ALL (PFALL)
- A/D port configuration register 0 (ADPC0)<sup>Note</sup>

**Note**  $\mu$ PD78F041x only

**(1) Port mode registers (PM1 to PM4, PM10 to PM12, PM14, PM15)**

These registers specify input or output mode for the port in 1-bit units.

These registers can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets these registers to FFH.

When port pins are used as alternate-function pins, set the port mode register by referencing **4.5 Settings of Port Mode Register and Output Latch When Using Alternate Function**.

Figure 4-16. Format of Port Mode Register

Symbol	7	6	5	4	3	2	1	0	Address	After reset	R/W
PM1	1	1	1	1	PM13	PM12	1	1	FF21H	FFH	R/W
PM2	1	1	PM25	PM24	PM23	PM22	PM21	PM20	FF22H	FFH	R/W
PM3	1	1	1	PM34	PM33	PM32	PM31	1	FF23H	FFH	R/W
PM4	1	1	1	1	1	1	1	PM40	FF24H	FFH	R/W
PM10	1	1	1	1	1	1	PM101	PM100	FF2AH	FFH	R/W
PM11	1	1	1	1	PM113	PM112	1	1	FF2BH	FFH	R/W
PM12	1	1	1	1	1	1	1	PM120	FF2CH	FFH	R/W
PM14	1	1	1	1	PM143	PM142	PM141	PM140	FF2EH	FFH	R/W
PM15	1	1	1	1	PM153	PM152	PM151	PM150	FF2FH	FFH	R/W

PMmn	Pmn pin I/O mode selection (m = 1 to 4, 10 to 12, 14, 15; n = 0 to 5)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

**Caution** Be sure to set bits 0, 1, and 4 to 7 of PM1, bits 6 and 7 of PM2, bits 0, and 5 to 7 of PM3, bits 1 to 7 of PM4, bits 2 to 7 of PM10, bits 0, 1, and 4 to 7 of PM11, bits 1 to 7 of PM12, bits 4 to 7 of PM14, and bits 4 to 7 of PM15 to “1”.

**(2) Port registers (P1 to P4, P10 to P12, P14, P15)**

These registers write the data that is output from the chip when data is output from a port.

If the data is read in the input mode, the pin level is read. If it is read in the output mode, the output latch value is read.

These registers can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears these registers to 00H.

**Figure 4-17 Format of Port Register**

Symbol	7	6	5	4	3	2	1	0	Address	After reset	R/W
P1	0	0	0	0	P13	P12	0	0	FF01H	00H (output latch)	R/W
P2	0	0	P25	P24	P23	P22	P21	P20	FF02H	00H (output latch)	R/W
P3	0	0	0	P34	P33	P32	P31	0	FF03H	00H (output latch)	R/W
P4	0	0	0	0	0	0	0	P40	FF04H	00H (output latch)	R/W
P10	0	0	0	0	0	0	P101	P100	FF0AH	00H (output latch)	R/W
P11	0	0	0	0	P113	P112	0	0	FF0BH	00H (output latch)	R/W
P12	0	0	0	P124 <sup>Note 2</sup>	P123 <sup>Note 2</sup>	P122 <sup>Note 2</sup>	P121 <sup>Note 2</sup>	P120	FF0CH	00H <sup>Note 1</sup> (output latch)	R/W <sup>Note 1</sup>
P14	0	0	0	0	P143	P142	P141	P140	FF0EH	00H (output latch)	R/W
P15	0	0	0	0	P153	P152	P151	P150	FF0FH	00H (output latch)	R/W

Pmn	m = 1 to 4, 10 to 12, 14, 15; n = 0 to 5	
	Output data control (in output mode)	Input data read (in input mode)
0	Output 0	Input low level
1	Output 1	Input high level

- Notes**
1. P121 to P124 are read-only. These become undefined at reset.
  2. When the operation mode of the pin is the clock input mode, 0 is always read.

**(3) Pull-up resistor option registers (PU1, PU3, PU4, PU10 to PU12, PU14, PU15)**

These registers specify whether the on-chip pull-up resistors of P12, P13, P31 to P34, P40, P100, P101, P112, P113, P120, P140 to P143, or P150 to P153 are to be used or not. On-chip pull-up resistors can be used in 1-bit units only for the bits set to input mode of the pins to which the use of an on-chip pull-up resistor has been specified in PU1, PU3, PU4, PU10 to PU12, PU14, and PU15. On-chip pull-up resistors cannot be connected to bits set to output mode and bits used as alternate-function output pins, regardless of the settings of PU1, PU3, PU4, PU10 to PU12, PU14, and PU15.

These registers can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears these registers to 00H.

**Figure 4-18. Format of Pull-up Resistor Option Register**

Symbol	7	6	5	4	3	2	1	0	Address	After reset	R/W
PU1	0	0	0	0	PU13	PU12	0	0	FF31H	00H	R/W
PU3	0	0	0	PU34	PU33	PU32	PU31	0	FF33H	00H	R/W
PU4	0	0	0	0	0	0	0	PU40	FF34H	00H	R/W
PU10	0	0	0	0	0	0	PU101	PU100	FF3AH	00H	R/W
PU11	0	0	0	0	PU113	PU112	0	0	FF3BH	00H	R/W
PU12	0	0	0	0	0	0	0	PU120	FF3CH	00H	R/W
PU14	0	0	0	0	PU143	PU142	PU141	PU140	FF3EH	00H	R/W
PU15	0	0	0	0	PU153	PU152	PU151	PU150	FF3FH	00H	R/W

PU <sub>m</sub> <sub>n</sub>	P <sub>m</sub> n pin on-chip pull-up resistor selection (m = 1, 3, 4, 10 to 12, 14, 15; n = 0 to 4)
0	On-chip pull-up resistor not connected
1	On-chip pull-up resistor connected

**(4) Port function register 1 (PF1)**

This register sets the pin functions of P13/TxD0/KR4/<TxD6> pins.  
 PF1 is set using a 1-bit or 8-bit memory manipulation instruction.  
 Reset signal generation sets PF1 to 00H.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

**Figure 4-19. Format of Port Function Register 1 (PF1)**

Address: FF20H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PF1	0	0	0	0	PF13	0	0	0

PF13	Port (P13), key interrupt (KR4), UART0, and UART6 output specification
0	Used as P13 or KR4
1	Used as TxD0 or TxD6

**(5) Port function register 2 (PF2)**

This register sets whether to use pins P20 to P25 as port pins (other than segment output pins) or segment output pins.  
 PF2 is set using a 1-bit or 8-bit memory manipulation instruction.  
 Reset signal generation sets PF2 to 00H.

**Figure 4-20. Format of Port Function Register 2 (PF2)**

Address: FFB5H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PF2	0	0	PF25	PF24	PF23	PF22	PF21	PF20

PF2n	Port/segment output specification
0	Used as port (other than segment output)
1	Used as segment output

**Remark** n = 0 to 5

**(6) Port function register ALL (PFALL)**

This register sets whether to use pins P10, P11, P14, and P15 as port pins (other than segment output pins) or segment output pins.

PFALL is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PFALL to 00H.

**Figure 4-21. Format of Port Function Register ALL (PFALL)**

Address: FFB6H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PFALL	0	PF15ALL	PF14ALL	0	PF11ALL	PF10ALL	0	0

PFnALL	Port/segment output specification
0	Used as port (other than segment output)
1	Used as segment output

**Remark** n = 10, 11, 14, 15

**(7) A/D port configuration register 0 (ADPC0) ( $\mu$ PD78F041x only)**

This register switches the P20/ANI0 to P25/ANI5 pins to analog input of A/D converter or digital I/O of port. ADPC0 can be set by a 1-bit or 8-bit memory manipulation instruction. Reset signal generation clears this register to 08H.

**Caution** Set the values shown in Figure 4-22 after the reset is released.

**Figure 4-22. Format of A/D Port Configuration Register 0 (ADPC0)**

Address: FF8FH After reset: 08H R/W

Symbol	7	6	5	4	3	2	1	0
ADPC0	0	0	0	0	0	ADPC02	ADPC01	ADPC00

ADPC02	ADPC01	ADPC00	Digital I/O (D)/analog input (A) switching					
			P25 /ANI5	P24 /ANI4	P23 /ANI3	P22 /AN2	P21 /ANI1	P20 /ANI0
0	0	0	A	A	A	A	A	A
0	0	1	A	A	A	A	A	D
0	1	0	A	A	A	A	D	D
0	1	1	A	A	A	D	D	D
1	0	0	A	A	D	D	D	D
1	0	1	A	D	D	D	D	D
1	1	0	D	D	D	D	D	D
Other than above			Setting prohibited					

- Cautions**
1. Set the channel used for A/D conversion to the input mode by using port mode register 2 (PM2).
  2. The pin to be set as a digital I/O via ADPC, must not be set via ADS, ADDS1 or ADDS0.
  3. If data is written to ADPC0, a wait cycle is generated. Do not write data to ADPC0 when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.
  4. If pins ANI0/P20/SEG21 to ANI5/P25/SEG16 are set to segment output via the PF2 register, output is set to segment output, regardless of the ADPC0 setting (for  $\mu$ PD78F041x only).

## 4.4 Port Function Operations

Port operations differ depending on whether the input or output mode is set, as shown below.

**Caution** In the case of 1-bit memory manipulation instruction, although a single bit is manipulated, the port is accessed as an 8-bit unit. Therefore, on a port with a mixture of input and output pins, the output latch contents for pins specified as input are undefined, even for bits other than the manipulated bit.

### 4.4.1 Writing to I/O port

#### (1) Output mode

A value is written to the output latch by a transfer instruction, and the output latch contents are output from the pin. Once data is written to the output latch, it is retained until data is written to the output latch again. The data of the output latch is cleared when a reset signal is generated.

#### (2) Input mode

A value is written to the output latch by a transfer instruction, but since the output buffer is off, the pin status does not change. Once data is written to the output latch, it is retained until data is written to the output latch again.

### 4.4.2 Reading from I/O port

#### (1) Output mode

The output latch contents are read by a transfer instruction. The output latch contents do not change.

#### (2) Input mode

The pin status is read by a transfer instruction. The output latch contents do not change.

### 4.4.3 Operations on I/O port

#### (1) Output mode

An operation is performed on the output latch contents, and the result is written to the output latch. The output latch contents are output from the pins. Once data is written to the output latch, it is retained until data is written to the output latch again. The data of the output latch is cleared when a reset signal is generated.

#### (2) Input mode

The pin level is read and an operation is performed on its contents. The result of the operation is written to the output latch, but since the output buffer is off, the pin status does not change.



#### 4.5 Settings of PFALL, PF2, PF1, ISC, Port Mode Register, and Output Latch When Using Alternate Function

To use the alternate function of a port pin, set the port mode register and output latch as shown in Table 4-5.

**Table 4-5. Settings of PFALL, PF2, PF1, ISC, Port Mode Register, and Output Latch When Using Alternate Function (1/2)**

Pin Name	Alternate Function		PFALL, PF2 <sup>Note 4</sup>	PF1	ISC	PM <sub>xx</sub>	P <sub>xx</sub>
	Function Name	I/O					
P12	KR3	Input	–			1	×
	RxD0	Input	–			1	×
	<RxD6>	Input	–		ISC4 = 0, ISC5 = 1 <sup>Notes 5,7</sup>	1	×
P13 <sup>Note 9</sup>	KR4	Input	–	PF13 = 0		1	×
	TxD0	Output	–	PF13 = 1		0	×
	<TxD6>	Output	–	PF13 = 1	ISC4 = 0, ISC5 = 1	0	×
P20 to P25 <sup>Note 2</sup>	SEG21 to SEG16	Output	1			×	×
	ANI0 to ANI5 <sup>Note 1</sup>	Input	0			1	×
P31	TOH1	Output	–			0	0
	INTP3	Input	–			1	×
P32	TOH0	Output	–			0	0
	MCGO	Output	–			0	0
P33	TI000	Input	–		ISC1 = 0	1	×
	RTCDIV	Output	–			0	0
	RTCCL	Output	–			0	0
	BUZ	Output	–			0	0
	INTP2	Input	–			1	×
P34	TI52	Input	–		<b>Note 6</b>	1	×
	TI010	Input	–			1	×
	TO00	Output	–			0	0
	RTC1HZ	Output	–			0	0
	INTP1	Input	–			1	×
P40	KR0	Input	–			1	×
	V <sub>LC3</sub> <sup>Note 8</sup>	Input	–			×	×
P100, P101	SEG4, SEG5	Output	1			×	×
P112	SEG6	Output	1		ISC3 = 0	×	×
	TxD6	Output	0		ISC3 = 1, ISC4 = ISC5 = 0	0	1

(Note and Remark are listed on the page after next.)

**Table 4-5. Settings of PFALL, PF2, PF1, ISC, Port Mode Register, and Output Latch When Using Alternate Function (2/2)**

Pin Name	Alternate Function		PFALL, PF2 <sup>Note 4</sup>	ISC	PM <sub>xx</sub>	P <sub>xx</sub>
	Function Name	I/O				
P113	SEG7	Output	1	ISC3 = 0	×	×
	RxD6	Input	0	ISC3 = 1, ISC4 = ISC5 = 0 <sup>Notes 5, 7</sup>	1	×
P120	EXLVI	Input	–		1	×
	INTP0	Input	–	ISC0 = 0	1	×
P121	X1 <sup>Note 3</sup>	–	–		×	×
	OCD0A	–	–		×	×
P122	X2 <sup>Note 3</sup>	–	–		×	×
	EXCLK <sup>Note 3</sup>	Input	–		×	×
	OCD0B	–	–		×	×
P123	XT1 <sup>Note 3</sup>	–	–		×	×
P124	XT2 <sup>Note 3</sup>	–	–		×	×
P140 to P143	SEG8 to SEG11	Output	1		×	×
P150 to P153	SEG12 to SEG15	Output	1		×	×

(Note and Remark are listed on the next page.)

- Notes**
1.  $\mu$ PD78F041x only.
  2. The functions of the P20/ANI0 to P25/ANI5 pins are determined according to the settings of port function register 2 (PF2), A/D port configuration register 0 (ADPC0), port mode register 2 (PM2), analog input channel specification register (ADS).

**Table 4-6. Setting Functions of P20/SEG21/ANI0<sup>Note</sup> to P25/SEG16/ANI5<sup>Note</sup> Pins**

PF2	ADPC0 <sup>Note</sup>	PM2	ADS	P20/SEG21/ANI0 <sup>Note</sup> to P25/SEG16/ANI5 <sup>Note</sup> Pins
Digital/Analog selection	Analog input selection	Input mode	Does not select ANI.	Analog input (not to be converted)
			Selects ANI.	Analog input (to be converted by successive approximation type A/D converter)
	Output mode	–	Setting prohibited	
	Digital I/O selection	Input mode	–	Digital input
Output mode		–	Digital output	
SEG output selection	–	–	–	Segment output

**Note**  $\mu$ PD78F041x only.

3. When using the P121 to P124 pins to connect a resonator for the main system clock (X1, X2) or subsystem clock (XT1, XT2), or to input an external clock for the main system clock (EXCLK), the X1 oscillation mode, XT1 oscillation mode, or external clock input mode must be set by using the clock operation mode select register (OSCCTL) (for details, see **5.3 (1) Clock operation mode select register (OSCCTL)** and **(3) Setting of operation mode for subsystem clock pin**). The reset value of OSCCTL is 00H (all of the P121 to P124 are Input port pins).
4. Targeted at registers corresponding to each port.
5. RxD6 can be set as the input source for TI000 by setting ISC1 = 1.
6. Input enable of TM52 via TMH2 can be controlled by setting ISC2 = 1.
7. RxD6 can be set as the input source for INTP0 by setting ISC0 = 1.
8. When the P40/KR0/V<sub>LC3</sub> pin is set to the 1/4 bias method, it is used as V<sub>LC3</sub>. When the pin is set to another bias method, it is used for the port function (P40) or the key interrupt function (KR0).
9. Set PF13 = 0 when using as port function.

**Remarks** 1. x: Don't care

–: Does not apply.

PMxx: Port mode register

Pxx: Port output latch

2. The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).
3. X1, X2 pins can be used as on-chip debug mode setting pins (OCD0A, OCD0B) when the on-chip debug function is used. For detail, see **CHAPTER 25 ON-CHIP DEBUG FUNCTION**.

## CHAPTER 5 CLOCK GENERATOR

### 5.1 Functions of Clock Generator

The clock generator generates the clock to be supplied to the CPU and peripheral hardware. The following three kinds of system clocks and clock oscillators are selectable.

#### (1) Main system clock

##### <1> X1 oscillator

This circuit oscillates a clock of  $f_x = 2$  to 10 MHz by connecting a resonator to X1 and X2.

Oscillation can be stopped by executing the STOP instruction or using the main OSC control register (MOC).

##### <2> Internal high-speed oscillator

This circuit oscillates a clock of  $f_{RH} = 8$  MHz (TYP.). After a reset release, the CPU always starts operating with this internal high-speed oscillation clock. Oscillation can be stopped by executing the STOP instruction or using the internal oscillation mode register (RCM).

An external main system clock ( $f_{EXCLK} = 2$  to 10 MHz) can also be supplied from the OCD0B/EXCLK/X2/P122 pin. An external main system clock input can be disabled by executing the STOP instruction or using RCM.

As the main system clock, a high-speed system clock (X1 clock or external main system clock) or internal high-speed oscillation clock can be selected by using the main clock mode register (MCM).

#### (2) Subsystem clock

##### • Subsystem clock oscillator

This circuit oscillates at a frequency of  $f_{XT} = 32.768$  kHz by connecting a 32.768 kHz resonator across XT1 and XT2. Oscillation can be stopped by using the processor clock control register (PCC) and clock operation mode select register (OSCCTL).

- Remarks**
1.  $f_x$ : X1 clock oscillation frequency
  2.  $f_{RH}$ : Internal high-speed oscillation clock frequency
  3.  $f_{EXCLK}$ : External main system clock frequency
  4.  $f_{XT}$ : XT1 clock oscillation frequency

**(3) Internal low-speed oscillation clock (clock for watchdog timer)**

- **Internal low-speed oscillator**

This circuit oscillates a clock of  $f_{RL} = 240 \text{ kHz}$  (TYP.). After a reset release, the internal low-speed oscillation clock always starts operating.

Oscillation can be stopped by using the internal oscillation mode register (RCM) when “internal low-speed oscillator can be stopped by software” is set by option byte.

The internal low-speed oscillation clock cannot be used as the CPU clock. The following hardware operates with the internal low-speed oscillation clock.

- Watchdog timer
- 8-bit timer H1 (if  $f_{RL}$ ,  $f_{RL}/2^7$  or  $f_{RL}/2^9$  is selected as the count clock)
- LCD controller/driver (if  $f_{RL}/2^3$  is selected as the LCD source clock)

**Remark**  $f_{RL}$ : Internal low-speed oscillation clock frequency


**5.2 Configuration of Clock Generator**

The clock generator includes the following hardware.

**Table 5-1. Configuration of Clock Generator**

Item	Configuration
Control registers	Clock operation mode select register (OSCCTL) Processor clock control register (PCC) Internal oscillation mode register (RCM) Main OSC control register (MOC) Main clock mode register (MCM) Oscillation stabilization time counter status register (OSTC) Oscillation stabilization time select register (OSTS) Internal high-speed oscillation trimming register (HIOTRM)
Oscillators	X1 oscillator XT1 oscillator Internal high-speed oscillator Internal low-speed oscillator

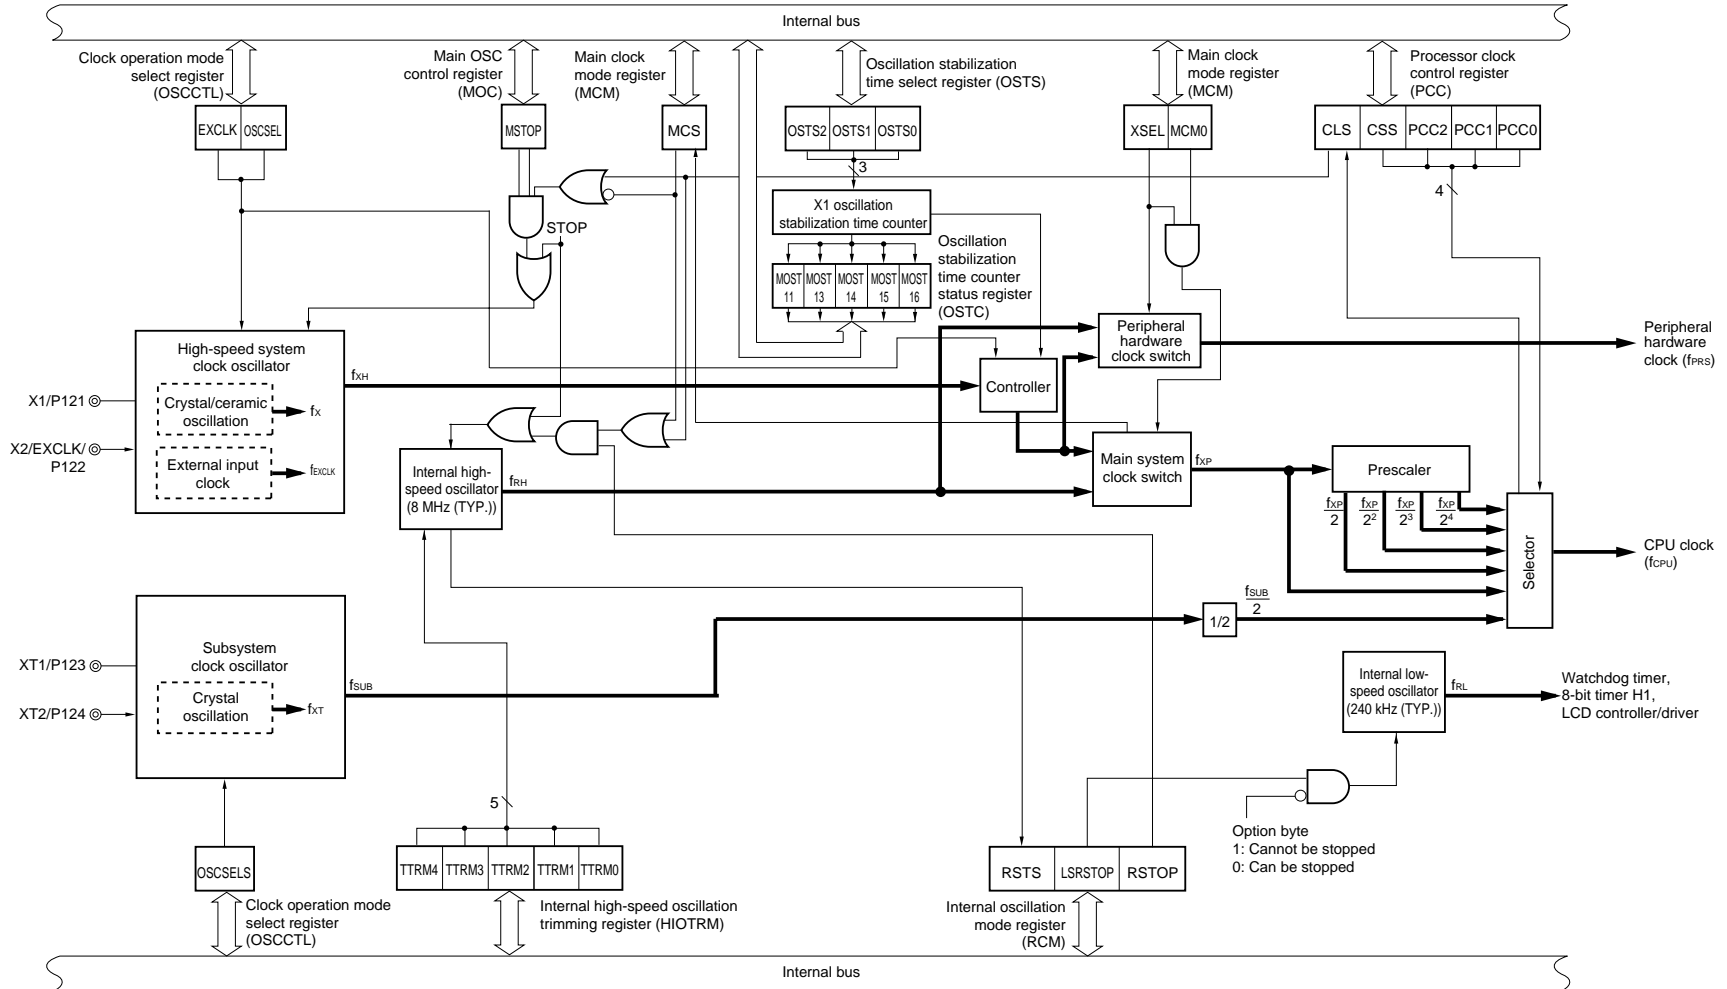Figure 5-1. Block Diagram of Clock Generator



- Remarks**
1.  $f_X$ : X1 clock oscillation frequency
  2.  $f_{RH}$ : Internal high-speed oscillation clock frequency
  3.  $f_{EXCLK}$ : External main system clock frequency
  4.  $f_{XH}$ : High-speed system clock frequency
  5.  $f_{XP}$ : Main system clock frequency
  6.  $f_{PRS}$ : Peripheral hardware clock frequency
  7.  $f_{CPU}$ : CPU clock frequency
  8.  $f_{XT}$ : XT1 clock oscillation frequency
  9.  $f_{SUB}$ : Subsystem clock frequency
  10.  $f_{RL}$ : Internal low-speed oscillation clock frequency

### 5.3 Registers Controlling Clock Generator

The following eight registers are used to control the clock generator.

- Clock operation mode select register (OSCCTL)
- Processor clock control register (PCC)
- Internal oscillation mode register (RCM)
- Main OSC control register (MOC)
- Main clock mode register (MCM)
- Oscillation stabilization time counter status register (OSTC)
- Oscillation stabilization time select register (OSTS)
- Internal high-speed oscillation trimming register (HIOTRM)

#### (1) Clock operation mode select register (OSCCTL)

This register selects the operation modes of the high-speed system and subsystem clocks, and the gain of the on-chip oscillator.

OSCCTL can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 5-2. Format of Clock Operation Mode Select Register (OSCCTL)**

Address: FF9FH After reset: 00H R/W

Symbol	<7>	<6>	5	<4>	3	2	1	0
OSCCTL	EXCLK	OSCSEL	0	OSCSELS	0	0	0	0

EXCLK	OSCSEL	High-speed system clock pin operation mode	P121/X1 pin	P122/X2/EXCLK pin
0	0	Input port mode	Input port	
0	1	X1 oscillation mode	Crystal/ceramic resonator connection	
1	0	Input port mode	Input port	
1	1	External clock input mode	Input port	External clock input

**Caution** To change the value of EXCLK and OSCSEL, be sure to confirm that bit 7 (MSTOP) of the main OSC control register (MOC) is 1 (the X1 oscillator stops or the external clock from the EXCLK pin is disabled).

Be sure to clear bits 0 to 3, and 5 to "0".

**Remark** f<sub>XH</sub>: High-speed system clock oscillation frequency



**(2) Processor clock control register (PCC)**

This register is used to select the CPU clock, the division ratio, and operation mode for subsystem clock. PCC is set by a 1-bit or 8-bit memory manipulation instruction. Reset signal generation sets PCC to 01H.

**Figure 5-3. Format of Processor Clock Control Register (PCC)**

Address: FFFBH After reset: 01H R/W<sup>Note</sup>

Symbol	7	6	<5>	<4>	3	2	1	0
PCC	0	0	CLS	CSS	0	PCC2	PCC1	PCC0

CLS	CPU clock status
0	Main system clock
1	Subsystem clock

CSS	PCC2	PCC1	PCC0	CPU clock ( $f_{CPU}$ ) selection
0	0	0	0	$f_{XP}$
	0	0	1	$f_{XP}/2$ (default)
	0	1	0	$f_{XP}/2^2$
	0	1	1	$f_{XP}/2^3$
	1	0	0	$f_{XP}/2^4$
1	0	0	0	$f_{SUB}/2$
	0	0	1	
	0	1	0	
	0	1	1	
	1	0	0	
Other than above				Setting prohibited

**Note** Bit 5 is read-only.

**Caution** Be sure to clear bits 3, 6, and 7 to "0".

- Remarks**
1.  $f_{XP}$ : Main system clock oscillation frequency
  2.  $f_{SUB}$ : Subsystem clock oscillation frequency

The fastest instruction can be executed in 2 clocks of the CPU clock in the 78K0/LC3. Therefore, the relationship between the CPU clock ( $f_{CPU}$ ) and the minimum instruction execution time is as shown in Table 5-2.

**Table 5-2. Relationship Between CPU Clock and Minimum Instruction Execution Time**

CPU Clock ( $f_{CPU}$ )	Minimum Instruction Execution Time: $2/f_{CPU}$		
	Main System Clock		Subsystem Clock
	High-Speed System Clock <sup>Note</sup>	Internal High-Speed Oscillation Clock <sup>Note</sup>	
	At 10 MHz Operation	At 8 MHz (TYP.) Operation	At 32.768 kHz Operation
$f_{XP}$	0.2 $\mu s$	0.25 $\mu s$ (TYP.)	–
$f_{XP}/2$	0.4 $\mu s$	0.5 $\mu s$ (TYP.)	–
$f_{XP}/2^2$	0.8 $\mu s$	1.0 $\mu s$ (TYP.)	–
$f_{XP}/2^3$	1.6 $\mu s$	2.0 $\mu s$ (TYP.)	–
$f_{XP}/2^4$	3.2 $\mu s$	4.0 $\mu s$ (TYP.)	–
$f_{SUB}/2$	–	–	122.1 $\mu s$

**Note** The main clock mode register (MCM) is used to set the main system clock supplied to CPU clock (high-speed system clock/internal high-speed oscillation clock) (see **Figure 5-6**).

### (3) Setting of operation mode for subsystem clock pin

The operation mode for the subsystem clock pin can be set by using bit 4 (OSCSELS) of the clock operation mode select register (OSCCTL) in combination.

**Table 5-3. Setting of Operation Mode for Subsystem Clock Pin**

Bit 4 of OSCCTL	Subsystem Clock Pin Operation Mode	P123/XT1 Pin	P124/XT2 Pin
OSCSELS			
0	Input port mode	Input port	
1	XT1 oscillation mode	Crystal resonator connection	

**Caution** Confirm that bit 5 (CLS) of the processor clock control register (PCC) is 0 (CPU is operating with main system clock) when changing the current values of OSCSELS.

**(4) Internal oscillation mode register (RCM)**

This register sets the operation mode of internal oscillator.

RCM can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 80H<sup>Note 1</sup>.

**Figure 5-4. Format of Internal Oscillation Mode Register (RCM)**

Address: FFA0H After reset: 80H<sup>Note 1</sup> R/W<sup>Note 2</sup>

Symbol	<7>	6	5	4	3	2	<1>	<0>
RCM	RSTS	0	0	0	0	0	LSRSTOP	RSTOP

RSTS	Status of internal high-speed oscillator
0	Waiting for accuracy stabilization of internal high-speed oscillator
1	Stability operating of internal high-speed oscillator

LSRSTOP	Internal low-speed oscillator oscillating/stopped
0	Internal low-speed oscillator oscillating
1	Internal low-speed oscillator stopped

RSTOP	Internal high-speed oscillator oscillating/stopped
0	Internal high-speed oscillator oscillating
1	Internal high-speed oscillator stopped

**Notes** 1. The value of this register is 00H immediately after a reset release but automatically changes to 80H after internal high-speed oscillator has been stabilized.

2. Bit 7 is read-only.

**Caution** When setting RSTOP to 1, be sure to confirm that the CPU operates with a clock other than the internal high-speed oscillation clock. Specifically, set under either of the following conditions.

- When MCS = 1 (when CPU operates with the high-speed system clock)
- When CLS = 1 (when CPU operates with the subsystem clock)

In addition, stop peripheral hardware that is operating on the internal high-speed oscillation clock before setting RSTOP to 1.

**(5) Main OSC control register (MOC)**

This register selects the operation mode of the high-speed system clock.

This register is used to stop the X1 oscillator or to disable an external clock input from the EXCLK pin when the CPU operates with a clock other than the high-speed system clock.

MOC can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 80H.

**Figure 5-5. Format of Main OSC Control Register (MOC)**

Address: FFA2H After reset: 80H R/W

Symbol	<7>	6	5	4	3	2	1	0
MOC	MSTOP	0	0	0	0	0	0	0

MSTOP	Control of high-speed system clock operation	
	X1 oscillation mode	External clock input mode
0	X1 oscillator operating	External clock from EXCLK pin is enabled
1	X1 oscillator stopped	External clock from EXCLK pin is disabled

- Cautions**
- When setting MSTOP to 1, be sure to confirm that the CPU operates with a clock other than the high-speed system clock. Specifically, set under either of the following conditions.
    - When MCS = 0 (when CPU operates with the internal high-speed oscillation clock)
    - When CLS = 1 (when CPU operates with the subsystem clock)
 In addition, stop peripheral hardware that is operating on the high-speed system clock before setting MSTOP to 1.
  - Do not clear MSTOP to 0 while bit 6 (OSCSEL) of the clock operation mode select register (OSCCTL) is 0 (I/O port mode).
  - The peripheral hardware cannot operate when the peripheral hardware clock is stopped. To resume the operation of the peripheral hardware after the peripheral hardware clock has been stopped, initialize the peripheral hardware.

**(6) Main clock mode register (MCM)**

This register selects the main system clock supplied to CPU clock and clock supplied to peripheral hardware clock.

MCM can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 5-6. Format of Main Clock Mode Register (MCM)**

Address: FFA1H After reset: 00H R/W<sup>Note</sup>

Symbol	7	6	5	4	3	<2>	<1>	<0>
MCM	0	0	0	0	0	XSEL	MCS	MCM0

XSEL	MCM0	Selection of clock supplied to main system clock and peripheral hardware	
		Main system clock (f <sub>XP</sub> )	Peripheral hardware clock (f <sub>PRS</sub> )
0	0	Internal high-speed oscillation clock (f <sub>RH</sub> )	Internal high-speed oscillation clock (f <sub>RH</sub> )
0	1		High-speed system clock (f <sub>XH</sub> )
1	0	High-speed system clock (f <sub>XH</sub> )	Internal high-speed oscillation clock (f <sub>RH</sub> )
1	1		High-speed system clock (f <sub>XH</sub> )

MCS	Main system clock status
0	Operates with internal high-speed oscillation clock
1	Operates with high-speed system clock

**Note** Bit 1 is read-only.

**Cautions** 1. XSEL can be changed only once after a reset release.

2. A clock other than f<sub>PRS</sub> is supplied to the following peripheral functions regardless of the setting of XSEL and MCM0.

- Watchdog timer (operates with internal low-speed oscillation clock)
- When “f<sub>RL</sub>”, “f<sub>RL</sub>/2<sup>7</sup>”, or “f<sub>RL</sub>/2<sup>9</sup>” is selected as the count clock for 8-bit timer H1 (operates with internal low-speed oscillation clock)
- When “f<sub>RL</sub>/2<sup>3</sup>” is selected as the LCD source clock for LCD controller/driver (operates with internal low-speed oscillation clock)
- Peripheral hardware selects the external clock as the clock source (Except when the external count clock of TM00 is selected (TI000 pin valid edge))

**(7) Oscillation stabilization time counter status register (OSTC)**

This is the register that indicates the count status of the X1 clock oscillation stabilization time counter. When X1 clock oscillation starts with the internal high-speed oscillation clock or subsystem clock used as the CPU clock, the X1 clock oscillation stabilization time can be checked.

OSTC can be read by a 1-bit or 8-bit memory manipulation instruction.

When reset is released (reset by  $\overline{\text{RESET}}$  input, POC, LVI, and WDT), the STOP instruction and MSTOP (bit 7 of the MOC register) = 1 clear OSTC to 00H.

**Figure 5-7. Format of Oscillation Stabilization Time Counter Status Register (OSTC)**

Address: FFA3H After reset: 00H R

Symbol	7	6	5	4	3	2	1	0
OSTC	0	0	0	MOST11	MOST13	MOST14	MOST15	MOST16


MOST 11	MOST 13	MOST 14	MOST 15	MOST 16	Oscillation stabilization time status			
					$f_x = 2 \text{ MHz}$	$f_x = 5 \text{ MHz}$	$f_x = 10 \text{ MHz}$	
1	0	0	0	0	$2^{11}/f_x \text{ min.}$	1.02 ms min.	409.6 $\mu\text{s}$ min.	204.8 $\mu\text{s}$ min.
1	1	0	0	0	$2^{13}/f_x \text{ min.}$	4.10 ms min.	1.64 ms min.	819.2 $\mu\text{s}$ min.
1	1	1	0	0	$2^{14}/f_x \text{ min.}$	8.19 ms min.	3.27 ms min.	1.64 ms min.
1	1	1	1	0	$2^{15}/f_x \text{ min.}$	16.38 ms min.	6.55 ms min.	3.27 ms min.
1	1	1	1	1	$2^{16}/f_x \text{ min.}$	32.77 ms min.	13.11 ms min.	6.55 ms min.

**Cautions 1.** After the above time has elapsed, the bits are set to 1 in order from MOST11 and remain 1.

2. The oscillation stabilization time counter counts up to the oscillation stabilization time set by OSTC. If the STOP mode is entered and then released while the internal high-speed oscillation clock is being used as the CPU clock, set the oscillation stabilization time as follows.
  - Desired OSTC oscillation stabilization time  $\leq$  Oscillation stabilization time set by OSTC

**Note,** therefore, that only the status up to the oscillation stabilization time set by OSTC is set to OSTC after STOP mode is released.

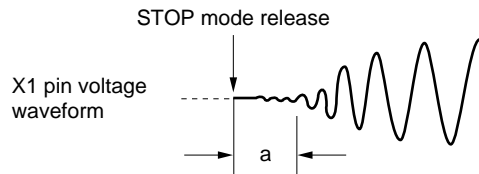3. The X1 clock oscillation stabilization wait time does not include the time until clock oscillation starts (“a” below).



**Remark**  $f_x$ : X1 clock oscillation frequency

**(8) Oscillation stabilization time select register (OSTS)**

This register is used to select the X1 clock oscillation stabilization wait time when the STOP mode is released. When the X1 clock is selected as the CPU clock, the operation waits for the time set using OSTS after the STOP mode is released.

When the internal high-speed oscillation clock is selected as the CPU clock, confirm with OSTC that the desired oscillation stabilization time has elapsed after the STOP mode is released. The oscillation stabilization time can be checked up to the time set using OSTC.

OSTS can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets OSTS to 05H.

**Figure 5-8. Format of Oscillation Stabilization Time Select Register (OSTS)**

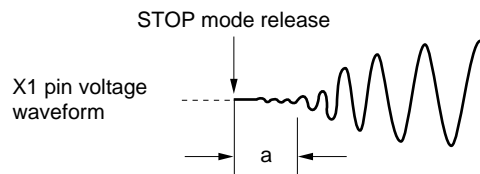
Address: FFA4H After reset: 05H R/W

Symbol	7	6	5	4	3	2	1	0
OSTS	0	0	0	0	0	OSTS2	OSTS1	OSTS0

OSTS2	OSTS1	OSTS0		Oscillation stabilization time selection		
				$f_x = 2 \text{ MHz}$	$f_x = 5 \text{ MHz}$	$f_x = 10 \text{ MHz}$
0	0	1	$2^{11}/f_x$	1.02 ms	409.6 $\mu\text{s}$	204.8 $\mu\text{s}$
0	1	0	$2^{13}/f_x$	4.10 ms	1.64 ms	819.2 $\mu\text{s}$
0	1	1	$2^{14}/f_x$	8.19 ms	3.27 ms	1.64 ms
1	0	0	$2^{15}/f_x$	16.38 ms	6.55 ms	3.27 ms
1	0	1	$2^{16}/f_x$	32.77 ms	13.11 ms	6.55 ms
Other than above			Setting prohibited			

- Cautions**
- To set the STOP mode when the X1 clock is used as the CPU clock, set OSTS before executing the STOP instruction.
  - Do not change the value of the OSTS register during the X1 clock oscillation stabilization time.
  - The oscillation stabilization time counter counts up to the oscillation stabilization time set by OSTS. If the STOP mode is entered and then released while the internal high-speed oscillation clock is being used as the CPU clock, set the oscillation stabilization time as follows.
    - Desired OSTC oscillation stabilization time  $\leq$  Oscillation stabilization time set by OSTS

Note, therefore, that only the status up to the oscillation stabilization time set by OSTS is set to OSTC after STOP mode is released.
  - The X1 clock oscillation stabilization wait time does not include the time until clock oscillation starts ("a" below).



**Remark**  $f_x$ : X1 clock oscillation frequency

**(9) Internal high-speed oscillation trimming register (HIOTRM)**

This register corrects the accuracy of the internal high-speed oscillator. The accuracy can be corrected by self-measuring the frequency of the internal high-speed oscillator, using a subsystem clock using a crystal resonator or using a timer with high-accuracy external clock input, such as a real-time counter.

HIOTRM can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets HIOTRM to 10H.

**Caution** If the temperature or  $V_{DD}$  pin voltage is changed after accuracy correction, the frequency will fluctuate. Also, if a value other than the initial value (10H) is set to the HIOTRM register, the oscillation accuracy of the internal high-speed oscillation clock may exceed the MIN. and MAX. values described in CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS) due to the subsequent fluctuation in the temperature or  $V_{DD}$  voltage, or HIOTRM register setting value. If the temperature or  $V_{DD}$  voltage fluctuates, accuracy correction must be executed either before frequency accuracy will be required or regularly.



Figure 5-9. Format of Internal High-speed Oscillation Trimming Register (HIOTRM)

Address: FF30H After reset: 10H R/W

Symbol	7	6	5	4	3	2	1	0
HIOTRM	0	0	0	TTRM4	TTRM3	TTRM2	TTRM1	TTRM0

TTRM4	TTRM3	TTRM2	TTRM1	TTRM0	Clock correction value (Target) (2.7 V ≤ VDD ≤ 5.5 V)		
					MIN.	TYP.	MAX.
0	0	0	0	0	TBD	-4.88%	TBD
0	0	0	0	1	TBD	-4.62%	TBD
0	0	0	1	0	TBD	-4.33%	TBD
0	0	0	1	1	TBD	-4.03%	TBD
0	0	1	0	0	TBD	-3.73%	TBD
0	0	1	0	1	TBD	-3.43%	TBD
0	0	1	1	0	TBD	-3.13%	TBD
0	0	1	1	1	TBD	-2.83%	TBD
0	1	0	0	0	TBD	-2.53%	TBD
0	1	0	0	1	TBD	-2.22%	TBD
0	1	0	1	0	TBD	-1.91%	TBD
0	1	0	1	1	TBD	-1.60%	TBD
0	1	1	0	0	TBD	-1.28%	TBD
0	1	1	0	1	TBD	-0.96%	TBD
0	1	1	1	0	TBD	-0.64%	TBD
0	1	1	1	1	TBD	-0.32%	TBD
1	0	0	0	0	±0% (default)		
1	0	0	0	1	TBD	+0.32%	TBD
1	0	0	1	0	TBD	+0.65%	TBD
1	0	0	1	1	TBD	+0.98%	TBD
1	0	1	0	0	TBD	+1.31%	TBD
1	0	1	0	1	TBD	+1.64%	TBD
1	0	1	1	0	TBD	+1.98%	TBD
1	0	1	1	1	TBD	+2.32%	TBD
1	1	0	0	0	TBD	+2.66%	TBD
1	1	0	0	1	TBD	+3.00%	TBD
1	1	0	1	0	TBD	+3.34%	TBD
1	1	0	1	1	TBD	+3.69%	TBD
1	1	1	0	0	TBD	+4.04%	TBD
1	1	1	0	1	TBD	+4.39%	TBD
1	1	1	1	0	TBD	+4.74%	TBD
1	1	1	1	1	TBD	+5.10%	TBD

**Caution** The internal high-speed oscillation frequency will increase in speed if the HIOTRM register value is incremented above a specific value, and will decrease in speed if decremented below that specific value. A reversal, such that the frequency decreases in speed by incrementing the value, or increases in speed by decrementing the value, will not occur.

## 5.4 System Clock Oscillator


### 5.4.1 X1 oscillator

The X1 oscillator oscillates with a crystal resonator or ceramic resonator (2 to 10 MHz) connected to the X1 and X2 pins.

An external clock can also be input. In this case, input the clock signal to the EXCLK pin.

Figure 5-10 shows an example of the external circuit of the X1 oscillator.

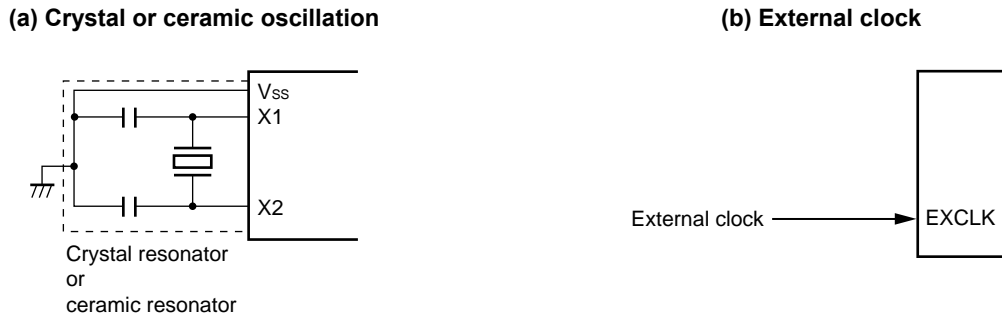Figure 5-10. Example of External Circuit of X1 Oscillator




### 5.4.2 XT1 oscillator

The XT1 oscillator oscillates with a crystal resonator (standard: 32.768 kHz) connected to the XT1 and XT2 pins.

Figure 5-11 shows an example of the external circuit of the XT1 oscillator.

Figure 5-11. Example of External Circuit of XT1 Oscillator




**Caution** 1. When using the X1 oscillator and XT1 oscillator, wire as follows in the area enclosed by the broken lines in the Figures 5-10 and 5-11 to avoid an adverse effect from wiring capacitance.

- Keep the wiring length as short as possible.
- Do not cross the wiring with the other signal lines. Do not route the wiring near a signal line through which a high fluctuating current flows.
- Always make the ground point of the oscillator capacitor the same potential as  $V_{SS}$ . Do not ground the capacitor to a ground pattern through which a high current flows.
- Do not fetch signals from the oscillator.

**Note** that the XT1 oscillator is designed as a low-amplitude circuit for reducing power consumption.

Figure 5-12 shows examples of incorrect resonator connection.

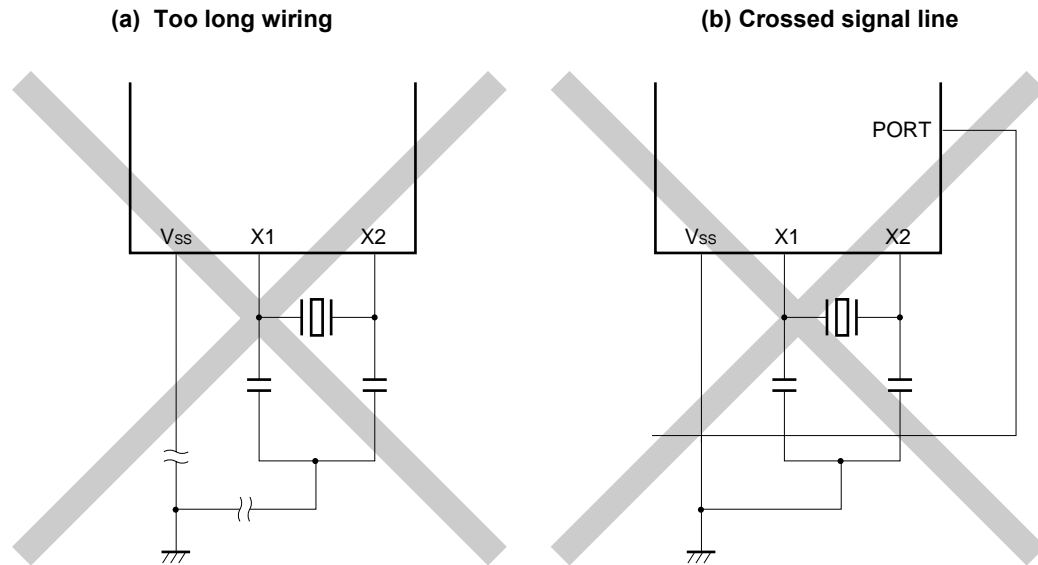
**Figure 5-12. Examples of Incorrect Resonator Connection (1/2)**




**Remark** When using the subsystem clock, replace X1 and X2 with XT1 and XT2, respectively. Also, insert resistors in series on the XT2 side.

Figure 5-12. Examples of Incorrect Resonator Connection (2/2)

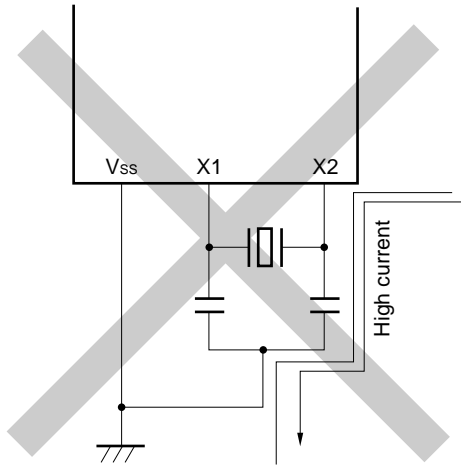
(c) Wiring near high alternating current



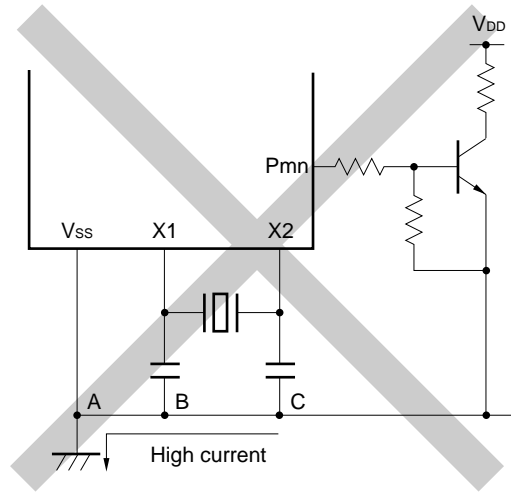(d) Current flowing through ground line of oscillator (potential at points A, B, and C fluctuates)



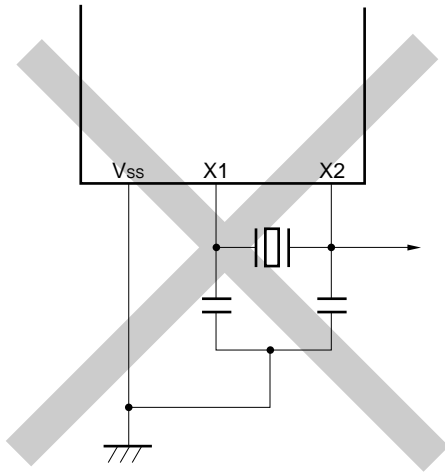(e) Signals are fetched



**Remark** When using the subsystem clock, replace X1 and X2 with XT1 and XT2, respectively. Also, insert resistors in series on the XT2 side.

**Caution 2.** When X2 and XT1 are wired in parallel, the crosstalk noise of X2 may increase with XT1, resulting in malfunctioning.

### 5.4.3 When subsystem clock is not used

If it is not necessary to use the subsystem clock for low power consumption operations, or if not using the subsystem clock as an I/O port, set the XT1 and XT2 pins to Input port mode (OSCSELS = 0) and independently connect to V<sub>DD</sub> or V<sub>SS</sub> via a resistor.

**Remark** OSCSELS: Bit 4 of clock operation mode select register (OSCCTL)

### 5.4.4 Internal high-speed oscillator

The internal high-speed oscillator is incorporated in the 78K0/LC3. Oscillation can be controlled by the internal oscillation mode register (RCM).

After a reset release, the internal high-speed oscillator automatically starts oscillation (8 MHz (TYP.)).

### 5.4.5 Internal low-speed oscillator

The internal low-speed oscillator is incorporated in the 78K0/LC3.

The internal low-speed oscillation clock is only used as the clock of the watchdog timer, 8-bit timer H1, and LCD controller/driver. The internal low-speed oscillation clock cannot be used as the CPU clock.

“Can be stopped by software” or “Cannot be stopped” can be selected by the option byte. When “Can be stopped by software” is set, oscillation can be controlled by the internal oscillation mode register (RCM).

After a reset release, the internal low-speed oscillator automatically starts oscillation, and the watchdog timer is driven (240 kHz (TYP.)) if the watchdog timer operation is enabled using the option byte.

### 5.4.6 Prescaler

The prescaler generates various clocks by dividing the main system clock when the main system clock is selected as the clock to be supplied to the CPU.

## 5.5 Clock Generator Operation

The clock generator generates the following clocks and controls the operation modes of the CPU, such as standby mode (see **Figure 5-1**).

- Main system clock  $f_{XP}$ 
  - High-speed system clock  $f_{XH}$ 
    - X1 clock  $f_X$
    - External main system clock  $f_{EXCLK}$
  - Internal high-speed oscillation clock  $f_{RH}$
- Subsystem clock  $f_{SUB}$ 
  - XT1 clock  $f_{XT}$
- Internal low-speed oscillation clock  $f_{RL}$
- CPU clock  $f_{CPU}$
- Peripheral hardware clock  $f_{PRS}$

The CPU starts operation when the internal high-speed oscillator starts outputting after a reset release in the 78K0/LC3, thus enabling the following.

### (1) Enhancement of security function


When the X1 clock is set as the CPU clock by the default setting, the device cannot operate if the X1 clock is damaged or badly connected and therefore does not operate after reset is released. However, the start clock of the CPU is the internal high-speed oscillation clock, so the device can be started by the internal high-speed oscillation clock after a reset release. Consequently, the system can be safely shut down by performing a minimum operation, such as acknowledging a reset source by software or performing safety processing when there is a malfunction.

### (2) Improvement of performance

Because the CPU can be started without waiting for the X1 clock oscillation stabilization time, the total performance can be improved.

When the power supply voltage is turned on, the clock generator operation is shown in Figure 5-13.

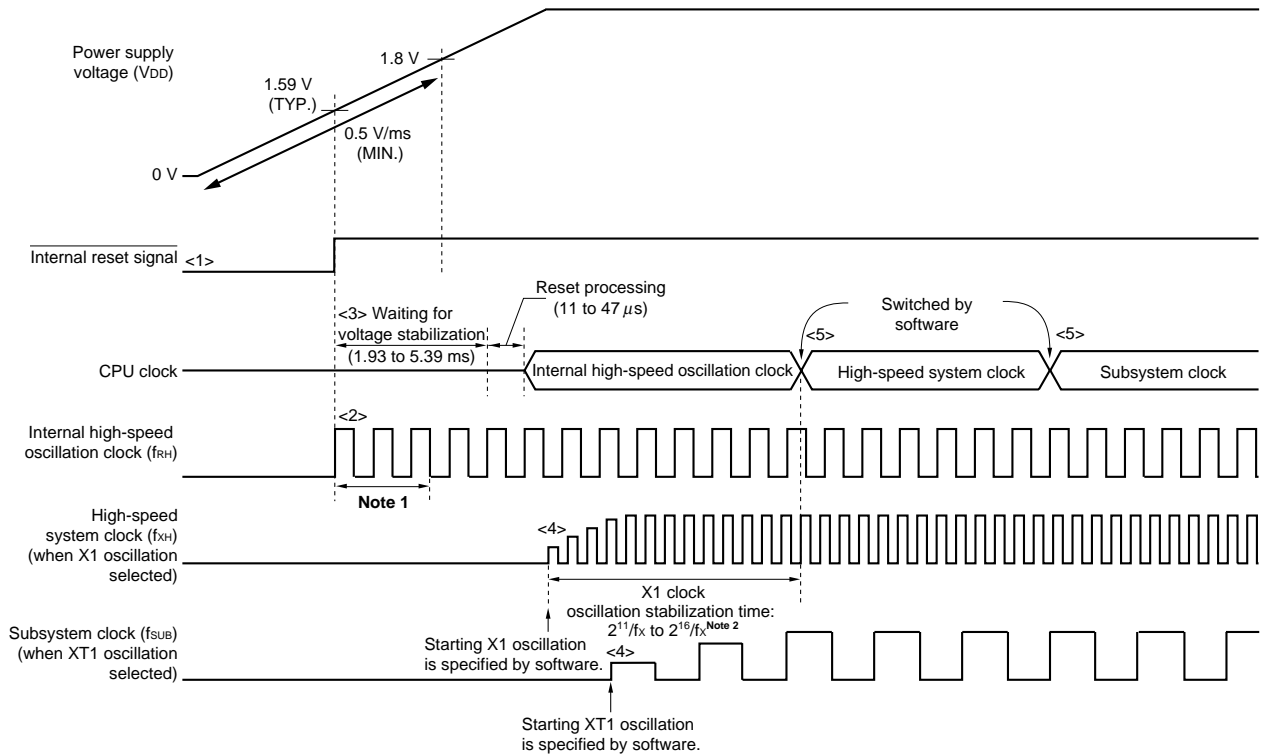**Figure 5-13. Clock Generator Operation When Power Supply Voltage Is Turned On  
(When 1.59 V POC Mode Is Set (Option Byte: POCMODE = 0))**




- <1> When the power is turned on, an internal reset signal is generated by the power-on-clear (POC) circuit.
- <2> When the power supply voltage exceeds 1.59 V (TYP.), the reset is released and the internal high-speed oscillator automatically starts oscillation.
- <3> When the power supply voltage rises with a slope of 0.5 V/ms (MIN.), the CPU starts operation on the internal high-speed oscillation clock after the reset is released and after the stabilization times for the voltage of the power supply and regulator have elapsed, and then reset processing is performed.
- <4> Set the start of oscillation of the X1 or XT1 clock via software (see (1) in 5.6.1 Example of controlling high-speed system clock and (1) in 5.6.3 Example of controlling subsystem clock).
- <5> When switching the CPU clock to the X1 or XT1 clock, wait for the clock oscillation to stabilize, and then set switching via software (see (3) in 5.6.1 Example of controlling high-speed system clock and (3) in 5.6.3 Example of controlling subsystem clock).

- Notes 1.** The internal voltage stabilization time includes the oscillation accuracy stabilization time of the internal high-speed oscillation clock.
- 2.** When releasing a reset (above figure) or releasing STOP mode while the CPU is operating on the internal high-speed oscillation clock, confirm the oscillation stabilization time for the X1 clock using the oscillation stabilization time counter status register (OSTC). If the CPU operates on the high-speed system clock (X1 oscillation), set the oscillation stabilization time when releasing STOP mode using the oscillation stabilization time select register (OSTS).

- Cautions 1.** If the voltage rises with a slope of less than 0.5 V/ms (MIN.) from power application until the voltage reaches 1.8 V, input a low level to the  $\overline{\text{RESET}}$  pin from power application until the voltage reaches 1.8 V, or set the 2.7 V/1.59 V POC mode by using the option byte (POCMODE = 1) (see Figure 5-14). By doing so, the CPU operates with the same timing as <2> and thereafter in Figure 5-13 after reset release by the  $\overline{\text{RESET}}$  pin.
- 2.** It is not necessary to wait for the oscillation stabilization time when an external clock input from the EXCLK pin is used.

**Remark** While the microcontroller is operating, a clock that is not used as the CPU clock can be stopped via software settings. The internal high-speed oscillation clock and high-speed system clock can be stopped by executing the STOP instruction (see (4) in 5.6.1 Example of controlling high-speed system clock, (3) in 5.6.2 Example of controlling internal high-speed oscillation clock, and (4) in 5.6.3 Example of controlling subsystem clock).

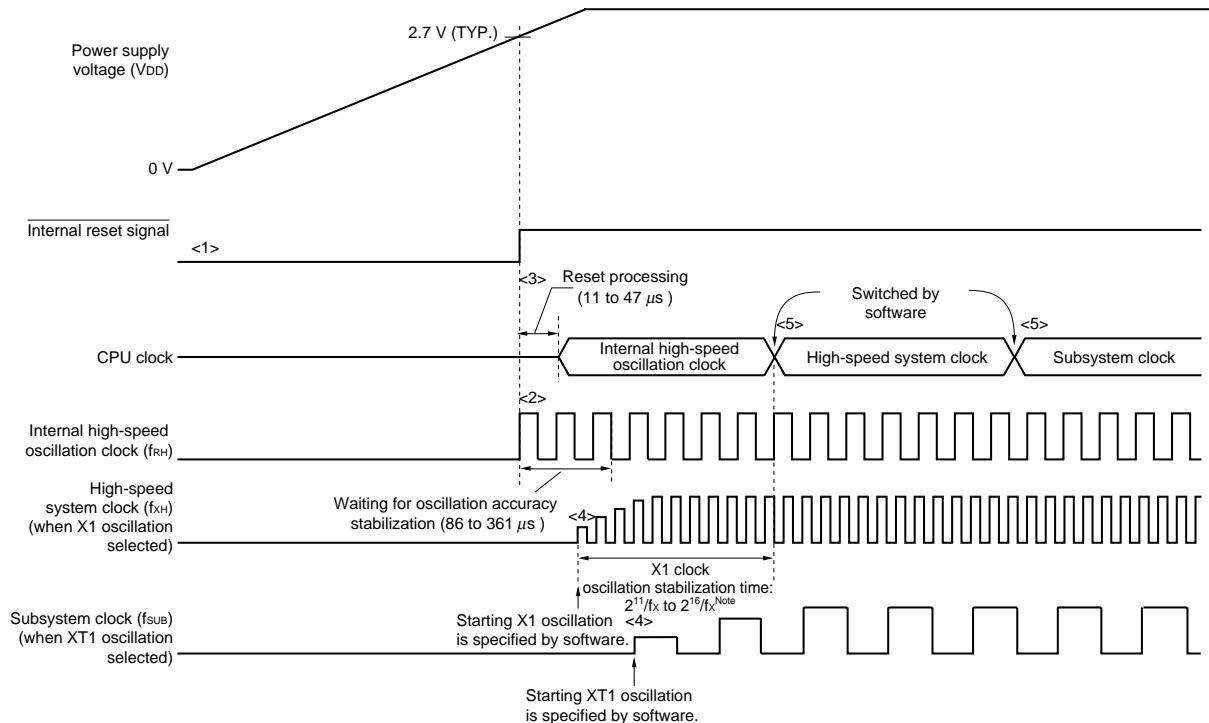**Figure 5-14. Clock Generator Operation When Power Supply Voltage Is Turned On  
(When 2.7 V/1.59 V POC Mode Is Set (Option Byte: POCMODE = 1))**



- <1> When the power is turned on, an internal reset signal is generated by the power-on-clear (POC) circuit.
- <2> When the power supply voltage exceeds 2.7 V (TYP.), the reset is released and the internal high-speed oscillator automatically starts oscillation.
- <3> After the reset is released and reset processing is performed, the CPU starts operation on the internal high-speed oscillation clock.
- <4> Set the start of oscillation of the X1 or XT1 clock via software (see (1) in 5.6.1 Example of controlling high-speed system clock and (1) in 5.6.3 Example of controlling subsystem clock).
- <5> When switching the CPU clock to the X1 or XT1 clock, wait for the clock oscillation to stabilize, and then set switching via software (see (3) in 5.6.1 Example of controlling high-speed system clock and (3) in 5.6.3 Example of controlling subsystem clock).

**Note** When releasing a reset (above figure) or releasing STOP mode while the CPU is operating on the internal high-speed oscillation clock, confirm the oscillation stabilization time for the X1 clock using the oscillation stabilization time counter status register (OSTC). If the CPU operates on the high-speed system clock (X1 oscillation), set the oscillation stabilization time when releasing STOP mode using the oscillation stabilization time select register (OSTS).

- Cautions**
1. A voltage oscillation stabilization time of 1.93 to 5.39 ms is required after the supply voltage reaches 1.59 V (TYP.). If the supply voltage rises from 1.59 V (TYP.) to 2.7 V (TYP.) within 1.93 ms, the power supply oscillation stabilization time of 0 to 5.39 ms is automatically generated before reset processing.
  2. It is not necessary to wait for the oscillation stabilization time when an external clock input from the EXCLK pin is used.



**Remark** While the microcontroller is operating, a clock that is not used as the CPU clock can be stopped via software settings. The internal high-speed oscillation clock and high-speed system clock can be stopped by executing the STOP instruction (see (4) in 5.6.1 **Example of controlling high-speed system clock**, (3) in 5.6.2 **Example of controlling internal high-speed oscillation clock**, and (4) in 5.6.3 **Example of controlling subsystem clock**).

## 5.6 Controlling Clock

### 5.6.1 Example of controlling high-speed system clock

The following two types of high-speed system clocks are available.

- X1 clock: Crystal/ceramic resonator is connected across the X1 and X2 pins.
- External main system clock: External clock is input to the EXCLK pin.

When the high-speed system clock is not used, the OCD0A/X1/P121 and OCD0B/X2/EXCLK/P122 pins can be used as I/O port pins.

**Caution** The OCD0A/X1/P121 and OCD0B/X2/EXCLK/P122 pins are in the I/O port mode after a reset release.

The following describes examples of setting procedures for the following cases.

- (1) When oscillating X1 clock
- (2) When using external main system clock
- (3) When using high-speed system clock as CPU clock and peripheral hardware clock
- (4) When stopping high-speed system clock

#### (1) Example of setting procedure when oscillating the X1 clock

- <1> Setting P121/X1 and P122/X2/EXCLK pins and selecting X1 clock or external clock (OSCCTL register)  
When EXCLK is cleared to 0 and OSCSEL is set to 1, the mode is switched from port mode to X1 oscillation mode.

EXCLK	OSCSEL	Operation Mode of High-Speed System Clock Pin	P121/X1 Pin	P122/X2/EXCLK Pin
0	1	X1 oscillation mode	Crystal/ceramic resonator connection	

- <2> Controlling oscillation of X1 clock (MOC register)  
If MSTOP is cleared to 0, the X1 oscillator starts oscillating.
- <3> Waiting for the stabilization of the oscillation of X1 clock  
Check the OSTC register and wait for the necessary time.  
During the wait time, other software processing can be executed with the internal high-speed oscillation clock.

- Cautions**
1. Do not change the value of EXCLK and OSCSEL while the X1 clock is operating.
  2. Set the X1 clock after the supply voltage has reached the operable voltage of the clock to be used (see CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)).

**(2) Example of setting procedure when using the external main system clock**

<1> Setting P121/X1 and P122/X2/EXCLK pins and selecting operation mode (OSCCTL register)

When EXCLK and OSCSEL are set to 1, the mode is switched from port mode to external clock input mode.

EXCLK	OSCSEL	Operation Mode of High-Speed System Clock Pin	P121/X1 Pin	P122/X2/EXCLK Pin
1	1	External clock input mode	I/O port	External clock input

<2> Controlling external main system clock input (MOC register)

When MSTOP is cleared to 0, the input of the external main system clock is enabled.

**Cautions 1. Do not change the value of EXCLK and OSCSEL while the external main system clock is operating.**

**2. Set the external main system clock after the supply voltage has reached the operable voltage of the clock to be used (see CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)).**

**(3) Example of setting procedure when using high-speed system clock as CPU clock and peripheral hardware clock**

<1> Setting high-speed system clock oscillation<sup>Note</sup>

(See 5.6.1 (1) Example of setting procedure when oscillating the X1 clock and (2) Example of setting procedure when using the external main system clock.)

**Note** The setting of <1> is not necessary when high-speed system clock is already operating.

<2> Setting the high-speed system clock as the main system clock (MCM register)

When XSEL and MCM0 are set to 1, the high-speed system clock is supplied as the main system clock and peripheral hardware clock.

XSEL	MCM0	Selection of Main System Clock and Clock Supplied to Peripheral Hardware	
		Main System Clock ( $f_{XP}$ )	Peripheral Hardware Clock ( $f_{PRS}$ )
1	1	High-speed system clock ( $f_{XH}$ )	High-speed system clock ( $f_{XH}$ )

**Caution** If the high-speed system clock is selected as the main system clock, a clock other than the high-speed system clock cannot be set as the peripheral hardware clock.

<3> Setting the main system clock as the CPU clock and selecting the division ratio (PCC register)

When CSS is cleared to 0, the main system clock is supplied to the CPU. To select the CPU clock division ratio, use PCC0, PCC1, and PCC2.

CSS	PCC2	PCC1	PCC0	CPU Clock ( $f_{CPU}$ ) Selection
0	0	0	0	$f_{XP}$
	0	0	1	$f_{XP}/2$ (default)
	0	1	0	$f_{XP}/2^2$
	0	1	1	$f_{XP}/2^3$
	1	0	0	$f_{XP}/2^4$
	Other than above			

**(4) Example of setting procedure when stopping the high-speed system clock**

The high-speed system clock can be stopped in the following two ways.

- Executing the STOP instruction to set the STOP mode
- Setting MSTOP to 1 and stopping the X1 oscillation (disabling clock input if the external clock is used)

**(a) To execute a STOP instruction**

<1> Setting to stop peripheral hardware

Stop peripheral hardware that cannot be used in the STOP mode (for peripheral hardware that cannot be used in STOP mode, see **CHAPTER 19 STANDBY FUNCTION**).

<2> Setting the X1 clock oscillation stabilization time after standby release

When the CPU is operating on the X1 clock, set the value of the OSTS register before the STOP instruction is executed.

<3> Executing the STOP instruction

When the STOP instruction is executed, the system is placed in the STOP mode and X1 oscillation is stopped (the input of the external clock is disabled).

**(b) To stop X1 oscillation (disabling external clock input) by setting MSTOP to 1**

<1> Confirming the CPU clock status (PCC and MCM registers)

Confirm with CLS and MCS that the CPU is operating on a clock other than the high-speed system clock.

When CLS = 0 and MCS = 1, the high-speed system clock is supplied to the CPU, so change the CPU clock to the subsystem clock or internal high-speed oscillation clock.

CLS	MCS	CPU Clock Status
0	0	Internal high-speed oscillation clock
0	1	High-speed system clock
1	×	Subsystem clock

<2> Stopping the high-speed system clock (MOC register)

When MSTOP is set to 1, X1 oscillation is stopped (the input of the external clock is disabled).

**Caution** Be sure to confirm that MCS = 0 or CLS = 1 when setting MSTOP to 1. In addition, stop peripheral hardware that is operating on the high-speed system clock.

**5.6.2 Example of controlling internal high-speed oscillation clock**

The following describes examples of clock setting procedures for the following cases.

- (1) When restarting oscillation of the internal high-speed oscillation clock
- (2) When using internal high-speed oscillation clock as CPU clock, and internal high-speed oscillation clock or high-speed system clock as peripheral hardware clock
- (3) When stopping the internal high-speed oscillation clock

**(1) Example of setting procedure when restarting oscillation of the internal high-speed oscillation clock<sup>Note 1</sup>**

<1> Setting restart of oscillation of the internal high-speed oscillation clock (RCM register)

When RSTOP is cleared to 0, the internal high-speed oscillation clock starts operating.

<2> Waiting for the oscillation accuracy stabilization time of internal high-speed oscillation clock (RCM register)

Wait until RSTS is set to 1<sup>Note 2</sup>.

**Notes** 1. After a reset release, the internal high-speed oscillator automatically starts oscillating and the internal high-speed oscillation clock is selected as the CPU clock.

2. This wait time is not necessary if high accuracy is not necessary for the CPU clock and peripheral hardware clock.

**(2) Example of setting procedure when using internal high-speed oscillation clock as CPU clock, and internal high-speed oscillation clock or high-speed system clock as peripheral hardware clock**

<1> • Restarting oscillation of the internal high-speed oscillation clock<sup>Note</sup>  
(See 5.6.2 (1) Example of setting procedure when restarting oscillation of the internal high-speed oscillation clock).

• Oscillating the high-speed system clock<sup>Note</sup>  
(This setting is required when using the high-speed system clock as the peripheral hardware clock. See 5.6.1 (1) Example of setting procedure when oscillating the X1 clock and (2) Example of setting procedure when using the external main system clock.)

**Note** The setting of <1> is not necessary when the internal high-speed oscillation clock or high-speed system clock is already operating.

<2> Selecting the clock supplied as the main system clock and peripheral hardware clock (MCM register)

Set the main system clock and peripheral hardware clock using XSEL and MCM0.

XSEL	MCM0	Selection of Main System Clock and Clock Supplied to Peripheral Hardware	
		Main System Clock ( $f_{XP}$ )	Peripheral Hardware Clock ( $f_{PRS}$ )
0	0	Internal high-speed oscillation clock ( $f_{RH}$ )	Internal high-speed oscillation clock ( $f_{RH}$ )
0	1		High-speed system clock ( $f_{XH}$ )

<3> Selecting the CPU clock division ratio (PCC register)

When CSS is cleared to 0, the main system clock is supplied to the CPU. To select the CPU clock division ratio, use PCC0, PCC1, and PCC2.

CSS	PCC2	PCC1	PCC0	CPU Clock ( $f_{CPU}$ ) Selection
0	0	0	0	$f_{XP}$
	0	0	1	$f_{XP}/2$ (default)
	0	1	0	$f_{XP}/2^2$
	0	1	1	$f_{XP}/2^3$
	1	0	0	$f_{XP}/2^4$
	Other than above			

**(3) Example of setting procedure when stopping the internal high-speed oscillation clock**

The internal high-speed oscillation clock can be stopped in the following two ways.

- Executing the STOP instruction to set the STOP mode
- Setting RSTOP to 1 and stopping the internal high-speed oscillation clock

**(a) To execute a STOP instruction**

<1> Setting of peripheral hardware

Stop peripheral hardware that cannot be used in the STOP mode (for peripheral hardware that cannot be used in STOP mode, see **CHAPTER 19 STANDBY FUNCTION**).

<2> Setting the X1 clock oscillation stabilization time after standby release

When the CPU is operating on the X1 clock, set the value of the OSTS register before the STOP instruction is executed.

<3> Executing the STOP instruction

When the STOP instruction is executed, the system is placed in the STOP mode and internal high-speed oscillation clock is stopped.

**(b) To stop internal high-speed oscillation clock by setting RSTOP to 1**

<1> Confirming the CPU clock status (PCC and MCM registers)

Confirm with CLS and MCS that the CPU is operating on a clock other than the internal high-speed oscillation clock.

When CLS = 0 and MCS = 0, the internal high-speed oscillation clock is supplied to the CPU, so change the CPU clock to the high-speed system clock or subsystem clock.

CLS	MCS	CPU Clock Status
0	0	Internal high-speed oscillation clock
0	1	High-speed system clock
1	×	Subsystem clock

<2> Stopping the internal high-speed oscillation clock (RCM register)

When RSTOP is set to 1, internal high-speed oscillation clock is stopped.

**Caution** Be sure to confirm that MCS = 1 or CLS = 1 when setting RSTOP to 1. In addition, stop peripheral hardware that is operating on the internal high-speed oscillation clock.

**5.6.3 Example of controlling subsystem clock**

The following two types of subsystem clocks are available.

- XT1 clock: Crystal/ceramic resonator is connected across the XT1 and XT2 pins.

When the subsystem clock is not used, the XT1/P123 and XT2/P124 pins can be used as Input port pins.

**Caution** The XT1/P123 and XT2/P124 pins are in the Input port mode after a reset release.

The following describes examples of setting procedures for the following cases.

- (1) When oscillating XT1 clock
- (2) When using subsystem clock as CPU clock
- (3) When stopping subsystem clock

**(1) Example of setting procedure when oscillating the XT1 clock**

<1> Setting XT1 and XT2 pins and selecting operation mode (PCC and OSCCTL registers)

When OSCSELS is set as any of the following, the mode is switched from port mode to XT1 oscillation mode.

OSCSELS	Operation Mode of Subsystem Clock Pin	P123/XT1 Pin	P124/XT2 Pin
1	XT1 oscillation mode	Crystal/ceramic resonator connection	

<2> Waiting for the stabilization of the subsystem clock oscillation

Wait for the oscillation stabilization time of the subsystem clock by software, using a timer function.

**Caution** Do not change the value of OSCSELS while the subsystem clock is operating.

**(2) Example of setting procedure when using the subsystem clock as the CPU clock**

<1> Setting subsystem clock oscillation<sup>Note</sup>

(See 5.6.3 (1) Example of setting procedure when oscillating the XT1 clock)

**Note** The setting of <1> is not necessary when while the subsystem clock is operating.

<2> Switching the CPU clock (PCC register)

When CSS is set to 1, the subsystem clock is supplied to the CPU.

CSS	PCC2	PCC1	PCC0	CPU Clock (f <sub>CPU</sub> ) Selection
1	0	0	0	f <sub>SUB</sub> /2
	0	0	1	
	0	1	0	
	0	1	1	
	1	0	0	
Other than above				Setting prohibited

**(3) Example of setting procedure when stopping the subsystem clock**

<1> Confirming the CPU clock status (PCC and MCM registers)

Confirm with CLS and MCS that the CPU is operating on a clock other than the subsystem clock.

When CLS = 1, the subsystem clock is supplied to the CPU, so change the CPU clock to the internal high-speed oscillation clock or high-speed system clock.

CLS	MCS	CPU Clock Status
0	0	Internal high-speed oscillation clock
0	1	High-speed system clock
1	×	Subsystem clock

<2> Stopping the subsystem clock (OSCCTL register)

When OSCSELS is cleared to 0, XT1 oscillation is stopped.

**Cautions** 1. Be sure to confirm that CLS = 0 when clearing OSCSELS to 0. In addition, stop the peripheral hardware if it is operating on the subsystem clock.

2. The subsystem clock oscillation cannot be stopped using the STOP instruction.

**5.6.4 Example of controlling internal low-speed oscillation clock**

The internal low-speed oscillation clock cannot be used as the CPU clock.

Only the following peripheral hardware can operate with this clock.

- Watchdog timer
- 8-bit timer H1 (if  $f_{RL}$ ,  $f_{RL}/2^7$  or  $f_{RL}/2^9$  is selected as the count clock)
- LCD controller/driver (if  $f_{RL}/2^3$  is selected as the LCD source clock)

In addition, the following operation modes can be selected by the option byte.

- Internal low-speed oscillator cannot be stopped
- Internal low-speed oscillator can be stopped by software

The internal low-speed oscillator automatically starts oscillation after a reset release, and the watchdog timer is driven (240 kHz (TYP.)) if the watchdog timer operation has been enabled by the option byte.

**(1) Example of setting procedure when stopping the internal low-speed oscillation clock**

<1> Setting LSRSTOP to 1 (RCM register)

When LSRSTOP is set to 1, the internal low-speed oscillation clock is stopped.

**(2) Example of setting procedure when restarting oscillation of the internal low-speed oscillation clock**

<1> Clearing LSRSTOP to 0 (RCM register)

When LSRSTOP is cleared to 0, the internal low-speed oscillation clock is restarted.

**Caution** If “Internal low-speed oscillator cannot be stopped” is selected by the option byte, oscillation of the internal low-speed oscillation clock cannot be controlled.

**5.6.5 Clocks supplied to CPU and peripheral hardware**

The following table shows the relation among the clocks supplied to the CPU and peripheral hardware, and setting of registers.

**Table 5-4. Clocks Supplied to CPU and Peripheral Hardware, and Register Setting**


Supplied Clock		XSEL	CSS	MCM0	EXCLK
Clock Supplied to CPU	Clock Supplied to Peripheral Hardware				
Internal high-speed oscillation clock		0	0	×	×
Internal high-speed oscillation clock	X1 clock	1	0	0	0
	External main system clock	1	0	0	1
X1 clock		1	0	1	0
External main system clock		1	0	1	1
Subsystem clock	Internal high-speed oscillation clock	0	1	×	×
	X1 clock	1	1	0	0
		1	1	1	0
	External main system clock	1	1	0	1
		1	1	1	1

- Remarks**
1. XSEL: Bit 2 of the main clock mode register (MCM)
  2. CSS: Bit 4 of the processor clock control register (PCC)
  3. MCM0: Bit 0 of MCM
  4. EXCLK: Bit 7 of the clock operation mode select register (OSCCTL)
  5. ×: don't care

5.6.6 CPU clock status transition diagram

Figure 5-15 shows the CPU clock status transition diagram of this product.

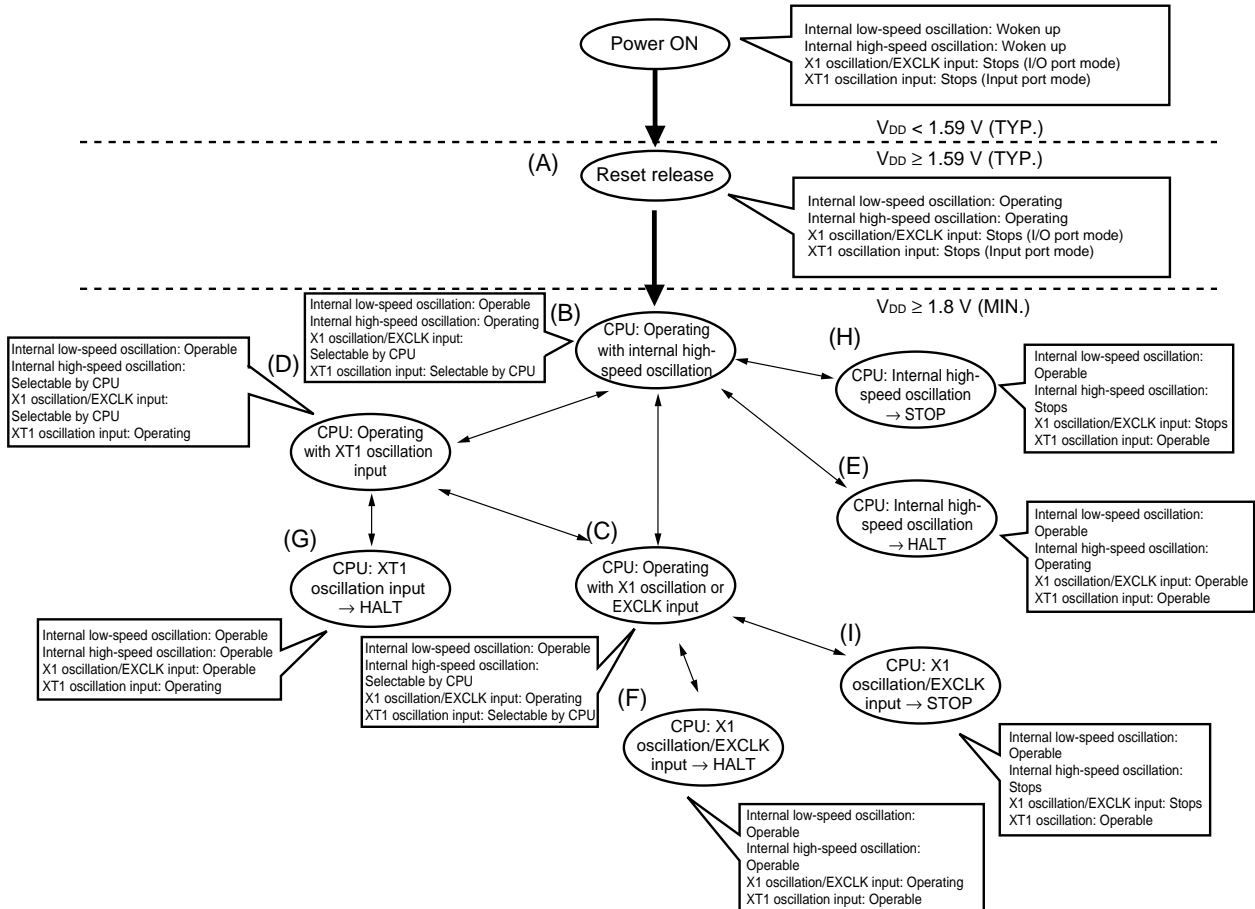**Figure 5-15. CPU Clock Status Transition Diagram  
(When 1.59 V POC Mode Is Set (Option Byte: POCMODE = 0))**



**Remark** In the 2.7 V/1.59 V POC mode (option byte: POCMODE = 1), the CPU clock status changes to (A) in the above figure when the supply voltage exceeds 2.7 V (TYP.), and to (B) after reset processing (11 to 47  $\mu$ s (TYP.)).



Table 5-5 shows transition of the CPU clock and examples of setting the SFR registers.

**Table 5-5. CPU Clock Transition and SFR Register Setting Examples (1/4)**

**(1) CPU operating with internal high-speed oscillation clock (B) after reset release (A)**

Status Transition	SFR Register Setting
(A) → (B)	SFR registers do not have to be set (default status after reset release).

**(2) CPU operating with high-speed system clock (C) after reset release (A)**

(The CPU operates with the internal high-speed oscillation clock immediately after a reset release (B).)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register Status Transition	EXCLK	OSCSEL	MSTOP	OSTC Register	XSEL	MCM0
(A) → (B) → (C) (X1 clock)	0	1	0	Must be checked	1	1
(A) → (B) → (C) (external main clock)	1	1	0	Must not be checked	1	1

**Caution** Set the clock after the supply voltage has reached the operable voltage of the clock to be set (see CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)).

**(3) CPU operating with subsystem clock (D) after reset release (A)**

(The CPU operates with the internal high-speed oscillation clock immediately after a reset release (B).)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register Status Transition	OSCSELS	Waiting for Oscillation Stabilization	CSS
(A) → (B) → (D)	1	Necessary	1

**Remarks** 1. (A) to (I) in Table 5-5 correspond to (A) to (I) in Figure 5-15.

2. EXCLK, OSCSEL, OSCSELS:

- MSTOP: Bits 7, 6, and 4 of the clock operation mode select register (OSCCTL)
- XSEL, MCM0: Bit 7 of the main OSC control register (MOC)
- CSS: Bits 2 and 0 of the main clock mode register (MCM)
- CSS: Bit 4 of the processor clock control register (PCC)

Table 5-5. CPU Clock Transition and SFR Register Setting Examples (2/4)

(4) CPU clock changing from internal high-speed oscillation clock (B) to high-speed system clock (C)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register	EXCLK	OSCSEL	MSTOP	OSTC Register	XSEL <sup>Note</sup>	MCM0
Status Transition						
(B) → (C) (X1 clock)	0	1	0	Must be checked	1	1
(B) → (C) (external main clock)	1	1	0	Must not be checked	1	1

Unnecessary if these registers are already set
 Unnecessary if the CPU is operating with the high-speed system clock

**Note** The value of this flag can be changed only once after a reset release. This setting is not necessary if it has already been set.

**Caution** Set the clock after the supply voltage has reached the operable voltage of the clock to be set (see CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)).

(5) CPU clock changing from internal high-speed oscillation clock (B) to subsystem clock (D)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register	OSCSELS	Waiting for Oscillation Stabilization	CSS
Status Transition			
(B) → (D)	1	Necessary	1

**Remarks 1.** (A) to (I) in Table 5-5 correspond to (A) to (I) in Figure 5-15.

**2.** EXCLK, OSCSEL, OSCSELS:

- Bits 7, 6, and 4 of the clock operation mode select register (OSCCTL)
- MSTOP: Bit 7 of the main OSC control register (MOC)
- XSEL, MCM0: Bits 2 and 0 of the main clock mode register (MCM)
- CSS: Bit 4 of the processor clock control register (PCC)

Table 5-5. CPU Clock Transition and SFR Register Setting Examples (3/4)

(6) CPU clock changing from high-speed system clock (C) to internal high-speed oscillation clock (B)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register	RSTOP	RSTS	MCM0
Status Transition			
(C) → (B)	0	Confirm this flag is 1.	0

Unnecessary if the CPU is operating with the internal high-speed oscillation clock

(7) CPU clock changing from high-speed system clock (C) to subsystem clock (D)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register	OSCSELS	Waiting for Oscillation Stabilization	CSS
Status Transition			
(C) → (D)	1	Necessary	1

Unnecessary if the CPU is operating with the subsystem clock

(8) CPU clock changing from subsystem clock (D) to internal high-speed oscillation clock (B)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register	RSTOP	RSTS	MCM0	CSS
Status Transition				
(D) → (B)	0	Confirm this flag is 1.	0	0

Unnecessary if the CPU is operating with the internal high-speed oscillation clock

↑  
Unnecessary if XSEL is 0

**Remarks 1.** (A) to (I) in Table 5-5 correspond to (A) to (I) in Figure 5-15.

- 2. MCM0: Bit 0 of the main clock mode register (MCM)
- OSCSELS: Bit 4 of the clock operation mode select register (OSCCTL)
- RSTS, RSTOP: Bits 7 and 0 of the internal oscillation mode register (RCM)
- CSS: Bit 4 of the processor clock control register (PCC)

Table 5-5. CPU Clock Transition and SFR Register Setting Examples (4/4)

(9) CPU clock changing from subsystem clock (D) to high-speed system clock (C)

(Setting sequence of SFR registers) →

Setting Flag of SFR Register Status Transition	EXCLK	OSCSEL	MSTOP	OSTC Register	XSEL <sup>Note</sup>	MCM0	CSS
(D) → (C) (X1 clock)	0	1	0	Must be checked	1	1	0
(D) → (C) (external main clock)	1	1	0	Must not be checked	1	1	0

Unnecessary if these registers are already set
 Unnecessary if the CPU is operating with the high-speed system clock

**Note** The value of this flag can be changed only once after a reset release. This setting is not necessary if it has already been set.

**Caution** Set the clock after the supply voltage has reached the operable voltage of the clock to be set (see CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)).

(10) • HALT mode (E) set while CPU is operating with internal high-speed oscillation clock (B)

- HALT mode (F) set while CPU is operating with high-speed system clock (C)
- HALT mode (G) set while CPU is operating with subsystem clock (D)

Status Transition	Setting
(B) → (E) (C) → (F) (D) → (G)	Executing HALT instruction

(11) • STOP mode (H) set while CPU is operating with internal high-speed oscillation clock (B)

- STOP mode (I) set while CPU is operating with high-speed system clock (C)

(Setting sequence) →

Status Transition	Setting	
(B) → (H) (C) → (I)	Stopping peripheral functions that cannot operate in STOP mode	Executing STOP instruction

- Remarks**
1. (A) to (I) in Table 5-5 correspond to (A) to (I) in Figure 5-15.
  2. EXCLK, OSCSEL: Bits 7 and 6 of the clock operation mode select register (OSCCTL)  
 MSTOP: Bit 7 of the main OSC control register (MOC)  
 XSEL, MCM0: Bits 2 and 0 of the main clock mode register (MCM)  
 CSS: Bit 4 of the processor clock control register (PCC)

**5.6.7 Condition before changing CPU clock and processing after changing CPU clock**

Condition before changing the CPU clock and processing after changing the CPU clock are shown below.

**Table 5-6. Changing CPU Clock**

CPU Clock		Condition Before Change	Processing After Change
Before Change	After Change		
Internal high-speed oscillation clock	X1 clock	Stabilization of X1 oscillation <ul style="list-style-type: none"> <li>• MSTOP = 0, OSCSEL = 1, EXCLK = 0</li> <li>• After elapse of oscillation stabilization time</li> </ul>	<ul style="list-style-type: none"> <li>• Internal high-speed oscillator can be stopped (RSTOP = 1).</li> </ul>
	External main system clock	Enabling input of external clock from EXCLK pin <ul style="list-style-type: none"> <li>• MSTOP = 0, OSCSEL = 1, EXCLK = 1</li> </ul>	
X1 clock	Internal high-speed oscillation clock	Oscillation of internal high-speed oscillator <ul style="list-style-type: none"> <li>• RSTOP = 0</li> </ul>	X1 oscillation can be stopped (MSTOP = 1).
External main system clock			External main system clock input can be disabled (MSTOP = 1).
Internal high-speed oscillation clock	XT1 clock	Stabilization of XT1 oscillation <ul style="list-style-type: none"> <li>• OSCSELS = 1</li> <li>• After elapse of oscillation stabilization time</li> </ul>	Operating current can be reduced by stopping internal high-speed oscillator (RSTOP = 1).
X1 clock			X1 oscillation can be stopped (MSTOP = 1).
External main system clock			External main system clock input can be disabled (MSTOP = 1).
XT1 clock	Internal high-speed oscillation clock	Oscillation of internal high-speed oscillator and selection of internal high-speed oscillation clock as main system clock <ul style="list-style-type: none"> <li>• RSTOP = 0, MCS = 0</li> </ul>	XT1 oscillation can be stopped (OSCSELS = 0).
	X1 clock	Stabilization of X1 oscillation and selection of high-speed system clock as main system clock <ul style="list-style-type: none"> <li>• MSTOP = 0, OSCSEL = 1, EXCLK = 0</li> <li>• After elapse of oscillation stabilization time</li> <li>• MCS = 1</li> </ul>	
	External main system clock	Enabling input of external clock from EXCLK pin and selection of high-speed system clock as main system clock <ul style="list-style-type: none"> <li>• MSTOP = 0, OSCSEL = 1, EXCLK = 1</li> <li>• MCS = 1</li> </ul>	

**5.6.8 Time required for switchover of CPU clock and main system clock**

By setting bits 0 to 2 (PCC0 to PCC2) and bit 4 (CSS) of the processor clock control register (PCC), the CPU clock can be switched (between the main system clock and the subsystem clock) and the division ratio of the main system clock can be changed.

The actual switchover operation is not performed immediately after rewriting to PCC; operation continues on the pre-switchover clock for several clocks (see **Table 5-7**).

Whether the CPU is operating on the main system clock or the subsystem clock can be ascertained using bit 5 (CLS) of the PCC register.

**Table 5-7. Time Required for Switchover of CPU Clock and Main System Clock Cycle Division Factor**

Set Value Before Switchover				Set Value After Switchover																							
CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0
				0	0	0	0	0	0	0	1	0	0	1	0	0	0	1	1	0	1	0	0	1	×	×	×
0	0	0	0	16 clocks				16 clocks				16 clocks				16 clocks				2f <sub>XP</sub> /f <sub>SUB</sub> clocks							
	0	0	1																					8 clocks			
	0	1	0	4 clocks				4 clocks				4 clocks				4 clocks				f <sub>XP</sub> /2f <sub>SUB</sub> clocks							
	0	1	1	2 clocks				2 clocks				2 clocks				2 clocks				f <sub>XP</sub> /4f <sub>SUB</sub> clocks							
	1	0	0	1 clock				1 clock				1 clock				1 clock				f <sub>XP</sub> /8f <sub>SUB</sub> clocks							
1	×	×	×	2 clocks				2 clocks				2 clocks				2 clocks				2 clocks							

**Caution** Selection of the main system clock cycle division factor (PCC0 to PCC2) and switchover from the main system clock to the subsystem clock (changing CSS from 0 to 1) should not be set simultaneously.

Simultaneous setting is possible, however, for selection of the main system clock cycle division factor (PCC0 to PCC2) and switchover from the subsystem clock to the main system clock (changing CSS from 1 to 0).

- Remarks**
1. The number of clocks listed in Table 5-7 is the number of CPU clocks before switchover.
  2. When switching the CPU clock from the main system clock to the subsystem clock, calculate the number of clocks by rounding up to the next clock and discarding the decimal portion, as shown below.

**Example** When switching CPU clock from f<sub>XP</sub>/2 to f<sub>SUB</sub>/2 (@ oscillation with f<sub>XP</sub> = 10 MHz, f<sub>SUB</sub> = 32.768 kHz)

$$f_{XP}/f_{SUB} = 10000/32.768 \approx 305.1 \rightarrow 306 \text{ clocks}$$

By setting bit 0 (MCM0) of the main clock mode register (MCM), the main system clock can be switched (between the internal high-speed oscillation clock and the high-speed system clock).

The actual switchover operation is not performed immediately after rewriting to MCM0; operation continues on the pre-switchover clock for several clocks (see **Table 5-8**).

Whether the CPU is operating on the internal high-speed oscillation clock or the high-speed system clock can be ascertained using bit 1 (MCS) of MCM.

**Table 5-8. Maximum Time Required for Main System Clock Switchover**

Set Value Before Switchover	Set Value After Switchover	
MCM0	MCM0	
	0	1
0		1 + 2f <sub>RH</sub> /f <sub>XH</sub> clock
1	1 + 2f <sub>XH</sub> /f <sub>RH</sub> clock	

**Caution** When switching the internal high-speed oscillation clock to the high-speed system clock, bit 2 (XSEL) of MCM must be set to 1 in advance. The value of XSEL can be changed only once after a reset release.

**Remarks** 1. The number of clocks listed in Table 5-8 is the number of main system clocks before switchover.  
 2. Calculate the number of clocks in Table 5-8 by removing the decimal portion.

**Example** When switching the main system clock from the internal high-speed oscillation clock to the high-speed system clock (@ oscillation with f<sub>RH</sub> = 8 MHz, f<sub>XH</sub> = 10 MHz)

$$1 + 2f_{RH}/f_{XH} = 1 + 2 \times 8/10 = 1 + 2 \times 0.8 = 1 + 1.6 = 2.6 \rightarrow 2 \text{ clocks}$$

**5.6.9 Conditions before clock oscillation is stopped**

The following lists the register flag settings for stopping the clock oscillation (disabling external clock input) and conditions before the clock oscillation is stopped.

**Table 5-9. Conditions Before the Clock Oscillation Is Stopped and Flag Settings**

Clock	Conditions Before Clock Oscillation Is Stopped (External Clock Input Disabled)	Flag Settings of SFR Register
Internal high-speed oscillation clock	MCS = 1 or CLS = 1 (The CPU is operating on a clock other than the internal high-speed oscillation clock)	RSTOP = 1
X1 clock External main system clock	MCS = 0 or CLS = 1 (The CPU is operating on a clock other than the high-speed system clock)	MSTOP = 1
XT1 clock	CLS = 0 (The CPU is operating on a clock other than the subsystem clock)	OSCSELS = 0

5.6.10 Peripheral hardware and source clocks

The following lists peripheral hardware and source clocks incorporated in the 78K0/LC3.

Table 5-10. Peripheral Hardware and Source Clocks

Source Clock		Peripheral Hardware Clock (f <sub>PRS</sub> )	Subsystem Clock (f <sub>SUB</sub> )	Internal Low-Speed Oscillation Clock (f <sub>RL</sub> )	TM50 Output	TM52 Output	TMH1 Output	External Clock from Peripheral Hardware Pins
Peripheral Hardware								
16-bit timer/ event counter	00	Y	Y	N	N	Y	N	Y (TI000 pin) <sup>Note 1</sup>
8-bit timer/ event counter	50	Y	N	N	N	N	N	N
	51	Y	N	N	N	N	Y	N
	52	Y	N	N	N	N	N	Y (TI52 pin) <sup>Note 1</sup>
8-bit timer	H0	Y	N	N	Y	N	N	N
	H1	Y	N	Y	N	N	N	N
	H2	Y	N	N	N	N	N	N
Real-time counter		Y	Y	N	N	N	N	N
Watchdog timer		N	N	Y	N	N	N	N
Buzzer output		Y	N	N	N	N	N	N
Successive approximation type A/D converter <sup>Note 2</sup>		Y	N	N	N	N	N	N
Serial interface	UART0	Y	N	N	Y	N	N	N
	UART6	Y	N	N	Y	N	N	N
LCD controller/driver		Y	Y	Y	N	N	N	N
Manchester code generator		Y	N	N	N	N	N	N

**Notes 1.** When the CPU is operating on the subsystem clock and the internal high-speed oscillation clock has been stopped, do not start operation of these functions on the external clock input from peripheral hardware pins.

**2.**  $\mu$ PD78F041x only.

**Remark** Y: Can be selected, N: Cannot be selected



### 6.1 Functions of 16-Bit Timer/Event Counter 00

16-bit timer/event counter 00 has the following functions.

**(1) Interval timer**

16-bit timer/event counter 00 generates an interrupt request at the preset time interval.

**(2) Square-wave output**

16-bit timer/event counter 00 can output a square wave with any selected frequency.

**(3) External event counter**

16-bit timer/event counter 00 can measure the number of pulses of an externally input signal.

**(4) One-shot pulse output**

16-bit timer event counter 00 can output a one-shot pulse whose output pulse width can be set freely.

**(5) PPG output**

16-bit timer/event counter 00 can output a rectangular wave whose frequency and output pulse width can be set freely.

**(6) Pulse width measurement**

16-bit timer/event counter 00 can measure the pulse width of an externally input signal.

**(7) 24-bit external event counter**

16-bit timer/event counter 00 can be operated to function as an external 24-bit event counter, by connecting 16-bit timer/event counter 00 and 8-bit timer/event counter 52 in cascade, and using the external event counter function of 8-bit timer/event counter 52.

When using it as an external 24-bit event counter, external event input gate enable can be controlled via 8-bit timer counter H2 output.

## 6.2 Configuration of 16-Bit Timer/Event Counter 00

16-bit timer/event counter 00 includes the following hardware.


**Table 6-1. Configuration of 16-Bit Timer/Event Counter 00**

Item	Configuration
Time/counter	16-bit timer counter 00 (TM00)
Register	16-bit timer capture/compare registers 000, 010 (CR000, CR010)
Timer input	TI000, TI010 pins
Timer output	TO00 pin, output controller
Control registers	16-bit timer mode control register 00 (TMC00) Capture/compare control register 00 (CRC00) 16-bit timer output control register 00 (TOC00) Prescaler mode register 00 (PRM00) Input switch control register (ISC) Port mode register 3 (PM3) Port register 3 (P3)

**Remark** When using 16-bit timer/event counter 00 as an external 24-bit event counter, 8-bit timer/event counter 52 (TM52) and 8-bit timer counter H2 (TMH2) are used. For details, see **6.4.9 External 24-bit event counter operation**.

Figures 6-1 shows the block diagrams.

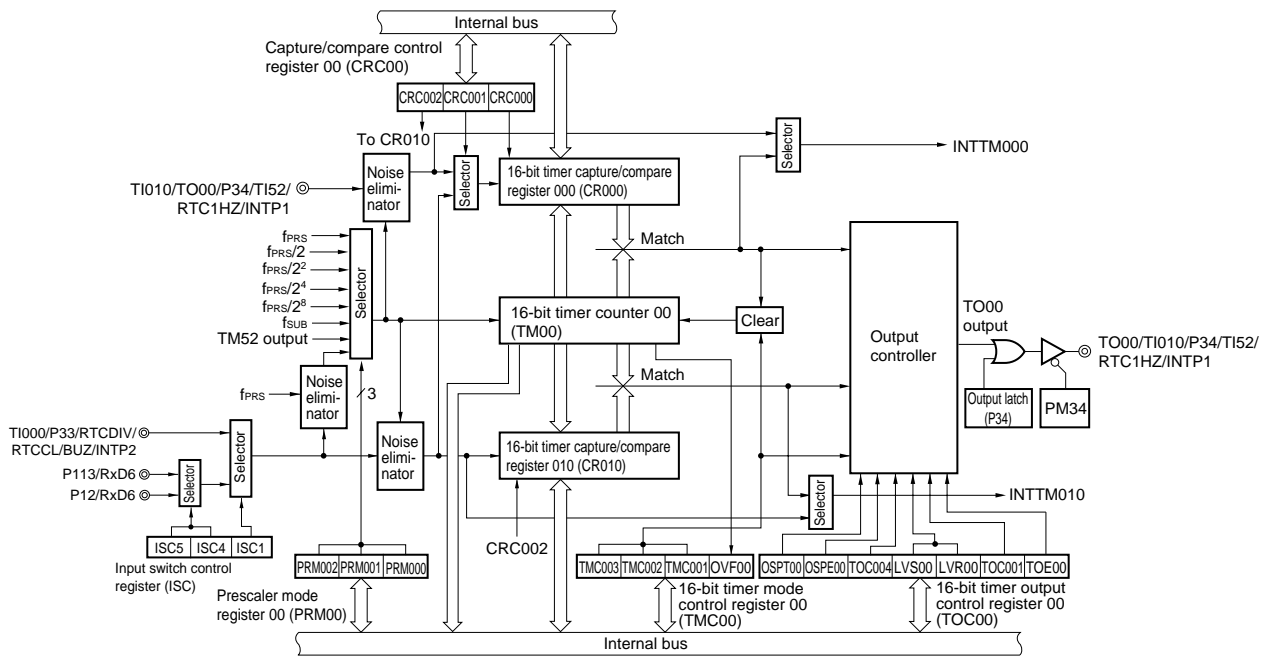**Figure 6-1. Block Diagram of 16-Bit Timer/Event Counter 00**



**Cautions 1.** The valid edge of TI010 and timer output (TO00) cannot be used for the P34 pin at the same time. Select either of the functions.

**Cautions 2.** If clearing of bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) to 00 and input of the capture trigger conflict, then the captured data is undefined.

**3.** To change the mode from the capture mode to the comparison mode, first clear the TMC003 and TMC002 bits to 00, and then change the setting.

A value that has been once captured remains stored in CR000 unless the device is reset. If the mode has been changed to the comparison mode, be sure to set a comparison value.


#### (1) 16-bit timer counter 00 (TM00)

TM00 is a 16-bit read-only register that counts count pulses.

The counter is incremented in synchronization with the rising edge of the count clock.

If the count value is read during operation, then input of the count clock is temporarily stopped, and the count value at that point is read.

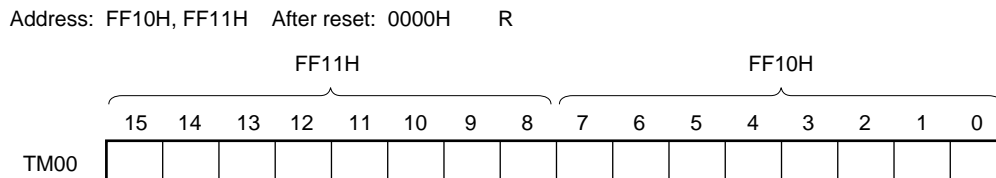**Figure 6-2. Format of 16-Bit Timer Counter 00 (TM00)**



The count value of TM00 can be read by reading TM00 when the value of bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) is other than 00. The value of TM00 is 0000H if it is read when TMC003 and TMC002 = 00.

The count value is reset to 0000H in the following cases.

- At reset signal generation
- If TMC003 and TMC002 are cleared to 00
- If the valid edge of the TI000 pin is input in the mode in which the clear & start occurs when inputting the valid edge to the TI000 pin
- If TM00 and CR000 match in the mode in which the clear & start occurs when TM00 and CR000 match
- OSPT00 is set to 1 in one-shot pulse output mode or the valid edge is input to the TI000 pin

**Caution** Even if TM00 is read, the value is not captured by CR010.

#### (2) 16-bit timer capture/compare register 000 (CR000), 16-bit timer capture/compare register 010 (CR010)


CR000 and CR010 are 16-bit registers that are used with a capture function or comparison function selected by using CRC00.

Change the value of CR000 while the timer is stopped (TMC003 and TMC002 = 00).

The value of CR010 can be changed during operation if the value has been set in a specific way. For details, see **6.5.1 Rewriting CR010 during TM00 operation.**

These registers can be read or written in 16-bit units.

Reset signal generation sets these registers to 0000H.

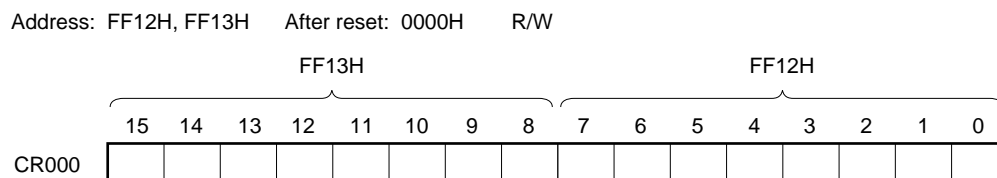**Figure 6-3. Format of 16-Bit Timer Capture/Compare Register 000 (CR000)****(i) When CR000 is used as a compare register**


The value set in CR000 is constantly compared with the TM00 count value, and an interrupt request signal (INTTM000) is generated if they match. The value is held until CR000 is rewritten.

**Caution** CR000 does not perform the capture operation when it is set in the comparison mode, even if a capture trigger is input to it.

**(ii) When CR000 is used as a capture register**

The count value of TM00 is captured to CR000 when a capture trigger is input.

As the capture trigger, an edge of a phase reverse to that of the TI000 pin or the valid edge of the TI010 pin can be selected by using CRC00 or PRM00.

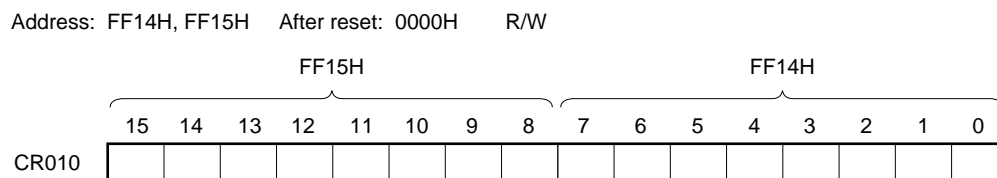**Figure 6-4. Format of 16-Bit Timer Capture/Compare Register 010 (CR010)****(i) When CR010 is used as a compare register**

The value set in CR010 is constantly compared with the TM00 count value, and an interrupt request signal (INTTM010) is generated if they match.

**Caution** CR010 does not perform the capture operation when it is set in the comparison mode, even if a capture trigger is input to it.

**(ii) When CR010 is used as a capture register**

The count value of TM00 is captured to CR010 when a capture trigger is input.

It is possible to select the valid edge of the TI000 pin as the capture trigger. The TI000 pin valid edge is set by PRM00.

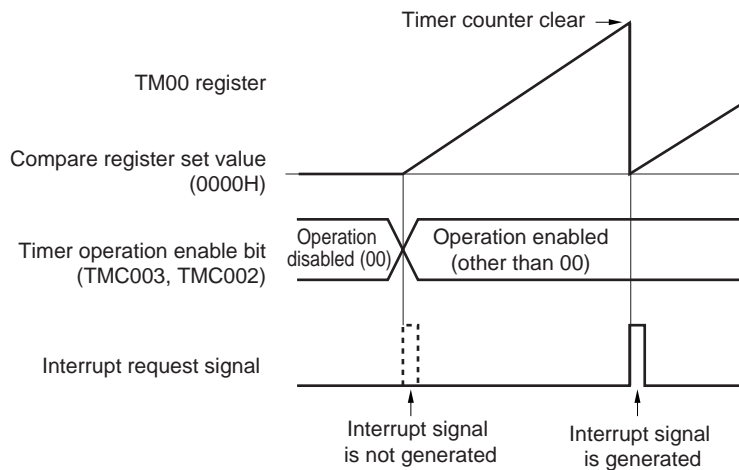
**(iii) Setting range when CR000 or CR010 is used as a compare register**

When CR000 or CR010 is used as a compare register, set it as shown below.

Operation	CR000 Register Setting Range	CR010 Register Setting Range
Operation as interval timer	0000H < N ≤ FFFFH	0000H <sup>Note</sup> ≤ M ≤ FFFFH
Operation as square-wave output		Normally, this setting is not used. Mask the match interrupt signal (INTTM010).
Operation as external event counter		
Operation in the clear & start mode entered by TI000 pin valid edge input	0000H <sup>Note</sup> ≤ N ≤ FFFFH	0000H <sup>Note</sup> ≤ M ≤ FFFFH
Operation as free-running timer		
Operation as PPG output	M < N ≤ FFFFH	0000H <sup>Note</sup> ≤ M < N
Operation as one-shot pulse output	0000H <sup>Note</sup> ≤ N ≤ FFFFH (N ≠ M)	0000H <sup>Note</sup> ≤ M ≤ FFFFH (M ≠ N)

**Note** When 0000H is set, a match interrupt immediately after the timer operation does not occur and timer output is not changed, and the first match timing is as follows. A match interrupt occurs at the timing when the timer counter (TM00 register) is changed from 0000H to 0001H.














- When the timer counter is cleared due to overflow
- When the timer counter is cleared due to TI000 pin valid edge (when clear & start mode is entered by TI000 pin valid edge input)
- When the timer counter is cleared due to compare match (when clear & start mode is entered by match between TM00 and CR000 (CR000 = other than 0000H, CR010 = 0000H))



**Remarks 1.** N: CR000 register set value, M: CR010 register set value

**2.** For details of TMC003 and TMC002, see **6.3 (1) 16-bit timer mode control register 00 (TMC00)**.

Table 6-2. Capture Operation of CR000 and CR010

External Input Signal	TI000 Pin Input 		TI010 Pin Input 	
Capture operation of CR000	CRC001 = 1 TI000 pin input (reverse phase) 	Set values of ES001 and ES000 Position of edge to be captured	CRC001 bit = 0 TI010 pin input 	Set values of ES101 and ES100 Position of edge to be captured
		01: Rising 		01: Rising 
		00: Falling 		00: Falling 
		11: Both edges (cannot be captured)		11: Both edges 
	Interrupt signal	INTTM000 signal is not generated even if value is captured.	Interrupt signal	INTTM000 signal is generated each time value is captured.
Capture operation of CR010	TI000 pin input <sup>Note</sup> 	Set values of ES001 and ES000 Position of edge to be captured		
		01: Rising 		
		00: Falling 		
		11: Both edges 		
	Interrupt signal	INTTM010 signal is generated each time value is captured.		

**Note** The capture operation of CR010 is not affected by the setting of the CRC001 bit.

**Caution** To capture the count value of the TM00 register to the CR000 register by using the phase reverse to that input to the TI000 pin, the interrupt request signal (INTTM000) is not generated after the value has been captured. If the valid edge is detected on the TI010 pin during this operation, the capture operation is not performed but the INTTM000 signal is generated as an external interrupt signal. To not use the external interrupt, mask the INTTM000 signal.

**Remark** CRC001: See 6.3 (2) Capture/compare control register 00 (CRC00).  
ES101, ES100, ES001, ES000: See 6.3 (4) Prescaler mode register 00 (PRM00).

### 6.3 Registers Controlling 16-Bit Timer/Event Counter 00

Registers used to control 16-bit timer/event counter 00 are shown below.

- 16-bit timer mode control register 00 (TMC00)
- Capture/compare control register 00 (CRC00)
- 16-bit timer output control register 00 (TOC00)
- Prescaler mode register 00 (PRM00)
- Input switch control register (ISC)
- Port mode register 3 (PM3)
- Port register 3 (P3)

#### (1) 16-bit timer mode control register 00 (TMC00)

TMC00 is an 8-bit register that sets the 16-bit timer/event counter 00 operation mode, TM00 clear mode, and output timing, and detects an overflow.

Rewriting TMC00 is prohibited during operation (when TMC003 and TMC002 = other than 00). However, it can be changed when TMC003 and TMC002 are cleared to 00 (stopping operation) and when OVF00 is cleared to 0.

TMC00 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets TMC00 to 00H.

**Caution** 16-bit timer/event counter 00 starts operation at the moment TMC002 and TMC003 are set to values other than 00 (operation stop mode), respectively. Set TMC002 and TMC003 to 00 to stop the operation.

Figure 6-5. Format of 16-Bit Timer Mode Control Register 00 (TMC00)

Address: FFBAH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	<0>
TMC00	0	0	0	0	TMC003	TMC002	TMC001	OVF00

TMC003	TMC002	Operation enable of 16-bit timer/event counter 00
0	0	Disables 16-bit timer/event counter 00 operation. Stops supplying operating clock. Clears 16-bit timer counter 00 (TM00).
0	1	Free-running timer mode
1	0	Clear & start mode entered by TI000 pin valid edge input <sup>Note</sup>
1	1	Clear & start mode entered upon a match between TM00 and CR000

TMC001	Condition to reverse timer output (TO00)
0	<ul style="list-style-type: none"> <li>Match between TM00 and CR000 or match between TM00 and CR010</li> </ul>
1	<ul style="list-style-type: none"> <li>Match between TM00 and CR000 or match between TM00 and CR010</li> <li>Trigger input of TI000 pin valid edge</li> </ul>

OVF00	TM00 overflow flag
Clear (0)	Clears OVF00 to 0 or TMC003 and TMC002 = 00
Set (1)	Overflow occurs.
<p>OVF00 is set to 1 when the value of TM00 changes from FFFFH to 0000H in all the operation modes (free-running timer mode, clear &amp; start mode entered by TI000 pin valid edge input, and clear &amp; start mode entered upon a match between TM00 and CR000). It can also be set to 1 by writing 1 to OVF00.</p>	

**Note** The TI000 pin valid edge is set by bits 5 and 4 (ES001, ES000) of prescaler mode register 00 (PRM00).



**(2) Capture/compare control register 00 (CRC00)**

CRC00 is the register that controls the operation of CR000 and CR010.

Changing the value of CRC00 is prohibited during operation (when TMC003 and TMC002 = other than 00).

CRC00 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears CRC00 to 00H.

**Figure 6-6. Format of Capture/Compare Control Register 00 (CRC00)**

Address: FFBC<sub>H</sub> After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CRC00	0	0	0	0	0	CRC002	CRC001	CRC000

CRC002	CR010 operating mode selection
0	Operates as compare register
1	Operates as capture register


CRC001	CR000 capture trigger selection
0	Captures on valid edge of TI010 pin
1	Captures on valid edge of TI000 pin by reverse phase <sup>Note</sup>
The valid edge of the TI010 and TI000 pin is set by PRM00. If ES001 and ES000 are set to 11 (both edges) when CRC001 is 1, the valid edge of the TI000 pin cannot be detected.	

CRC000	CR000 operating mode selection
0	Operates as compare register
1	Operates as capture register
If TMC003 and TMC002 are set to 11 (clear & start mode entered upon a match between TM00 and CR000), be sure to set CRC000 to 0.	

**Note** When the valid edge is detected from the TI010 pin, the capture operation is not performed but the INTTM000 signal is generated as an external interrupt signal.

**Caution** To ensure that the capture operation is performed properly, the capture trigger requires a pulse two cycles longer than the count clock selected by prescaler mode register 00 (PRM00).

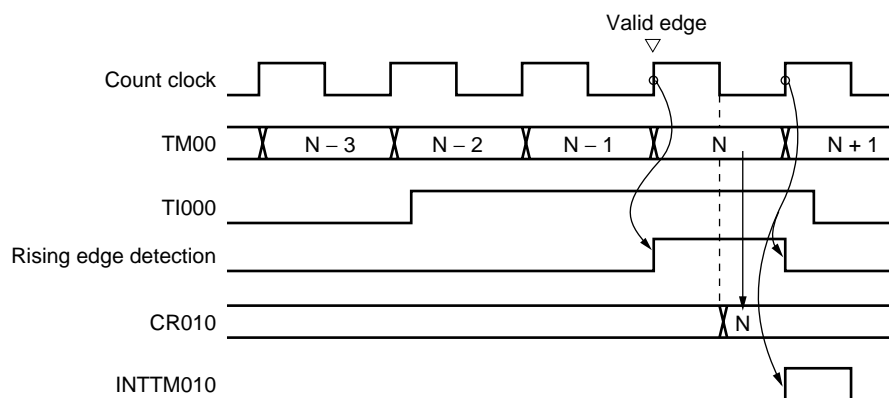Figure 6-7. Example of CR010 Capture Operation (When Rising Edge Is Specified)

**(3) 16-bit timer output control register 00 (TOC00)**

TOC00 is an 8-bit register that controls TO00 output.

TOC00 can be rewritten while only OSPT00 is operating (when TMC003 and TMC002 = other than 00).

Rewriting the other bits is prohibited during operation.

However, TOC004 can be rewritten during timer operation as a means to rewrite CR010 (see **6.5.1 Rewriting CR010 during TM00 operation**).

TOC00 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears TOC00 to 00H.

**Caution** Be sure to set TOC00 using the following procedure.

<1> Set TOC004 and TOC001 to 1.

<2> Set only TOE00 to 1.

<3> Set either of LVS00 or LVR00 to 1.

Figure 6-8. Format of 16-Bit Timer Output Control Register 00 (TOC00)

Address: FFBDH After reset: 00H R/W

Symbol	7	<6>	<5>	4	<3>	<2>	1	<0>
TOC00	0	OSPT00	OSPE00	TOC004	LVS00	LVR00	TOC001	TOE00
OSPT00	One-shot pulse output trigger via software							
0	-							
1	One-shot pulse output							
The value of this bit is always "0" when it is read. Do not set this bit to 1 in a mode other than the one-shot pulse output mode. If it is set to 1, TM00 is cleared and started.								
OSPE00	One-shot pulse output operation control							
0	Successive pulse output							
1	One-shot pulse output							
One-shot pulse output operates correctly in the free-running timer mode or clear & start mode entered by T1000 pin valid edge input. The one-shot pulse cannot be output in the clear & start mode entered upon a match between TM00 and CR000.								
TOC004	TO00 output control on match between CR010 and TM00							
0	Disables inversion operation							
1	Enables inversion operation							
The interrupt signal (INTTM010) is generated even when TOC004 = 0.								
LVS00	LVR00	Setting of TO00 output status						
0	0	No change						
0	1	Initial value of TO00 output is low level (TO00 output is cleared to 0).						
1	0	Initial value of TO00 output is high level (TO00 output is set to 1).						
1	1	Setting prohibited						
<ul style="list-style-type: none"> <li>LVS00 and LVR00 can be used to set the initial value of the TO00 output level. If the initial value does not have to be set, leave LVS00 and LVR00 as 00.</li> <li>Be sure to set LVS00 and LVR00 when TOE00 = 1. LVS00, LVR00, and TOE00 being simultaneously set to 1 is prohibited.</li> <li>LVS00 and LVR00 are trigger bits. By setting these bits to 1, the initial value of the TO00 output level can be set. Even if these bits are cleared to 0, TO00 output is not affected.</li> <li>The values of LVS00 and LVR00 are always 0 when they are read.</li> <li>For how to set LVS00 and LVR00, see <b>6.5.2 Setting LVS00 and LVR00</b>.</li> <li>The actual TO00/TI010/P34/TI52/RTC1HZ/INTP1 pin output is determined depending on PM34 and P34, besides TO00 output.</li> </ul>								
TOC001	TO00 output control on match between CR000 and TM00							
0	Disables inversion operation							
1	Enables inversion operation							
The interrupt signal (INTTM000) is generated even when TOC001 = 0.								
TOE00	TO00 output control							
0	Disables output (TO00 output fixed to low level)							
1	Enables output							

**(4) Prescaler mode register 00 (PRM00)**

PRM00 is the register that sets the TM00 count clock and TI000 and TI010 pin input valid edges.

Rewriting PRM00 is prohibited during operation (when TMC003 and TMC002 = other than 00).

PRM00 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PRM00 to 00H.

**Cautions** 1. Do not apply the following setting when setting the PRM001 and PRM000 bits to 11 (to specify the valid edge of the TI000 pin as a count clock).

- Clear & start mode entered by the TI000 pin valid edge
- Setting the TI000 pin as a capture trigger

2. If the operation of the 16-bit timer/event counter 00 is enabled when the TI000 or TI010 pin is at high level and when the valid edge of the TI000 or TI010 pin is specified to be the rising edge or both edges, the high level of the TI000 or TI010 pin is detected as a rising edge. Note this when the TI000 or TI010 pin is pulled up. However, the rising edge is not detected when the timer operation has been once stopped and then is enabled again.

3. The valid edge of TI010 and timer output (TO00) cannot be used for the P34 pin at the same time. Select either of the functions.

Figure 6-9. Format of Prescaler Mode Register 00 (PRM00)

Address: FFBBH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PRM00	ES101	ES100	ES001	ES000	0	PRM002	PRM001	PRM000

ES101	ES100	TI010 pin valid edge selection
0	0	Falling edge
0	1	Rising edge
1	0	Setting prohibited
1	1	Both falling and rising edges

ES001	ES000	TI000 pin valid edge selection
0	0	Falling edge
0	1	Rising edge
1	0	Setting prohibited
1	1	Both falling and rising edges

PRM002	PRM001	PRM000		Count clock selection <sup>Note1</sup>		
				f <sub>PRS</sub> = 2 MHz	f <sub>PRS</sub> = 5 MHz	f <sub>PRS</sub> = 10 MHz
0	0	0	f <sub>PRS</sub> <sup>Note2</sup>	2 MHz	5 MHz	10 MHz
0	0	1	f <sub>PRS</sub> /2	1 MHz	2.5 MHz	5 MHz
0	1	0	f <sub>PRS</sub> /2 <sup>2</sup>	500 kHz	1.25 MHz	2.5 MHz
0	1	1	f <sub>PRS</sub> /2 <sup>4</sup>	1.25 MHz	2.5 MHz	625 kHz
1	0	0	f <sub>PRS</sub> /2 <sup>8</sup>	7.81 kHz	19.53 kHz	39.06 kHz
1	0	1	f <sub>SUB</sub>	32.768 kHz		
1	1	0	TI000 valid edge <sup>Note3</sup>			
1	1	1	TM52 output			

- Notes**
1. If the peripheral hardware clock (f<sub>PRS</sub>) operates on the high-speed system clock (f<sub>XH</sub>) (XSEL = 1), the f<sub>PRS</sub> operating frequency varies depending on the supply voltage.
    - V<sub>DD</sub> = 2.7 to 5.5 V: f<sub>PRS</sub> ≤ 10 MHz
    - V<sub>DD</sub> = 1.8 to 2.7 V: f<sub>PRS</sub> ≤ 5 MHz
  2. If the peripheral hardware clock (f<sub>PRS</sub>) operates on the internal high-speed oscillation clock (f<sub>RH</sub>) (XSEL = 0), when 1.8 V ≤ V<sub>DD</sub> < 2.7 V, the setting of PRM002 = PRM001 = PRM000 = 0 (count clock: f<sub>PRS</sub>) is prohibited.
  3. The external clock from the TI000 pin requires a pulse longer than twice the cycle of the peripheral hardware clock (f<sub>PRS</sub>).

**Caution** Do not select the valid edge of TI000 as the count clock during the pulse width measurement.

- Remarks**
1. 8-bit timer/event counter 52 (TM52) output can be selected as the TM00 count clock by setting PRM002, PRM001, PRM000 = 1, 1, 1. Any frequency can be set as the 16-bit timer (TM00) count clock, depending on the TM52 count clock and compare register setting values.
  2. f<sub>PRS</sub>: Peripheral hardware clock frequency  
f<sub>SUB</sub>: Subsystem clock frequency

**(5) Input switch control register (ISC)**

The input source to TI000 becomes the input signal from the P33/TI000 pin, by setting ISC1 to 0.

ISC can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets ISC to 00H.

**Figure 6-10. Format of Input Switch Control Register (ISC)**

Address: FF4FH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ISC	0	0	ICS5	ICS4	ICS3	ICS2	ICS1	ICS0

ICS5	ICS4	TxD6, RxD6 input source selection
0	0	TxD6:P112, RxD6: P113
1	0	TxD6:P13, RxD6: P12
Other than above		Setting prohibited

ICS3	RxD6/P113 input enabled/disabled
0	RxD6/P113 input disabled
1	RxD6/P113 input enabled

ICS2	TI52 input source control
0	No enable control of TI52 input (P34)
1	Enable controlled of TI52 input (P34) <sup>Note 1</sup>

ICS1	TI000 input source selection
0	TI000 (P33)
1	RxD6 (P12 or P113) <sup>Note 2</sup>

ICS0	INTP0 input source selection
0	INTP0 (P120)
1	RxD6 (P12 or P113) <sup>Note 2</sup>

**Notes 1.** TI52 input is controlled by TOH2 output signal.

**2.** TI000 and INTP0 inputs are selected by ISC5 and ISC4.

**(6) Port mode register 3 (PM3)**

This register sets port 3 input/output in 1-bit units.

When using the P34/TI52/TI010/TO00/RTC1HZ/INTP1 pin for timer output, set PM34 and the output latches of P34 to 0.

When using the P33/TI000/RTCDIV/RTCCL/BUZ/INTP2 and P34/TI52/TI010/TO00/RTC1HZ/INTP1 pins for timer input, set PM33 and PM34 to 1. At this time, the output latches of P33 and P34 may be 0 or 1.

PM3 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PM3 to FFH.

**Figure 6-11. Format of Port Mode Register 3 (PM3)**

Address: FF23H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	1	1	PM34	PM33	PM32	PM31	1

PM3n	P3n pin I/O mode selection (n = 1 to 4)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

## 6.4 Operation of 16-Bit Timer/Event Counter 00


### 6.4.1 Interval timer operation

If bits 3 and 2 (TMC003 and TMC002) of the 16-bit timer mode control register (TMC00) are set to 11 (clear & start mode entered upon a match between TM00 and CR000), the count operation is started in synchronization with the count clock.

When the value of TM00 later matches the value of CR000, TM00 is cleared to 0000H and a match interrupt signal (INTTM000) is generated. This INTTM000 signal enables TM00 to operate as an interval timer.

- Remarks**
1. For the setting of I/O pins, see **6.3 (6) Port mode register 3 (PM3)**.
  2. For how to enable the INTTM000 interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

**Figure 6-12. Block Diagram of Interval Timer Operation**

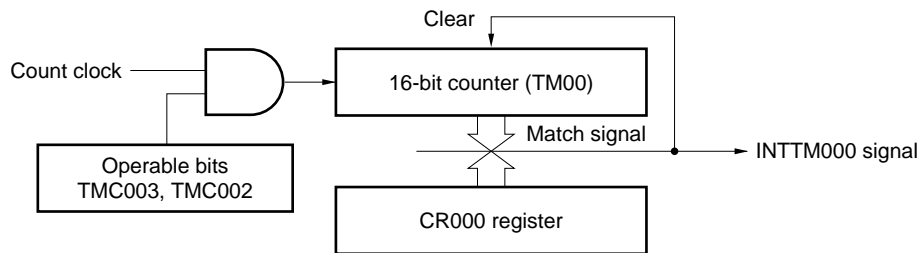

**Figure 6-13. Basic Timing Example of Interval Timer Operation**

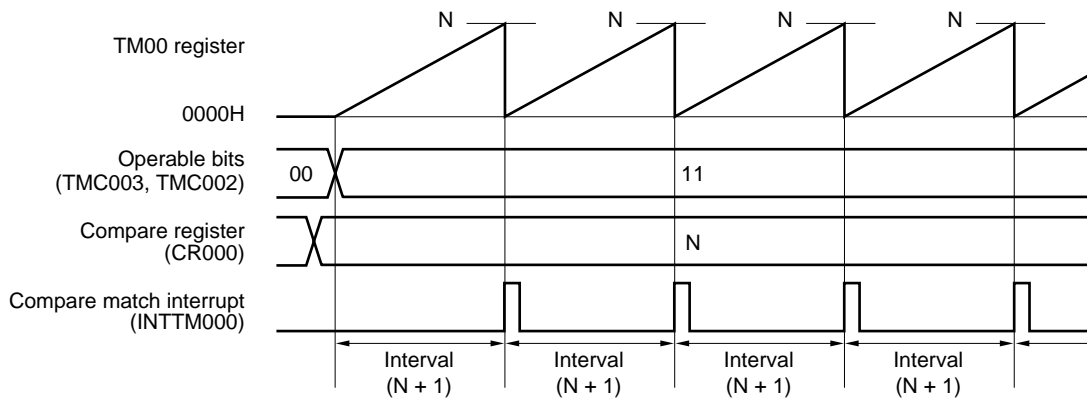
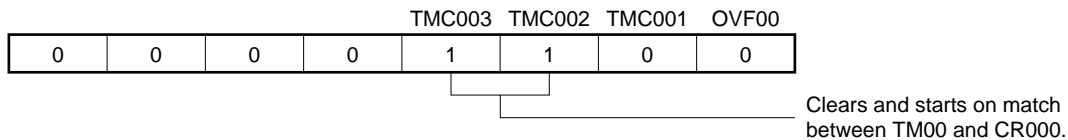





Figure 6-14. Example of Register Settings for Interval Timer Operation


## (a) 16-bit timer mode control register 00 (TMC00)




## (b) Capture/compare control register 00 (CRC00)



## (c) 16-bit timer output control register 00 (TOC00)



## (d) Prescaler mode register 00 (PRM00)

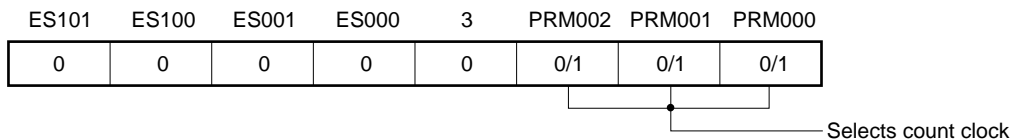

## (e) 16-bit timer counter 00 (TM00)

By reading TM00, the count value can be read.

## (f) 16-bit capture/compare register 000 (CR000)

If M is set to CR000, the interval time is as follows.

- Interval time =  $(M + 1) \times$  Count clock cycle


Setting CR000 to 0000H is prohibited.

## (g) 16-bit capture/compare register 010 (CR010)


Usually, CR010 is not used for the interval timer function. However, a compare match interrupt (INTTM010) is generated when the set value of CR010 matches the value of TM00.

Therefore, mask the interrupt request by using the interrupt mask flag (TMMK010).

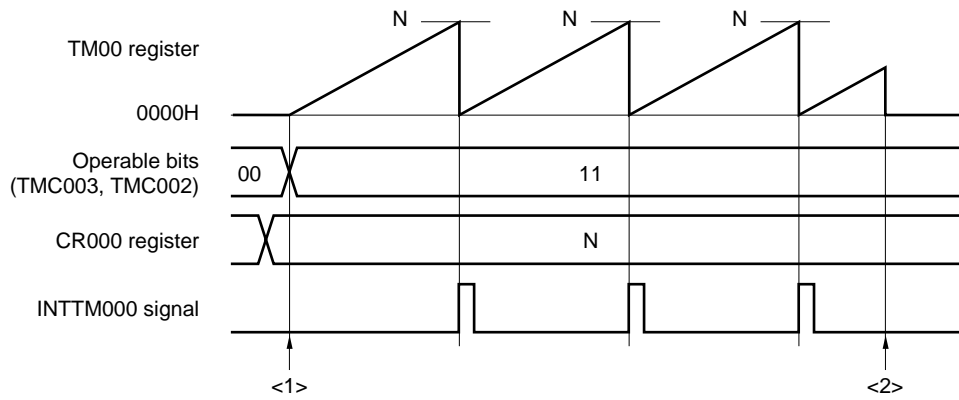
Figure 6-15. Example of Software Processing for Interval Timer Function



<1> Count operation start flow

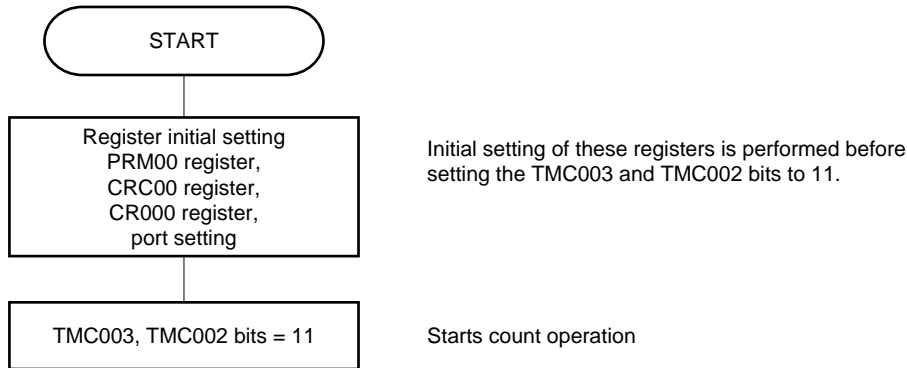

<2> Count operation stop flow

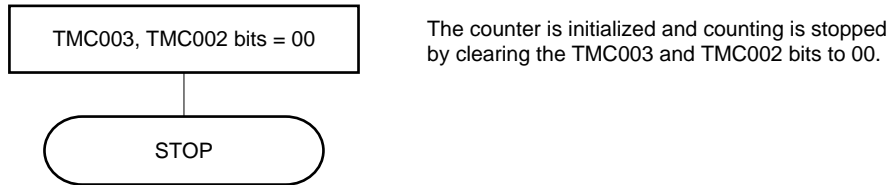

### 6.4.2 Square wave output operation


When 16-bit timer/event counter 00 operates as an interval timer (see 6.4.1), a square wave can be output from the TO00 pin by setting the 16-bit timer output control register 00 (TOC00) to 03H.

When TMC003 and TMC002 are set to 11 (count clear & start mode entered upon a match between TM00 and CR000), the counting operation is started in synchronization with the count clock.

When the value of TM00 later matches the value of CR000, TM00 is cleared to 0000H, an interrupt signal (INTTM000) is generated, and TO00 output is inverted. This TO00 output that is inverted at fixed intervals enables TO00 to output a square wave.

- Remarks 1.** For the setting of I/O pins, see 6.3 (6) **Port mode register 3 (PM3).**  
**2.** For how to enable the INTTM000 signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS.**

**Figure 6-16. Block Diagram of Square Wave Output Operation**

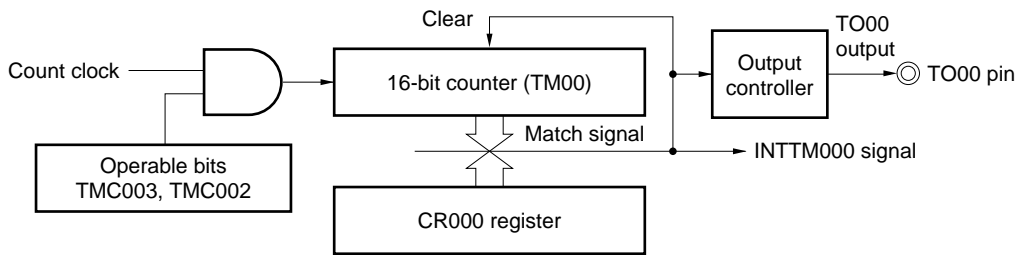

**Figure 6-17. Basic Timing Example of Square Wave Output Operation**



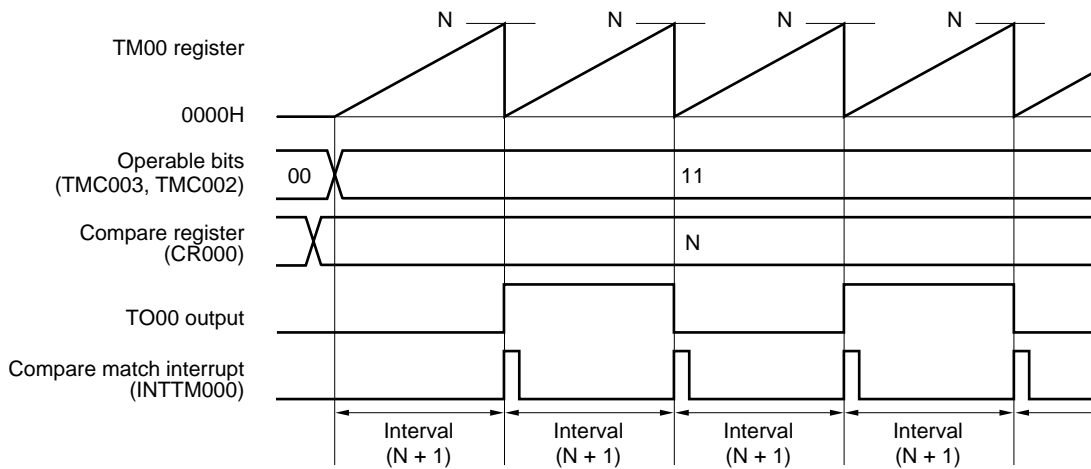


Figure 6-18. Example of Register Settings for Square Wave Output Operation

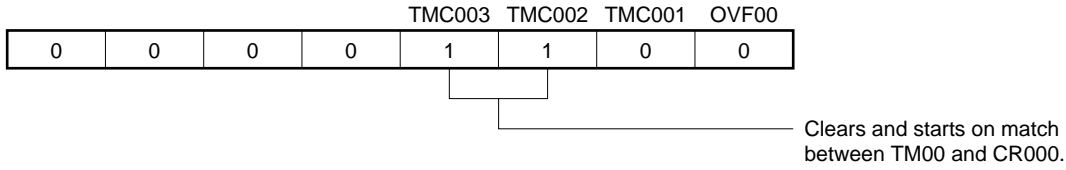
(a) 16-bit timer mode control register 00 (TMC00)



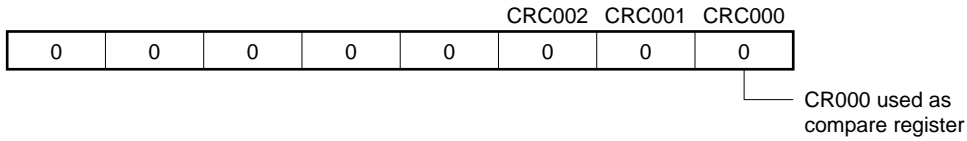
(b) Capture/compare control register 00 (CRC00)



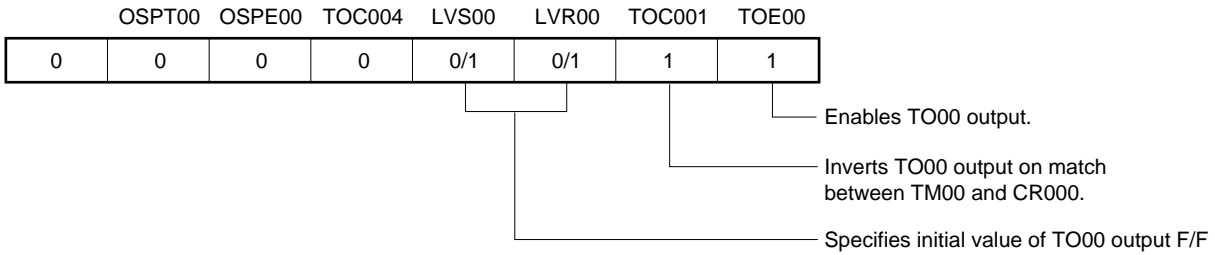(c) 16-bit timer output control register 00 (TOC00)



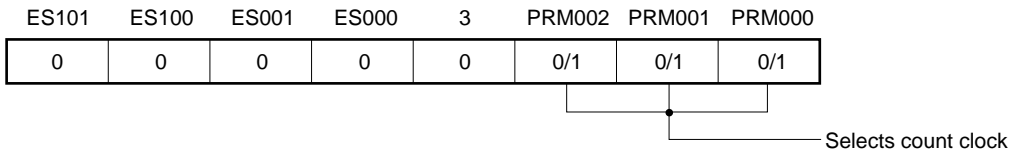(d) Prescaler mode register 00 (PRM00)



(e) 16-bit timer counter 00 (TM00)

By reading TM00, the count value can be read.

(f) 16-bit capture/compare register 000 (CR000)

If M is set to CR000, the interval time is as follows.

- Square wave frequency = 1 / [2 × (M + 1) × Count clock cycle]


Setting CR000 to 0000H is prohibited.

(g) 16-bit capture/compare register 010 (CR010)


Usually, CR010 is not used for the square wave output function. However, a compare match interrupt (INTTM010) is generated when the set value of CR010 matches the value of TM00.

Therefore, mask the interrupt request by using the interrupt mask flag (TMMK010).

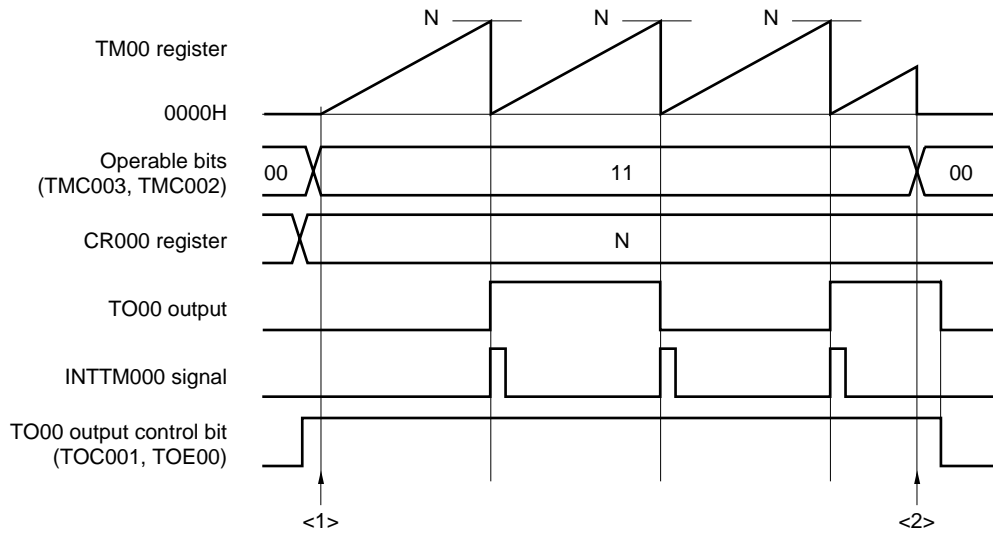
Figure 6-19. Example of Software Processing for Square Wave Output Function



<1> Count operation start flow

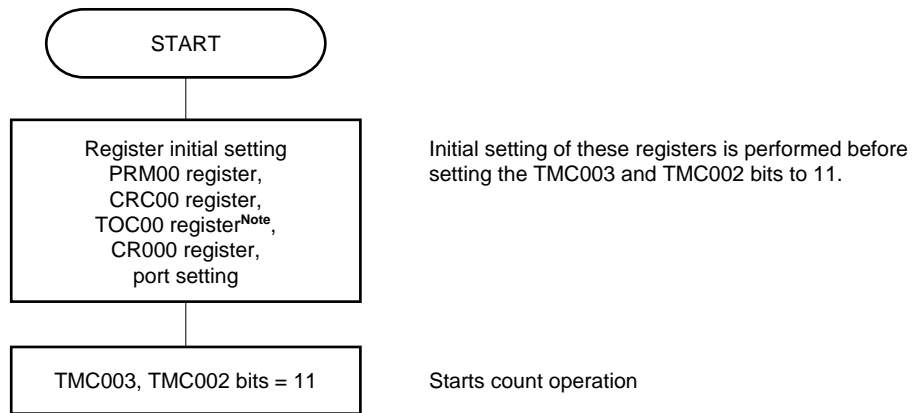

<2> Count operation stop flow

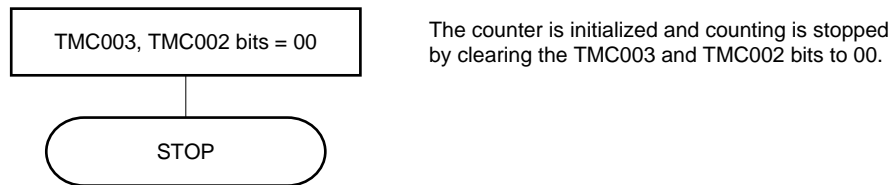

**Note** Care must be exercised when setting TOC00. For details, see 6.3 (3) 16-bit timer output control register 00 (TOC00).

### 6.4.3 External event counter operation

When bits 1 and 0 (PRM001 and PRM000) of the prescaler mode register 00 (PRM00) are set to 11 (for counting up with the valid edge of the TI000 pin) and bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) are set to 11, the valid edge of an external event input is counted, and a match interrupt signal indicating matching between TM00 and CR000 (INTTM000) is generated.

To input the external event, the TI000 pin is used. Therefore, the timer/event counter cannot be used as an external event counter in the clear & start mode entered by the TI000 pin valid edge input (when TMC003 and TMC002 = 10).

The INTTM000 signal is generated with the following timing.

- Timing of generation of INTTM000 signal (second time or later)  
= Number of times of detection of valid edge of external event  $\times$  (Set value of CR000 + 1)

However, the first match interrupt immediately after the timer/event counter has started operating is generated with the following timing.

- Timing of generation of INTTM000 signal (first time only)  
= Number of times of detection of valid edge of external event input  $\times$  (Set value of CR000 + 2)

To detect the valid edge, the signal input to the TI000 pin is sampled during the clock cycle of  $f_{PRS}$ . The valid edge is not detected until it is detected two times in a row. Therefore, a noise with a short pulse width can be eliminated.

**Remarks 1.** For the setting of I/O pins, see **6.3 (6) Port mode register 3 (PM3)**.

**2.** For how to enable the INTTM000 signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

**Figure 6-20. Block Diagram of External Event Counter Operation**



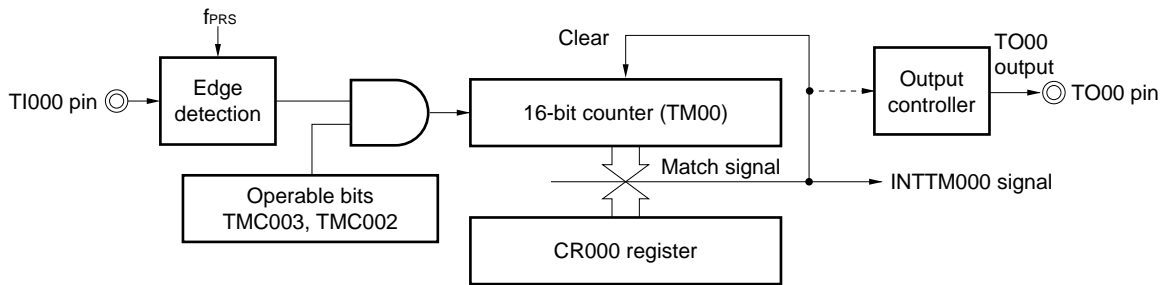


Figure 6-21. Example of Register Settings in External Event Counter Mode (1/2)

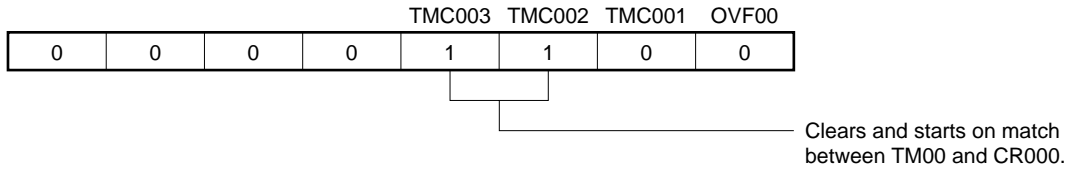
(a) 16-bit timer mode control register 00 (TMC00)



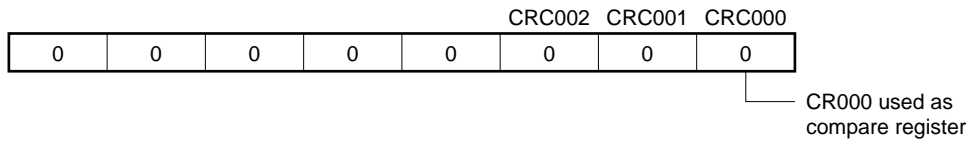
(b) Capture/compare control register 00 (CRC00)



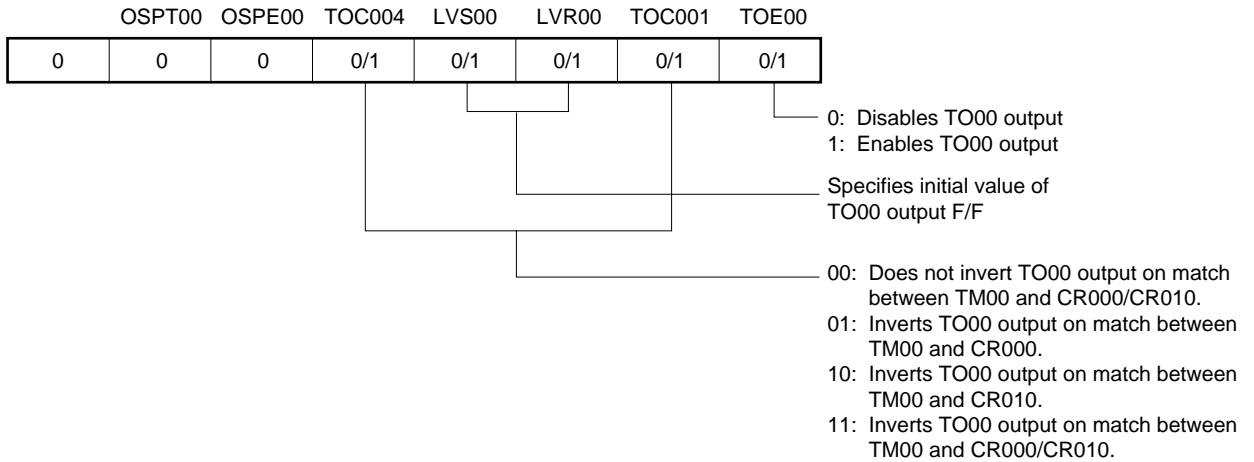(c) 16-bit timer output control register 00 (TOC00)



(d) Prescaler mode register 00 (PRM00)

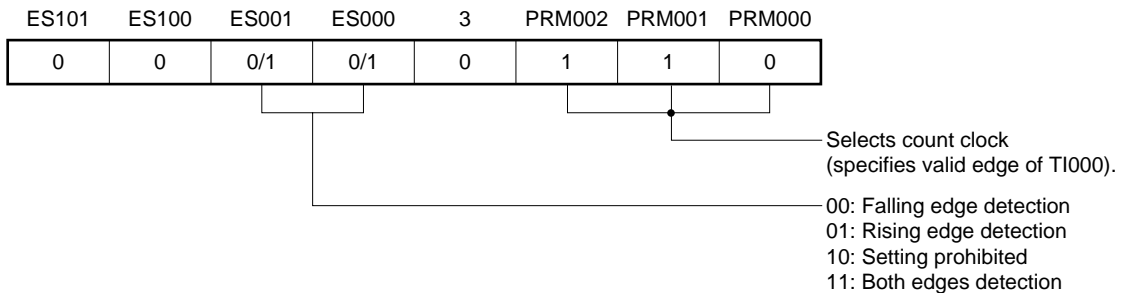

**Figure 6-21. Example of Register Settings in External Event Counter Mode (2/2)****(e) 16-bit timer counter 00 (TM00)**

By reading TM00, the count value can be read.

**(f) 16-bit capture/compare register 000 (CR000)**

If M is set to CR000, the interrupt signal (INTTM000) is generated when the number of external events reaches (M + 1).

Setting CR000 to 0000H is prohibited.


**(g) 16-bit capture/compare register 010 (CR010)**

Usually, CR010 is not used in the external event counter mode. However, a compare match interrupt (INTTM010) is generated when the set value of CR010 matches the value of TM00.


Therefore, mask the interrupt request by using the interrupt mask flag (TMMK010).



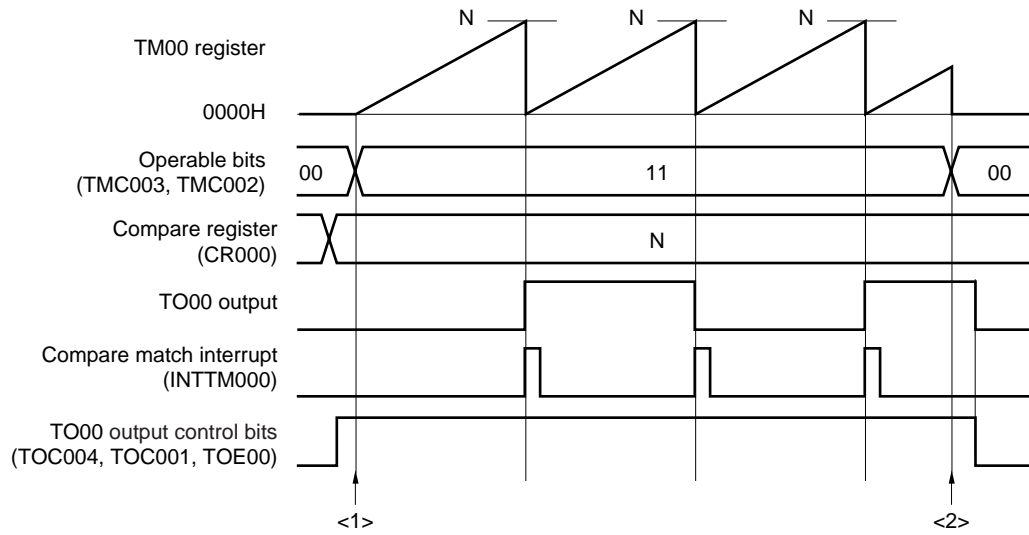
Figure 6-22. Example of Software Processing in External Event Counter Mode



<1> Count operation start flow

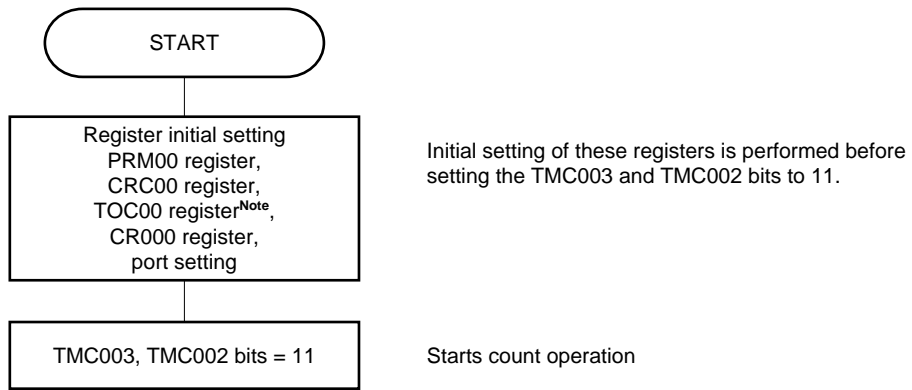

<2> Count operation stop flow

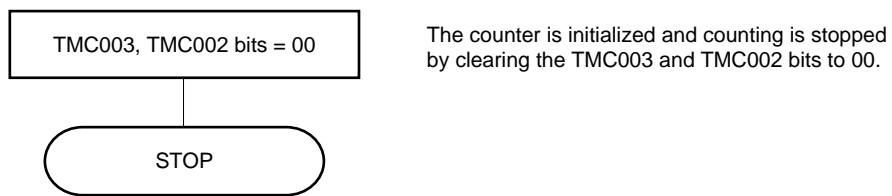

**Note** Care must be exercised when setting TOC00. For details, see 6.3 (3) 16-bit timer output control register 00 (TOC00).

#### 6.4.4 Operation in clear & start mode entered by TI000 pin valid edge input

When bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) are set to 10 (clear & start mode entered by the TI000 pin valid edge input) and the count clock (set by PRM00) is supplied to the timer/event counter, TM00 starts counting up. When the valid edge of the TI000 pin is detected during the counting operation, TM00 is cleared to 0000H and starts counting up again. If the valid edge of the TI000 pin is not detected, TM00 overflows and continues counting.

The valid edge of the TI000 pin is a cause to clear TM00. Starting the counter is not controlled immediately after the start of the operation.

CR000 and CR010 are used as compare registers and capture registers.

##### (a) When CR000 and CR010 are used as compare registers

Signals INTTM000 and INTTM010 are generated when the value of TM00 matches the value of CR000 and CR010.

##### (b) When CR000 and CR010 are used as capture registers

The count value of TM00 is captured to CR000 and the INTTM000 signal is generated when the valid edge is input to the TI010 pin (or when the phase reverse to that of the valid edge is input to the TI000 pin).

When the valid edge is input to the TI000 pin, the count value of TM00 is captured to CR010 and the INTTM010 signal is generated. As soon as the count value has been captured, the counter is cleared to 0000H.

**Caution** Do not set the count clock as the valid edge of the TI000 pin (PRM002, PRM001, and PRM000 = 110). When PRM002, PRM001, and PRM000 = 110, TM00 is cleared.


**Remarks** 1. For the setting of the I/O pins, see 6.3 (6) Port mode register 3 (PM3).

2. For how to enable the INTTM000 signal interrupt, see CHAPTER 17 INTERRUPT FUNCTIONS.

#### (1) Operation in clear & start mode entered by TI000 pin valid edge input


(CR000: compare register, CR010: compare register)

**Figure 6-23. Block Diagram of Clear & Start Mode Entered by TI000 Pin Valid Edge Input (CR000: Compare Register, CR010: Compare Register)**

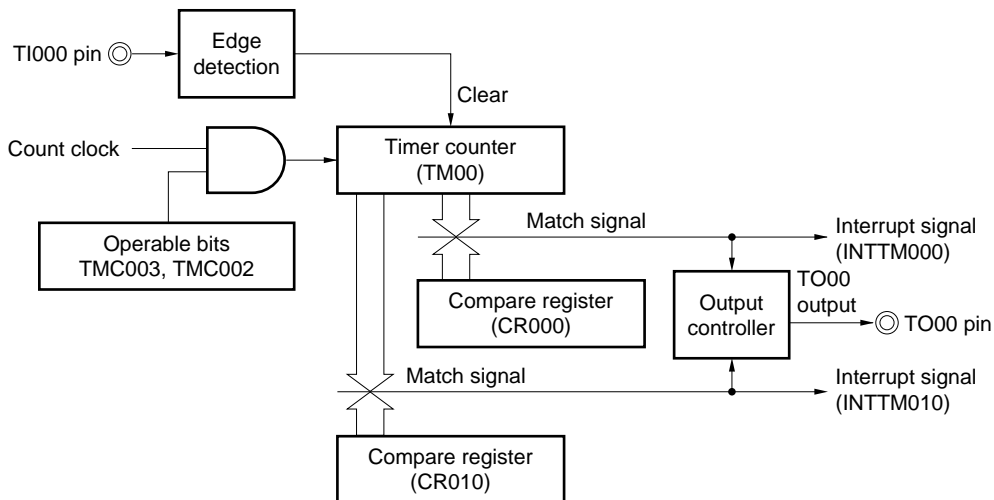


**Figure 6-24. Timing Example of Clear & Start Mode Entered by TI000 Pin Valid Edge Input (CR000: Compare Register, CR010: Compare Register)**

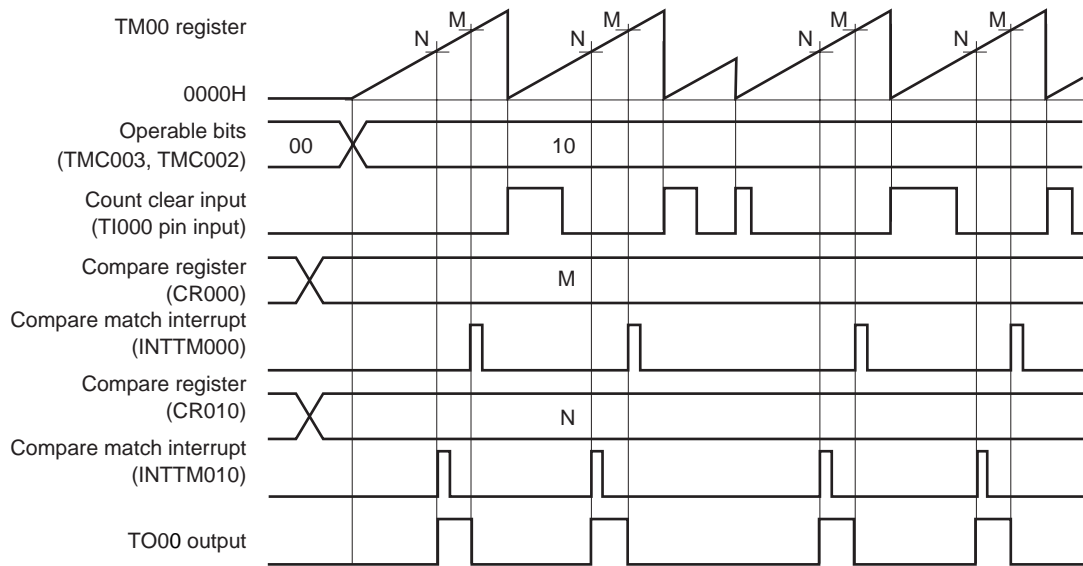**(a) TOC00 = 13H, PRM00 = 10H, CRC00, = 00H, TMC00 = 08H**



**(b) TOC00 = 13H, PRM00 = 10H, CRC00, = 00H, TMC00 = 0AH**

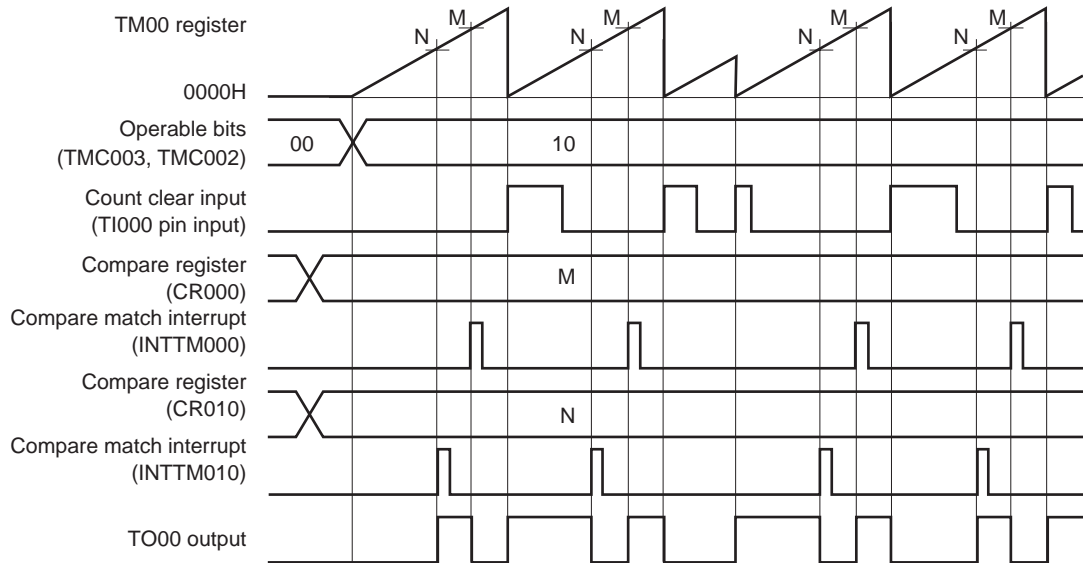

(a) and (b) differ as follows depending on the setting of bit 1 (TMC001) of the 16-bit timer mode control register 01 (TMC00).

- (a) The TO00 output level is inverted when TM00 matches a compare register.
- (b) The TO00 output level is inverted when TM00 matches a compare register or when the valid edge of the TI000 pin is detected.

(2) Operation in clear & start mode entered by TI000 pin valid edge input  
(CR000: compare register, CR010: capture register)

Figure 6-25. Block Diagram of Clear & Start Mode Entered by TI000 Pin Valid Edge Input  
(CR000: Compare Register, CR010: Capture Register)


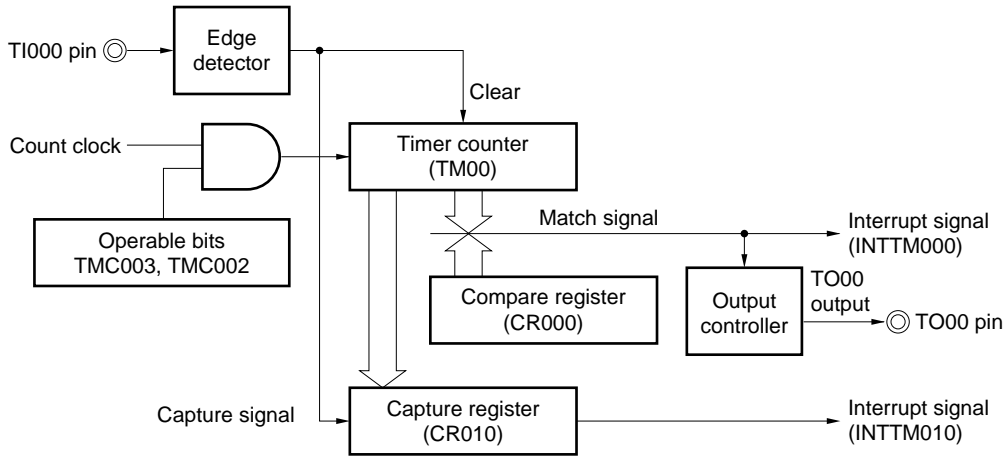


Figure 6-26. Timing Example of Clear & Start Mode Entered by TI000 Pin Valid Edge Input  
(CR000: Compare Register, CR010: Capture Register) (1/2)

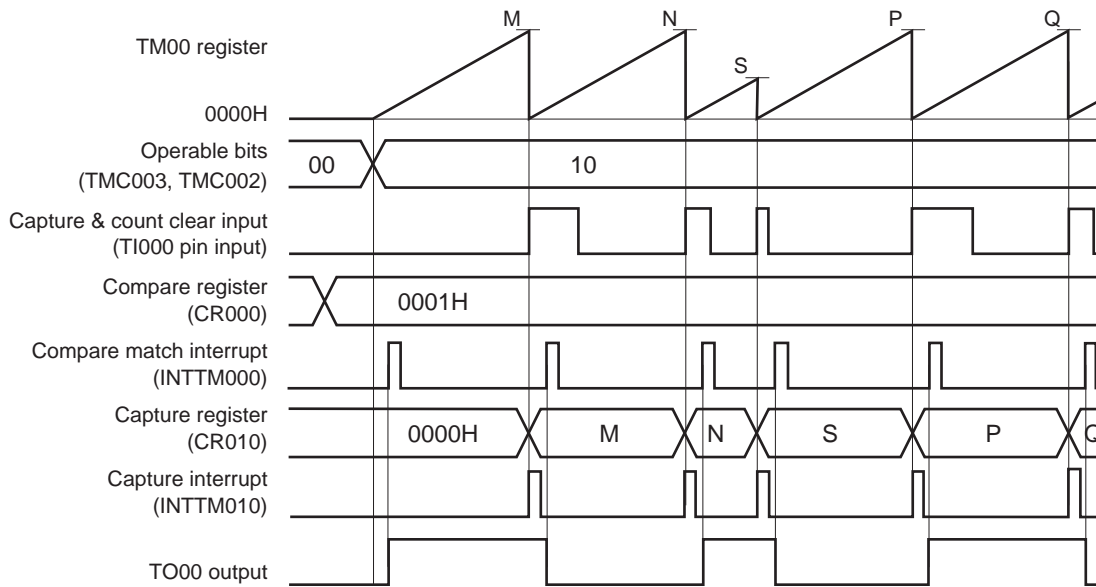(a) TOC00 = 13H, PRM00 = 10H, CRC00, = 04H, TMC00 = 08H, CR000 = 0001H




This is an application example where the TO00 output level is inverted when the count value has been captured & cleared.

The count value is captured to CR010 and TM00 is cleared (to 0000H) when the valid edge of the TI000 pin is detected. When the count value of TM00 is 0001H, a compare match interrupt signal (INTTM000) is generated, and the TO00 output level is inverted.

**Figure 6-26. Timing Example of Clear & Start Mode Entered by T1000 Pin Valid Edge Input (CR000: Compare Register, CR010: Capture Register) (2/2)**

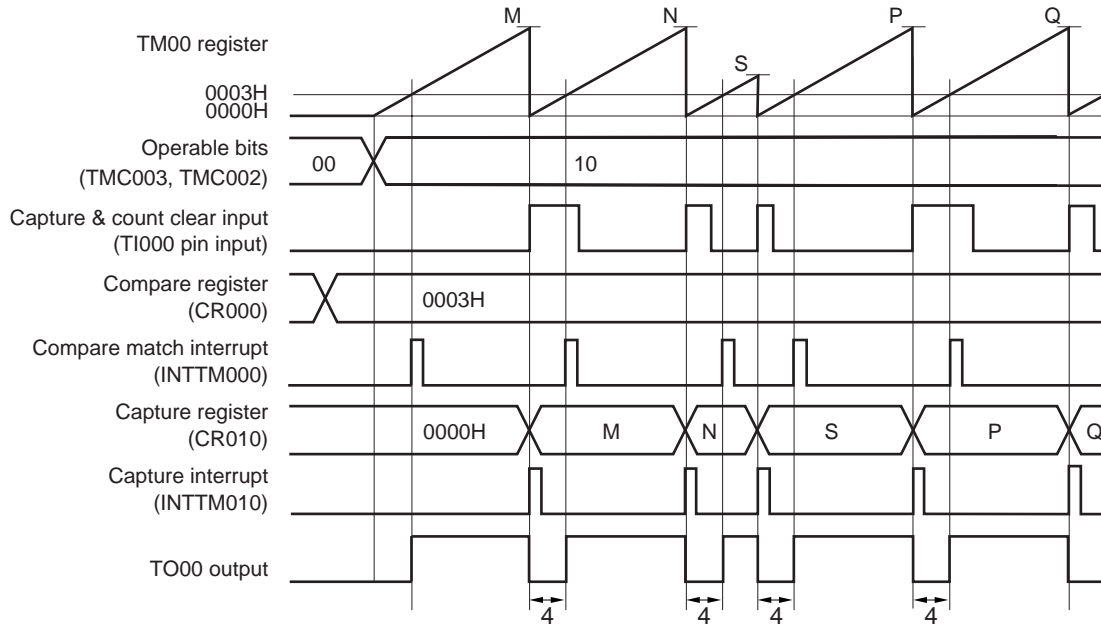**(b) TOC00 = 13H, PRM00 = 10H, CRC00, = 04H, TMC00 = 0AH, CR000 = 0003H**




This is an application example where the width set to CR000 (4 clocks in this example) is to be output from the TO00 pin when the count value has been captured & cleared.

The count value is captured to CR010, a capture interrupt signal (INTTM010) is generated, TM00 is cleared (to 0000H), and the TO00 output is inverted when the valid edge of the T1000 pin is detected. When the count value of TM00 is 0003H (four clocks have been counted), a compare match interrupt signal (INTTM000) is generated and the TO00 output level is inverted.


(3) Operation in clear & start mode by entered TI000 pin valid edge input  
(CR000: capture register, CR010: compare register)

Figure 6-27. Block Diagram of Clear & Start Mode Entered by TI000 Pin Valid Edge Input  
(CR000: Capture Register, CR010: Compare Register)

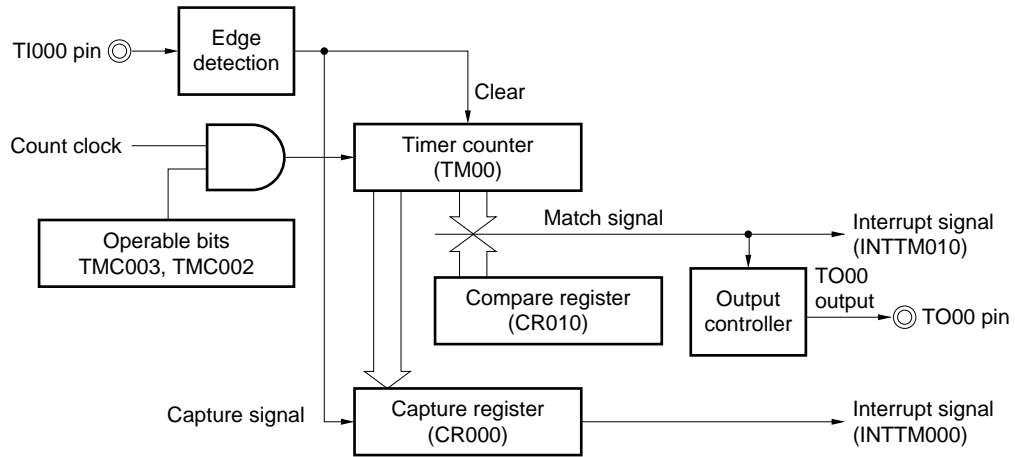

**Figure 6-28. Timing Example of Clear & Start Mode Entered by TI000 Pin Valid Edge Input  
(CR000: Capture Register, CR010: Compare Register) (1/2)**

**(a) TOC00 = 13H, PRM00 = 10H, CRC00, = 03H, TMC00 = 08H, CR010 = 0001H**

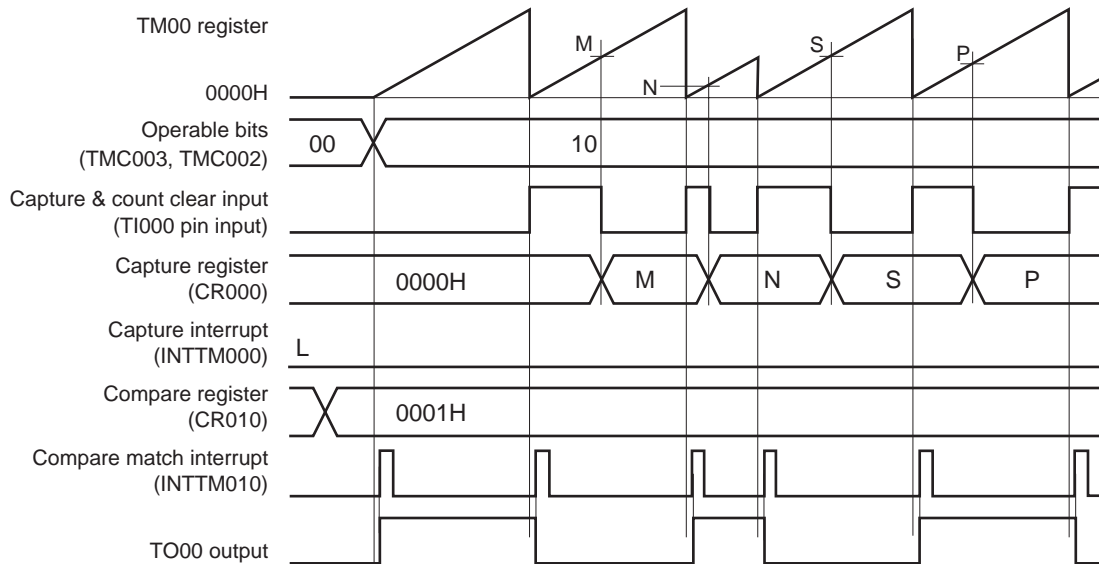


This is an application example where the TO00 output level is to be inverted when the count value has been captured & cleared.

TM00 is cleared at the rising edge detection of the TI000 pin and it is captured to CR000 at the falling edge detection of the TI000 pin.

When bit 1 (CRC001) of capture/compare control register 00 (CRC00) is set to 1, the count value of TM00 is captured to CR000 in the phase reverse to that of the signal input to the TI000 pin, but the capture interrupt signal (INTTM000) is not generated. However, the INTTM000 signal is generated when the valid edge of the TI010 pin is detected. Mask the INTTM000 signal when it is not used.

**Figure 6-28. Timing Example of Clear & Start Mode Entered by T1000 Pin Valid Edge Input (CR000: Capture Register, CR010: Compare Register) (2/2)**

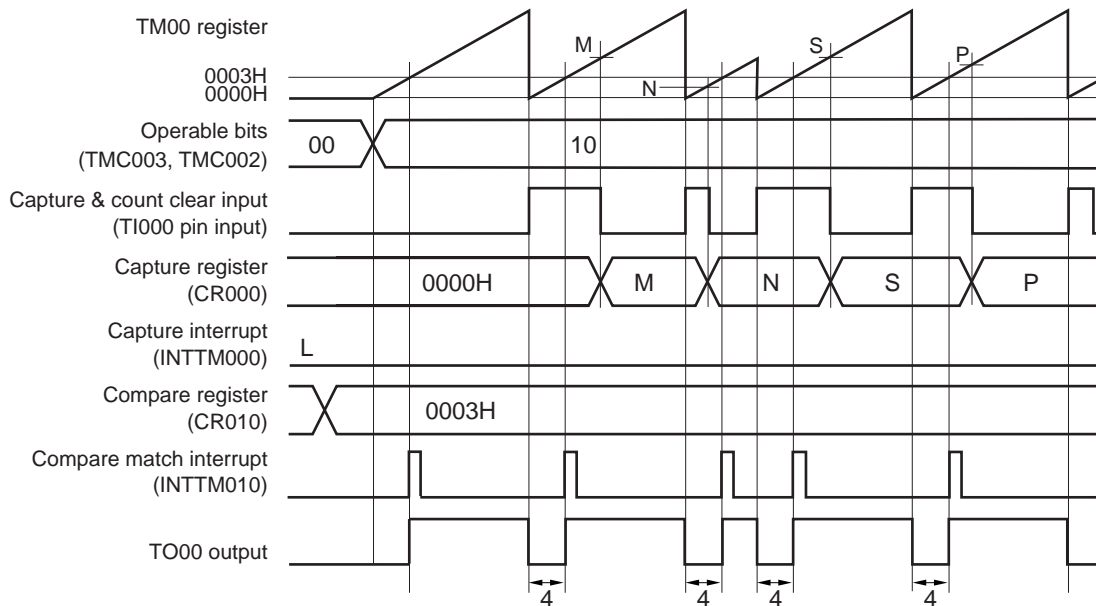**(b) TOC00 = 13H, PRM00 = 10H, CRC00, = 03H, TMC00 = 0AH, CR010 = 0003H**



This is an application example where the width set to CR010 (4 clocks in this example) is to be output from the TO00 pin when the count value has been captured & cleared.


TM00 is cleared (to 0000H) at the rising edge detection of the T1000 pin and captured to CR000 at the falling edge detection of the T1000 pin. The TO00 output is inverted when TM00 is cleared (to 0000H) because the rising edge of the T1000 pin has been detected or when the value of TM00 matches that of a compare register (CR010).

When bit 1 (CRC001) of capture/compare control register 00 (CRC00) is 1, the count value of TM00 is captured to CR000 in the phase reverse to that of the input signal of the T1000 pin, but the capture interrupt signal (INTTM000) is not generated. However, the INTTM000 interrupt is generated when the valid edge of the T1010 pin is detected. Mask the INTTM000 signal when it is not used.



(4) Operation in clear & start mode entered by TI000 pin valid edge input  
(CR000: capture register, CR010: capture register)

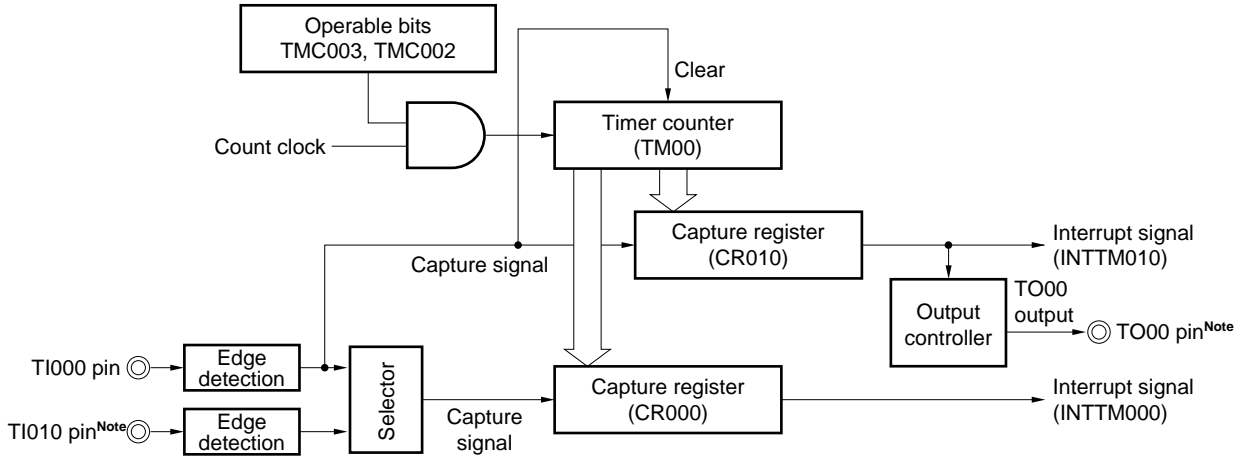
Figure 6-29. Block Diagram of Clear & Start Mode Entered by TI000 Pin Valid Edge Input  
(CR000: Capture Register, CR010: Capture Register)



**Note** The timer output (TO00) cannot be used when detecting the valid edge of the TI010 pin is used.

Figure 6-30. Timing Example of Clear & Start Mode Entered by TI000 Pin Valid Edge Input  
(CR000: Capture Register, CR010: Capture Register) (1/3)

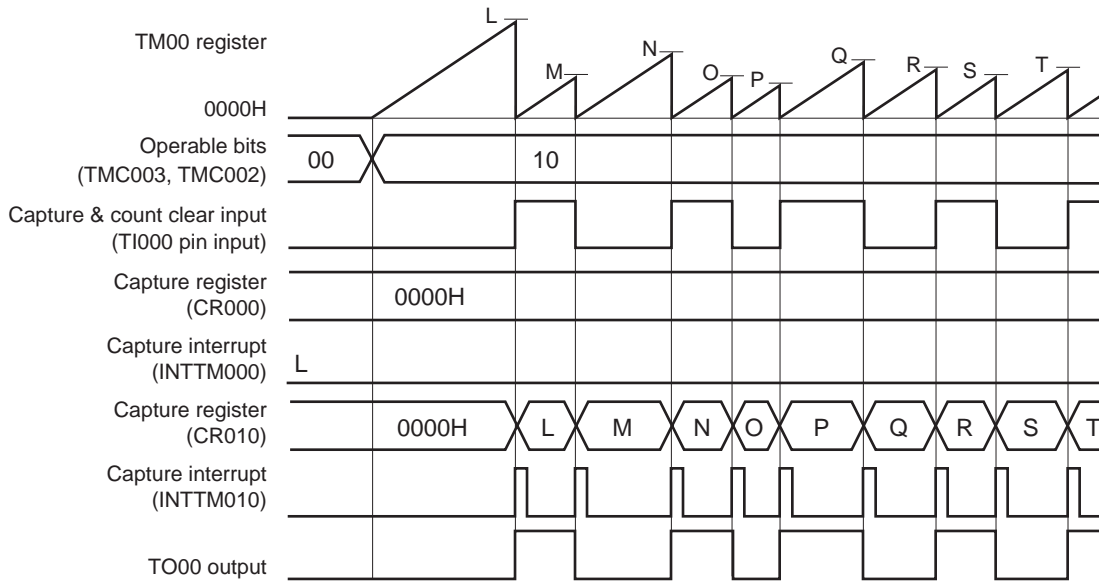(a) TOC00 = 13H, PRM00 = 30H, CRC00 = 05H, TMC00 = 0AH




This is an application example where the count value is captured to CR010, TM00 is cleared, and the TO00 output is inverted when the rising or falling edge of the TI000 pin is detected.

When the edge of the TI010 pin is detected, an interrupt signal (INTTM000) is generated. Mask the INTTM000 signal when it is not used.

**Figure 6-30. Timing Example of Clear & Start Mode Entered by TI000 Pin Valid Edge Input (CR000: Capture Register, CR010: Capture Register) (2/3)**

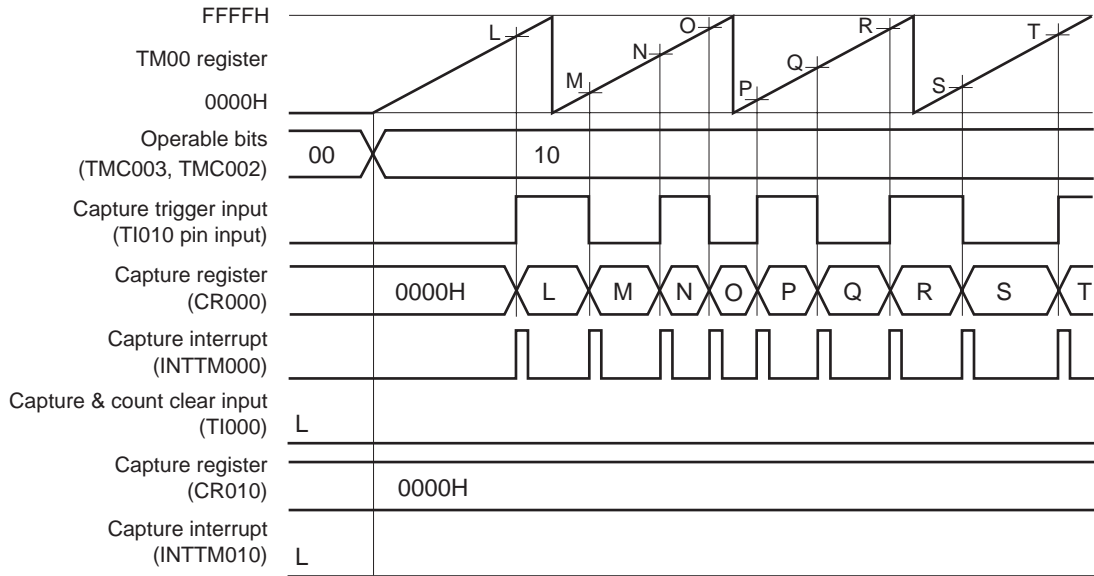
**(b) TOC00 = 13H, PRM00 = C0H, CRC00 = 05H, TMC00 = 0AH**



This is a timing example where an edge is not input to the TI000 pin, in an application where the count value is captured to CR000 when the rising or falling edge of the TI010 pin is detected.

**Figure 6-30. Timing Example of Clear & Start Mode Entered by TI000 Pin Valid Edge Input (CR000: Capture Register, CR010: Capture Register) (3/3)**

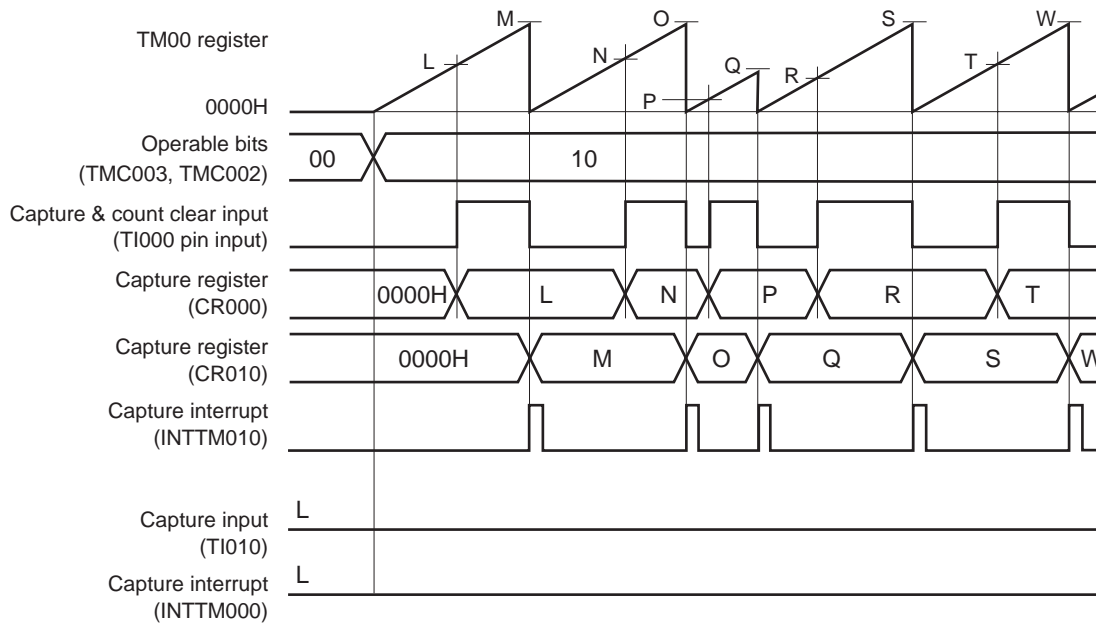(c) TOC00 = 13H, PRM00 = 00H, CRC00 = 07H, TMC00 = 0AH



This is an application example where the pulse width of the signal input to the TI000 pin is measured.

By setting CRC00, the count value can be captured to CR000 in the phase reverse to the falling edge of the TI000 pin (i.e., rising edge) and to CR010 at the falling edge of the TI000 pin.

The high- and low-level widths of the input pulse can be calculated by the following expressions.


- High-level width = [CR010 value] – [CR000 value] × [Count clock cycle]
- Low-level width = [CR000 value] × [Count clock cycle]

If the reverse phase of the TI000 pin is selected as a trigger to capture the count value to CR000, the INTTM000 signal is not generated. Read the values of CR000 and CR010 to measure the pulse width immediately after the INTTM010 signal is generated.


However, if the valid edge specified by bits 6 and 5 (ES101 and ES100) of prescaler mode register 00 (PRM00) is input to the TI010 pin, the count value is not captured but the INTTM000 signal is generated. To measure the pulse width of the TI000 pin, mask the INTTM000 signal when it is not used.

Figure 6-31. Example of Register Settings in Clear & Start Mode Entered by TI000 Pin Valid Edge Input (1/2)

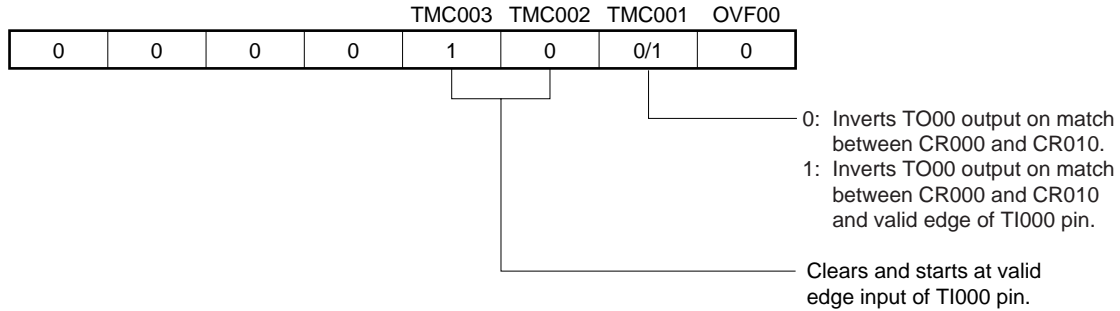
(a) 16-bit timer mode control register 00 (TMC00)



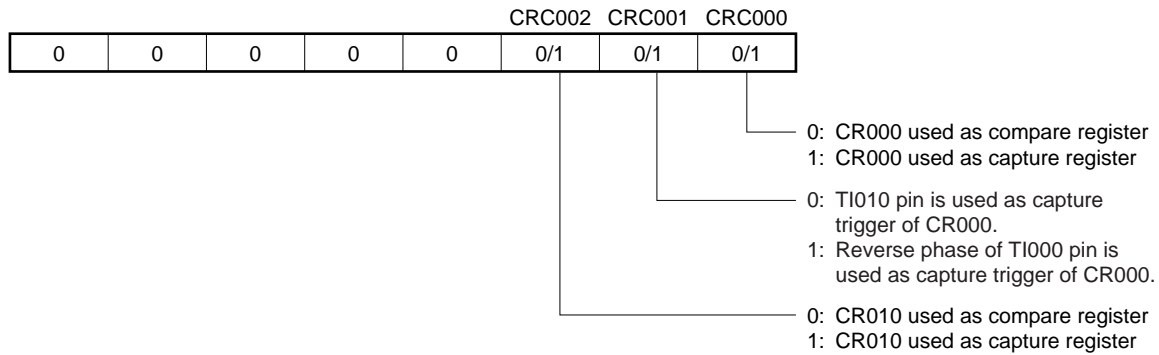(b) Capture/compare control register 00 (CRC00)



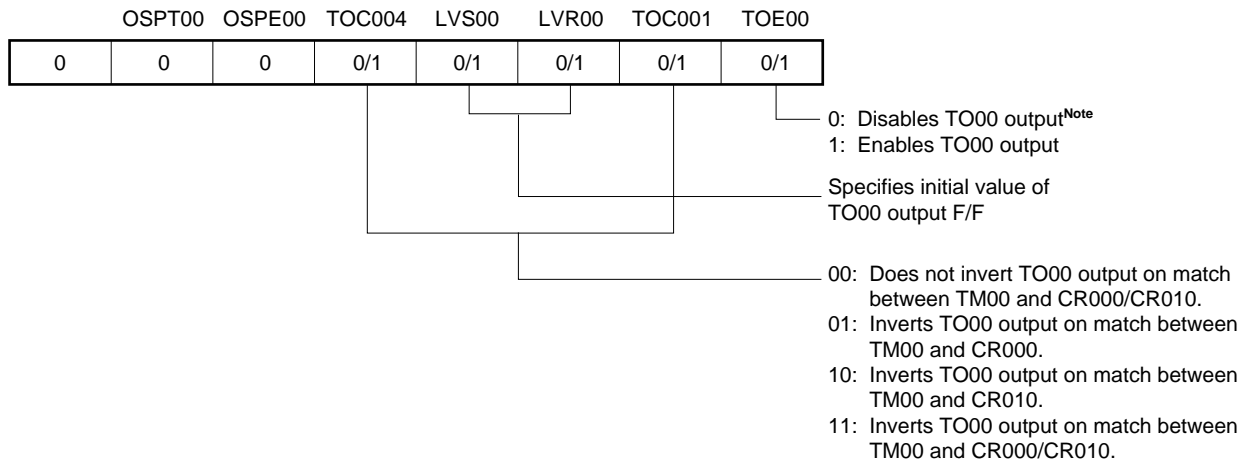
(c) 16-bit timer output control register 00 (TOC00)



**Note** The timer output (TO00) cannot be used when detecting the valid edge of the TI010 pin is used.

Figure 6-31. Example of Register Settings in Clear &amp; Start Mode Entered by TI000 Pin Valid Edge Input (2/2)

## (d) Prescaler mode register 00 (PRM00)

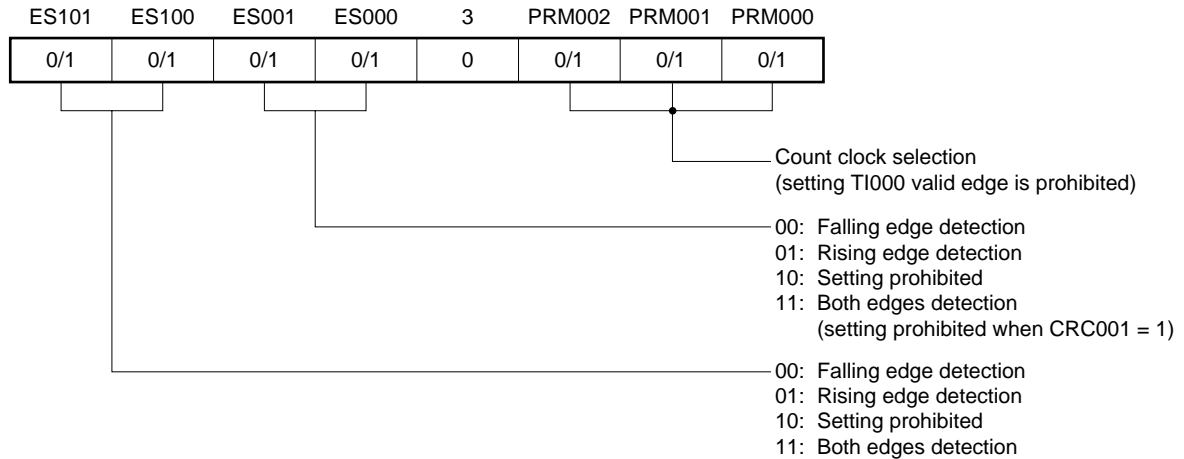

## (e) 16-bit timer counter 00 (TM00)

By reading TM00, the count value can be read.

## (f) 16-bit capture/compare register 000 (CR000)

When this register is used as a compare register and when its value matches the count value of TM00, an interrupt signal (INTTM000) is generated. The count value of TM00 is not cleared.

To use this register as a capture register, select either the TI000 or TI010 pin<sup>Note</sup> input as a capture trigger. When the valid edge of the capture trigger is detected, the count value of TM00 is stored in CR000.


**Note** The timer output (TO00) cannot be used when detection of the valid edge of the TI010 pin is used.

## (g) 16-bit capture/compare register 010 (CR010)


When this register is used as a compare register and when its value matches the count value of TM00, an interrupt signal (INTTM010) is generated. The count value of TM00 is not cleared.

When this register is used as a capture register, the TI000 pin input is used as a capture trigger. When the valid edge of the capture trigger is detected, the count value of TM00 is stored in CR010.

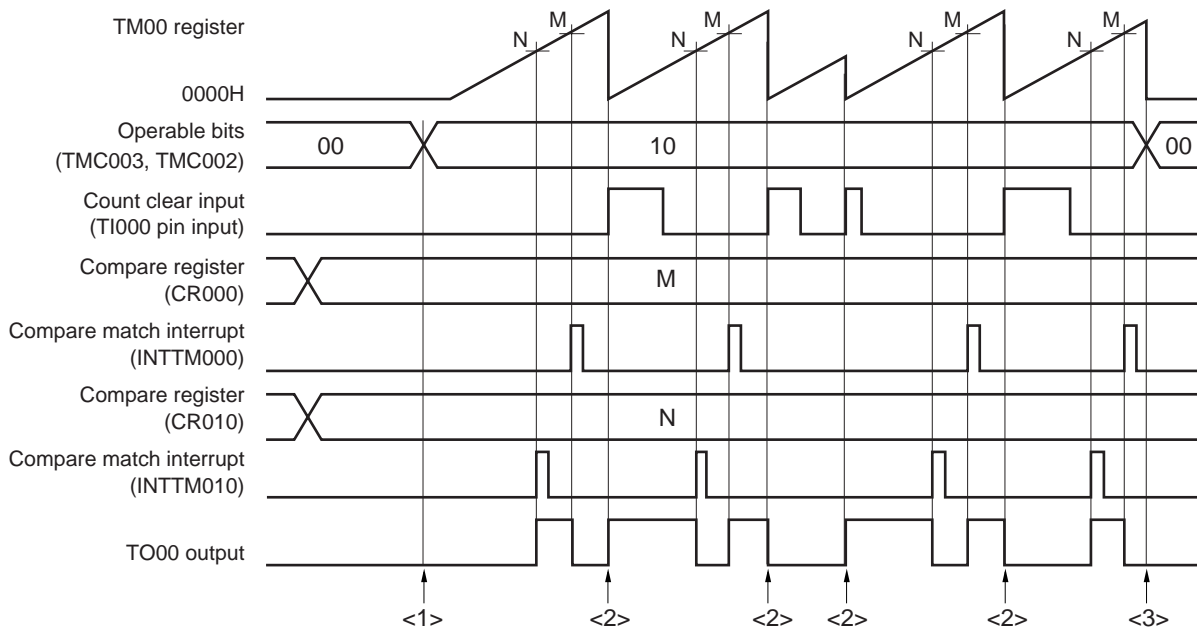
Figure 6-32. Example of Software Processing in Clear & Start Mode Entered by TI000 Pin Valid Edge Input




<1> Count operation start flow

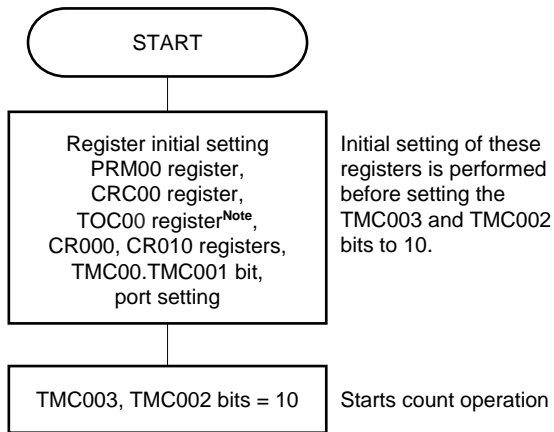

<3> Count operation stop flow

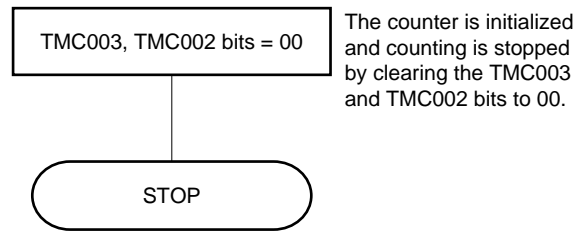

<2> TM00 register clear & start flow

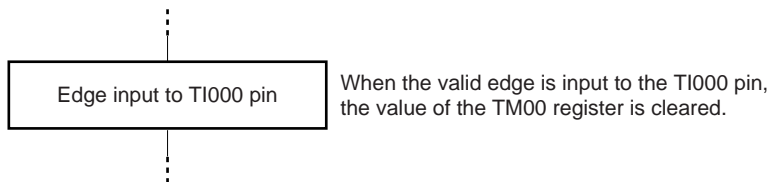

**Note** Care must be exercised when setting TOC00. For details, see 6.3 (3) 16-bit timer output control register 00 (TOC00).

### 6.4.5 Free-running timer operation

When bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) are set to 01 (free-running timer mode), 16-bit timer/event counter 00 continues counting up in synchronization with the count clock. When it has counted up to FFFFH, the overflow flag (OVF00) is set to 1 at the next clock, and TM00 is cleared (to 0000H) and continues counting. Clear OVF00 to 0 by executing the CLR instruction via software.

The following three types of free-running timer operations are available.

- Both CR000 and CR010 are used as compare registers.
- One of CR000 or CR010 is used as a compare register and the other is used as a capture register.
- Both CR000 and CR010 are used as capture registers.


**Remarks 1.** For the setting of the I/O pins, see **6.3 (6) Port mode register 3 (PM3)**.

**2.** For how to enable the INTTM000 signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

#### (1) Free-running timer mode operation


(CR000: compare register, CR010: compare register)

**Figure 6-33. Block Diagram of Free-Running Timer Mode  
(CR000: Compare Register, CR010: Compare Register)**

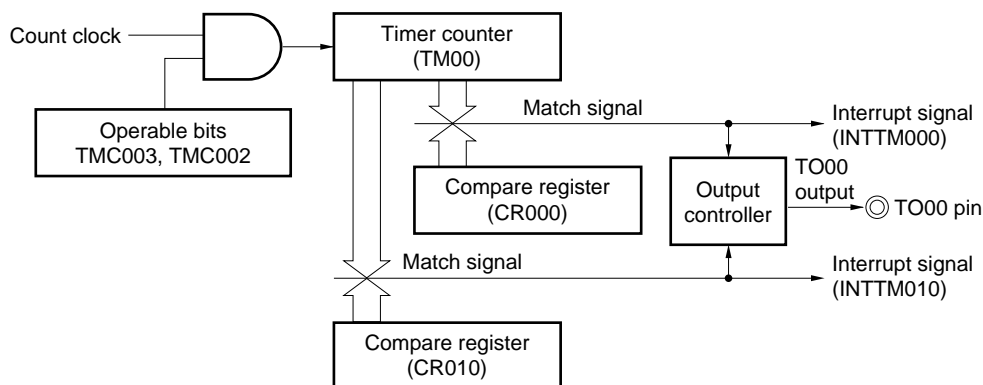

**Figure 6-34. Timing Example of Free-Running Timer Mode  
(CR000: Compare Register, CR010: Compare Register)**

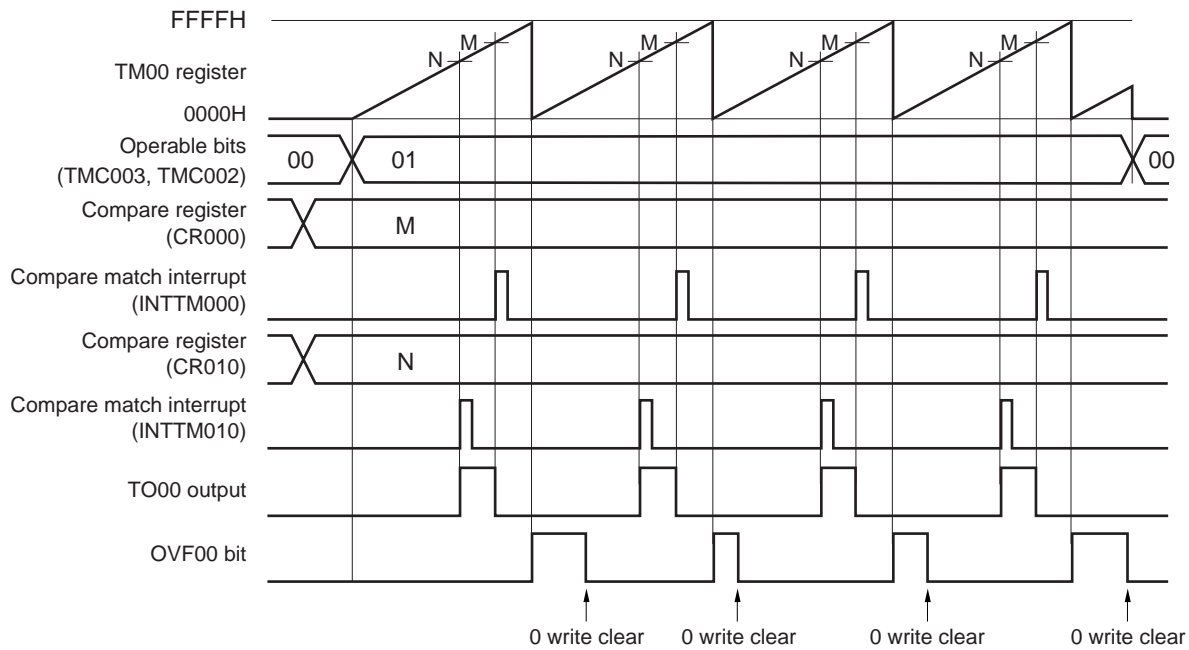
• TOC00 = 13H, PRM00 = 00H, CRC00 = 00H, TMC00 = 04H



This is an application example where two compare registers are used in the free-running timer mode. The TO00 output level is reversed each time the count value of TM00 matches the set value of CR000 or CR010. When the count value matches the register value, the INTTM000 or INTTM010 signal is generated.

**(2) Free-running timer mode operation  
(CR000: compare register, CR010: capture register)**


**Figure 6-35. Block Diagram of Free-Running Timer Mode  
(CR000: Compare Register, CR010: Capture Register)**

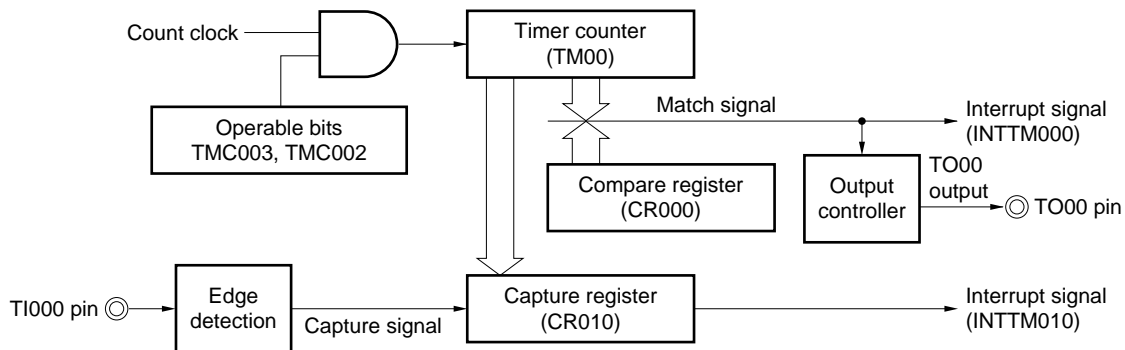



**Figure 6-36. Timing Example of Free-Running Timer Mode  
(CR000: Compare Register, CR010: Capture Register)**

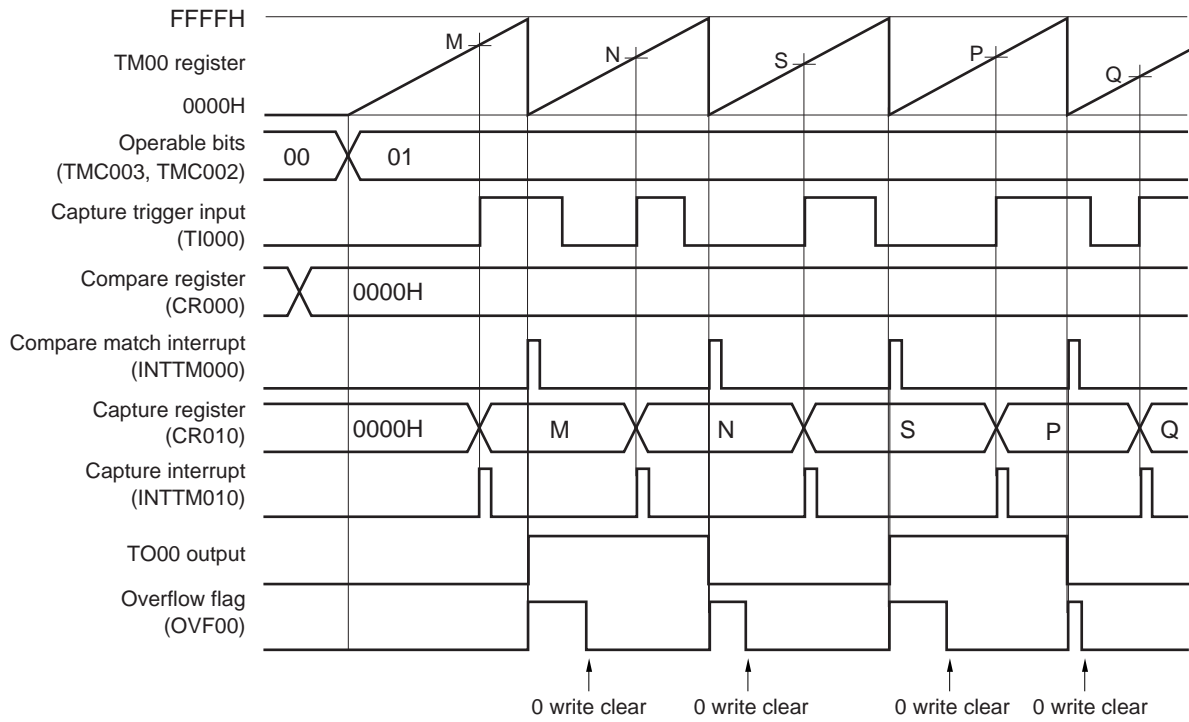• TOC00 = 13H, PRM00 = 10H, CRC00 = 04H, TMC00 = 04H




This is an application example where a compare register and a capture register are used at the same time in the free-running timer mode.

In this example, the INTTM000 signal is generated and the TO00 output is reversed each time the count value of TM00 matches the set value of CR000 (compare register). In addition, the INTTM010 signal is generated and the count value of TM00 is captured to CR010 each time the valid edge of the TI000 pin is detected.

(3) Free-running timer mode operation  
(CR000: capture register, CR010: capture register)

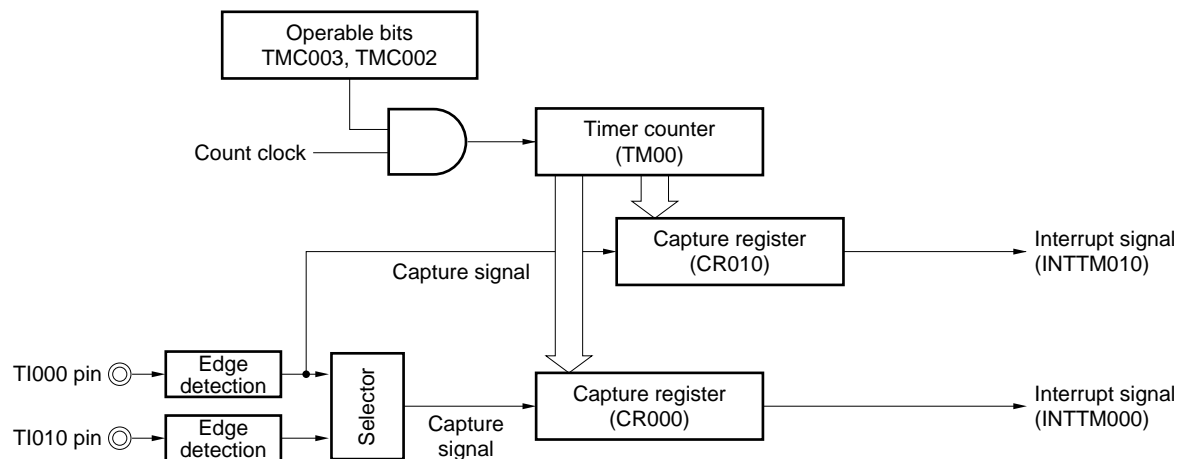Figure 6-37. Block Diagram of Free-Running Timer Mode  
(CR000: Capture Register, CR010: Capture Register)




**Remark** If both CR000 and CR010 are used as capture registers in the free-running timer mode, the TO00 output level is not inverted.

However, it can be inverted each time the valid edge of the TI000 pin is detected if bit 1 (TMC001) of 16-bit timer mode control register 00 (TMC00) is set to 1.

**Figure 6-38. Timing Example of Free-Running Timer Mode  
(CR000: Capture Register, CR010: Capture Register) (1/2)**

**(a) TOC00 = 13H, PRM00 = 50H, CRC00 = 05H, TMC00 = 04H**

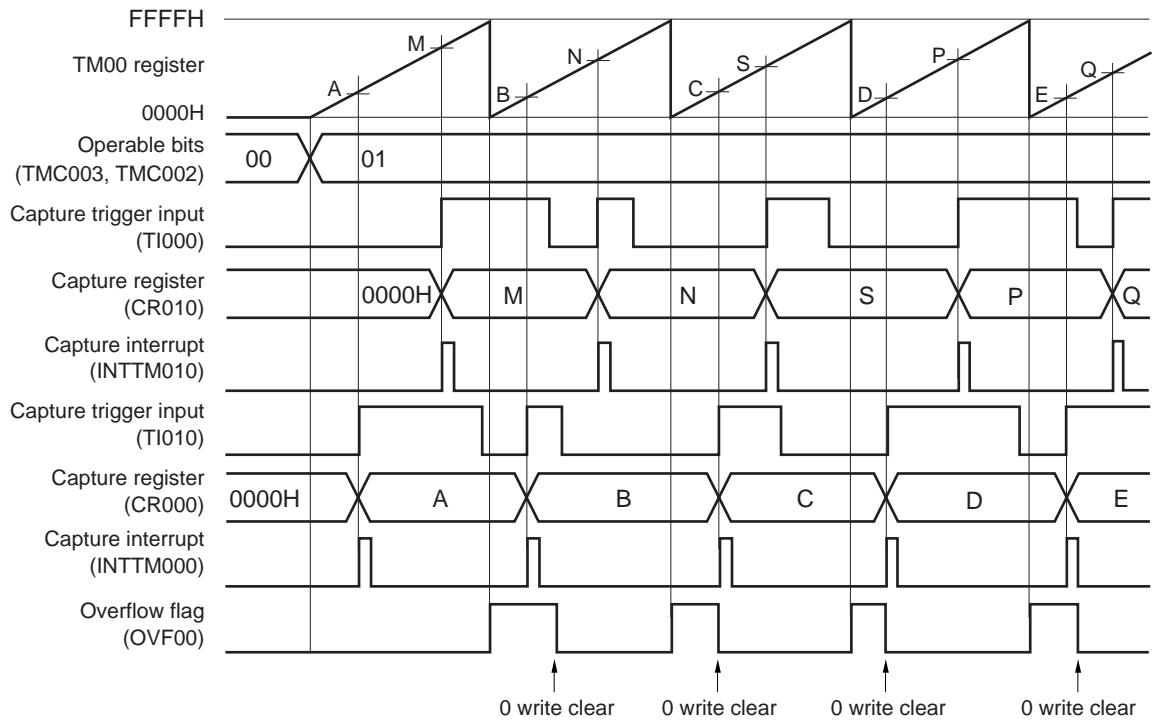


This is an application example where the count values that have been captured at the valid edges of separate capture trigger signals are stored in separate capture registers in the free-running timer mode.

The count value is captured to CR010 when the valid edge of the TI000 pin input is detected and to CR000 when the valid edge of the TI010 pin input is detected.

**Figure 6-38. Timing Example of Free-Running Timer Mode  
(CR000: Capture Register, CR010: Capture Register) (2/2)**

**(b) TOC00 = 13H, PRM00 = C0H, CRC00 = 05H, TMC00 = 04H**

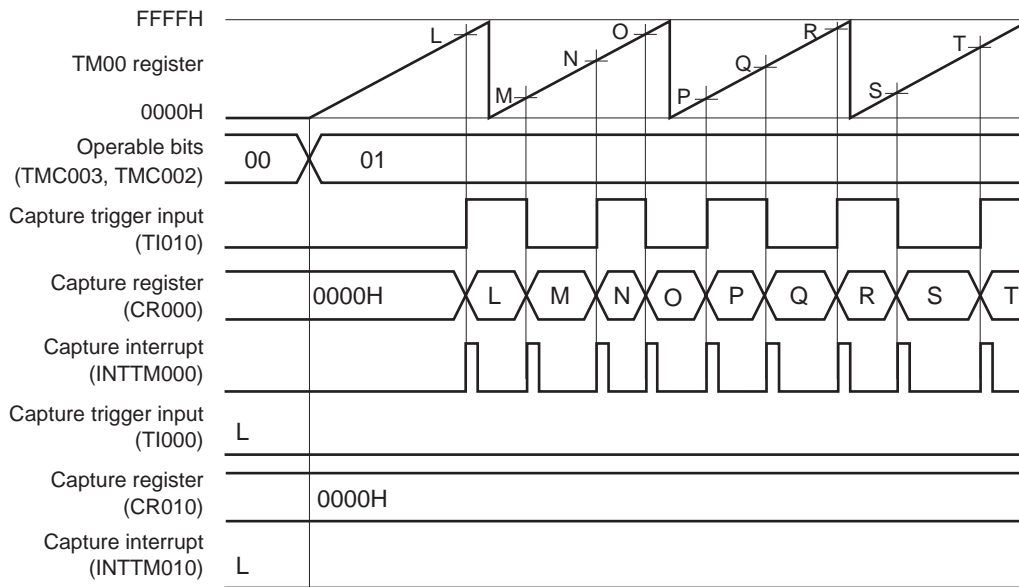

This is an application example where both the edges of the TI010 pin are detected and the count value is captured to CR000 in the free-running timer mode.

When both CR000 and CR010 are used as capture registers and when the valid edge of only the TI010 pin is to be detected, the count value cannot be captured to CR010.

Figure 6-39. Example of Register Settings in Free-Running Timer Mode (1/2)

(a) 16-bit timer mode control register 00 (TMC00)

				TMC003	TMC002	TMC001	OVF00
0	0	0	0	0	1	0/1	0

- 0: Inverts TO00 output on match between TM00 and CR000/CR010.
- 1: Inverts TO00 output on match between TM00 and CR000/CR010 and valid edge of TI000 pin.
- Free-running timer mode

(b) Capture/compare control register 00 (CRC00)

				CRC002	CRC001	CRC000
0	0	0	0	0	0/1	0/1


- 0: CR000 used as compare register
- 1: CR000 used as capture register
- 0: TI010 pin is used as capture trigger of CR000.
- 1: Reverse phase of TI000 pin is used as capture trigger of CR000.
- 0: CR010 used as compare register
- 1: CR010 used as capture register

(c) 16-bit timer output control register 00 (TOC00)

OSPT00	OSPE00	TOC004	LVS00	LVR00	TOC001	TOE00
0	0	0/1	0/1	0/1	0/1	0/1

- 0: Disables TO00 output
- 1: Enables TO00 output
- Specifies initial value of TO00 output F/F
- 00: Does not invert TO00 output on match between TM00 and CR000/CR010.
- 01: Inverts TO00 output on match between TM00 and CR000.
- 10: Inverts TO00 output on match between TM00 and CR010.
- 11: Inverts TO00 output on match between TM00 and CR000/CR010.

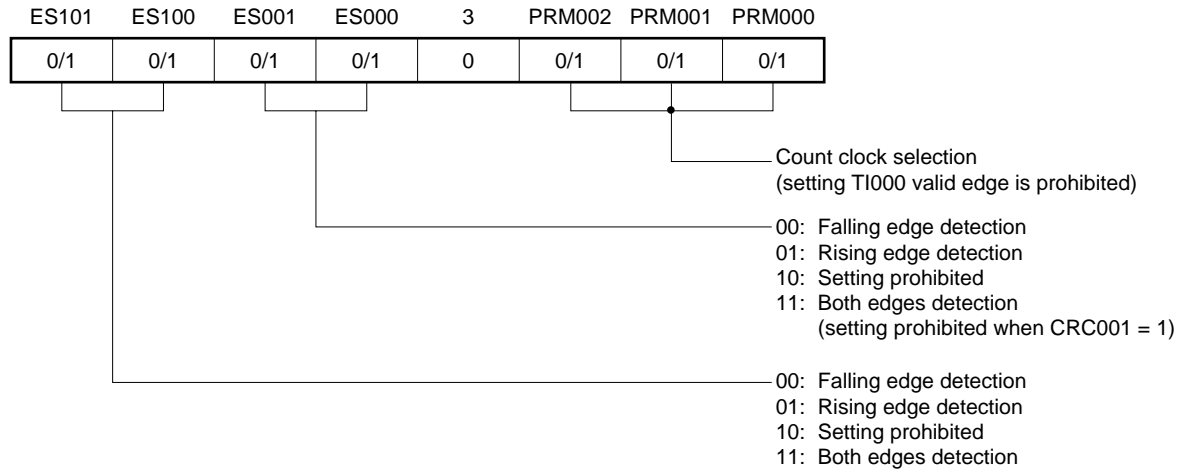Figure 6-39. Example of Register Settings in Free-Running Timer Mode (2/2)

**(d) Prescaler mode register 00 (PRM00)****(e) 16-bit timer counter 00 (TM00)**

By reading TM00, the count value can be read.

**(f) 16-bit capture/compare register 000 (CR000)**

When this register is used as a compare register and when its value matches the count value of TM00, an interrupt signal (INTTM000) is generated. The count value of TM00 is not cleared.


To use this register as a capture register, select either the TI000 or TI010 pin input as a capture trigger. When the valid edge of the capture trigger is detected, the count value of TM00 is stored in CR000.

**(g) 16-bit capture/compare register 010 (CR010)**


When this register is used as a compare register and when its value matches the count value of TM00, an interrupt signal (INTTM010) is generated. The count value of TM00 is not cleared.

When this register is used as a capture register, the TI000 pin input is used as a capture trigger. When the valid edge of the capture trigger is detected, the count value of TM00 is stored in CR010.

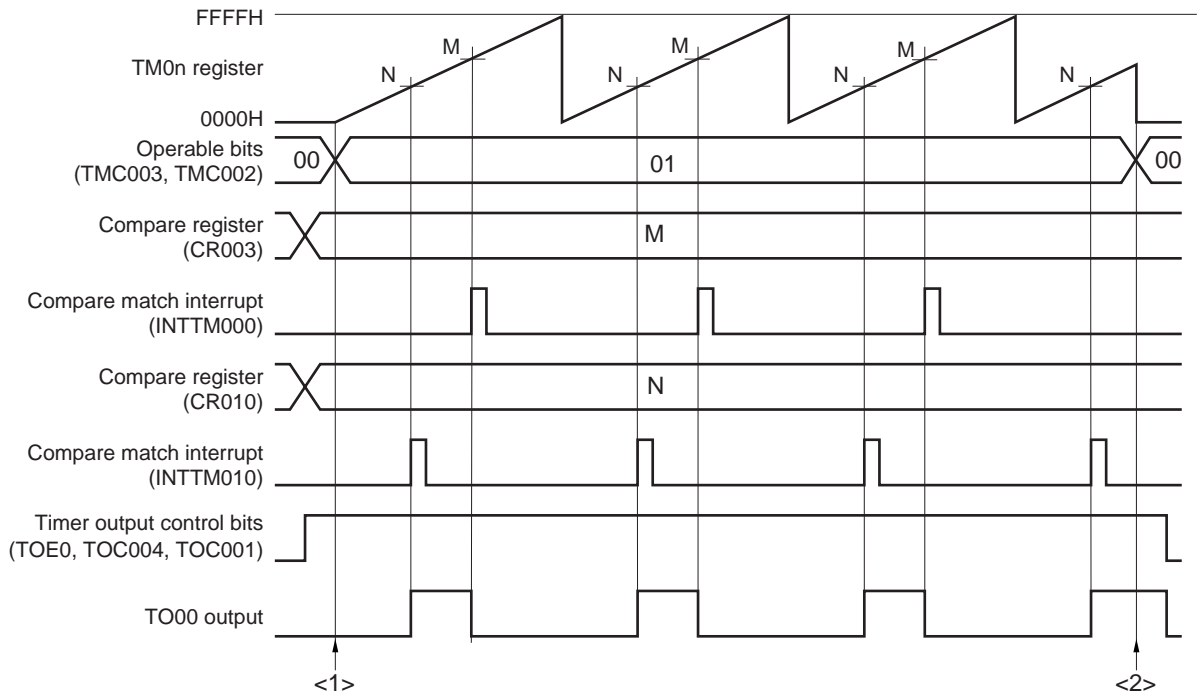
Figure 6-40. Example of Software Processing in Free-Running Timer Mode



<1> Count operation start flow

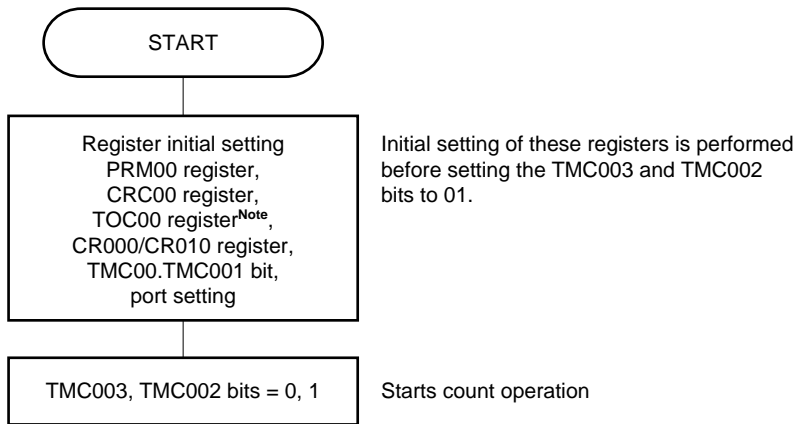

<2> Count operation stop flow

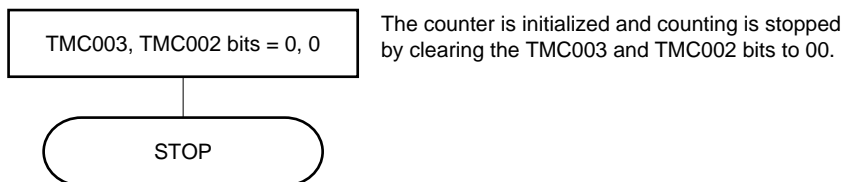

**Note** Care must be exercised when setting TOC00. For details, see 6.3 (3) 16-bit timer output control register 00 (TOC00).

### 6.4.6 PPG output operation

A square wave having a pulse width set in advance by CR010 is output from the TO00 pin as a PPG (Programmable Pulse Generator) signal during a cycle set by CR000 when bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) are set to 11 (clear & start upon a match between TM00 and CR000).

The pulse cycle and duty factor of the pulse generated as the PPG output are as follows.

- Pulse cycle = (Set value of CR000 + 1) × Count clock cycle
- Duty = (Set value of CR010 + 1) / (Set value of CR000 + 1)

**Caution** To change the duty factor (value of CR010) during operation, see 6.5.1 Rewriting CR010 during TM00 operation.

- Remarks**
1. For the setting of I/O pins, see 6.3 (6) Port mode register 3 (PM3).
  2. For how to enable the INTTM000 signal interrupt, see CHAPTER 17 INTERRUPT FUNCTIONS.

Figure 6-41. Block Diagram of PPG Output Operation

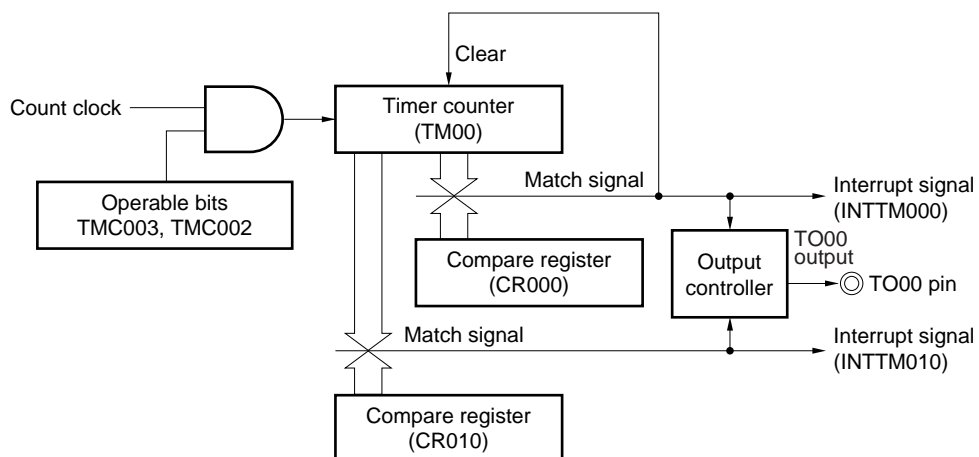
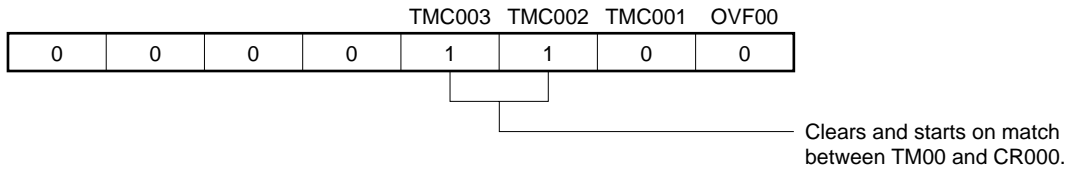


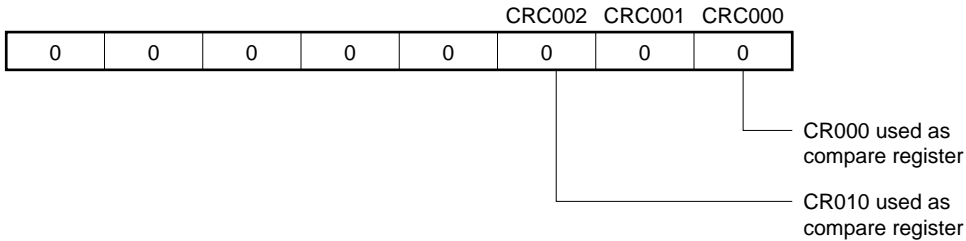


Figure 6-42. Example of Register Settings for PPG Output Operation

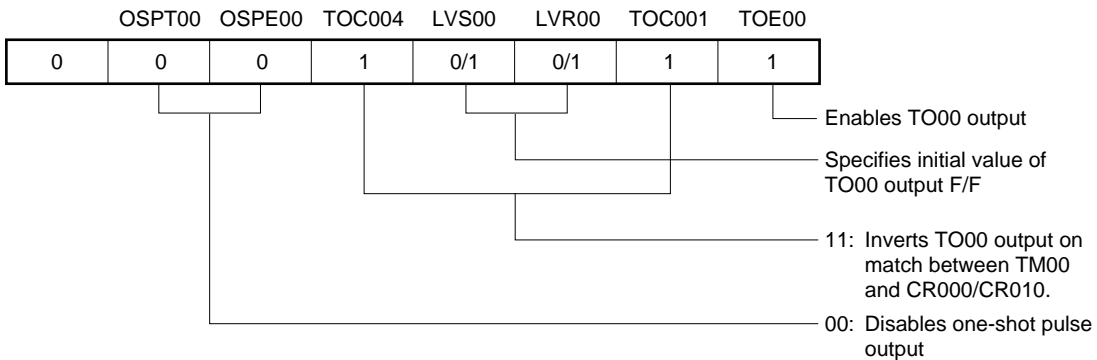
(a) 16-bit timer mode control register 00 (TMC00)




(b) Capture/compare control register 00 (CRC00)



(c) 16-bit timer output control register 00 (TOC00)



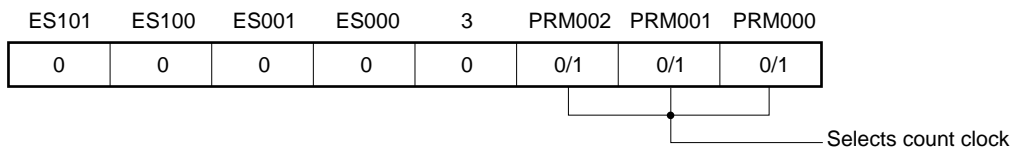(d) Prescaler mode register 00 (PRM00)



(e) 16-bit timer counter 00 (TM00)

By reading TM00, the count value can be read.

(f) 16-bit capture/compare register 000 (CR000)


An interrupt signal (INTTM000) is generated when the value of this register matches the count value of TM00. The count value of TM00 is not cleared.

(g) 16-bit capture/compare register 010 (CR010)


An interrupt signal (INTTM010) is generated when the value of this register matches the count value of TM00. The count value of TM00 is not cleared.

**Caution** Set values to CR000 and CR010 such that the condition  $0000H \leq CR010 < CR000 \leq FFFFH$  is satisfied.

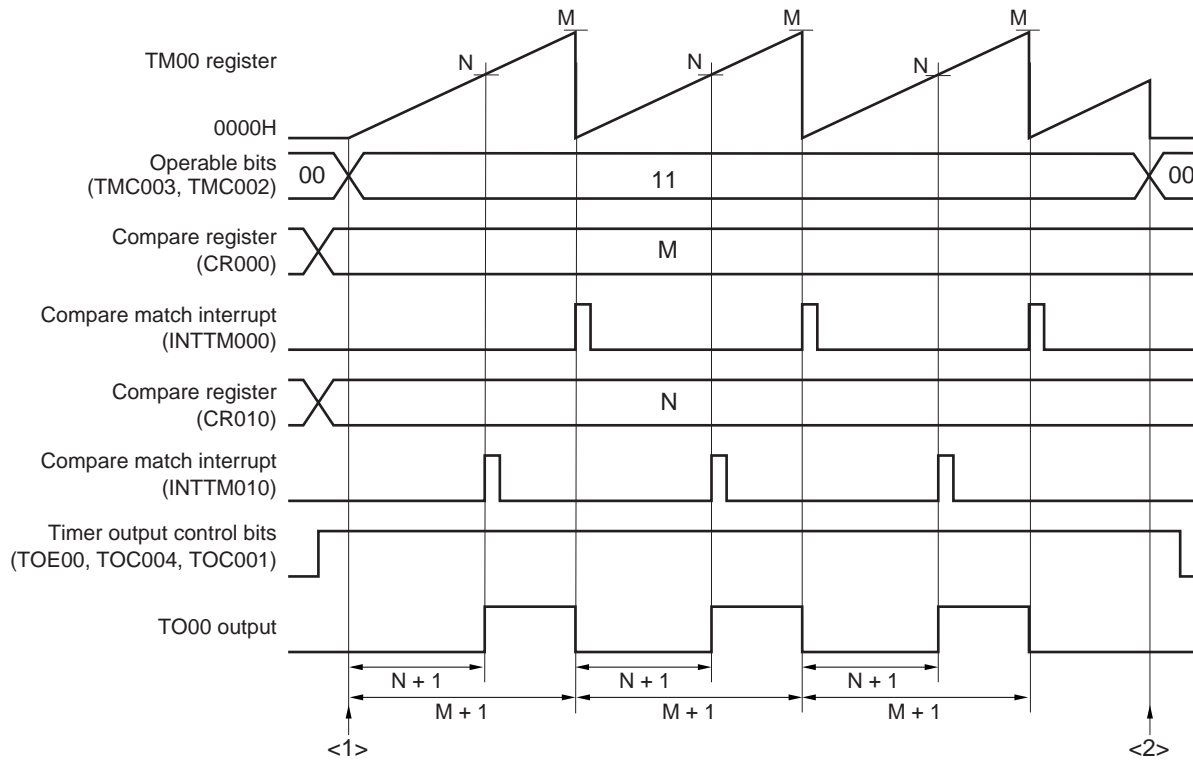
Figure 6-43. Example of Software Processing for PPG Output Operation



<1> Count operation start flow

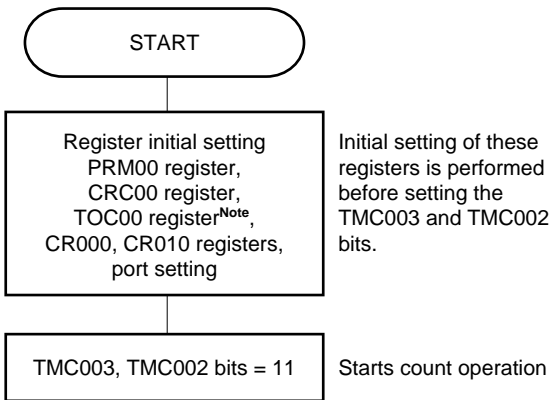

<2> Count operation stop flow

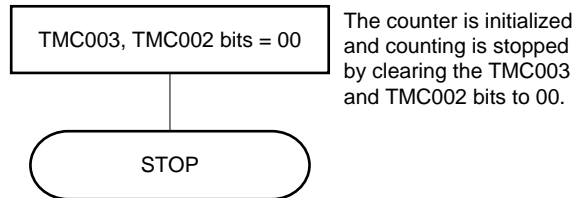

**Note** Care must be exercised when setting TOC00. For details, see 6.3 (3) 16-bit timer output control register 00 (TOC00).

**Remark** PPG pulse cycle =  $(M + 1) \times \text{Count clock cycle}$   
 PPG duty =  $(N + 1)/(M + 1)$

### 6.4.7 One-shot pulse output operation

A one-shot pulse can be output by setting bits 3 and 2 (TMC003 and TMC002) of the 16-bit timer mode control register 00 (TMC00) to 01 (free-running timer mode) or to 10 (clear & start mode entered by the TI000 pin valid edge) and setting bit 5 (OSPE00) of 16-bit timer output control register 00 (TOC00) to 1.

When bit 6 (OSPT00) of TOC00 is set to 1 or when the valid edge is input to the TI000 pin during timer operation, clearing & starting of TM00 is triggered, and a pulse of the difference between the values of CR000 and CR010 is output only once from the TO00 pin.

- Cautions**
1. Do not input the trigger again (setting OSPT00 to 1 or detecting the valid edge of the TI000 pin) while the one-shot pulse is output. To output the one-shot pulse again, generate the trigger after the current one-shot pulse output has completed.
  2. To use only the setting of OSPT00 to 1 as the trigger of one-shot pulse output, do not change the level of the TI000 pin or its alternate function port pin. Otherwise, the pulse will be unexpectedly output.

- Remarks**
1. For the setting of the I/O pins, see 6.3 (6) Port mode register 3 (PM3).
  2. For how to enable the INTTM000 signal interrupt, see CHAPTER 17 INTERRUPT FUNCTIONS.

Figure 6-44. Block Diagram of One-Shot Pulse Output Operation


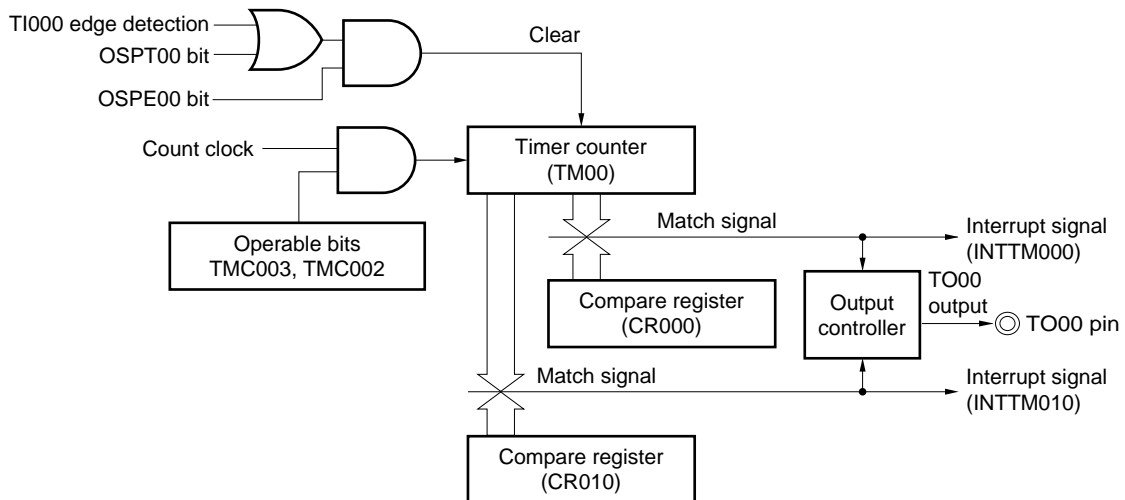



Figure 6-45. Example of Register Settings for One-Shot Pulse Output Operation (1/2)

(a) 16-bit timer mode control register 00 (TMC00)



01: Free running timer mode  
10: Clear and start mode by valid edge of T1000 pin.


(b) Capture/compare control register 00 (CRC00)



CR000 used as compare register

CR010 used as compare register

(c) 16-bit timer output control register 00 (TOC00)



Enables TO00 output


Specifies initial value of TO00 output

Inverts TO00 output on match between TM00 and CR000/CR010.

Enables one-shot pulse output

Software trigger is generated by writing 1 to this bit (operation is not affected even if 0 is written to it).

(d) Prescaler mode register 00 (PRM00)



Selects count clock

**Figure 6-45. Example of Register Settings for One-Shot Pulse Output Operation (2/2)****(e) 16-bit timer counter 00 (TM00)**

By reading TM00, the count value can be read.

**(f) 16-bit capture/compare register 000 (CR000)**


This register is used as a compare register when a one-shot pulse is output. When the value of TM00 matches that of CR000, an interrupt signal (INTTM000) is generated and the TO00 output level is inverted.

**(g) 16-bit capture/compare register 010 (CR010)**

This register is used as a compare register when a one-shot pulse is output. When the value of TM00 matches that of CR010, an interrupt signal (INTTM010) is generated and the TO00 output level is inverted.

**Caution** Do not set the same value to CR000 and CR010.

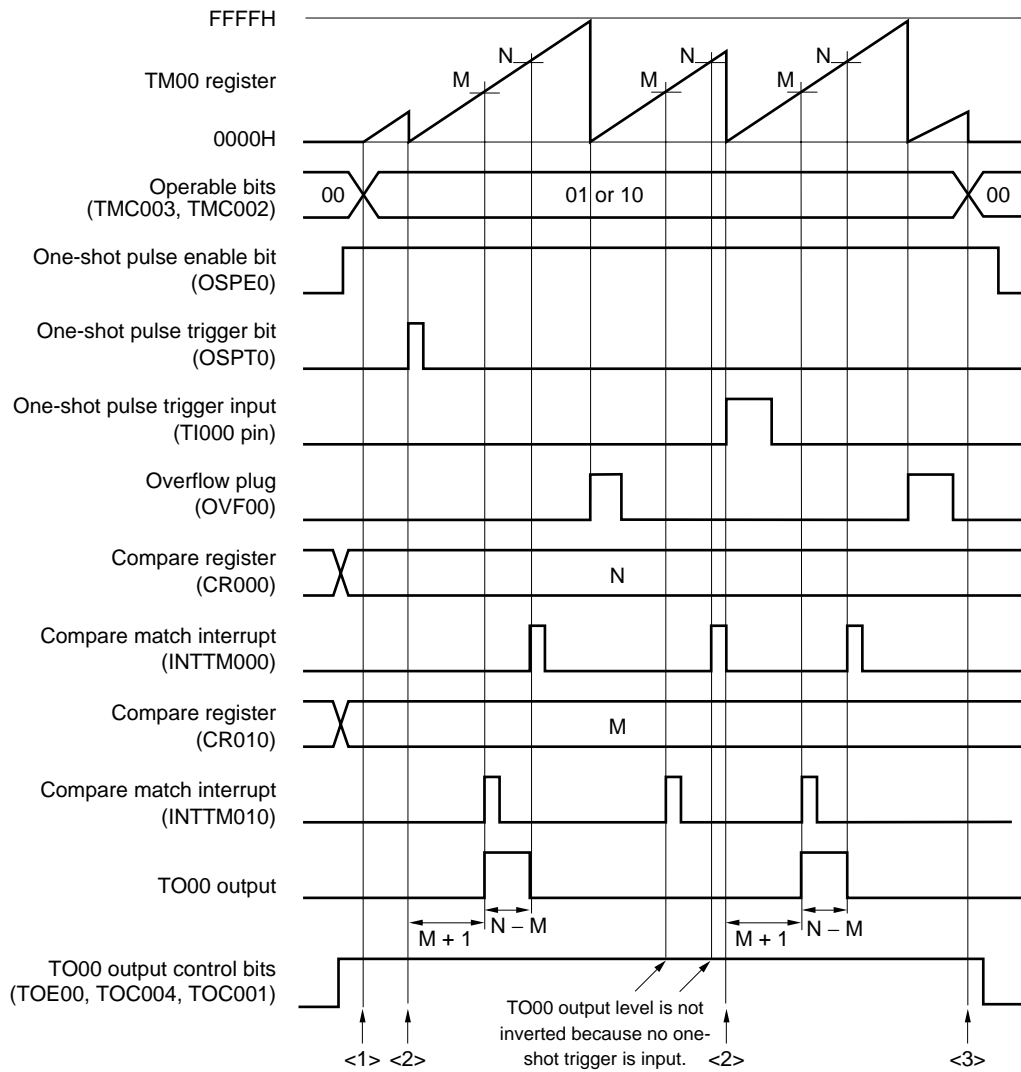
Figure 6-46. Example of Software Processing for One-Shot Pulse Output Operation (1/2)




- Time from when the one-shot pulse trigger is input until the one-shot pulse is output  
 $= (M + 1) \times \text{Count clock cycle}$
- One-shot pulse output active level width  
 $= (N - M) \times \text{Count clock cycle}$

Figure 6-46. Example of Software Processing for One-Shot Pulse Output Operation (2/2)

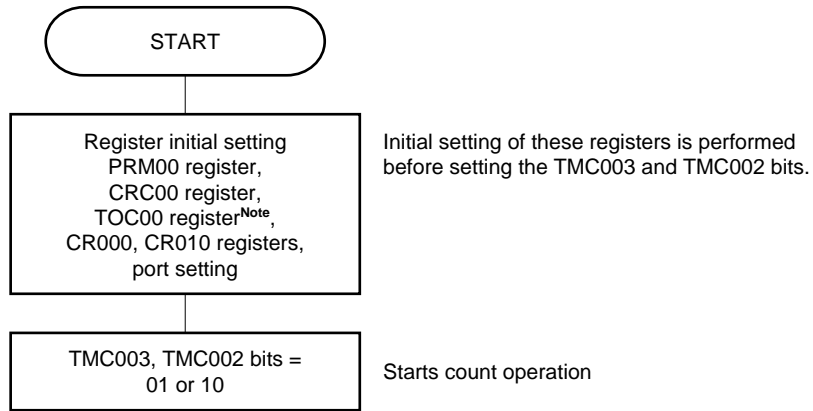
<1> Count operation start flow



<2> One-shot trigger input flow

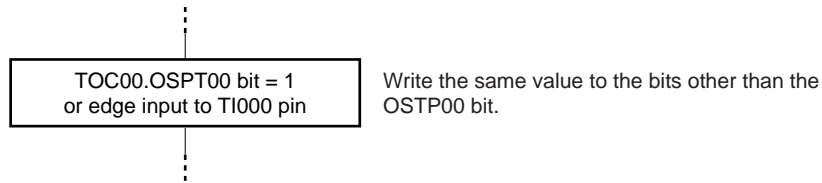

<3> Count operation stop flow

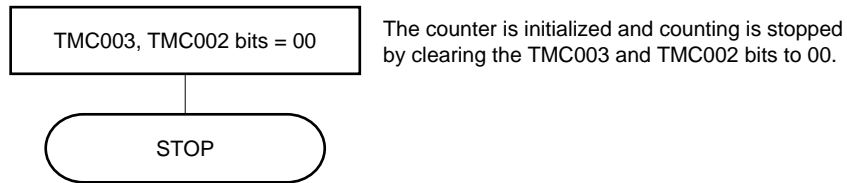

**Note** Care must be exercised when setting TOC00. For details, see **6.3 (3) 16-bit timer output control register 00 (TOC00)**.


**6.4.8 Pulse width measurement operation**

TM00 can be used to measure the pulse width of the signal input to the TI000 and TI010 pins.


Measurement can be accomplished by operating the 16-bit timer/event counter 00 in the free-running timer mode or by restarting the timer in synchronization with the signal input to the TI000 pin.

When an interrupt is generated, read the value of the valid capture register and measure the pulse width. Check bit 0 (OVF00) of 16-bit timer mode control register 00 (TMC00). If it is set (to 1), clear it to 0 by software.

**Figure 6-47. Block Diagram of Pulse Width Measurement (Free-Running Timer Mode)**

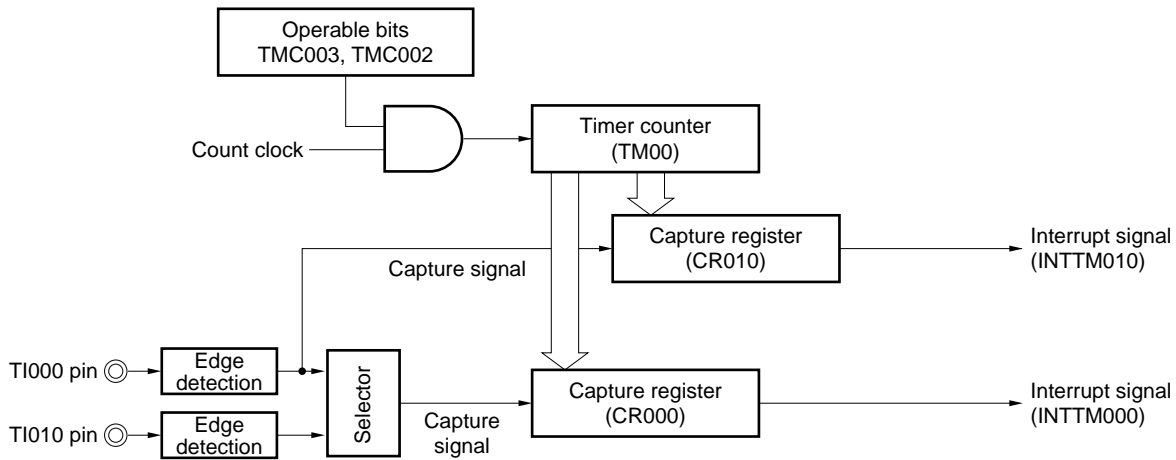

**Figure 6-48. Block Diagram of Pulse Width Measurement (Clear & Start Mode Entered by TI000 Pin Valid Edge Input)**

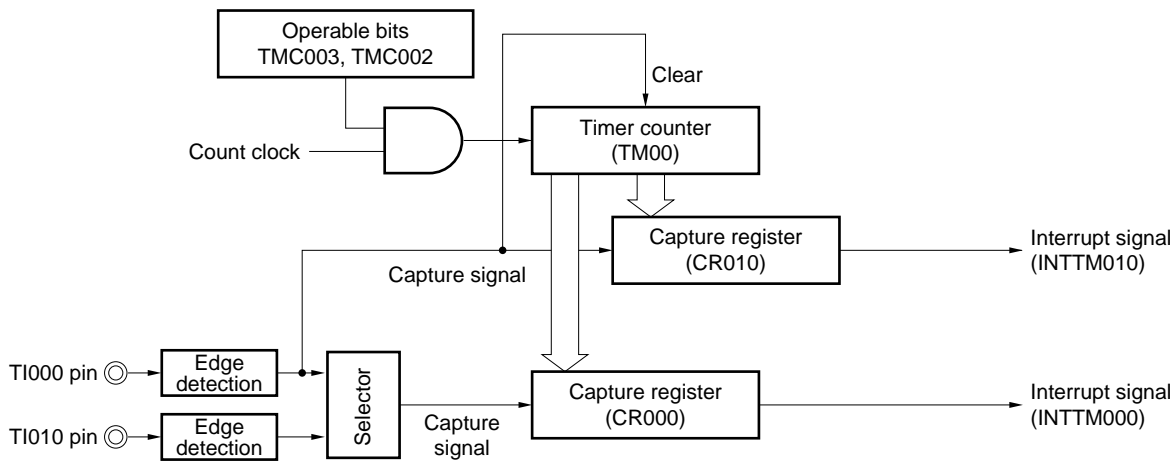



A pulse width can be measured in the following three ways.

- Measuring the pulse width by using two input signals of the TI000 and TI010 pins (free-running timer mode)
- Measuring the pulse width by using one input signal of the TI000 pin (free-running timer mode)
- Measuring the pulse width by using one input signal of the TI000 pin (clear & start mode entered by the TI000 pin valid edge input)

**Caution** Do not select the TI000 valid edge as the count clock when measuring the pulse width.

**Remarks 1.** For the setting of the I/O pins, see **6.3 (6) Port mode register 3 (PM3)**.

**2.** For how to enable the INTTM000 signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

**(1) Measuring the pulse width by using two input signals of the TI000 and TI010 pins (free-running timer mode)**


Set the free-running timer mode (TMC003 and TMC002 = 01). When the valid edge of the TI000 pin is detected, the count value of TM00 is captured to CR010. When the valid edge of the TI010 pin is detected, the count value of TM00 is captured to CR000. Specify detection of both the edges of the TI000 and TI010 pins.

By this measurement method, the previous count value is subtracted from the count value captured by the edge of each input signal. Therefore, save the previously captured value to a separate register in advance.

If an overflow occurs, the value becomes negative if the previously captured value is simply subtracted from the current captured value and, therefore, a borrow occurs (bit 0 (CY) of the program status word (PSW) is set to 1). If this happens, ignore CY and take the calculated value as the pulse width. In addition, clear bit 0 (OVF00) of 16-bit timer mode control register 00 (TMC00) to 0.

**Figure 6-49. Timing Example of Pulse Width Measurement (1)**

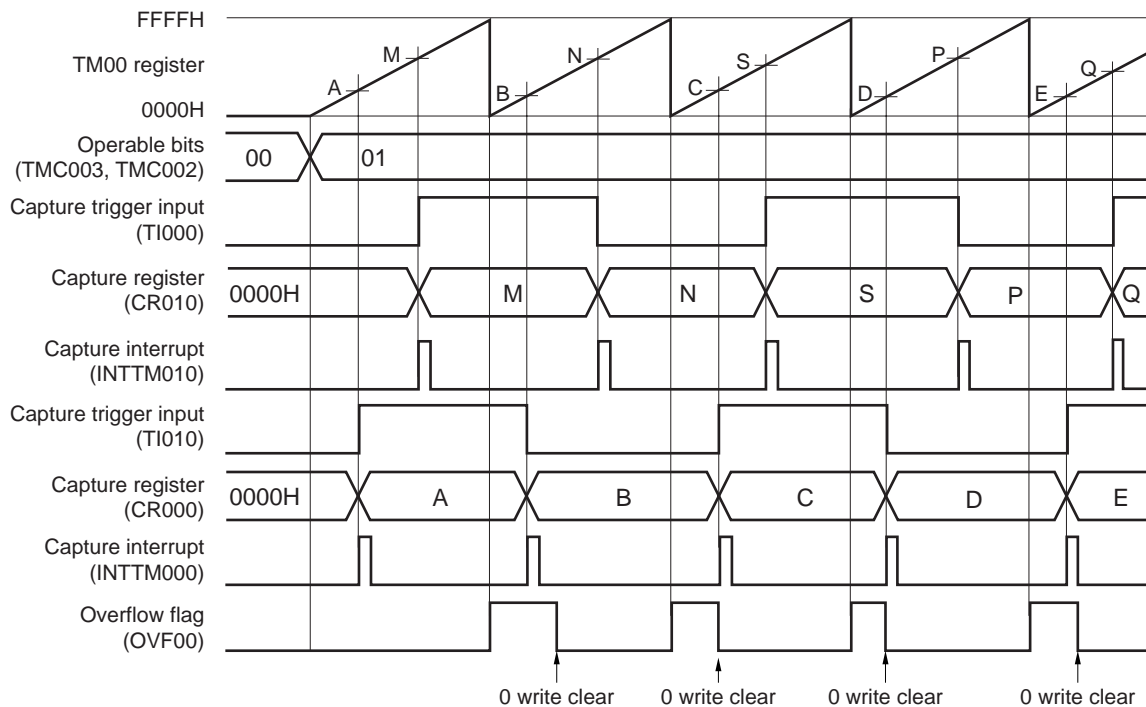• TMC00 = 04H, PRM00 = F0H, CRC00 = 05H



**(2) Measuring the pulse width by using one input signal of the TI000 pin (free-running mode)**


Set the free-running timer mode (TMC003 and TMC002 = 01). The count value of TM00 is captured to CR000 in the phase reverse to the valid edge detected on the TI000 pin. When the valid edge of the TI000 pin is detected, the count value of TM00 is captured to CR010.

By this measurement method, values are stored in separate capture registers when a width from one edge to another is measured. Therefore, the capture values do not have to be saved. By subtracting the value of one capture register from that of another, a high-level width, low-level width, and cycle are calculated.

If an overflow occurs, the value becomes negative if one captured value is simply subtracted from another and, therefore, a borrow occurs (bit 0 (CY) of the program status word (PSW) is set to 1). If this happens, ignore CY and take the calculated value as the pulse width. In addition, clear bit 0 (OVF00) of 16-bit timer mode control register 00 (TMC00) to 0.

**Figure 6-50. Timing Example of Pulse Width Measurement (2)**

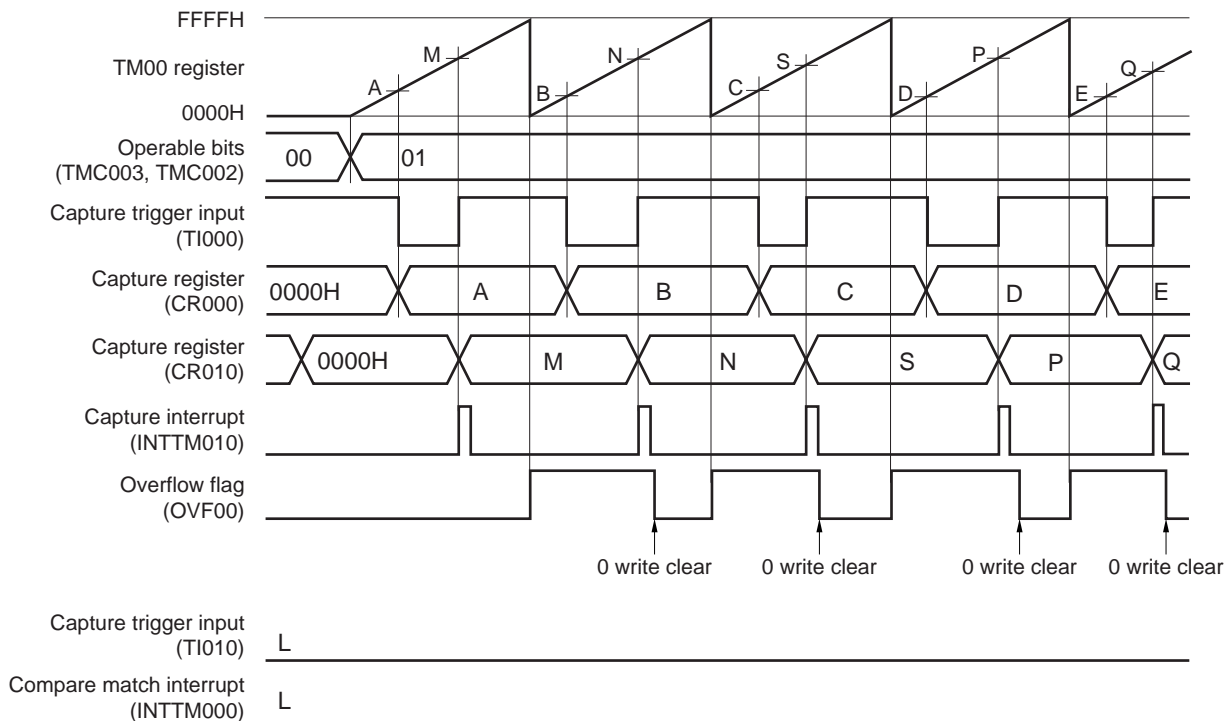• TMC00 = 04H, PRM00 = 10H, CRC00 = 07H




**(3) Measuring the pulse width by using one input signal of the TI000 pin (clear & start mode entered by the TI000 pin valid edge input)**

Set the clear & start mode entered by the TI000 pin valid edge (TMC003 and TMC002 = 10). The count value of TM00 is captured to CR000 in the phase reverse to the valid edge of the TI000 pin, and the count value of TM00 is captured to CR010 and TM00 is cleared (0000H) when the valid edge of the TI000 pin is detected. Therefore, a cycle is stored in CR010 if TM00 does not overflow.

If an overflow occurs, take the value that results from adding 10000H to the value stored in CR010 as a cycle. Clear bit 0 (OVF00) of 16-bit timer mode control register 00 (TMC00) to 0.

**Figure 6-51. Timing Example of Pulse Width Measurement (3)**

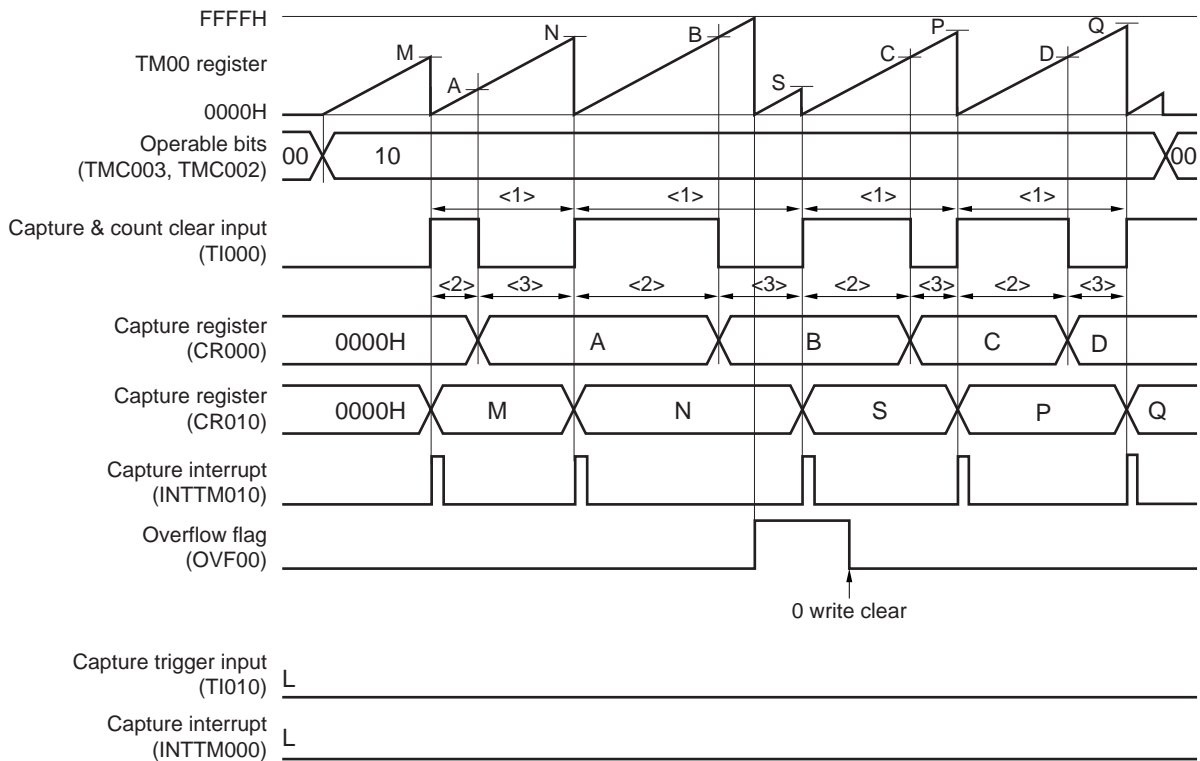
• TMC00 = 08H, PRM00 = 10H, CRC00 = 07H



- <1> Pulse cycle =  $(10000H \times \text{Number of times OVF00 bit is set to 1} + \text{Captured value of CR010}) \times \text{Count clock cycle}$
- <2> High-level pulse width =  $(10000H \times \text{Number of times OVF00 bit is set to 1} + \text{Captured value of CR000}) \times \text{Count clock cycle}$
- <3> Low-level pulse width =  $(\text{Pulse cycle} - \text{High-level pulse width})$


Figure 6-52. Example of Register Settings for Pulse Width Measurement (1/2)

(a) 16-bit timer mode control register 00 (TMC00)




01: Free running timer mode  
 10: Clear and start mode entered by valid edge of TI000 pin.

(b) Capture/compare control register 00 (CRC00)




1: CR000 used as capture register  
 0: TI010 pin is used as capture trigger of CR000.  
 1: Reverse phase of TI000 pin is used as capture trigger of CR000.  
 1: CR010 used as capture register

(c) 16-bit timer output control register 00 (TOC00)



(d) Prescaler mode register 00 (PRM00)



Selects count clock (setting valid edge of TI000 is prohibited)  
 00: Falling edge detection  
 01: Rising edge detection  
 10: Setting prohibited  
 11: Both edges detection (setting when CRC001 = 1 is prohibited)  
 00: Falling edge detection  
 01: Rising edge detection  
 10: Setting prohibited  
 11: Both edges detection

**Figure 6-52. Example of Register Settings for Pulse Width Measurement (2/2)****(e) 16-bit timer counter 00 (TM00)**

By reading TM00, the count value can be read.

**(f) 16-bit capture/compare register 000 (CR000)**


This register is used as a capture register. Either the TI000 or TI010 pin is selected as a capture trigger. When a specified edge of the capture trigger is detected, the count value of TM00 is stored in CR000.

**(g) 16-bit capture/compare register 010 (CR010)**

This register is used as a capture register. The signal input to the TI000 pin is used as a capture trigger. When the capture trigger is detected, the count value of TM00 is stored in CR010.

Figure 6-53. Example of Software Processing for Pulse Width Measurement (1/2)

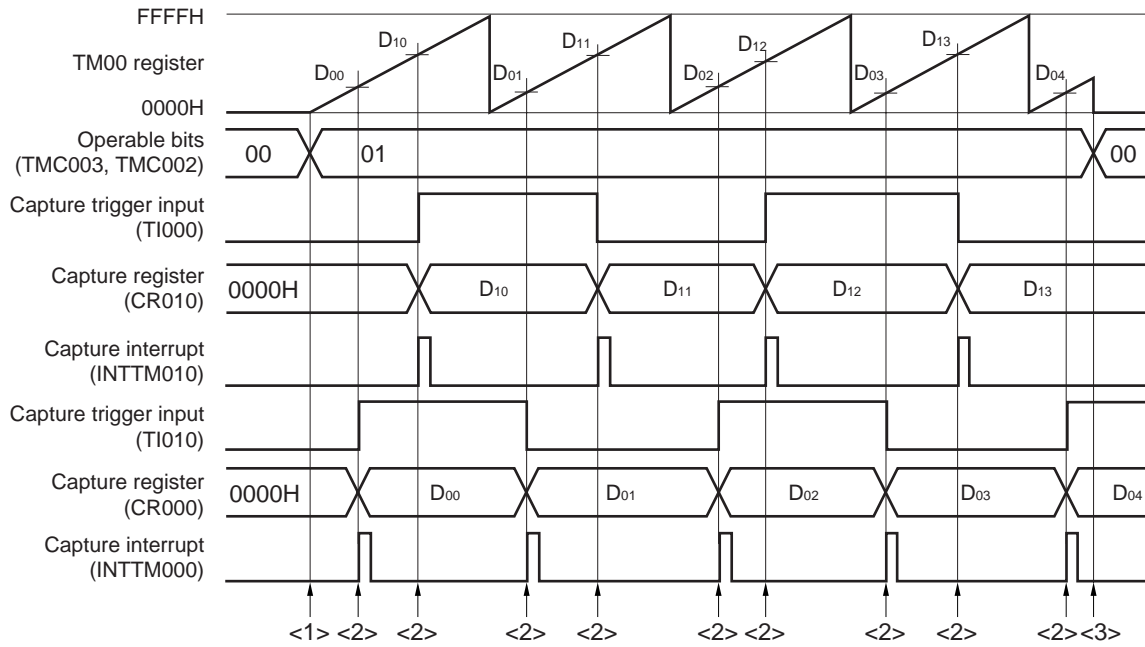(a) Example of free-running timer mode



(b) Example of clear & start mode entered by TI000 pin valid edge



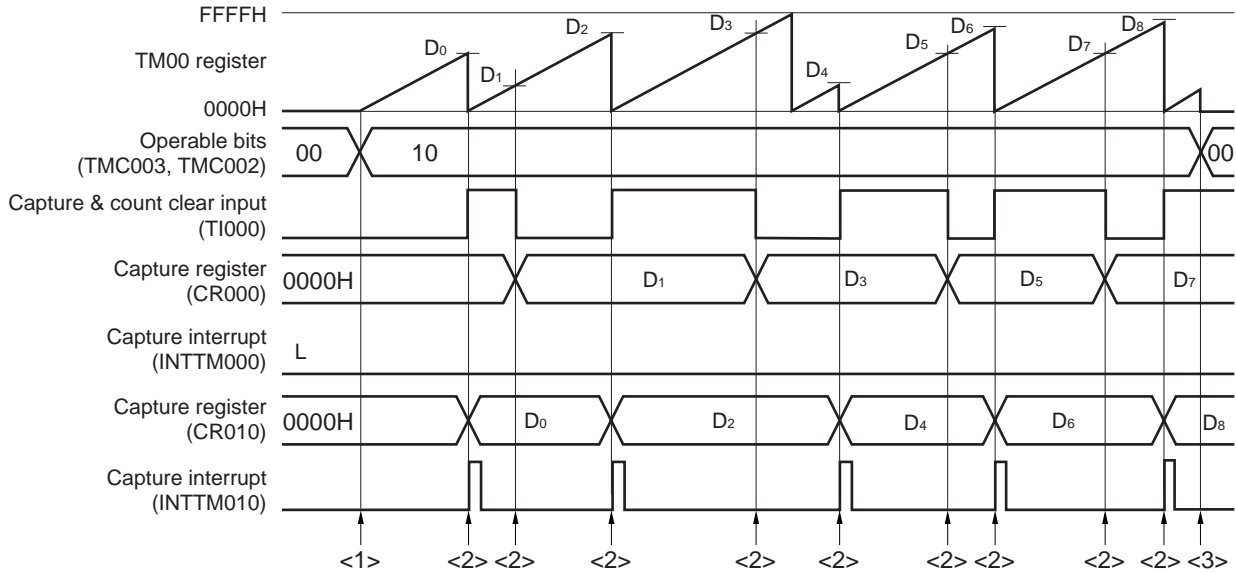


Figure 6-53. Example of Software Processing for Pulse Width Measurement (2/2)

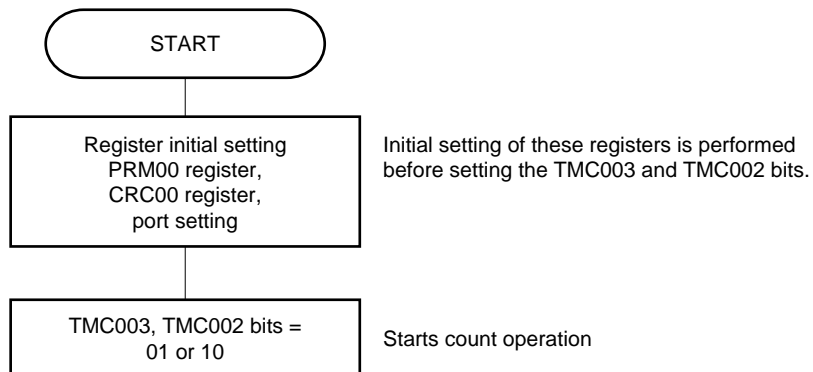
<1> Count operation start flow



<2> Capture trigger input flow

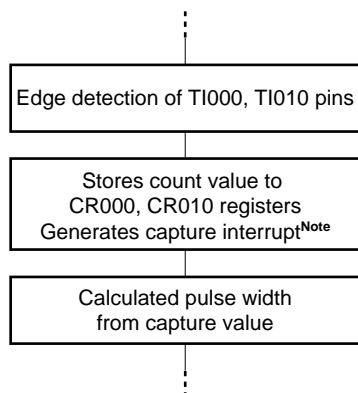

<3> Count operation stop flow

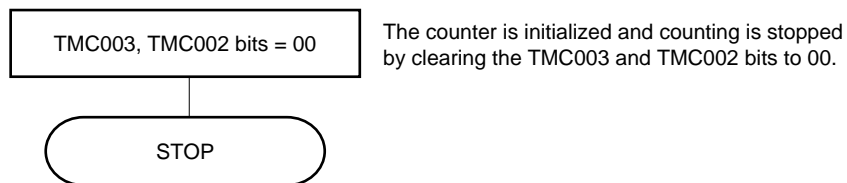

**Note** The capture interrupt signal (INTTM000) is not generated when the reverse-phase edge of the TI000 pin input is selected to the valid edge of CR000.

#### 6.4.9 External 24-bit event counter operation

16-bit timer/event counter 00 can be operated to function as an external 24-bit event counter, by connecting 16-bit timer/event counter 00 and 8-bit timer/event counter 52 in cascade, and using the external event counter function of 8-bit timer/event counter 52.

It operates as an external 24-bit event counter, by counting the number of external clock pulses input to the T152 pin via 8-bit timer counter 52 (TM52), and counting the signal which has been output upon a match between the TM52 count value and 8-bit timer compare register 52 (CR52 = FFH<sup>Note</sup>) via 16-bit timer counter 00 (TM00).

When using 16-bit timer/event counter 00 as an external 24-bit event counter, external event input enable can be controlled via 8-bit timer counter H2 output.

The valid edge of the input to the T152 pin can be specified by timer clock selection register 52 (TCL52) of 8-bit timer counter 52 (TM52). Also, input enable for TM52 external event input can be controlled via 8-bit timer counter H2 output, by setting bit 2 (ISC2) of the input switch control register (ISC) to "1".

Count operation using 8-bit timer 52 output as the count clock is started, by setting bits 2, 1, and 0 (PRM002, PRM001, and PRM000) of prescaler mode register 00 (PRM00) of 16-bit timer/event counter 00 to "1", "1", and "1" (TM52 output is selected as a count clock), and bits 3 and 2 (TMC003 and TMC002) of 16-bit timer mode control register 00 (TMC00) to "1" and "1" (count clear & start mode entered upon a match between TM00 and CR000). TM00 is cleared to "0" and an interrupt request signal (INTTM000) is generated upon a match between the TM00 count value and 16-bit timer compare register 000 (CR000) value.


Subsequently, INTTM000 is generated upon every match between the TM00 and CR000 values.

**Note** When operating 16-bit timer/event counter 00 as an external 24-bit event counter, the 8-bit timer compare register 52 (CR52) value must be set to FFH. Also, the TM52 interrupt request signal (INTTM52) must be masked (TMMK52 = 1).



Figure 6-54. Configuration Diagram of External 24-bit Event Counter

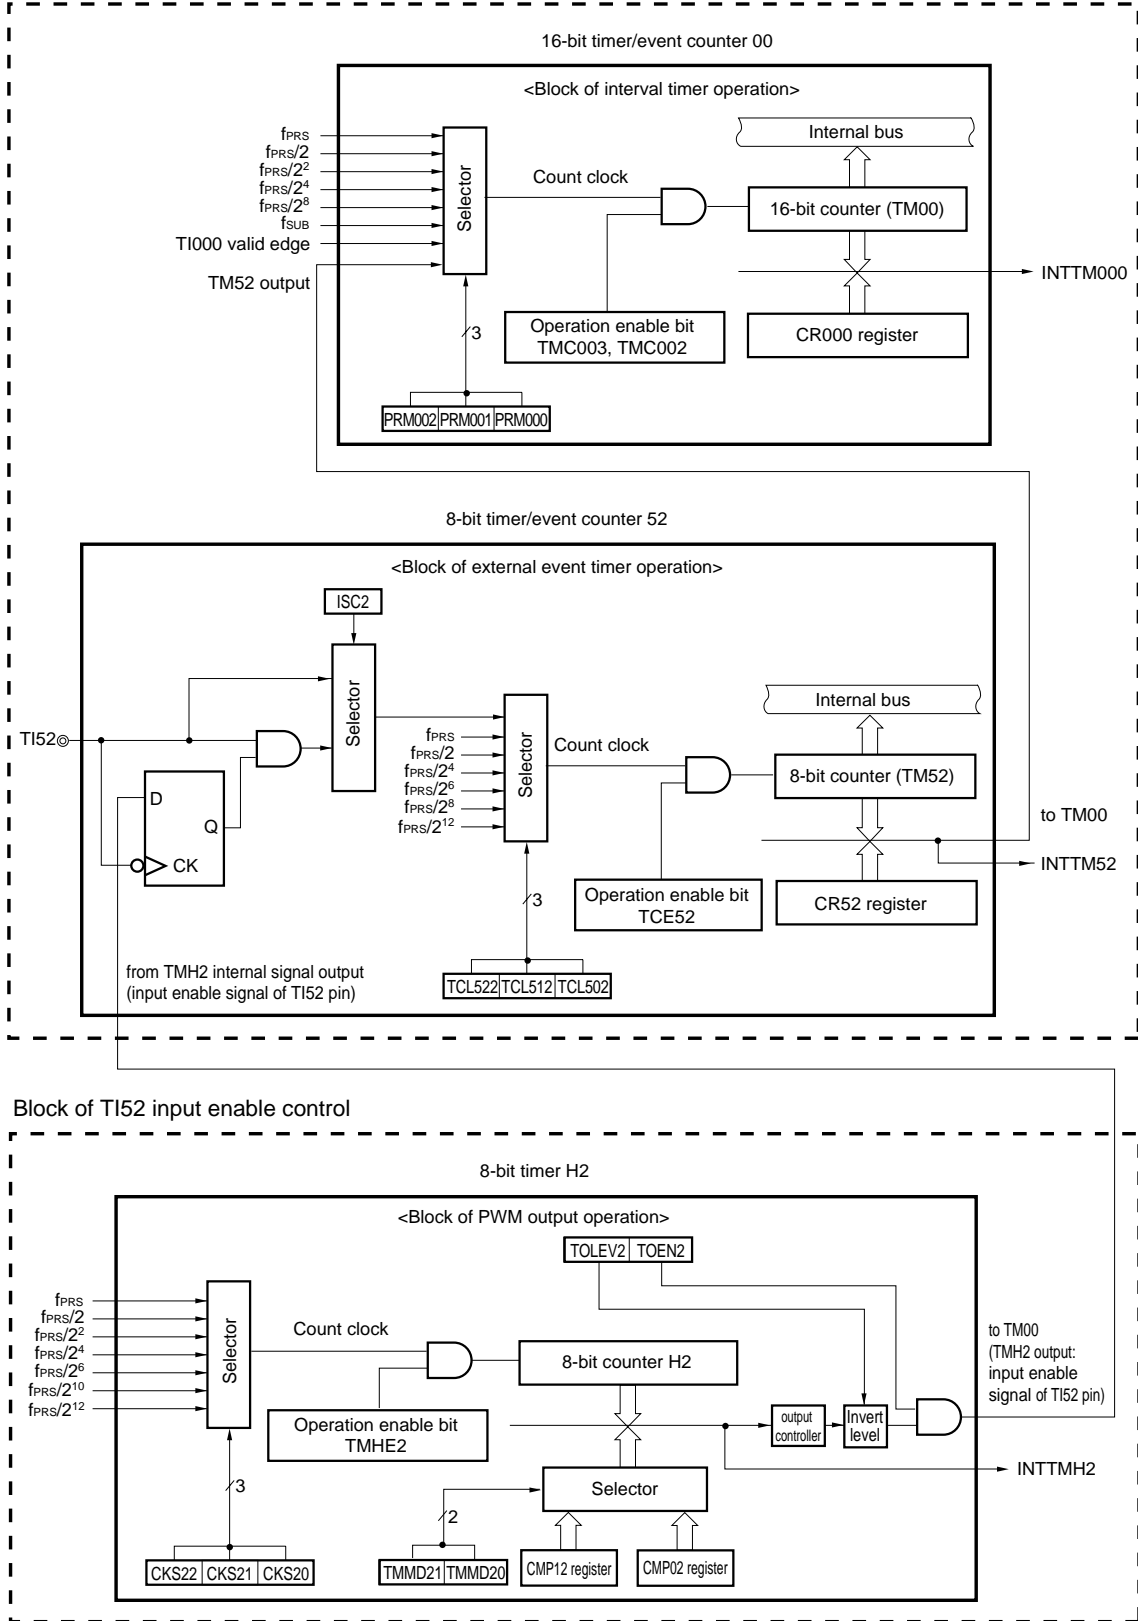Block of external 24-bit event counter



**Setting**

<1> Each mode of TM00 and TM52 is set.

(a) Set TM00 as an interval timer. Select TM52 output as the count clock.

- TMC00: Set to operation prohibited.  
(TMC00 = 00000000B)
- CRC00: Set to operation as a compare register.  
(CRC00 = 000000x0B, x = don't care)
- TOC00: Setting TO00 pin output is prohibited upon a match between CR000 and TM00  
(TOC00 = 00000000B)
- PRM00: TM52 output selected as a count clock.  
(PRM00 = 00000111B)
- CR000: Set the compare value to FFFFH.  
If the compare value is set to M, TM00 will only count up to M.
- CR010: Normally, CR010 is not used, however, a compare match interrupt (INTTM010) is generated upon a match between the CR010 setting value and TM00 value. Therefore, mask the interrupt request by using the interrupt mask flag (TMMK010).

(b) Set TM52 as an external event counter.

- TCL52: Edge selection of TI52 pin input  
Falling edge of TI52 pin → TCL52 = 00H  
Rising edge of TI52 pin → TCL52 = 01H
- CR52: Set the compare register value to FFH.
- TMC52: Count operation is stopped.  
(TMC52 = 00000000B)
- TMIF52: Clear this register.

**Caution** When operating 16-bit timer/event counter 00 as an external 24-bit event counter, INTTM52 must be masked (TMMK52 = 1). Also, the compare register 52 (CR52) value must be set to FFH.

(c) Set TMH2 to the input enable width adjust mode (PWM mode) for the TI52 pin.<sup>Note</sup>

- TMHMD2: Count operation is stopped, the count clock is selected, the mode is set to input enable width adjust mode (PWM mode), the timer output level default value is set to high level, and timer output is set to enable (TMHMD2 = 0xxx1011B, x = set based on usage conditions).
- CMP02: Compare value (N) frequency setting
- CMP12: Compare value (M) duty setting  
Remark  $00H \leq \text{CMP12 (M)} < \text{CMP02 (N)} \leq \text{FFH}$
- ISC2: Set to ISC2 = 1 (TI52 pin input enable controlled)

**Note** This setting is not required if input enable for the TI52 pin is not controlled.

<2> TM00, TM52, and TMH2 count operation is started. Timer operation must be started in accordance with the following procedure.

- (a) Start TM00 counter operation by setting the TMC003 and TMC002 bits to 1 and 1.
- (b) Start TM52 counter operation by setting TCE52 to 1.
- (c) Start TMH2 counter operation by setting TMHE2 to 1.<sup>Note</sup>

**Note** This setting is not required if input enable for the TI52 pin is not controlled.

<3> When the TM52 and CR52 (= FFH) values match, TM52 is cleared to 00, and the match signal causes TM000 to start counting up. Then, when the TM000 and CR000 values match, TM00 is cleared to 0000H, and a match interrupt signal (INTTM000) is generated.

If input enable for the TI52 pin is controlled, external event count values within the input enable periods for the TI52 pin can be measured, by reading TM52, the TM00 count value, and TMIF52 via interrupt servicing by the TMH2 interrupt request signal (INTTMH2).

**Figure 6-55. Operation Timing of External 24-bit Event Counter**


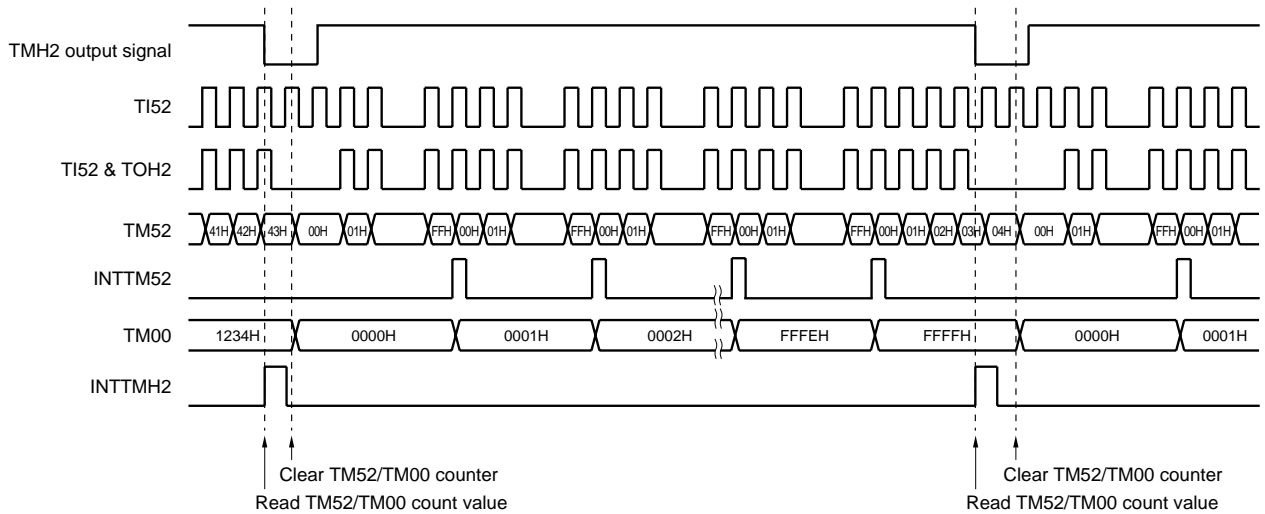


Figure 6-56. Operation Flowchart of External 24-bit Event Counter

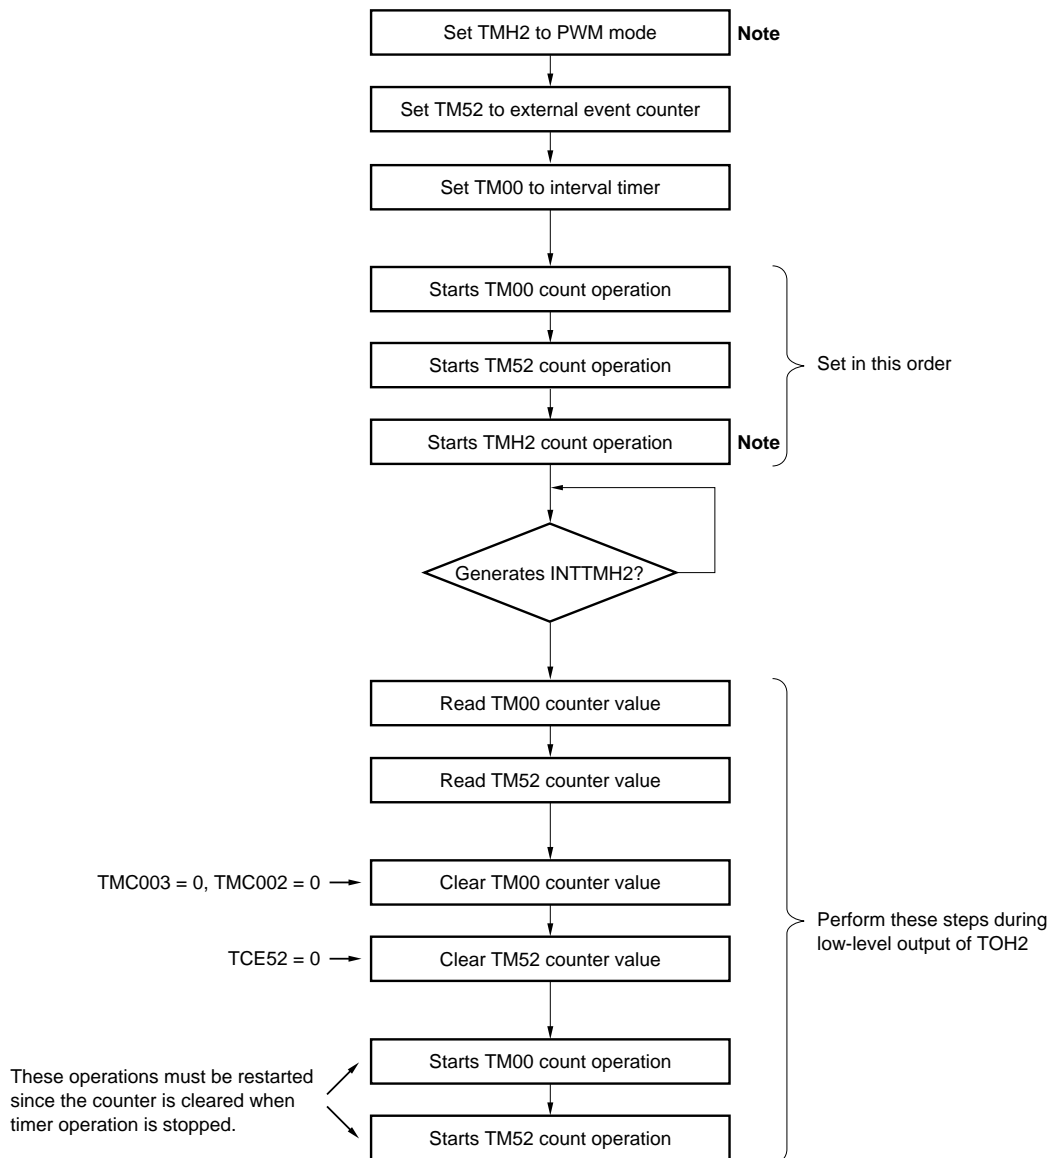

**Note** This setting is not required if input enable for the TI52 pin is not controlled.

#### 6.4.10 Cautions for external 24-bit event counter

##### (1) 8-bit timer counter H2 output signal

The output level control (default value) of 8-bit timer H2 which is used to control input enable for the TI52 pin, must be set to high level (TOLEV2 = 1). Consequently, an interrupt request signal (INTTMH2) is generated while the input enable signal to the TI52 pin is disabled (TMH2 output: low level), and the TM52 and TM00 count values (= external event count value in input enable period) can be read via servicing of this interrupt.

Note with caution that the input enable signal to the TI52 pin is at high level (enable status) until the TMH2 and CMP02 register values match, after 8-bit timer H2 operation has been enabled (TMHE2 = 1) via this setting (TOLEV2 = 1).

**(2) Cautions for input enable control for TI52 pin**

The input enable control signal (TMH2 output signal) for the TI52 pin is synchronized by the TI52 pin input clock, as described in **Figure 6-54 Configuration Diagram of External 24-bit Event Counter** and **Figure 6-55 Operation Timing of External 24-bit Event Counter**. Thus, when the counter is operated as an external event counter, an error up to one count may be caused.

**(3) Cautions for 16-bit timer/event counter 00 count up during external 24-bit event counter operation**

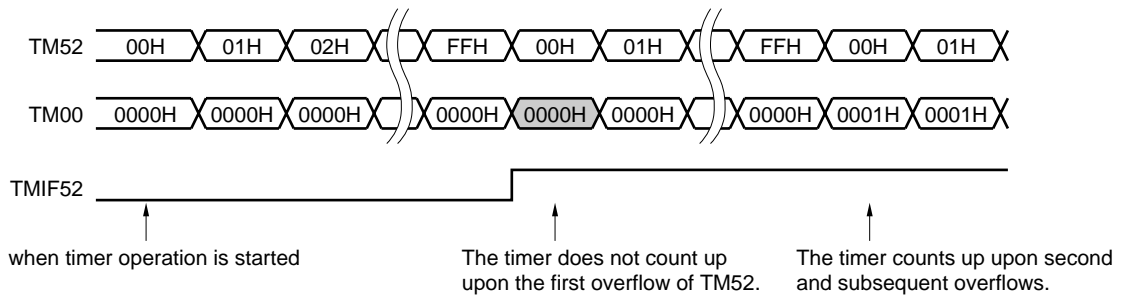
16-bit timer/event counter 00 has an internal synchronization circuit to eliminate noise when starting operation, and the first clock immediately after operation start is not counted.

When using the counter as a 24-bit counter, by setting 16-bit timer/event counter 00 and 8-bit timer/event counter 52 as the higher and lower timer and connecting them in cascade, the interrupt request flag of 8-bit timer/event counter 52 which is the lower timer must be checked as described below, in order to accurately read the 24-bit count values.


- If TMIF52 = 1 when TM52 and TM00 are read:  
The actual TM00 count value is "read value of TM00 + 1".
- If TMIF52 = 0 when TM52 and TM00 are read:  
The read value is the correct value.

This phenomenon of 16-bit timer/event counter 00 occurs only when operation is started. A count delay will not occur when 16-bit timer/event counter 00 overflows and the count is restarted from 0000H, since synchronization has already been implemented.

<When starting operation>



<Overflow of higher timer>

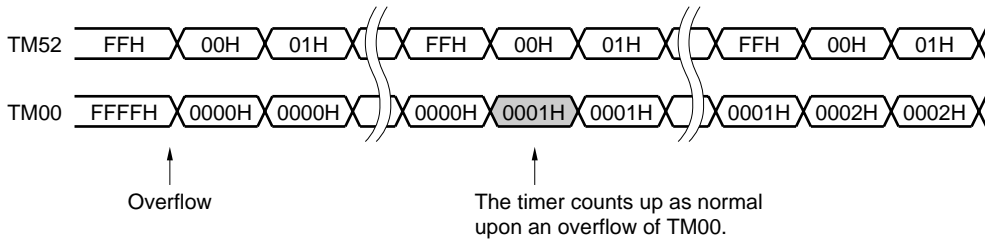

## 6.5 Special Use of TM00

### 6.5.1 Rewriting CR010 during TM00 operation

In principle, rewriting CR000 and CR010 of the 78K0/LC3 when they are used as compare registers is prohibited while TM00 is operating (TMC003 and TMC002 = other than 00).

However, the value of CR010 can be changed, even while TM00 is operating, using the following procedure if CR010 is used for PPG output and the duty factor is changed (when setting CR010 to a smaller or larger value than the current value, rewrite the CR010 value immediately after a match between CR010 and TM00 or between CR000 and TM00. When CR010 is rewritten immediately before a match between CR010 and TM00 or between CR000 and TM00, an unexpected operation may be performed).

#### Procedure for changing value of CR010

- <1> Disable interrupt INTTM010 (TMMK010 = 1).
- <2> Disable reversal of the timer output when the value of TM00 matches that of CR010 (TOC004 = 0).
- <3> Change the value of CR010.
- <4> Wait for one cycle of the count clock of TM00.
- <5> Enable reversal of the timer output when the value of TM00 matches that of CR010 (TOC004 = 1).
- <6> Clear the interrupt flag of INTTM010 (TMIF010 = 0) to 0.
- <7> Enable interrupt INTTM010 (TMMK010 = 0).

**Remark** For TMIF010 and TMMK010, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

### 6.5.2 Setting LVS00 and LVR00

#### (1) Usage of LVS00 and LVR00


LVS00 and LVR00 are used to set the default value of the TO00 output and to invert the timer output without enabling the timer operation (TMC003 and TMC002 = 00). Clear LVS00 and LVR00 to 00 (default value: low-level output) when software control is unnecessary.

LVS00	LVR00	Timer Output Status
0	0	Not changed (low-level output)
0	1	Cleared (low-level output)
1	0	Set (high-level output)
1	1	Setting prohibited

**(2) Setting LVS00 and LVR00**


Set LVS00 and LVR00 using the following procedure.

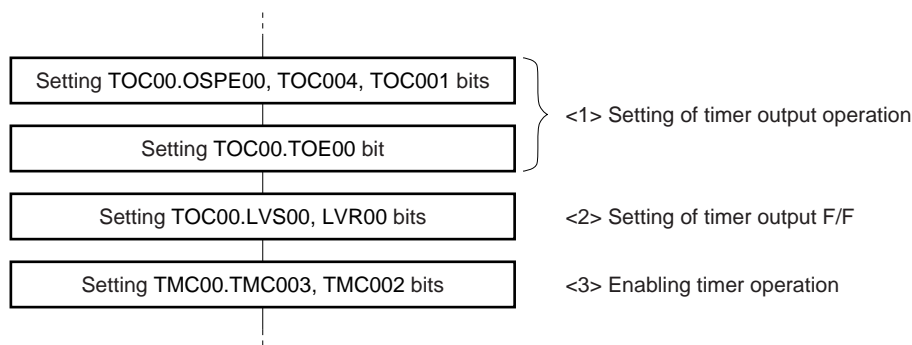**Figure 6-57. Example of Flow for Setting LVS00 and LVR00 Bits**



**Caution** Be sure to set LVS00 and LVR00 following steps <1>, <2>, and <3> above. Step <2> can be performed after <1> and before <3>.

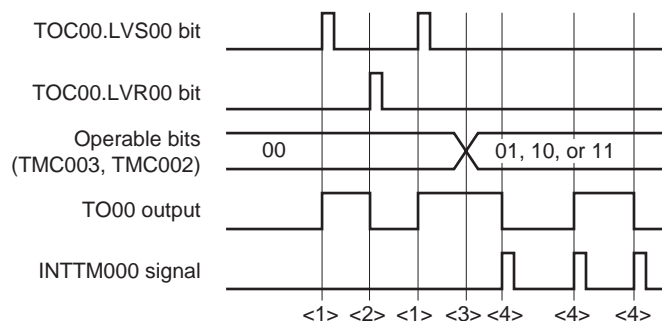**Figure 6-58. Timing Example of LVR00 and LVS00**



- <1> The TO00 output goes high when LVS00 and LVR00 = 10.
- <2> The TO00 output goes low when LVS00 and LVR00 = 01 (the pin output remains unchanged from the high level even if LVS00 and LVR00 are cleared to 00).
- <3> The timer starts operating when TMC003 and TMC002 are set to 01, 10, or 11. Because LVS00 and LVR00 were set to 10 before the operation was started, the TO00 output starts from the high level. After the timer starts operating, setting LVS00 and LVR00 is prohibited until TMC003 and TMC002 = 00 (disabling the timer operation).
- <4> The TO00 output level is inverted each time an interrupt signal (INTTM000) is generated.

## 6.6 Cautions for 16-Bit Timer/Event Counter 00

### (1) Restrictions for each channel of 16-bit timer/event counter 00

Table 6-3 shows the restrictions for each channel.


**Table 6-3. Restrictions for Each Channel of 16-Bit Timer/Event Counter 00**

Operation	Restriction
As interval timer	-
As square wave output	
As external event counter	
As clear & start mode entered by TI000 pin valid edge input	Using timer output (TO00) is prohibited when detection of the valid edge of the TI010 pin is used. (TOC00 = 00H)
As free-running timer	-
As PPG output	$0000H \leq CR010 < CR000 \leq FFFFH$
As one-shot pulse output	Setting the same value to CR000 and CR010 is prohibited.
As pulse width measurement	Using timer output (TO00) is prohibited (TOC00 = 00H)

### (2) Timer start errors

An error of up to one clock may occur in the time required for a match signal to be generated after timer start. This is because counting TM00 is started asynchronously to the count pulse.

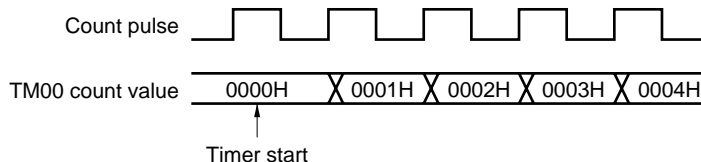**Figure 6-59. Start Timing of TM00 Count**



### (3) Setting of CR000 and CR010 (clear & start mode entered upon a match between TM00 and CR000)

Set a value other than 0000H to CR000 and CR010 (TM00 cannot count one pulse when it is used as an external event counter).




**(4) Timing of holding data by capture register**

- (a) When the valid edge is input to the TI000/TI010 pin and the reverse phase of the TI000 pin is detected while CR000/CR010 is read, CR010 performs a capture operation but the read value of CR000/CR010 is not guaranteed. At this time, an interrupt signal (INTTM000/INTTM010) is generated when the valid edge of the TI000/TI010 pin is detected (the interrupt signal is not generated when the reverse-phase edge of the TI000 pin is detected).

When the count value is captured because the valid edge of the TI000/TI010 pin was detected, read the value of CR000/CR010 after INTTM000/INTTM010 is generated.

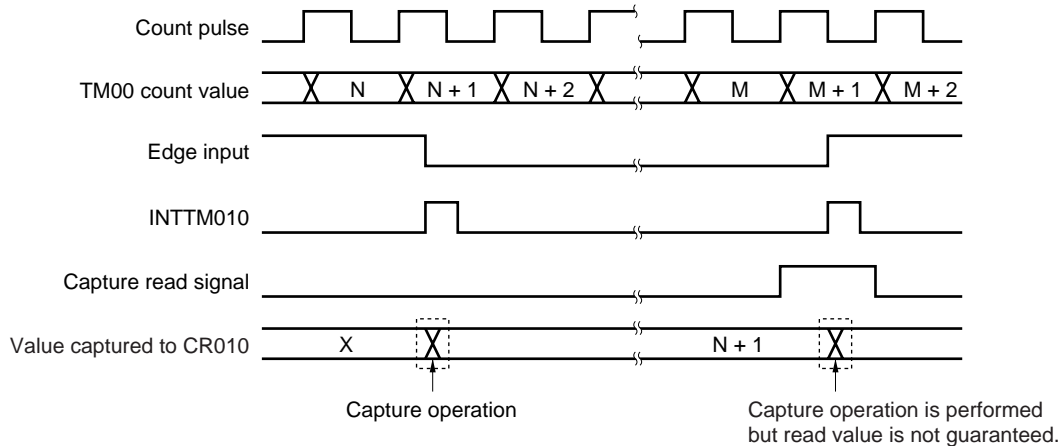**Figure 6-60. Timing of Holding Data by Capture Register**



- (b) The values of CR000 and CR010 are not guaranteed after 16-bit timer/event counter 00 stops.

**(5) Setting valid edge**

Set the valid edge of the TI000 pin while the timer operation is stopped (TMC003 and TMC002 = 00). Set the valid edge by using ES000 and ES001.

**(6) Re-triggering one-shot pulse**

Make sure that the trigger is not generated while an active level is being output in the one-shot pulse output mode. Be sure to input the next trigger after the current active level is output.

**(7) Operation of OVF00 flag****(a) Setting OVF00 flag (1)**

The OVF00 flag is set to 1 in the following case, as well as when TM00 overflows.

Select the clear & start mode entered upon a match between TM00 and CR000.


↓

Set CR000 to FFFFH.

↓

When TM00 matches CR000 and TM00 is cleared from FFFFH to 0000H

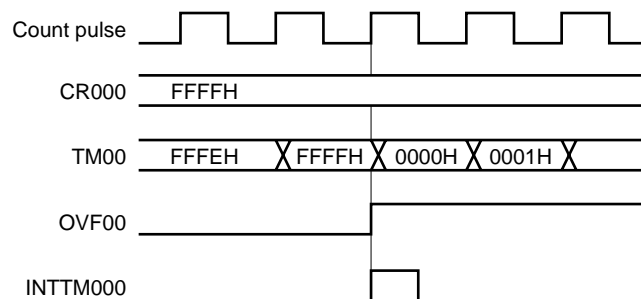**Figure 6-61. Operation Timing of OVF00 Flag**

**(b) Clearing OVF00 flag**

Even if the OVF00 flag is cleared to 0 after TM00 overflows and before the next count clock is counted (before the value of TM00 becomes 0001H), it is set to 1 again and clearing is invalid.

**(8) One-shot pulse output**

One-shot pulse output operates correctly in the free-running timer mode or the clear & start mode entered by the TI000 pin valid edge. The one-shot pulse cannot be output in the clear & start mode entered upon a match between TM00 and CR000.

**(9) Capture operation****(a) When valid edge of TI000 is specified as count clock**

When the valid edge of TI000 is specified as the count clock, the capture register for which TI000 is specified as a trigger does not operate correctly.

**(b) Pulse width to accurately capture value by signals input to TI010 and TI000 pins**

To accurately capture the count value, the pulse input to the TI000 and TI010 pins as a capture trigger must be wider than two count clocks selected by PRM00 (see **Figure 6-7**).

**(c) Generation of interrupt signal**

The capture operation is performed at the falling edge of the count clock but the interrupt signals (INTTM000 and INTTM010) are generated at the rising edge of the next count clock (see **Figure 6-7**).

**(d) Note when CRC001 (bit 1 of capture/compare control register 00 (CRC00)) is set to 1**

When the count value of the TM00 register is captured to the CR000 register in the phase reverse to the signal input to the TI000 pin, the interrupt signal (INTTM000) is not generated after the count value is captured. If the valid edge is detected on the TI010 pin during this operation, the capture operation is not performed but the INTTM000 signal is generated as an external interrupt signal. Mask the INTTM000 signal when the external interrupt is not used.

**(10) Edge detection****(a) Specifying valid edge after reset**

If the operation of the 16-bit timer/event counter 00 is enabled after reset and while the TI000 or TI010 pin is at high level and when the rising edge or both the edges are specified as the valid edge of the TI000 or TI010 pin, then the high level of the TI000 or TI010 pin is detected as the rising edge. Note this when the TI000 or TI010 pin is pulled up. However, the rising edge is not detected when the operation is once stopped and then enabled again.

**(b) Sampling clock for eliminating noise**

The sampling clock for eliminating noise differs depending on whether the valid edge of TI000 is used as the count clock or capture trigger. In the former case, the sampling clock is fixed to  $f_{PRS}$ . In the latter, the count clock selected by PRM00 is used for sampling.

When the signal input to the TI000 pin is sampled and the valid level is detected two times in a row, the valid edge is detected. Therefore, noise having a short pulse width can be eliminated (see **Figure 6-7**).

**(11) Timer operation**

The signal input to the TI000/TI010 pin is not acknowledged while the timer is stopped, regardless of the operation mode of the CPU.

**Remark**  $f_{PRS}$ : Peripheral hardware clock frequency

## CHAPTER 7 8-BIT TIMER/EVENT COUNTERS 50, 51, AND 52

### 7.1 Functions of 8-Bit Timer/Event Counters 50, 51, and 52

8-bit timer/event counters 50, 51 and 52 have the following functions.

- Interval timer
- External event counter<sup>Note</sup>

**Note** TM52 only. TM52 and TM00 can be connected in cascade to be used as an external 24-bit event counter. Also, the external event input of TM52 can be input enable-controlled via TMH2. For detail, see **CHAPTER 6 16-BIT TIMER/EVENT COUNTER 00**.

### 7.2 Configuration of 8-Bit Timer/Event Counters 50, 51, and 52

8-bit timer/event counters 50, 51, and 52 include the following hardware.

**Table 7-1. Configuration of 8-Bit Timer/Event Counters 50, 51, and 52**

Item	Configuration
Timer register	8-bit timer counter 5n (TM5n)
Register	8-bit timer compare register 5n (CR5n)
Timer input	TI5n
Control registers	Timer clock selection register 5n (TCL5n) 8-bit timer mode control register 5n (TMC5n) Input switch control register (ISC) Port mode register 3 (PM3) Port register 3 (P3)

**Remark** n = 0 to 2

Figures 7-1 to 7-3 show the block diagrams of 8-bit timer/event counters 50, 51, and 52.

Figure 7-1. Block Diagram of 8-Bit Timer/Event Counter 50

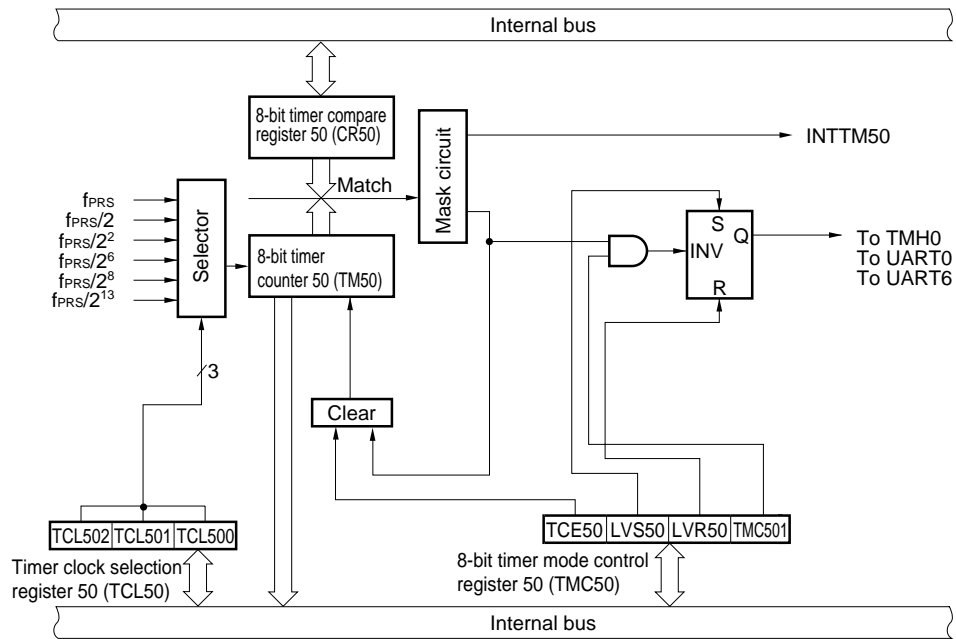


Figure 7-2. Block Diagram of 8-Bit Timer/Event Counter 51


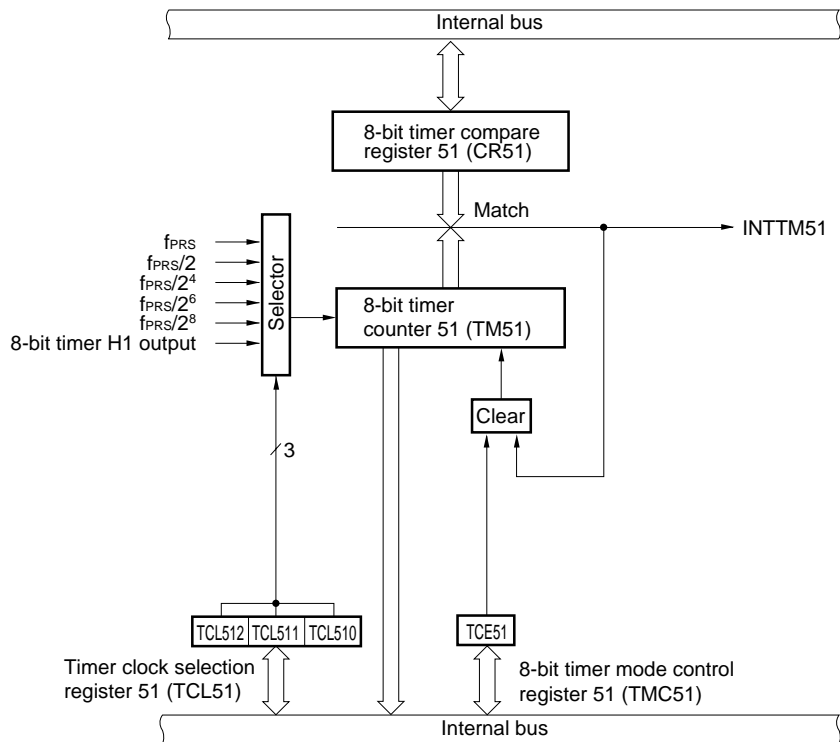


Figure 7-3. Block Diagram of 8-Bit Timer/Event Counter 52

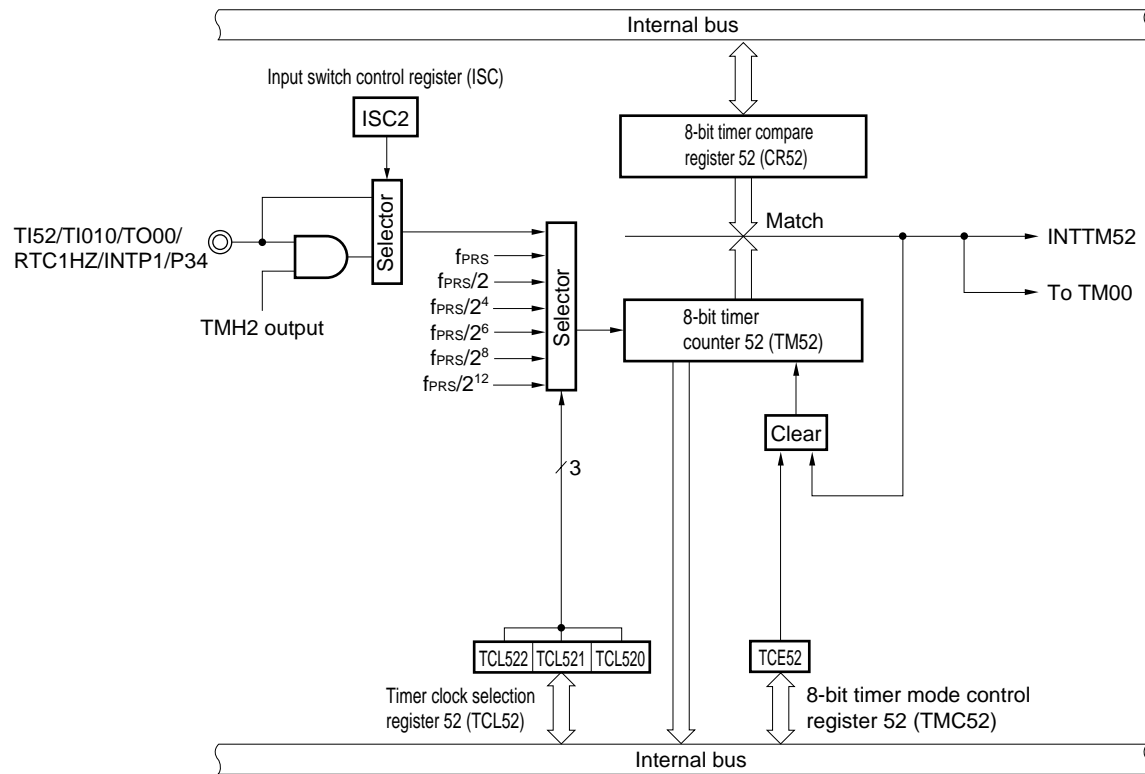


**(1) 8-bit timer counter 5n (TM5n)**

TM5n is an 8-bit register that counts the count pulses and is read-only.

The counter is incremented in synchronization with the rising edge of the count clock.

**Figure 7-4. Format of 8-Bit Timer Counter 5n (TM5n)**

Address: FF16H (TM50), FF6FH (TM51), FF51H (TM52)      After reset: 00H      R



In the following situations, the count value is cleared to 00H.

- <1> Reset signal generation
- <2> When TCE5n is cleared
- <3> When TM5n and CR5n match.

**(2) 8-bit timer compare register 5n (CR5n)**

CR5n can be read and written by an 8-bit memory manipulation instruction.


The value set in CR5n is constantly compared with the 8-bit timer counter 5n (TM5n) count value, and an interrupt request (INTTM5n) is generated if they match.

The value of CR5n can be set within 00H to FFH.

Reset signal generation sets CR5n to 00H.

**Figure 7-5. Format of 8-Bit Timer Compare Register 5n (CR5n)**

Address: FF17H (CR50), FF41H (CR51), FF59H (CR52)      After reset: 00H      R/W



**Caution** Do not write other values to CR5n during operation.

**Remark** n = 0 to 2

### 7.3 Registers Controlling 8-Bit Timer/Event Counters 50, 51, and 52

The following five registers are used to control 8-bit timer/event counters 50, 51, and 52.

- Timer clock selection register 5n (TCL5n)
- 8-bit timer mode control register 5n (TMC5n)
- Input switch control register (ISC)
- Port mode register 3 (PM3)
- Port register 3 (P3)

#### (1) Timer clock selection register 5n (TCL5n)

This register sets the count clock of 8-bit timer/event counter 5n and the valid edge of the T15n pin input.

TCL5n can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets TCL5n to 00H.

**Remark** n = 0 to 2

**Figure 7-6. Format of Timer Clock Selection Register 50 (TCL50)**

Address: FF6AH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TCL50	0	0	0	0	0	TCL502	TCL501	TCL500

TCL502	TCL501	TCL500	Count clock selection <sup>Note1</sup>			
			f <sub>PRS</sub> = 2 MHz	f <sub>PRS</sub> = 5 MHz	f <sub>PRS</sub> = 10 MHz	
0	0	0	Setting prohibited			
0	0	1	Setting prohibited			
0	1	0	f <sub>PRS</sub> <sup>Note2</sup>	2 MHz	5 MHz	10 MHz
0	1	1	f <sub>PRS</sub> /2	1 MHz	2.5 MHz	5 MHz
1	0	0	f <sub>PRS</sub> /2 <sup>2</sup>	500 kHz	1.25 MHz	2.5 MHz
1	0	1	f <sub>PRS</sub> /2 <sup>6</sup>	31.25 kHz	78.13 kHz	156.25 kHz
1	1	0	f <sub>PRS</sub> /2 <sup>8</sup>	7.81 kHz	19.53 kHz	39.06 kHz
1	1	1	f <sub>PRS</sub> /2 <sup>13</sup>	0.24 kHz	0.61 kHz	1.22 kHz

**Notes** 1. If the peripheral hardware clock (f<sub>PRS</sub>) operates on the high-speed system clock (f<sub>XH</sub>) (XSEL = 1), the f<sub>PRS</sub> operating frequency varies depending on the supply voltage.

- V<sub>DD</sub> = 2.7 to 5.5 V: f<sub>PRS</sub> ≤ 10 MHz
- V<sub>DD</sub> = 1.8 to 2.7 V: f<sub>PRS</sub> ≤ 5 MHz

2. If the peripheral hardware clock (f<sub>PRS</sub>) operates on the internal high-speed oscillation clock (f<sub>RH</sub>) (XSEL = 0), when 1.8 V ≤ V<sub>DD</sub> < 2.7 V, the setting of TCL502, TCL501, TCL500 = 0, 1, 0 (count clock: f<sub>PRS</sub>) is prohibited.

**Cautions** 1. When rewriting TCL50 to other data, stop the timer operation beforehand.

2. Be sure to clear bits 3 to 7 to 0.

**Remark** f<sub>PRS</sub>: Peripheral hardware clock frequency



Figure 7-7. Format of Timer Clock Selection Register 51 (TCL51)

Address: FF8CH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TCL51	0	0	0	0	0	TCL512	TCL511	TCL510

TCL512	TCL511	TCL510	Count clock selection <sup>Note1</sup>			
			$f_{PRS} =$ 2 MHz	$f_{PRS} =$ 5 MHz	$f_{PRS} =$ 10 MHz	
0	0	0	Setting prohibited			
0	0	1	Setting prohibited			
0	1	0	$f_{PRS}$ <sup>Note2</sup>	2 MHz	5 MHz	10 MHz
0	1	1	$f_{PRS}/2$	1 MHz	2.5 MHz	5 MHz
1	0	0	$f_{PRS}/2^4$	125 kHz	312.5 kHz	625 kHz
1	0	1	$f_{PRS}/2^6$	31.25 kHz	78.13 kHz	156.25 kHz
1	1	0	$f_{PRS}/2^8$	7.81 kHz	19.53 kHz	39.06 kHz
1	1	1	Timer H1 output signal			

- Notes**
- If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) ( $XSEL = 1$ ), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  - If the peripheral hardware clock ( $f_{PRS}$ ) operates on the internal high-speed oscillation clock ( $f_{RH}$ ) ( $XSEL = 0$ ), when  $1.8$  V  $\leq$   $V_{DD}$  <  $2.7$  V, the setting of TCL512, TCL511, TCL510 = 0, 1, 0 (count clock:  $f_{PRS}$ ) is prohibited.

- Cautions**
- When rewriting TCL51 to other data, stop the timer operation beforehand.
  - Be sure to clear bits 3 to 7 to 0.

Figure 7-8. Format of Timer Clock Selection Register 52 (TCL52)

Address: FF5BH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TCL52	0	0	0	0	0	TCL522	TCL521	TCL520

TCL522	TCL521	TCL520	Count clock selection <sup>Note1</sup>			
			$f_{PRS} =$ 2 MHz	$f_{PRS} =$ 5 MHz	$f_{PRS} =$ 10 MHz	
0	0	0	Falling edge of clock selected by ISC2			
0	0	1	Rising edge of clock selected by ISC2			
0	1	0	$f_{PRS}$ <sup>Note2</sup>	2 MHz	5 MHz	10 MHz
0	1	1	$f_{PRS}/2$	1 MHz	2.5 MHz	5 MHz
1	0	0	$f_{PRS}/2^4$	125 kHz	312.5 kHz	625 kHz
1	0	1	$f_{PRS}/2^6$	31.25 kHz	78.13 kHz	156.25 kHz
1	1	0	$f_{PRS}/2^8$	7.81 kHz	19.53 kHz	39.06 kHz
1	1	1	$f_{PRS}/2^{12}$	0.49 kHz	1.22 kHz	2.44 kHz

- Notes**
- If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) ( $XSEL = 1$ ), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  - If the peripheral hardware clock ( $f_{PRS}$ ) operates on the internal high-speed oscillation clock ( $f_{RH}$ ) ( $XSEL = 0$ ), when  $1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$ , the setting of TCL522, TCL521, TCL520 = 0, 1, 0 (count clock:  $f_{PRS}$ ) is prohibited.

- Cautions**
- When rewriting TCL52 to other data, stop the timer operation beforehand.
  - Be sure to clear bits 3 to 7 to 0.

**Remark**  $f_{PRS}$ : Peripheral hardware clock frequency

**(2) 8-bit timer mode control register 5n (TMC5n)**

TMC5n is a register that controls the count operation of 8-bit timer counter 5n (TM5n).

TMC5n can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 00H.

**Remark** n = 0 to 2

**Figure 7-9. Format of 8-Bit Timer Mode Control Register 50 (TMC50)**

Address: FF6BH After reset: 00H R/W<sup>Note</sup>

Symbol	<7>	6	5	4	<3>	<2>	1	0
TMC50	TCE50	0	0	0	LVS50	LVR50	TMC501	0

TCE50	TM50 count operation control
0	After clearing to 0, count operation disabled (counter stopped)
1	Count operation start

LVS50	LVR50	Timer output F/F status setting
0	0	No change
0	1	Timer output F/F clear (0) (default value of TM50 output: low level)
1	0	Timer output F/F set (1) (default value of TM50 output: high level)
1	1	Setting prohibited

TMC501	Timer F/F control
0	Inversion operation disabled
1	Inversion operation enabled

**Note** Bits 2 and 3 are write-only.

**Cautions** 1. Be sure to clear bits 0, and 4 to 6 to 0.

2. Perform <1> to <3> below in the following order, not at the same time.

- |                       |                        |
|-----------------------|------------------------|
| <1> Set TMC501:       | Operation mode setting |
| <2> Set LVS50, LVR50: | Timer F/F setting      |
| <4> Set TCE50         |                        |

**Remark** If LVS50 and LVR50 are read, the value is 0.

**Figure 7-10. Format of 8-Bit Timer Mode Control Register 51 (TMC51)**Address: FF43H After reset: 00H R/W<sup>Note</sup>

Symbol	<7>	6	5	4	3	2	1	0
TMC51	TCE51	0	0	0	0	0	0	0

TCE51	TM51 count operation control
0	After clearing to 0, count operation disabled (counter stopped)
1	Count operation start

**Caution** Be sure to clear bits 0 to 6 to 0.**Figure 7-11. Format of 8-Bit Timer Mode Control Register 52 (TMC52)**

Address: FF5CH After reset: 00H R/W

Symbol	<7>	6	5	4	3	2	1	0
TMC52	TCE52	0	0	0	0	0	0	0

TCE52	TM52 count operation control
0	After clearing to 0, count operation disabled (counter stopped)
1	Count operation start

**Caution** Be sure to clear bits 0 to 6 to 0.

**(3) Input switch control register (ISC)**

By setting ISC2 to 1, the TI52 input signal can be controlled via the TOH2 output signal.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 00H.

**Figure 7-12. Format of Input Switch Control Register (ISC)**

Address: FF4FH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ISC	0	0	ISC5	ISC4	ISC3	ISC2	ISC1	ISC0

ISC5	ISC4	TxD6, RxD6 input source selection
0	0	TxD6:P112, RxD6: P113
1	0	TxD6:P13, RxD6: P12
Other than above		Setting prohibited

ISC3	RxD6/P113 input enabled/disabled
0	RxD6/P113 input disabled
1	RxD6/P113 input enabled

ISC2	TI52 input source control
0	No enable control of TI52 input (P34)
1	Enable controlled of TI52 input (P34) <sup>Note 1</sup>

ISC1	TI000 input source selection
0	TI000 (P33)
1	RxD6 (P12 or P113) <sup>Note 2</sup>

ISC0	INTP0 input source selection
0	INTP0 (P120)
1	RxD6 (P12 or P113) <sup>Note 2</sup>

**Notes 1.** TI52 input is controlled by TOH2 output signal.

**2.** P12 or P113 is selected by ISC5 and ISC4.

**(4) Port mode registers 3 (PM3)**

These registers set port 3 input/output in 1-bit units.

When using the P34/TI52/TI010/TO00/RTC1HZ/INTP1 pins for timer input, set PM34 to 1. The output latch of PM34 at this time may be 0 or 1.

PM3 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets these registers to FFH.

**Figure 7-13. Format of Port Mode Register 3 (PM3)**

Address: FF23H    After reset: FFH    R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	1	1	PM34	PM33	PM32	PM31	1

PM3n	P1n pin I/O mode selection (n = 1 to 4)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

## 7.4 Operations of 8-Bit Timer/Event Counters 50, 51, and 52

### 7.4.1 Operation as interval timer

8-bit timer/event counter 5n operates as an interval timer that generates interrupt requests repeatedly at intervals of the count value preset to 8-bit timer compare register 5n (CR5n).

When the count value of 8-bit timer counter 5n (TM5n) matches the value set to CR5n, counting continues with the TM5n value cleared to 0 and an interrupt request signal (INTTM5n) is generated.

The count clock of TM5n can be selected with bits 0 to 2 (TCL5n0 to TCL5n2) of timer clock selection register 5n (TCL5n).

#### Setting

<1> Set the registers.

- TCL5n: Select the count clock.
- CR5n: Compare value
- TMC5n: Stop the count operation.  
(TMC50 = 0000xxx0B, TMC51 = TMC52 = 00000000B × = Don't care)

<2> After TCE5n = 1 is set, the count operation starts.

<3> If the values of TM5n and CR5n match, INTTM5n is generated (TM5n is cleared to 00H).

<4> INTTM5n is generated repeatedly at the same interval.


Set TCE5n to 0 to stop the count operation.

**Caution** Do not write other values to CR5n during operation.

**Remarks** 1. For how to enable the INTTM5n signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.  
2. n = 0 to 2

**Figure 7-14. Interval Timer Operation Timing (1/2)**

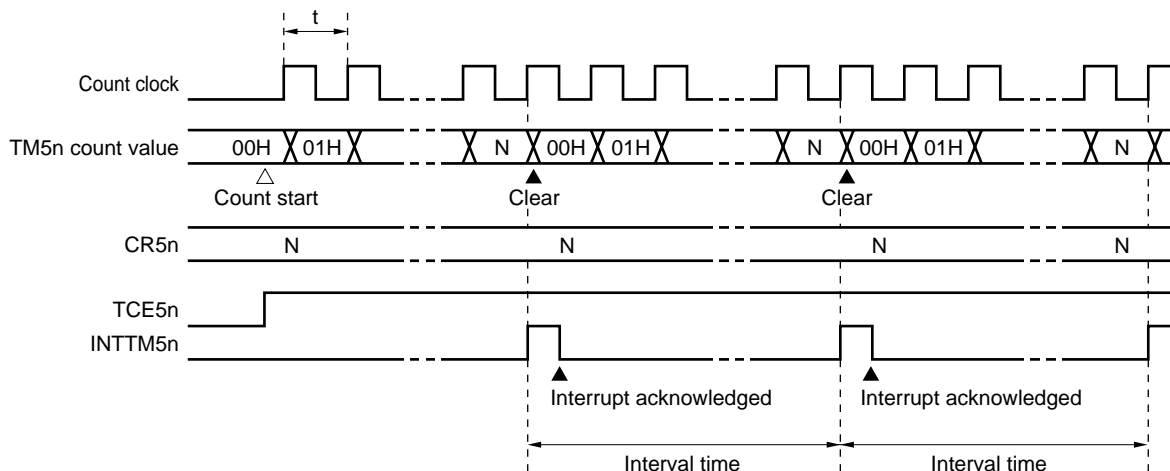
#### (a) Basic operation




**Remark** Interval time =  $(N + 1) \times t$   
N = 01H to FFH  
n = 0 to 2

Figure 7-14. Interval Timer Operation Timing (2/2)

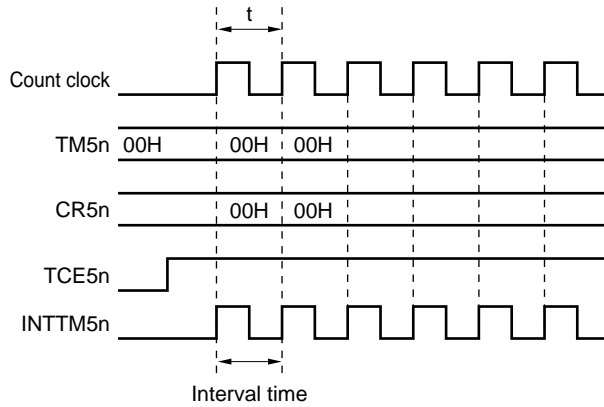(b) When CR5n = 00H



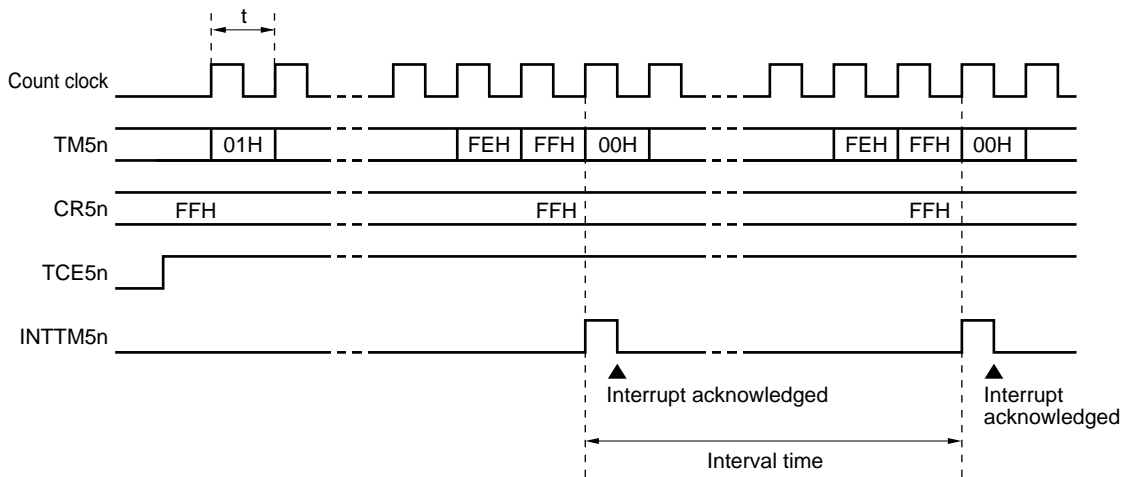(c) When CR5n = FFH



**Remark**  $n = 0$  to 2



### 7.4.2 Operation as external event counter (TM52 only)

The external event counter counts the number of external clock pulses to be input to the TI52 pin by 8-bit timer counter 52 (TM52).

TM52 is incremented each time the valid edge specified by timer clock selection register 52 (TCL52) is input. Either the rising or falling edge can be selected.

When the TM52 count value matches the value of 8-bit timer compare register 52 (CR52), TM52 is cleared to 0 and an interrupt request signal (INTTM52) is generated.

Whenever the TM52 value matches the value of CR52, INTTM52 is generated.

#### Setting

<1> Set each register.

- Set the port mode register (PM34) to 1.
- TCL52: Select TI52 pin input edge.  
TI52 pin falling edge → TCL52 = 00H  
TI52 pin rising edge → TCL52 = 01H
- CR52: Compare value
- TMC52: Stop the count operation.  
(TMC52 = 00000000B)


<2> When TCE52 = 1 is set, the number of pulses input from the TI52 pin is counted.

<3> When the values of TM52 and CR52 match, INTTM52 is generated (TM52 is cleared to 00H).

<4> After these settings, INTTM52 is generated each time the values of TM52 and CR52 match.

**Remark** For how to enable the INTTM52 signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

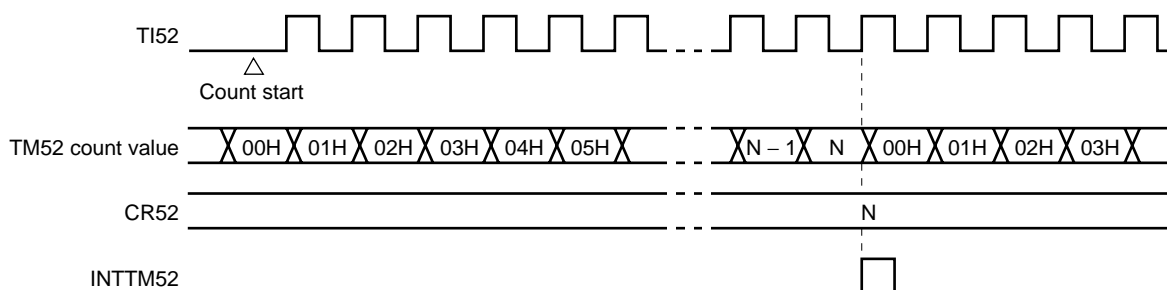**Figure 7-15. External Event Counter Operation Timing (with Rising Edge Specified)**



**Remark 1.** 8-bit timer/event counter 52 (TM52) can be used as a 24-bit timer/event counter, by connecting it with 16-bit timer/event counter (TM00) in cascade. Also, input enable of TM52 can be controlled via TMH2. For details, see **6.4.9 External 24-bit event counter operation**.


2. N = 00H to FFH

## 7.5 Cautions for 8-Bit Timer/Event Counters 50, 51, and 52

### (1) Timer start error

An error of up to one clock may occur in the time required for a match signal to be generated after timer start. This is because 8-bit timer counters 50, 51, and 52 (TM50, TM51, and TM52) are started asynchronously to the count clock.

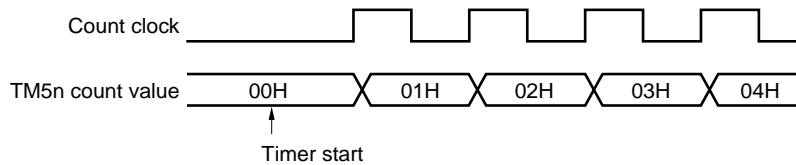**Figure 7-16. 8-Bit Timer Counter 5n Start Timing**



**Remark**  $n = 0$  to 2

### (2) Cautions for 16-bit timer/event counter 00 count up during external 24-bit event counter operation

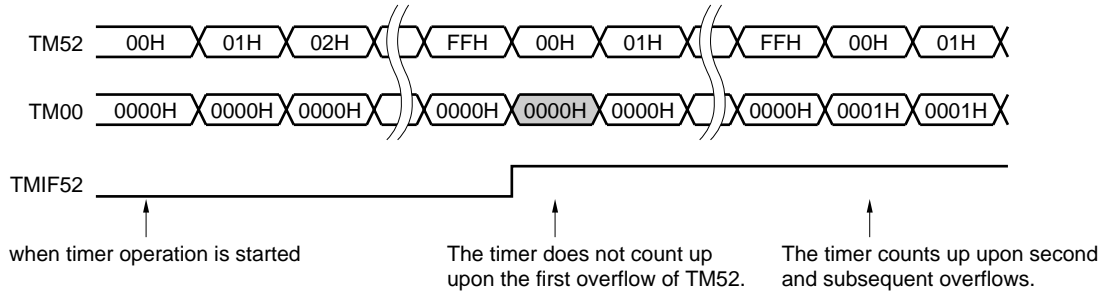
16-bit timer/event counter 00 has an internal synchronization circuit to eliminate noise when starting operation, and the first clock immediately after operation start is not counted.

When using the counter as a 24-bit counter, by setting 16-bit timer/event counter 00 and 8-bit timer/event counter 52 as the higher and lower timer and connecting them in cascade, the interrupt request flag of 8-bit timer/event counter 52 which is the lower timer must be checked as described below, in order to accurately read the 24-bit count values.


- If TMIF52 = 1 when TM52 and TM00 are read:  
The actual TM00 count value is "read value of TM00 + 1".
- If TMIF52 = 0 when TM52 and TM00 are read:  
The read value is the correct value.

This phenomenon of 16-bit timer/event counter 00 occurs only when operation is started. A count delay will not occur when 16-bit timer/event counter 00 overflows and the count is restarted from 0000H, since synchronization has already been implemented.

<When starting operation>



<Overflow of higher timer>

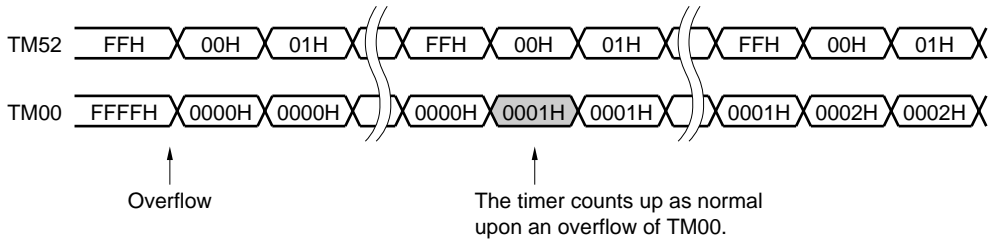

## CHAPTER 8 8-BIT TIMERS H0, H1 AND H2

### 8.1 Functions of 8-Bit Timers H0, H1, and H2

8-bit timers H0, H1, and H2 have the following functions.

- Interval timer
- Square-wave output<sup>Note 1</sup>
- PWM output<sup>Note 2</sup>
- Carrier generator (8-bit timer H1 only)<sup>Note 3</sup>

- Notes**
1. TMH0 and TMH1 only.
  2. However, TOH0 and TOH1 only for TOHn
  3. TMH1 only. TM51 and TMH1 can be used in combination as a carrier generator mode.

### 8.2 Configuration of 8-Bit Timers H0, H1, and H2

8-bit timers H0, H1, and H2 include the following hardware.

**Table 8-1. Configuration of 8-Bit Timers H0, H1, and H2**

Item	Configuration
Timer register	8-bit timer counter Hn
Registers	8-bit timer H compare register 0n (CMP0n) 8-bit timer H compare register 1n (CMP1n)
Timer output	TOHn <sup>Note 1</sup> , output controller
Control registers	8-bit timer H mode register n (TMHMDn) 8-bit timer H carrier control register 1 (TMCYC1) <sup>Note 2</sup> Port mode register 3 (PM3) Port register 3 (P3)

- Notes**
1. TMH2 does not have an output pin (TOH2). It can only be used as an internal interrupt (INTTMH2) or an external event input enable signal for the TI52 pin.
  2. 8-bit timer H1 only

**Remark** n = 0-2, however, TOH0 and TOH1 only for TOHn

Figures 8-1 and 8-3 show the block diagrams.

Figure 8-1. Block Diagram of 8-Bit Timer H0

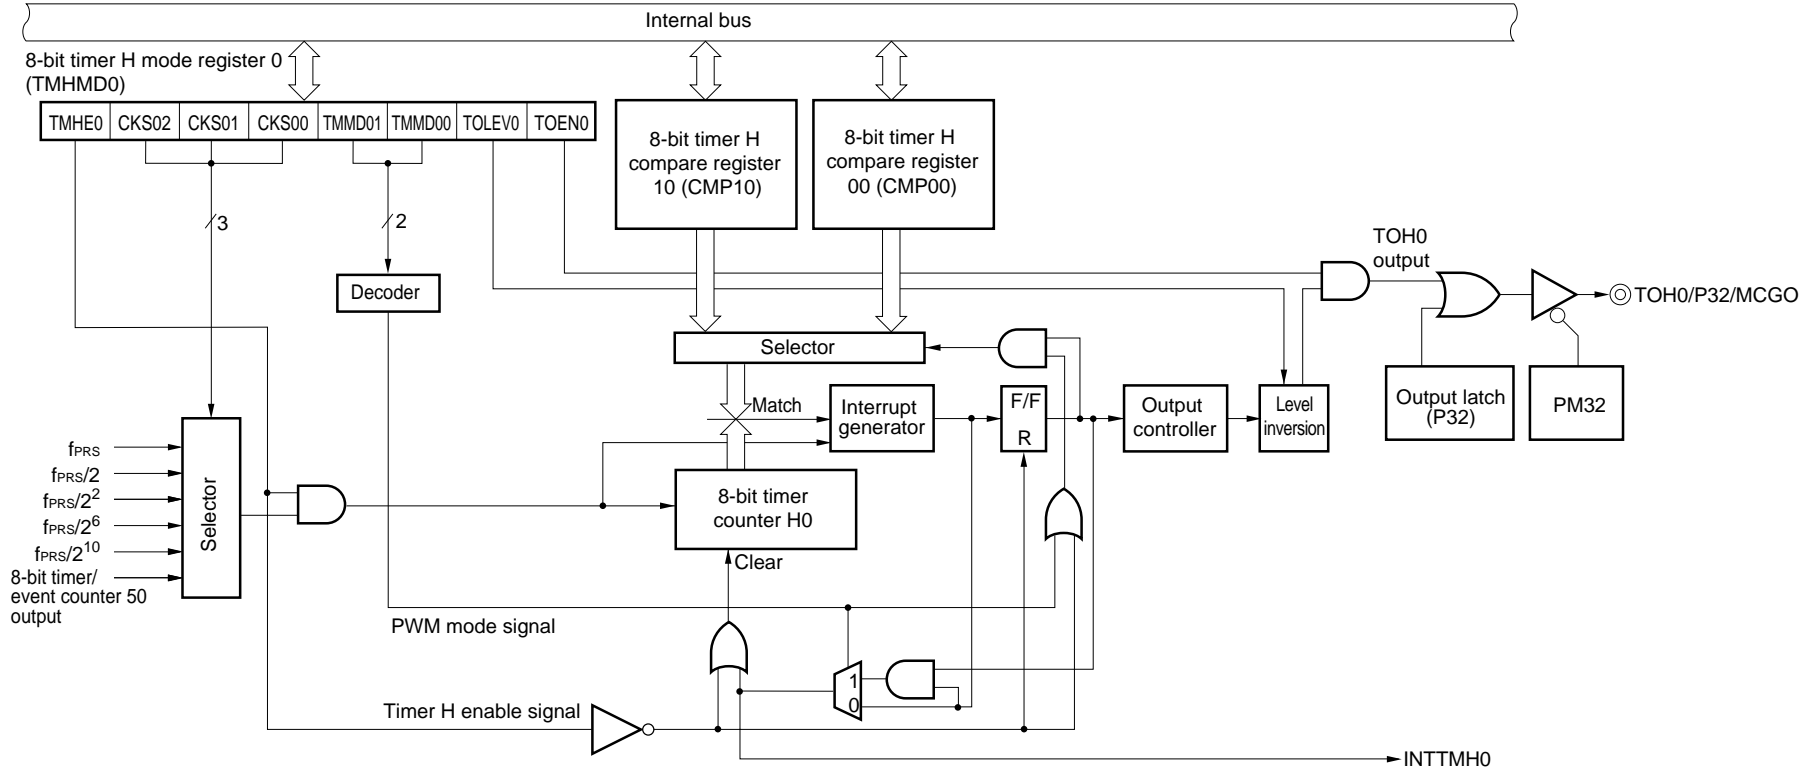


Figure 8-2. Block Diagram of 8-Bit Timer H1


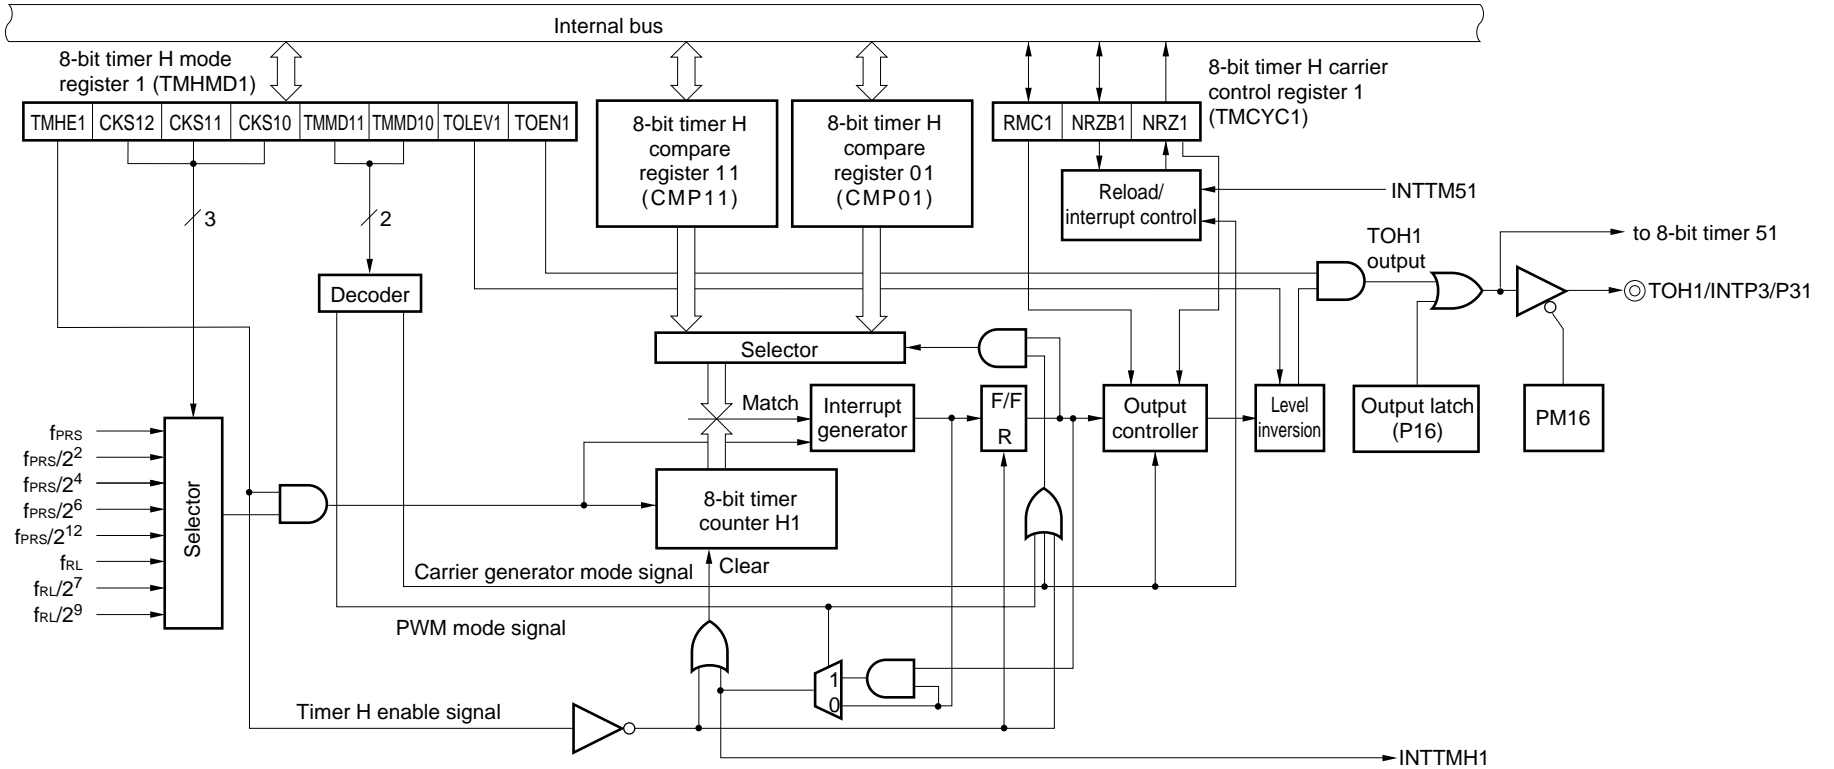


Figure 8-3. Block Diagram of 8-Bit Timer H2

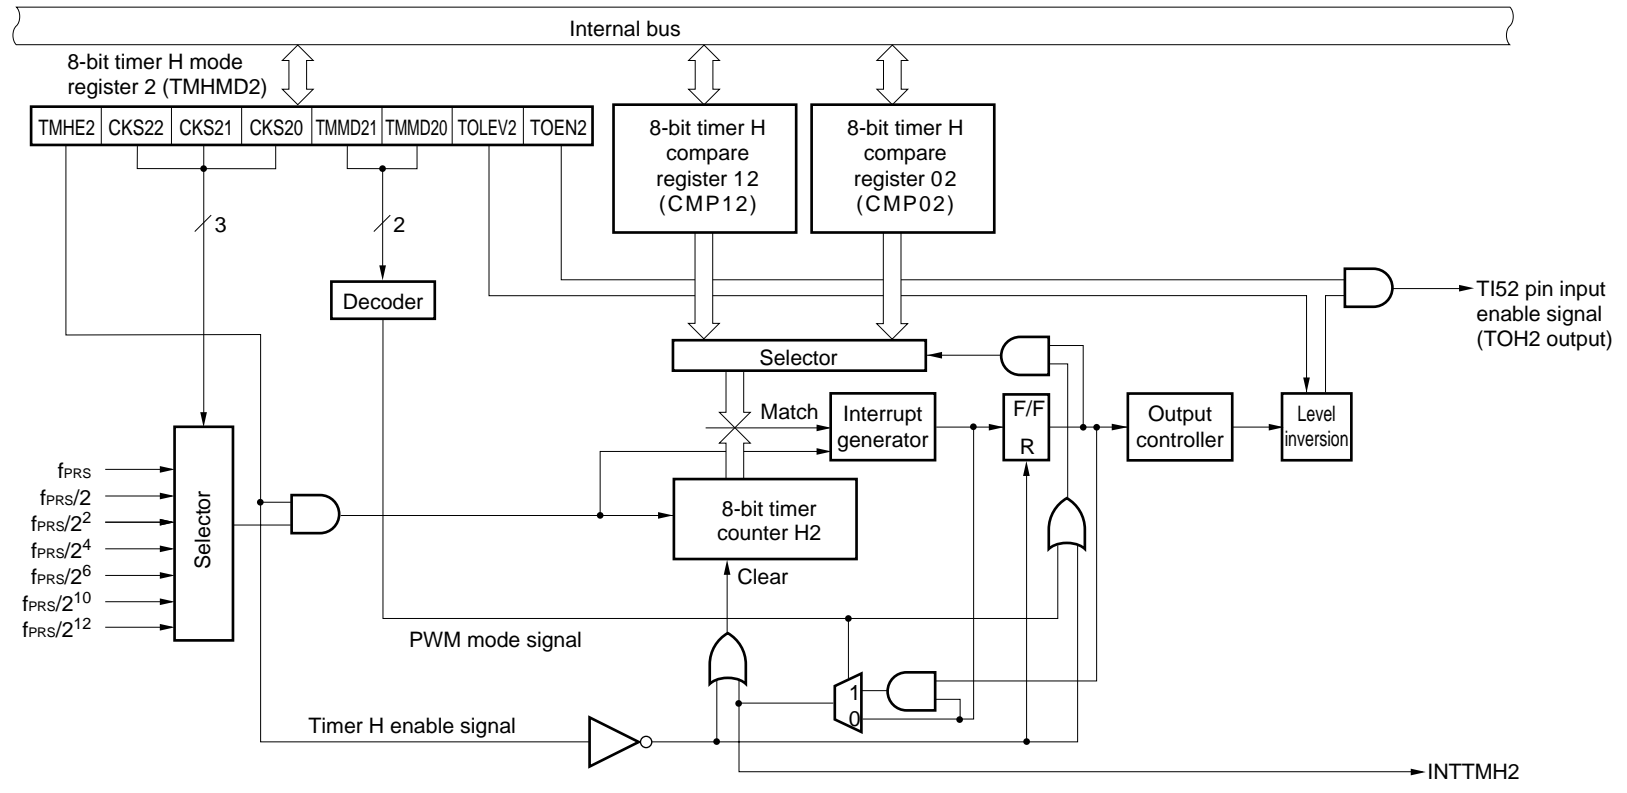

**(1) 8-bit timer H compare register 0n (CMP0n)**


This register can be read or written by an 8-bit memory manipulation instruction. This register is used in all of the timer operation modes.

This register constantly compares the value set to CMP0n with the count value of the 8-bit timer counter Hn and, when the two values match, generates an interrupt request signal (INTTMHn) and inverts the output level of TOHn.

Rewrite the value of CMP0n while the timer is stopped (TMHEn = 0).

A reset signal generation sets this register to 00H.

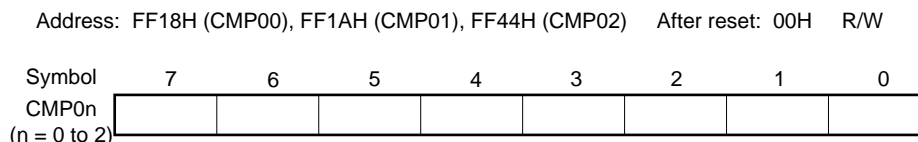**Figure 8-4. Format of 8-Bit Timer H Compare Register 0n (CMP0n)**



**Caution** CMP0n cannot be rewritten during timer count operation. CMP0n can be refreshed (the same value is written) during timer count operation.

**(2) 8-bit timer H compare register 1n (CMP1n)**

This register can be read or written by an 8-bit memory manipulation instruction. This register is used in the PWM output mode and carrier generator mode.

In the PWM output mode, this register constantly compares the value set to CMP1n with the count value of the 8-bit timer counter Hn and, when the two values match, inverts the output level of TOHn. No interrupt request signal is generated.


In the carrier generator mode, the CMP1n register always compares the value set to CMP1n with the count value of the 8-bit timer counter Hn and, when the two values match, generates an interrupt request signal (INTTMHn). At the same time, the count value is cleared.

CMP1n can be rewritten during timer count operation.

If the value of CMP1n is rewritten while the timer is operating, the new value is latched and transferred to CMP1n when the count value of the timer matches the old value of CMP1n, and then the value of CMP1n is changed to the new value. If matching of the count value and the CMP1n value and writing a value to CMP1n conflict, the value of CMP1n is not changed.

A reset signal generation sets this register to 00H.

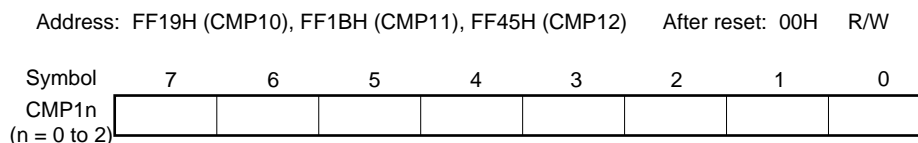**Figure 8-5. Format of 8-Bit Timer H Compare Register 1n (CMP1n)**



**Caution** In the PWM output mode and carrier generator mode, be sure to set CMP1n when starting the timer count operation (TMHEn = 1) after the timer count operation was stopped (TMHEn = 0) (be sure to set again even if setting the same value to CMP1n).

**Remark** n = 0 to 2, however, TOH0 and TOH1 only for TOHn



### 8.3 Registers Controlling 8-Bit Timers H0, H1, and H2

The following four registers are used to control 8-bit timers H0, H1, and H2.

- 8-bit timer H mode register n (TMHMDn)
- 8-bit timer H carrier control register 1 (TMCYC1)<sup>Note</sup>
- Port mode register 3 (PM3)
- Port register 3 (P3)

**Note** 8-bit timer H1 only

**(1) 8-bit timer H mode register n (TMHMDn)**

This register controls the mode of timer H.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 00H.

**Remark** n = 0 to 2

Figure 8-6. Format of 8-Bit Timer H Mode Register 0 (TMHMD0)

Address: FF69H After reset: 00H R/W

	<7>	6	5	4	3	2	<1>	<0>
TMHMD0	TMHE0	CKS02	CKS01	CKS00	TMMD01	TMMD00	TOLEV0	TOENO

TMHE0	Timer operation enable
0	Stops timer count operation (counter is cleared to 0)
1	Enables timer count operation (count operation started by inputting clock)

CKS02	CKS01	CKS00	Count clock selection <sup>Note 1</sup>			
				$f_{PRS} =$ 2 MHz	$f_{PRS} =$ 5 MHz	$f_{PRS} =$ 10 MHz
0	0	0	$f_{PRS}$ <sup>Note 2</sup>	2 MHz	5 MHz	10 MHz
0	0	1	$f_{PRS}/2$	1 MHz	2.5 MHz	5 MHz
0	1	0	$f_{PRS}/2^2$	500 kHz	1.25 MHz	2.5 MHz
0	1	1	$f_{PRS}/2^6$	31.25 kHz	78.13 kHz	156.25 kHz
1	0	0	$f_{PRS}/2^{10}$	1.95 kHz	4.88 kHz	9.77 kHz
1	0	1	TM50 output <sup>Note 3</sup>			
Other than above			Setting prohibited			

TMMD01	TMMD00	Timer operation mode
0	0	Interval timer mode
1	0	Input enable width adjust mode for pins (PWM mode)
Other than above		Setting prohibited

TOLEV0	Timer output level control (in default mode)
0	Low level
1	High level

TOENO	Timer output control
0	Disables output
1	Enables output

- Notes**
1. If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) ( $XSEL = 1$ ), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  2. If the peripheral hardware clock ( $f_{PRS}$ ) operates on the internal high-speed oscillation clock ( $f_{RH}$ ) ( $XSEL = 0$ ), when  $1.8$  V  $\leq V_{DD} < 2.7$  V, the setting of  $CKS02 = CKS01 = CKS00 = 0$  (count clock:  $f_{PRS}$ ) is prohibited.
  3. When selecting the TM50 output as the count clock, start the operation of the 8-bit timer/event counter 50 first and then enable the timer F/F inversion operation ( $TMC501 = 1$ ).

- Cautions**
1. When  $TMHE0 = 1$ , setting the other bits of  $TMHMD0$  is prohibited. However,  $TMHMD0$  can be refreshed (the same value is written).
  2. In the PWM output mode, be sure to set the 8-bit timer H compare register 10 ( $CMP10$ ) when starting the timer count operation ( $TMHE0 = 1$ ) after the timer count operation was stopped ( $TMHE0 = 0$ ) (be sure to set again even if setting the same value to  $CMP10$ ).
  3. The actual  $TOH0/P32/MCGO$  pin output is determined depending on  $PM32$  and  $P32$ , besides  $TOH0$  output.

**Remark**  $f_{PRS}$ : Peripheral hardware clock frequency

Figure 8-7. Format of 8-Bit Timer H Mode Register 1 (TMHMD1)

Address: FF6CH After reset: 00H R/W

	<7>	6	5	4	3	2	<1>	<0>
TMHMD1	TMHE1	CKS12	CKS11	CKS10	TMMD11	TMMD10	TOLEV1	TOEN1
	TMHE1	Timer operation enable						
	0	Stops timer count operation (counter is cleared to 0)						
	1	Enables timer count operation (count operation started by inputting clock)						
	CKS12	CKS11	CKS10	Count clock selection <sup>Note 1</sup>				
					$f_{PRS} =$ 2 MHz	$f_{PRS} =$ 5 MHz	$f_{PRS} =$ 10 MHz	
	0	0	0	$f_{PRS}$ <sup>Note 2</sup>	2 MHz	5 MHz	10 MHz	
	0	0	1	$f_{PRS}/2^2$	500 kHz	1.25 MHz	2.5 MHz	
	0	1	0	$f_{PRS}/2^4$	125 kHz	312.5 kHz	625 kHz	
	0	1	1	$f_{PRS}/2^6$	31.25 kHz	78.13 kHz	156.25 kHz	
	1	0	0	$f_{PRS}/2^{12}$	0.49 kHz	1.22 kHz	2.44 kHz	
	1	0	1	$f_{RL}/2^7$	1.88 kHz (TYP.)			
	1	1	0	$f_{RL}/2^9$	0.47 kHz (TYP.)			
	1	1	1	$f_{RL}$	240 kHz (TYP.)			
	TMMD11	TMMD10	Timer operation mode					
	0	0	Interval timer mode					
	0	1	Carrier generator mode					
	1	0	PWM output mode					
	1	1	Setting prohibited					
	TOLEV1	Timer output level control (in default mode)						
	0	Low level						
	1	High level						
	TOEN1	Timer output control						
	0	Disables output						
	1	Enables output						

- Notes**
- If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) ( $XSEL = 1$ ), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  - If the peripheral hardware clock ( $f_{PRS}$ ) operates on the internal high-speed oscillation clock ( $f_{RH}$ ) ( $XSEL = 0$ ), when  $1.8$  V  $\leq V_{DD} < 2.7$  V, the setting of  $CKS12 = CKS11 = CKS10 = 0$  (count clock:  $f_{PRS}$ ) is prohibited.

- Cautions**
1. When  $TMHE1 = 1$ , setting the other bits of  $TMHMD1$  is prohibited. However,  $TMHMD1$  can be refreshed (the same value is written).
  2. In the PWM output mode and carrier generator mode, be sure to set the 8-bit timer H compare register 11 ( $CMP11$ ) when starting the timer count operation ( $TMHE1 = 1$ ) after the timer count operation was stopped ( $TMHE1 = 0$ ) (be sure to set again even if setting the same value to  $CMP11$ ).
  3. When the carrier generator mode is used, set so that the count clock frequency of  $TMH1$  becomes more than 6 times the count clock frequency of  $TM51$ .
  4. The actual  $TOH1/P31/INTP3$  pin output is determined depending on  $PM31$  and  $P31$ , besides  $TOH1$  output.

- Remarks**
1.  $f_{PRS}$ : Peripheral hardware clock frequency
  2.  $f_{RL}$ : Internal low-speed oscillation clock frequency

Figure 8-8. Format of 8-Bit Timer H Mode Register 2 (TMHMD2)

Address: FF42H After reset: 00H R/W

	<7>	6	5	4	3	2	<1>	<0>
TMHMD2	TMHE2	CKS22	CKS21	CKS20	TMMD21	TMMD20	TOLEV2	TOEN2

TMHE2	Timer operation enable
0	Stops timer count operation (counter is cleared to 0)
1	Enables timer count operation (count operation started by inputting clock)

CKS22	CKS21	CKS20	Count clock selection <sup>Note 1</sup>			
				$f_{PRS} =$ 2 MHz	$f_{PRS} =$ 5 MHz	$f_{PRS} =$ 10 MHz
0	0	0	$f_{PRS}$ <sup>Note 2</sup>	2 MHz	5 MHz	10 MHz
0	0	1	$f_{PRS}/2$	1 MHz	2.5 MHz	5 MHz
0	1	0	$f_{PRS}/2^2$	500 kHz	1.25 MHz	2.5 MHz
0	1	1	$f_{PRS}/2^4$	125 kHz	312.5 kHz	625 kHz
1	0	0	$f_{PRS}/2^6$	31.25 kHz	78.13 kHz	156.25 kHz
1	0	1	$f_{PRS}/2^{10}$	1.95 kHz	4.88 kHz	9.77 kHz
1	1	0	$f_{PRS}/2^{12}$	0.49 kHz	1.22 kHz	2.44 kHz
Other than above			Setting prohibited			

TMMD21	TMMD20	Timer operation mode
0	0	Interval timer mode
1	0	Input enable width adjust mode for pins (PWM mode)
Other than above		Setting prohibited

TOLEV2	Timer output level control (in default mode)
0	Low level
1	High level

TOEN2	Timer output control
0	Disables output
1	Enables output <sup>Note 3</sup>

- Notes**
1. If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) ( $XSEL = 1$ ), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  2. If the peripheral hardware clock ( $f_{PRS}$ ) operates on the internal high-speed oscillation clock ( $f_{RH}$ ) ( $XSEL = 0$ ), when  $1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$ , the setting of  $CKS22 = CKS21 = CKS20 = 0$  (count clock:  $f_{PRS}$ ) is prohibited.
  3. The timer output of TMH2 can only be used as an external event input enable signal of TM52. No pins for external output are available.

**Caution** When **TMHE2 = 1**, setting the other bits of **TMHMD2** is prohibited.

**Remark**  $f_{PRS}$ : Peripheral hardware clock frequency

**(2) 8-bit timer H carrier control register 1 (TMCYC1)**

This register controls the remote control output and carrier pulse output status of 8-bit timer H1. This register can be set by a 1-bit or 8-bit memory manipulation instruction. Reset signal generation sets this register to 00H.

**Figure 8-9. Format of 8-Bit Timer H Carrier Control Register 1 (TMCYC1)**

Address: FF6DH After reset: 00H R/W<sup>Note</sup>

Symbol	7	6	5	4	3	2	1	<0>
TMCYC1	0	0	0	0	0	RMC1	NRZB1	NRZ1

RMC1	NRZB1	Remote control output
0	0	Low-level output
0	1	High-level output at rising edge of INTTM51 signal input
1	0	Low-level output
1	1	Carrier pulse output at rising edge of INTTM51 signal input

NRZ1	Carrier pulse output status flag
0	Carrier output disabled status (low-level status)
1	Carrier output enabled status (RMC1 = 1: Carrier pulse output, RMC1 = 0: High-level status)

**Note** Bit 0 is read-only.

**Caution** Do not rewrite RMC1 when TMHE1 = 1. However, TMCYC1 can be refreshed (the same value is written).

**(3) Port mode register 3 (PM3)**

This register sets port 3 input/output in 1-bit units. When using the P32/TOH0/MCGO and P31/TOH1/INTP3 pins for timer output, clear PM32 and PM31 and the output latches of P32 and P31 to 0. PM3 can be set by a 1-bit or 8-bit memory manipulation instruction. Reset signal generation sets this register to FFH.

**Figure 8-10. Format of Port Mode Register 3 (PM3)**

Address: FF23H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	1	1	PM34	PM33	PM32	PM31	1

PM3n	P3n pin I/O mode selection (n = 1 to 4)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

## 8.4 Operation of 8-Bit Timers H0, H1 and H2

### 8.4.1 Operation as interval timer/square-wave output

When the 8-bit timer counter Hn and compare register 0n (CMP0n) match, an interrupt request signal (INTTMHn) is generated and the 8-bit timer counter Hn is cleared to 00H.

Compare register 1n (CMP1n) is not used in interval timer mode. Since a match of the 8-bit timer counter Hn and the CMP1n register is not detected even if the CMP1n register is set, timer output is not affected.

By setting bit 0 (TOENn) of timer H mode register n (TMHMDn) to 1, a square wave of any frequency (duty = 50%) is output from TOHn.


The timer output of TMH2 can only be used as an external event input enable signal of TM52. Note, no pins for external output are available.

#### Setting

<1> Set each register.

Figure 8-11. Register Setting During Interval Timer/Square-Wave Output Operation
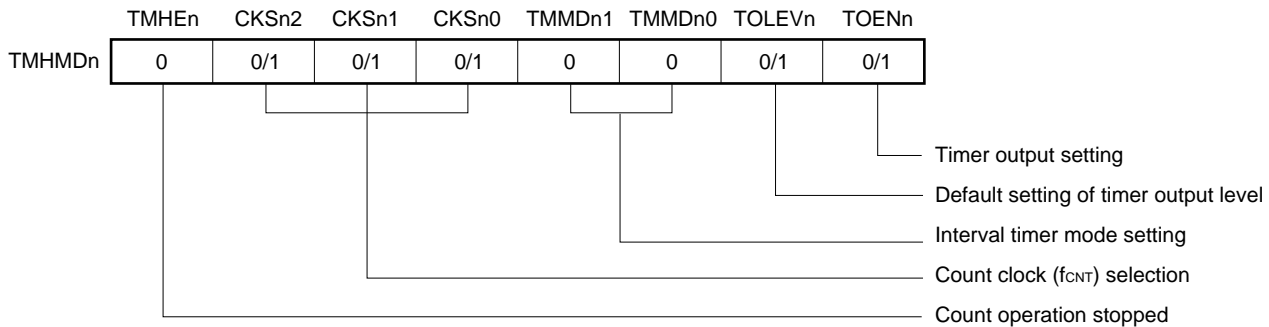
#### (i) Setting timer H mode register n (TMHMDn)



#### (ii) CMP0n register setting

The interval time is as follows if N is set as a comparison value.

- Interval time = (N + 1)/f<sub>CNT</sub>

<2> Count operation starts when TMHEn = 1.

<3> When the values of the 8-bit timer counter Hn and the CMP0n register match, the INTTMHn signal is generated and the 8-bit timer counter Hn is cleared to 00H.

<4> Subsequently, the INTTMHn signal is generated at the same interval. To stop the count operation, clear TMHEn to 0.


**Remarks 1.** For the setting of the output pin, see **8.3 (3) Port mode register 3 (PM3)**.

**2.** For how to enable the INTTMHn signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

**3.** n = 0 to 2, however, TOH0 and TOH1 only for TOHn



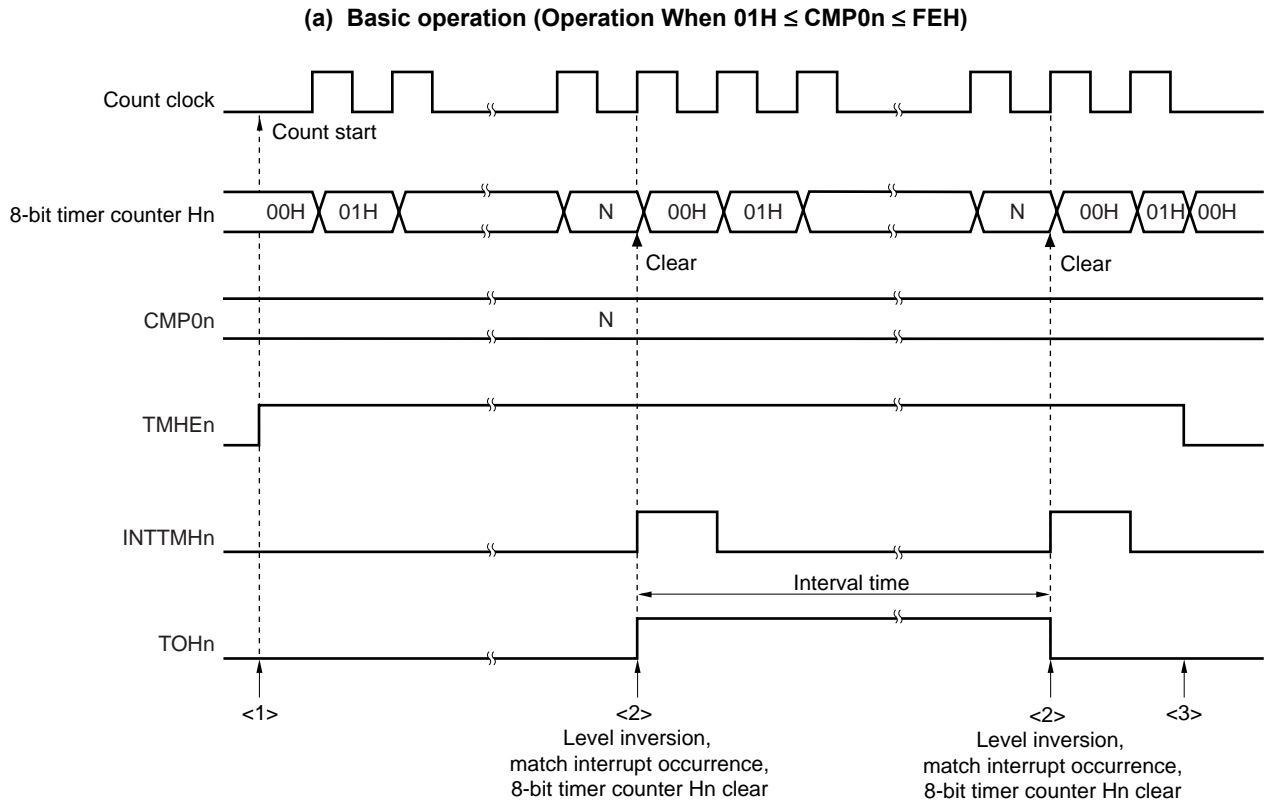Figure 8-12. Timing of Interval Timer/Square-Wave Output Operation (1/2)




- <1> The count operation is enabled by setting the TMHEn bit to 1. The count clock starts counting no more than 1 clock after the operation is enabled.
- <2> When the value of the 8-bit timer counter Hn matches the value of the CMP0n register, the value of the timer counter is cleared, and the level of the TOHn output is inverted. In addition, the INTTMHn signal is output at the rising edge of the count clock.
- <3> If the TMHEn bit is cleared to 0 while timer H is operating, the INTTMHn signal and TOHn output are set to the default level. If they are already at the default level before the TMHEn bit is cleared to 0, then that level is maintained.

**Remarks 1.**  $n = 0$  to 2, however, TOH0 and TOH1 only for TOHn


**2.**  $01H \leq N \leq FEH$

Figure 8-12. Timing of Interval Timer/Square-Wave Output Operation (2/2)

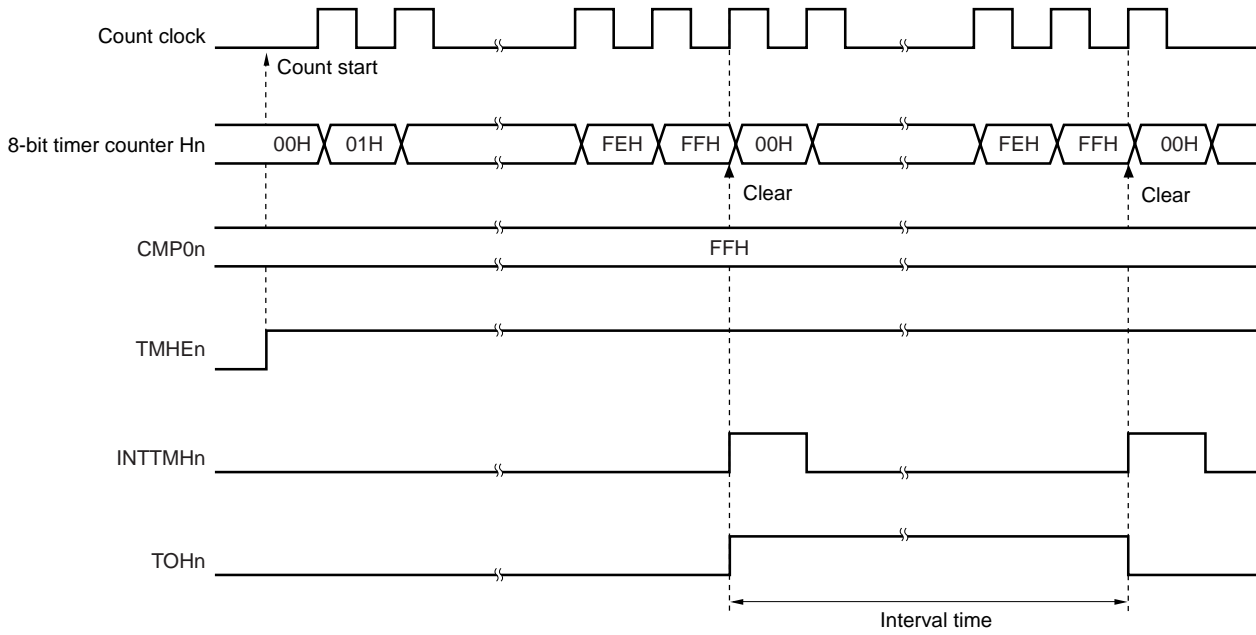(b) Operation when CMP0n = FFH



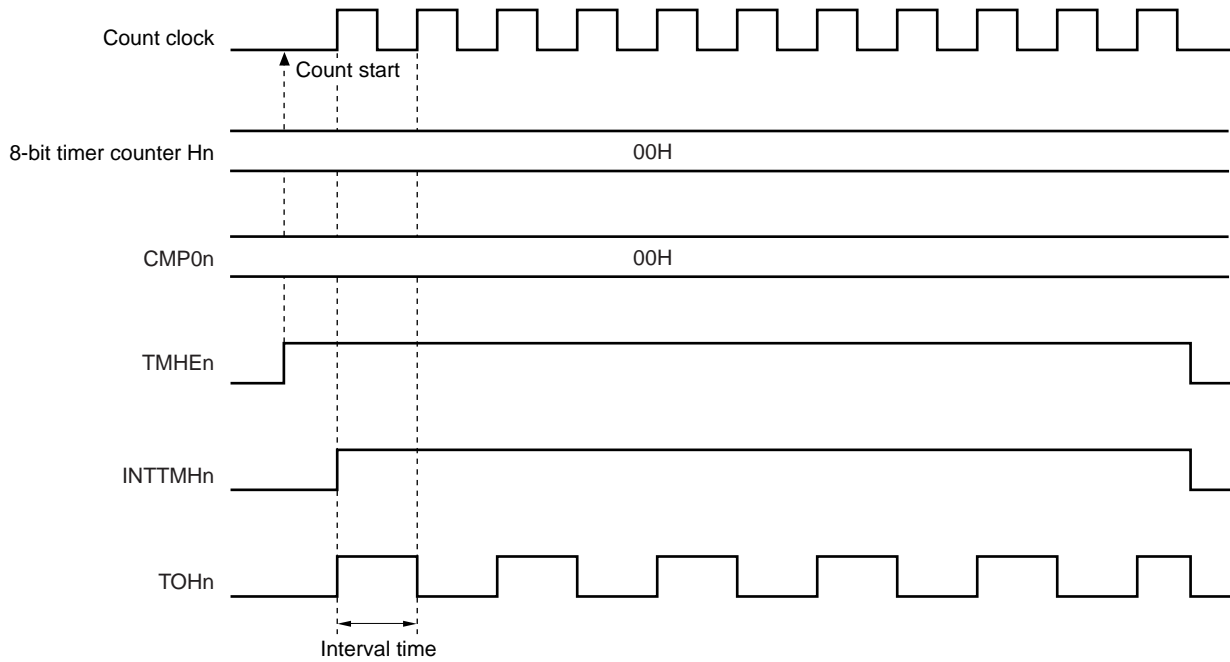(c) Operation when  $CMP0n = 00H$



**Remark**  $n = 0$  to  $2$ , however,  $TOH0$  and  $TOH1$  only for  $TOHn$

### 8.4.2 Operation as PWM output

In PWM output mode, a pulse with an arbitrary duty and arbitrary cycle can be output.

The 8-bit timer compare register 0n (CMP0n) controls the cycle of timer output (TOHn). Rewriting the CMP0n register during timer operation is prohibited.

The 8-bit timer compare register 1n (CMP1n) controls the duty of timer output (TOHn). Rewriting the CMP1n register during timer operation is possible.

The operation in PWM output mode is as follows.


PWM output (TOHn output) outputs an active level and 8-bit timer counter Hn is cleared to 0 when 8-bit timer counter Hn and the CMP0n register match after the timer count is started. PWM output (TOHn output) outputs an inactive level when 8-bit timer counter Hn and the CMP1n register match.

The timer output of TMH2 (PWM output) can only be used as an external event input enable signal of TM52. Note, no pins for external output are available.

#### Setting

<1> Set each register.

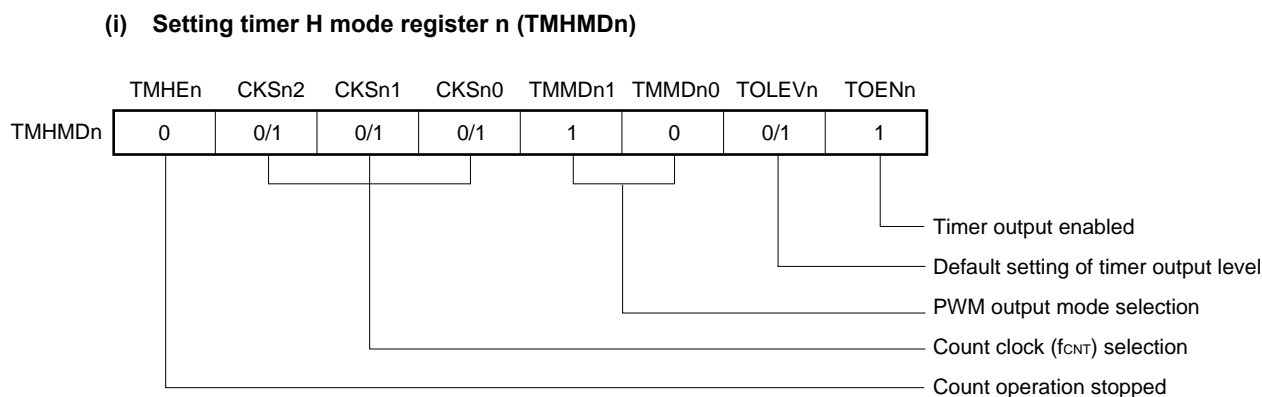Figure 8-13. Register Setting in PWM Output Mode



(ii) Setting CMP0n register

- Compare value (N): Cycle setting

(iii) Setting CMP1n register

- Compare value (M): Duty setting

- Remarks**
1. n = 0 to 2, however, TOH0 and TOH1 only for TOHn
  2. 00H ≤ CMP1n (M) < CMP0n (N) ≤ FFH

<2> The count operation starts when TMHEn = 1.

<3> The CMP0n register is the compare register that is to be compared first after counter operation is enabled. When the values of the 8-bit timer counter Hn and the CMP0n register match, the 8-bit timer counter Hn is cleared, an interrupt request signal (INTTMHn) is generated, an active level is output. At the same time, the compare register to be compared with the 8-bit timer counter Hn is changed from the CMP0n register to the CMP1n register.

- <4> When the 8-bit timer counter Hn and the CMP1n register match, an inactive level is output and the compare register to be compared with 8-bit timer counter Hn is changed from the CMP1n register to the CMP0n register. At this time, 8-bit timer counter Hn is not cleared and the INTTMHn signal is not generated.
- <5> By performing procedures <3> and <4> repeatedly, a pulse with an arbitrary duty can be obtained.
- <6> To stop the count operation, set TMHEn = 0.


If the setting value of the CMP0n register is N, the setting value of the CMP1n register is M, and the count clock frequency is  $f_{CNT}$ , the PWM pulse output cycle and duty are as follows.

- PWM pulse output cycle =  $(N + 1)/f_{CNT}$
- Duty =  $(M + 1)/(N + 1)$

- Cautions**
1. The set value of the CMP1n register can be changed while the timer counter is operating. However, this takes a duration of three operating clocks (signal selected by the CKSn2 to CKSn0 bits of the TMHMDn register) from when the value of the CMP1n register is changed until the value is transferred to the register.
  2. Be sure to set the CMP1n register when starting the timer count operation (TMHEn = 1) after the timer count operation was stopped (TMHEn = 0) (be sure to set again even if setting the same value to the CMP1n register).
  3. Make sure that the CMP1n register setting value (M) and CMP0n register setting value (N) are within the following range.  
 $00H \leq \text{CMP1n (M)} < \text{CMP0n (N)} \leq FFH$

- Remarks**
1. For the setting of the output pin, see 8.3 (3) Port mode register 3 (PM3).
  2. For details on how to enable the INTTMHn signal interrupt, see CHAPTER 17 INTERRUPT FUNCTIONS.
  3. n = 0 to 2, however, TOH0 and TOH1 only for TOHn

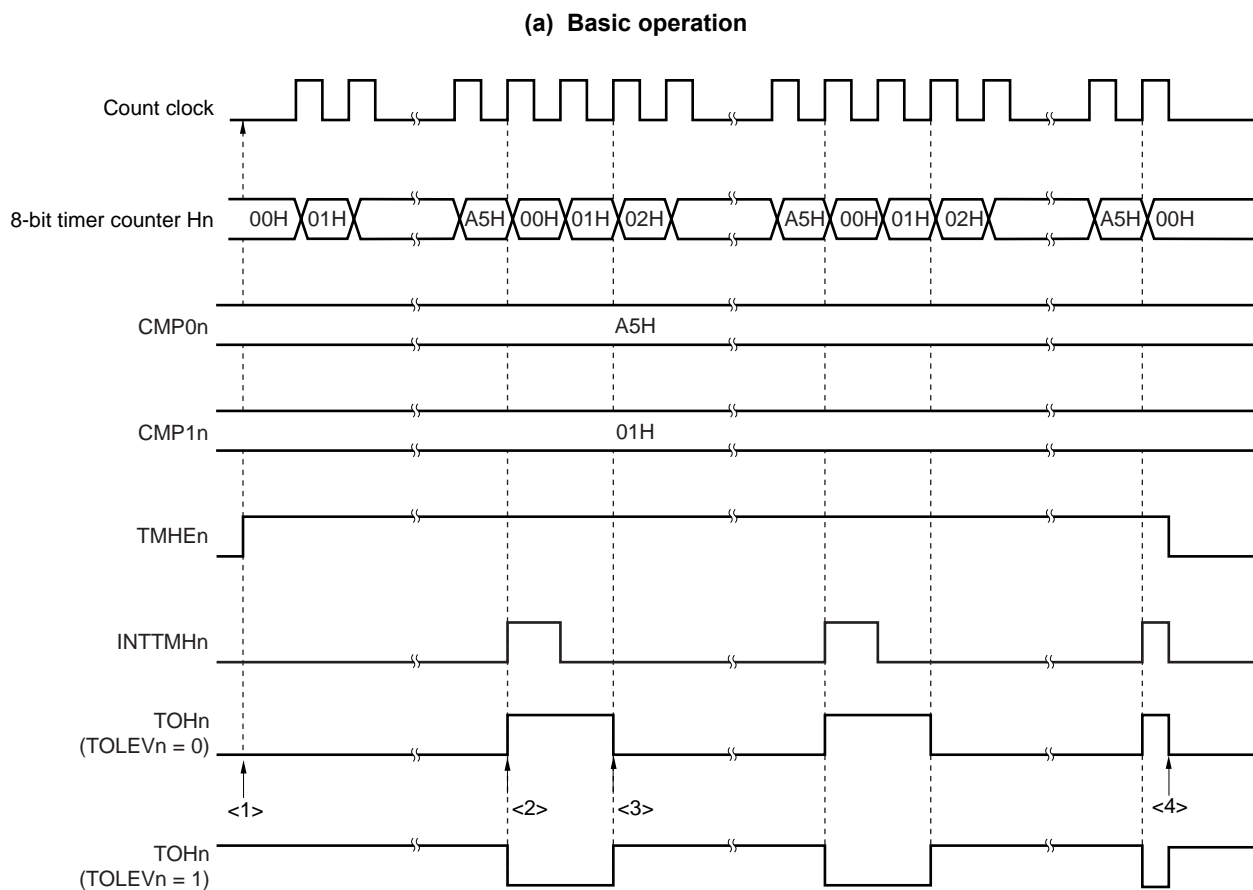Figure 8-14. Operation Timing in PWM Output Mode (1/4)




- <1> The count operation is enabled by setting the TMHEn bit to 1. Start 8-bit timer counter Hn by masking one count clock to count up. At this time, PWM output outputs an inactive level.
- <2> When the values of 8-bit timer counter Hn and the CMP0n register match, an active level is output. At this time, the value of 8-bit timer counter Hn is cleared, and the INTTMHn signal is output.
- <3> When the values of 8-bit timer counter Hn and the CMP1n register match, an inactive level is output. At this time, the 8-bit counter value is not cleared and the INTTMHn signal is not output.
- <4> Clearing the TMHEn bit to 0 during timer Hn operation sets the INTTMHn signal to the default and PWM output to an inactive level.


**Remark** n = 0 to 2, however, TOH0 and TOH1 only for TOHn

Figure 8-14. Operation Timing in PWM Output Mode (2/4)

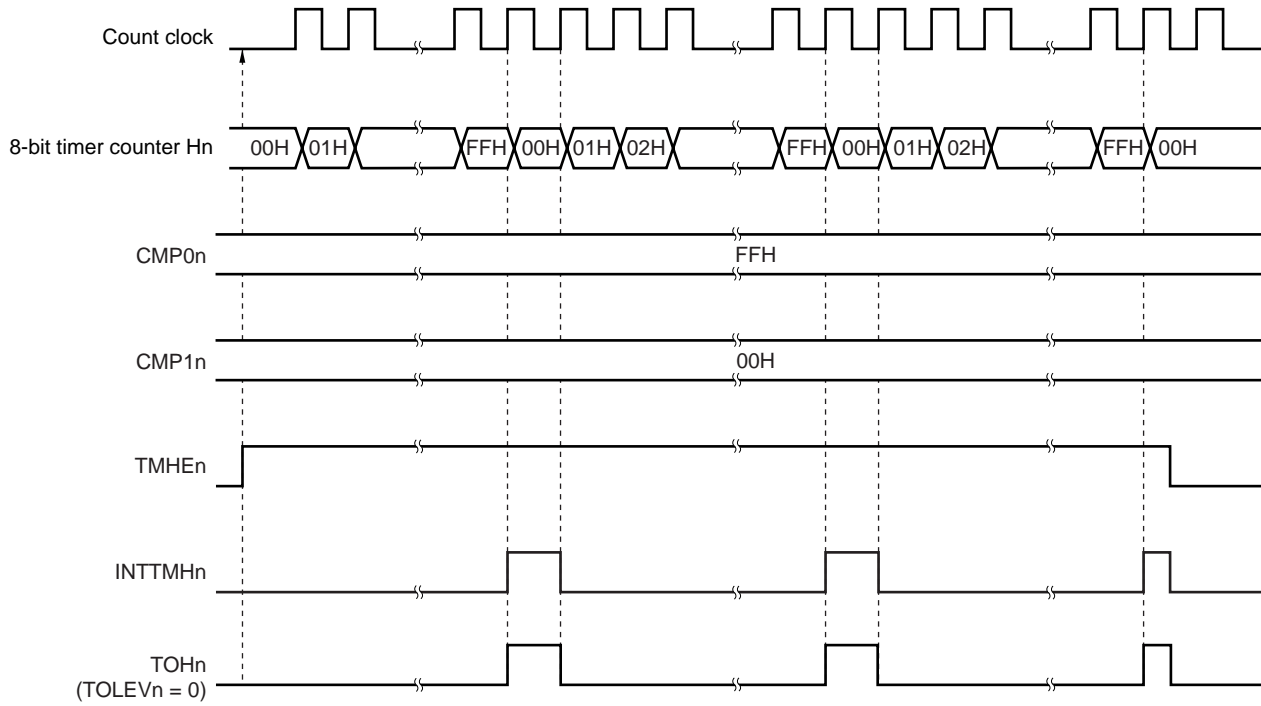(b) Operation when  $CMP0n = FFH$ ,  $CMP1n = 00H$



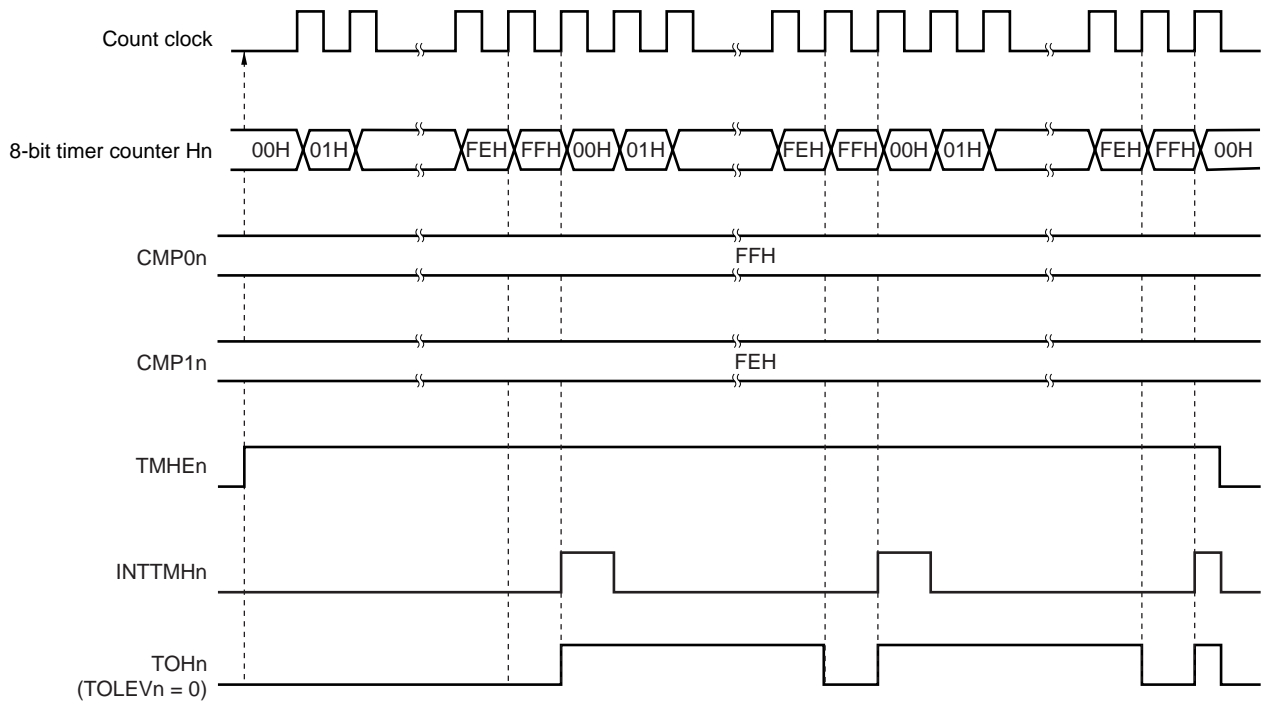
(c) Operation when  $CMP0n = FFH$ ,  $CMP1n = FEH$



**Remark** n = 0 to 2, however, TOH0 and TOH1 only for TOHn

Figure 8-14. Operation Timing in PWM Output Mode (3/4)

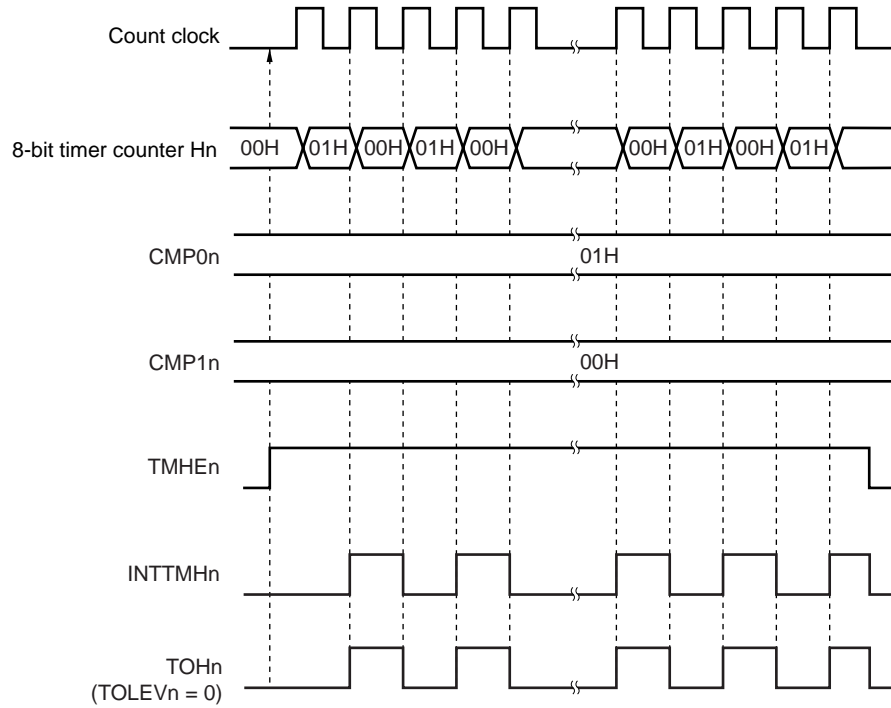
(d) Operation when  $CMP0n = 01H$ ,  $CMP1n = 00H$



**Remark**  $n = 0$  to 2, however, TOH0 and TOH1 only for TOHn

Figure 8-14. Operation Timing in PWM Output Mode (4/4)

## (e) Operation by changing CMP1n (CMP1n = 02H → 03H, CMP0n = A5H)

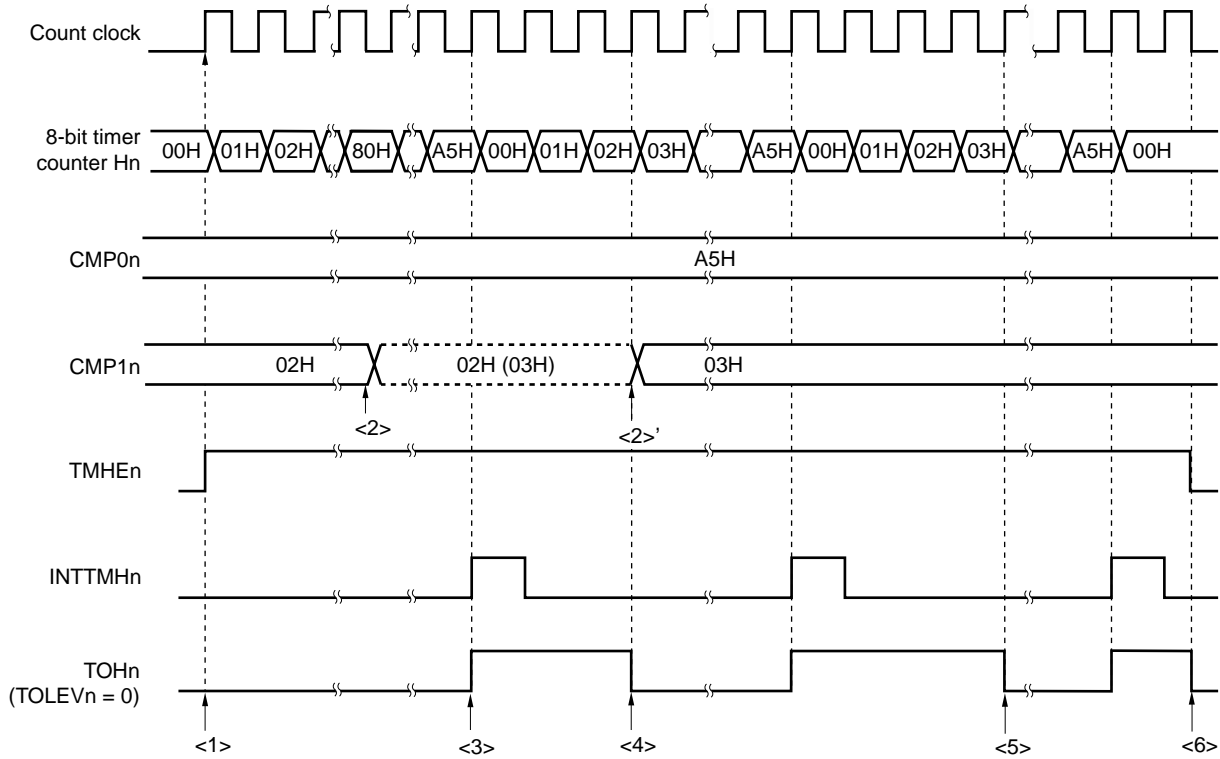

- <1> The count operation is enabled by setting TMHEn = 1. Start 8-bit timer counter Hn by masking one count clock to count up. At this time, PWM output outputs an inactive level.
- <2> The CMP1n register value can be changed during timer counter operation. This operation is asynchronous to the count clock.
- <3> When the values of 8-bit timer counter Hn and the CMP0n register match, the value of 8-bit timer counter Hn is cleared, an active level is output, and the INTTMHn signal is output.
- <4> If the CMP1n register value is changed, the value is latched and not transferred to the register. When the values of the 8-bit timer counter Hn and the CMP1n register before the change match, the value is transferred to the CMP1n register and the CMP1n register value is changed (<2>'). However, three count clocks or more are required from when the CMP1n register value is changed to when the value is transferred to the register. If a match signal is generated within three count clocks, the changed value cannot be transferred to the register.
- <5> When the values of 8-bit timer counter Hn and the CMP1n register after the change match, an inactive level is output. 8-bit timer counter Hn is not cleared and the INTTMHn signal is not generated.
- <6> Clearing the TMHEn bit to 0 during timer Hn operation sets the INTTMHn signal to the default and PWM output to an inactive level.

**Remark** n = 0 to 2, however, TOH0 and TOH1 only for TOHn



### 8.4.3 Carrier generator operation (8-bit timer H1 only)

In the carrier generator mode, the 8-bit timer H1 is used to generate the carrier signal of an infrared remote controller, and the 8-bit timer/event counter 51 is used to generate an infrared remote control signal (time count).

The carrier clock generated by the 8-bit timer H1 is output in the cycle set by the 8-bit timer/event counter 51.

In carrier generator mode, the output of the 8-bit timer H1 carrier pulse is controlled by the 8-bit timer/event counter 51, and the carrier pulse is output from the TOH1 output.

#### (1) Carrier generation

In carrier generator mode, the 8-bit timer H compare register 01 (CMP01) generates a low-level width carrier pulse waveform and the 8-bit timer H compare register 11 (CMP11) generates a high-level width carrier pulse waveform.

Rewriting the CMP11 register during the 8-bit timer H1 operation is possible but rewriting the CMP01 register is prohibited.


#### (2) Carrier output control

Carrier output is controlled by the interrupt request signal (INTTM51) of the 8-bit timer/event counter 51 and the NRZB1 and RMC1 bits of the 8-bit timer H carrier control register (TMCYC1). The relationship between the outputs is shown below.

RMC1 Bit	NRZB1 Bit	Output
0	0	Low-level output
0	1	High-level output at rising edge of INTTM51 signal input
1	0	Low-level output
1	1	Carrier pulse output at rising edge of INTTM51 signal input

To control the carrier pulse output during a count operation, the NRZ1 and NRZB1 bits of the TMCYC1 register have a master and slave bit configuration. The NRZ1 bit is read-only but the NRZB1 bit can be read and written. The INTTM51 signal is synchronized with the 8-bit timer H1 count clock and is output as the INTTM5H1 signal. The INTTM5H1 signal becomes the data transfer signal of the NRZ1 bit, and the NRZB1 bit value is transferred to the NRZ1 bit. The timing for transfer from the NRZB1 bit to the NRZ1 bit is as shown below.

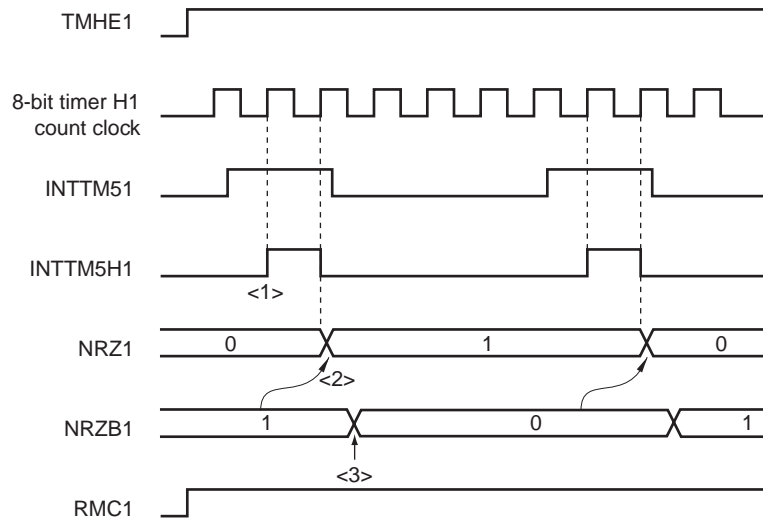**Figure 8-15. Transfer Timing**



- <1> The INTTM51 signal is synchronized with the count clock of the 8-bit timer H1 and is output as the INTTM5H1 signal.
- <2> The value of the NRZB1 bit is transferred to the NRZ1 bit at the second clock from the rising edge of the INTTM5H1 signal.
- <3> Write the next value to the NRZB1 bit in the interrupt servicing program that has been started by the INTTM5H1 interrupt or after timing has been checked by polling the interrupt request flag. Write data to count the next time to the CR51 register.


- Cautions**
1. Do not rewrite the NRZB1 bit again until at least the second clock after it has been rewritten, or else the transfer from the NRZB1 bit to the NRZ1 bit is not guaranteed.
  2. When the 8-bit timer/event counter 51 is used in the carrier generator mode, an interrupt is generated at the timing of <1>. When the 8-bit timer/event counter 51 is used in a mode other than the carrier generator mode, the timing of the interrupt generation differs.

**Remark** INTTM5H1 is an internal signal and not an interrupt source.

**Setting**

<1> Set each register.

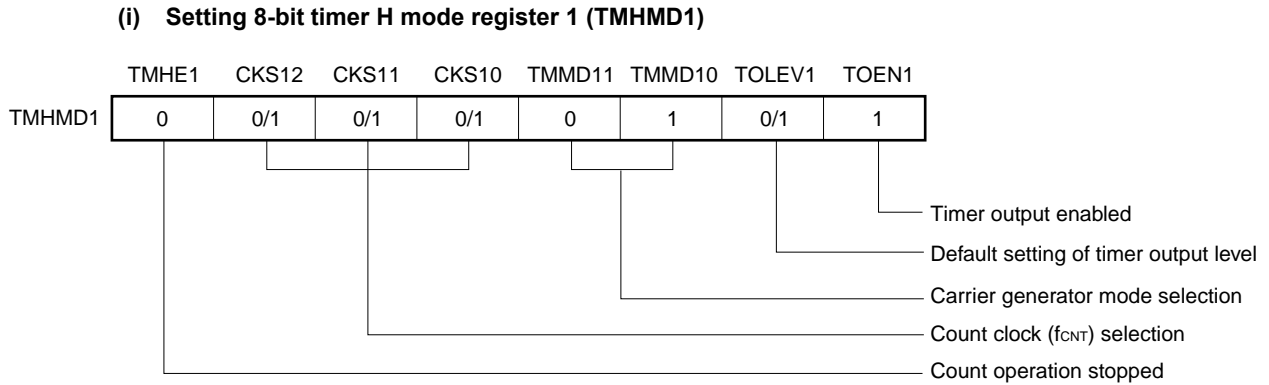**Figure 8-16. Register Setting in Carrier Generator Mode**



(ii) **CMP01 register setting**

- Compare value

(iii) **CMP11 register setting**

- Compare value

(iv) **TMCYC1 register setting**

- RMC1 = 1 ... Remote control output enable bit
- NRZB1 = 0/1 ... carrier output enable bit

(v) **TCL51 and TMC51 register setting**

- See 7.3 **Registers Controlling 8-Bit Timer/Event Counters 50, 51, and 52.**

<2> When TMHE1 = 1, the 8-bit timer H1 starts counting.

<3> When TCE51 of the 8-bit timer mode control register 51 (TMC51) is set to 1, the 8-bit timer/event counter 51 starts counting.

<4> After the count operation is enabled, the first compare register to be compared is the CMP01 register. When the count value of the 8-bit timer counter H1 and the CMP01 register value match, the INTTMH1 signal is generated, the 8-bit timer counter H1 is cleared. At the same time, the compare register to be compared with the 8-bit timer counter H1 is switched from the CMP01 register to the CMP11 register.

<5> When the count value of the 8-bit timer counter H1 and the CMP11 register value match, the INTTMH1 signal is generated, the 8-bit timer counter H1 is cleared. At the same time, the compare register to be compared with the 8-bit timer counter H1 is switched from the CMP11 register to the CMP01 register.

<6> By performing procedures <4> and <5> repeatedly, a carrier clock is generated.

<7> The INTTM51 signal is synchronized with count clock of the 8-bit timer H1 and output as the INTTM5H1 signal. The INTTM5H1 signal becomes the data transfer signal for the NRZB1 bit, and the NRZB1 bit value is transferred to the NRZ1 bit.

<8> Write the next value to the NRZB1 bit in the interrupt servicing program that has been started by the INTTM5H1 interrupt or after timing has been checked by polling the interrupt request flag. Write data to count the next time to the CR51 register.

<9> When the NRZ1 bit is high level, a carrier clock is output by TOH1 output.

<10> By performing the procedures above, an arbitrary carrier clock is obtained. To stop the count operation, clear TMHE1 to 0.


If the setting value of the CMP01 register is N, the setting value of the CMP11 register is M, and the count clock frequency is  $f_{CNT}$ , the carrier clock output cycle and duty are as follows.

- Carrier clock output cycle =  $(N + M + 2)/f_{CNT}$
- Duty = High-level width/carrier clock output width =  $(M + 1)/(N + M + 2)$

- Cautions**
1. **Be sure to set the CMP11 register when starting the timer count operation (TMHE1 = 1) after the timer count operation was stopped (TMHE1 = 0) (be sure to set again even if setting the same value to the CMP11 register).**
  2. **Set so that the count clock frequency of TMH1 becomes more than 6 times the count clock frequency of TM51.**
  3. **Set the values of the CMP01 and CMP11 registers in a range of 01H to FFH.**
  4. **The set value of the CMP11 register can be changed while the timer counter is operating. However, it takes the duration of three operating clocks (signal selected by the CKS12 to CKS10 bits of the TMHMD1 register) since the value of the CMP11 register has been changed until the value is transferred to the register.**
  5. **Be sure to set the RMC1 bit before the count operation is started.**

- Remarks**
1. For the setting of the output pin, see **8.3 (3) Port mode register 3 (PM3)**.
  2. For how to enable the INTTMH1 signal interrupt, see **CHAPTER 17 INTERRUPT FUNCTIONS**.

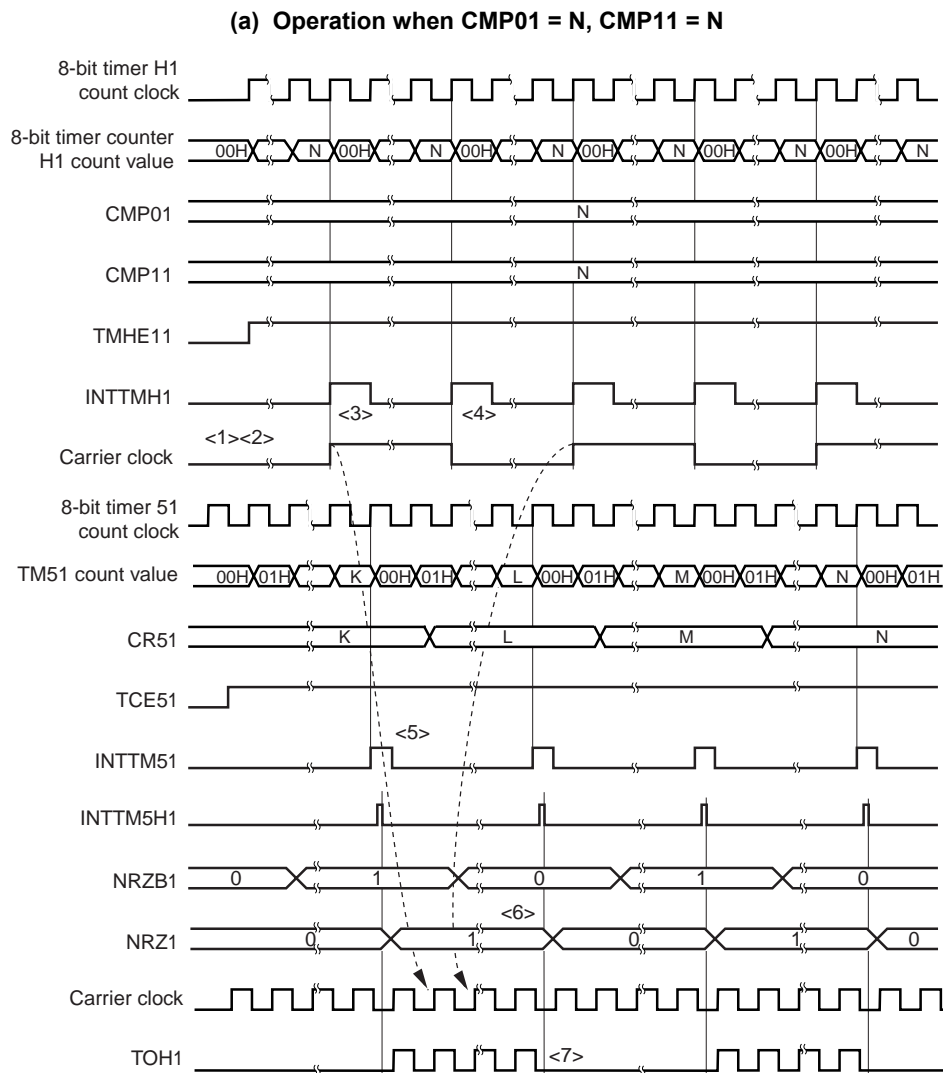
Figure 8-17. Carrier Generator Mode Operation Timing (1/3)



- <1> When TMHE1 = 0 and TCE51 = 0, the 8-bit timer counter H1 operation is stopped.
- <2> When TMHE1 = 1 is set, the 8-bit timer counter H1 starts a count operation. At that time, the carrier clock remains default.
- <3> When the count value of the 8-bit timer counter H1 matches the CMP01 register value, the first INTTMH1 signal is generated, the carrier clock signal is inverted, and the compare register to be compared with the 8-bit timer counter H1 is switched from the CMP01 register to the CMP11 register. The 8-bit timer counter H1 is cleared to 00H.
- <4> When the count value of the 8-bit timer counter H1 matches the CMP11 register value, the INTTMH1 signal is generated, the carrier clock signal is inverted, and the compare register to be compared with the 8-bit timer counter H1 is switched from the CMP11 register to the CMP01 register. The 8-bit timer counter H1 is cleared to 00H. By performing procedures <3> and <4> repeatedly, a carrier clock with duty fixed to 50% is generated.
- <5> When the INTTM51 signal is generated, it is synchronized with the 8-bit timer H1 count clock and is output as the INTTM5H1 signal.
- <6> The INTTM5H1 signal becomes the data transfer signal for the NRZB1 bit, and the NRZB1 bit value is transferred to the NRZ1 bit.
- <7> When NRZ1 = 0 is set, the TOH1 output becomes low level.

**Remark** INTTM5H1 is an internal signal and not an interrupt source.

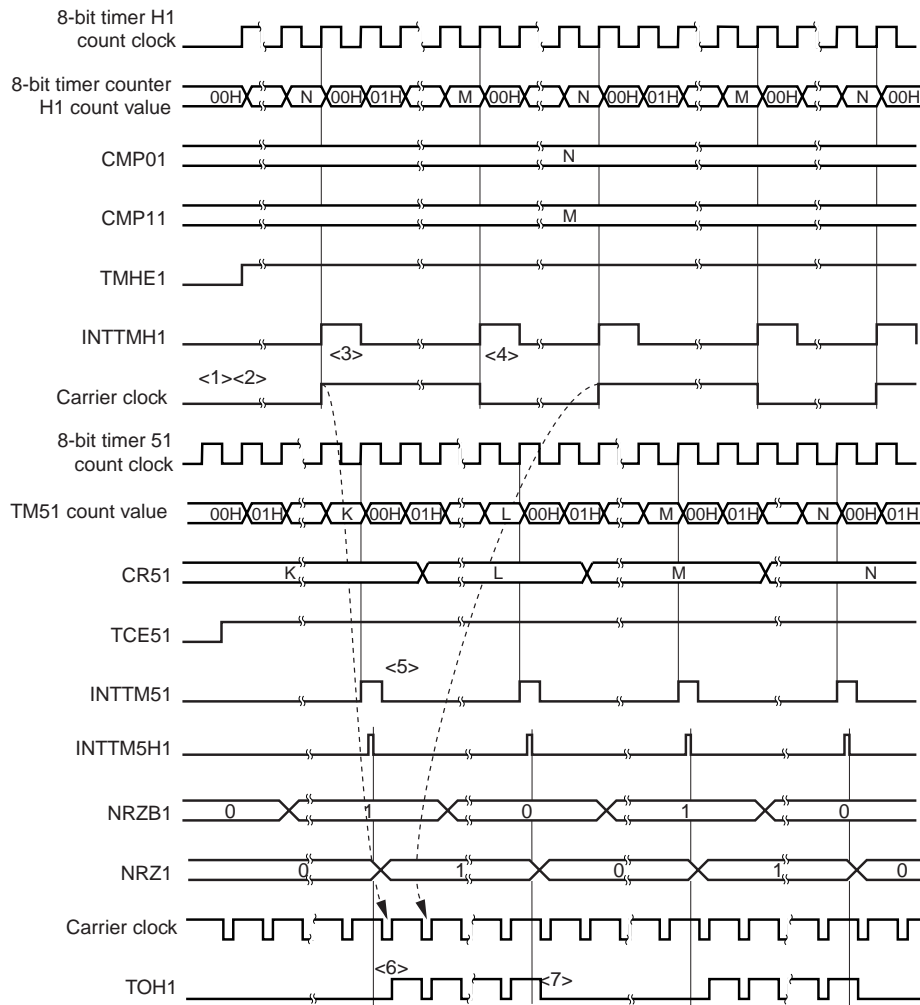
Figure 8-17. Carrier Generator Mode Operation Timing (2/3)

(b) Operation when  $CMP01 = N$ ,  $CMP11 = M$ 

- <1> When  $TMHE1 = 0$  and  $TCE51 = 0$ , the 8-bit timer counter H1 operation is stopped.
- <2> When  $TMHE1 = 1$  is set, the 8-bit timer counter H1 starts a count operation. At that time, the carrier clock remains default.
- <3> When the count value of the 8-bit timer counter H1 matches the  $CMP01$  register value, the first  $INTTMH1$  signal is generated, the carrier clock signal is inverted, and the compare register to be compared with the 8-bit timer counter H1 is switched from the  $CMP01$  register to the  $CMP11$  register. The 8-bit timer counter H1 is cleared to 00H.
- <4> When the count value of the 8-bit timer counter H1 matches the  $CMP11$  register value, the  $INTTMH1$  signal is generated, the carrier clock signal is inverted, and the compare register to be compared with the 8-bit timer counter H1 is switched from the  $CMP11$  register to the  $CMP01$  register. The 8-bit timer counter H1 is cleared to 00H. By performing procedures <3> and <4> repeatedly, a carrier clock with duty fixed to other than 50% is generated.
- <5> When the  $INTTM51$  signal is generated, it is synchronized with the 8-bit timer H1 count clock and is output as the  $INTTM5H1$  signal.
- <6> A carrier signal is output at the first rising edge of the carrier clock if  $NRZ1$  is set to 1.
- <7> When  $NRZ1 = 0$ , the  $TOH1$  output is held at the high level and is not changed to low level while the carrier clock is high level (from <6> and <7>, the high-level width of the carrier clock waveform is guaranteed).

**Remark**  $INTTM5H1$  is an internal signal and not an interrupt source.

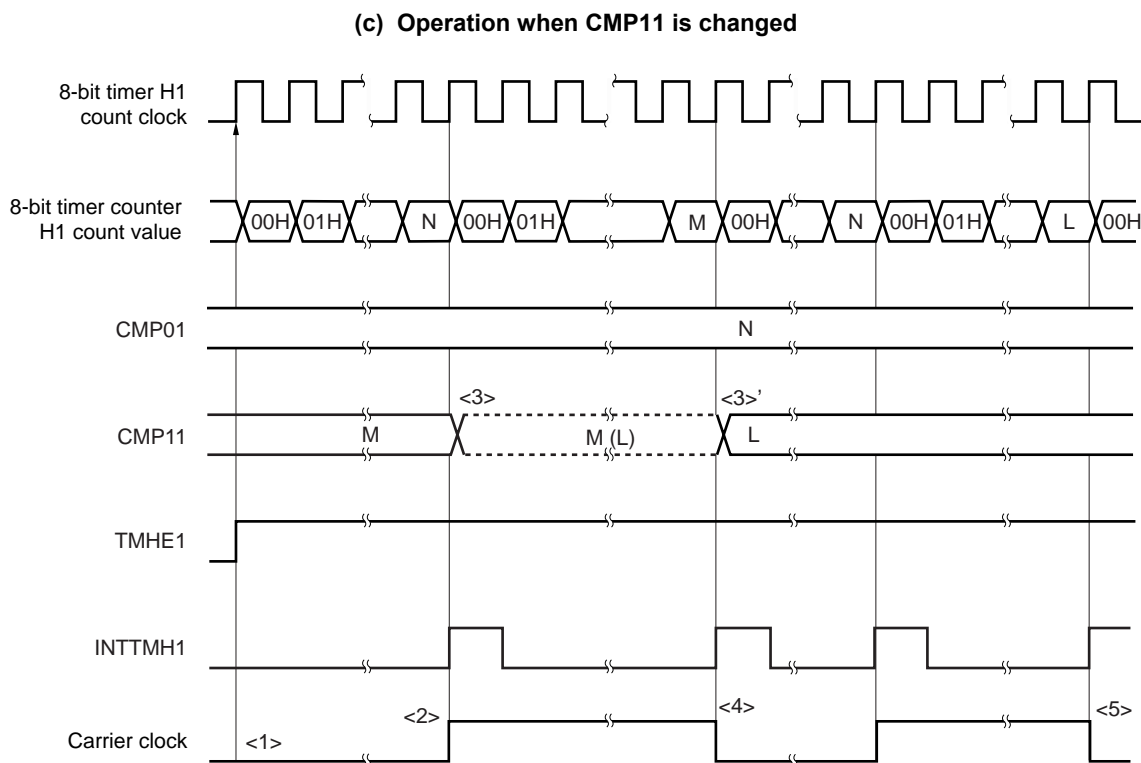Figure 8-17. Carrier Generator Mode Operation Timing (3/3)



- <1> When TMHE1 = 1 is set, the 8-bit timer H1 starts a count operation. At that time, the carrier clock remains default.
- <2> When the count value of the 8-bit timer counter H1 matches the value of the CMP01 register, the INTTMH1 signal is output, the carrier signal is inverted, and the timer counter is cleared to 00H. At the same time, the compare register whose value is to be compared with that of the 8-bit timer counter H1 is changed from the CMP01 register to the CMP11 register.
- <3> The CMP11 register is asynchronous to the count clock, and its value can be changed while the 8-bit timer H1 is operating. The new value (L) to which the value of the register is to be changed is latched. When the count value of the 8-bit timer counter H1 matches the value (M) of the CMP11 register before the change, the CMP11 register is changed (<3>'). However, it takes three count clocks or more since the value of the CMP11 register has been changed until the value is transferred to the register. Even if a match signal is generated before the duration of three count clocks elapses, the new value is not transferred to the register.
- <4> When the count value of 8-bit timer counter H1 matches the value (M) of the CMP1 register before the change, the INTTMH1 signal is output, the carrier signal is inverted, and the timer counter is cleared to 00H. At the same time, the compare register whose value is to be compared with that of the 8-bit timer counter H1 is changed from the CMP11 register to the CMP01 register.
- <5> The timing at which the count value of the 8-bit timer counter H1 and the CMP11 register value match again is indicated by the value after the change (L).

## CHAPTER 9 REAL-TIME COUNTER

### 9.1 Functions of Real-Time Counter

The real-time counter has the following features.

- Having counters of year, month, week, day, hour, minute, and second, and can count up to 99 years.
- Constant-period interrupt function (period: 1 month to 0.5 seconds)
- Alarm interrupt function (alarm: week, hour, minute)
- Interval interrupt function
- Pin output function of 1 Hz
- Pin output function of 512 Hz or 16.384 kHz or 32.768 kHz

### 9.2 Configuration of Real-Time Counter


The real-time counter includes the following hardware.

**Table 9-1. Configuration of Real-Time Counter**

Item	Configuration
Control registers	Real-time counter clock selection register (RTCCL)
	Real-time counter control register 0 (RTCC0)
	Real-time counter control register 1 (RTCC1)
	Real-time counter control register 2 (RTCC2)
	Sub-count register (RSUBC)
	Second count register (SEC)
	Minute count register (MIN)
	Hour count register (HOUR)
	Day count register (DAY)
	Week count register (WEEK)
	Month count register (MONTH)
	Year count register (YEAR)
	Watch error correction register (SUBCUD)
	Alarm minute register (ALARMWM)
	Alarm hour register (ALARMWH)
	Alarm week register (ALARMWW)



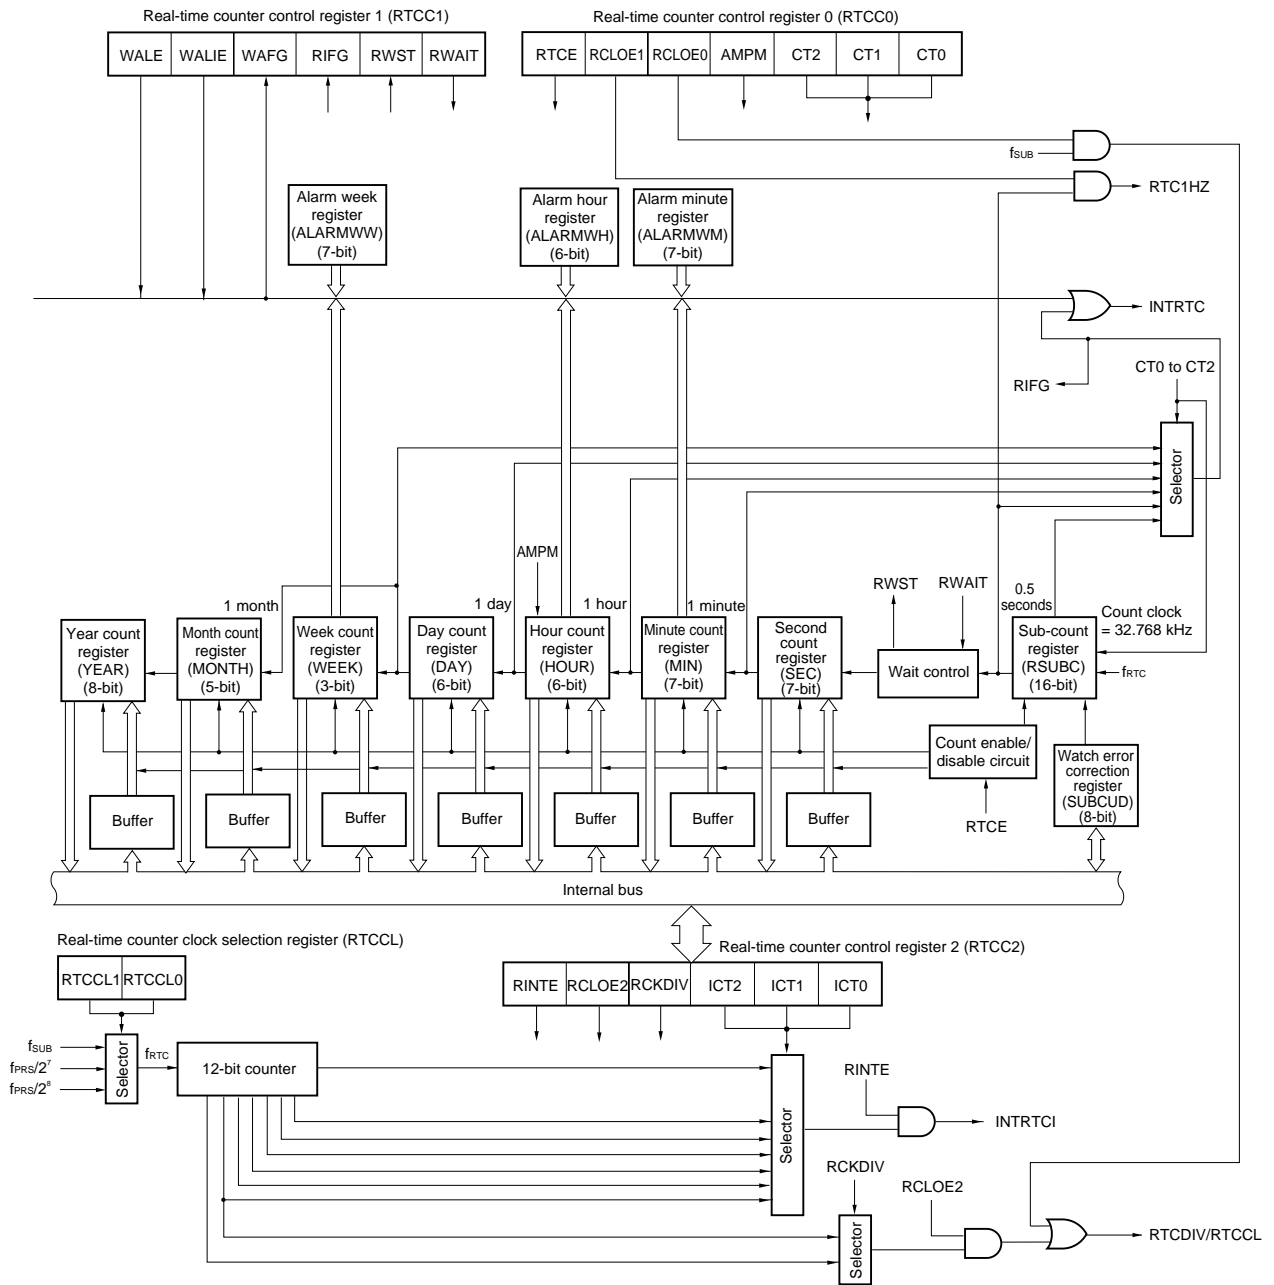Figure 9-1. Block Diagram of Real-Time Counter



### 9.3 Registers Controlling Real-Time Counter

Timer real-time counter is controlled by the following 16 registers.

#### (1) Real-time counter clock selection register (RTCCL)

This register controls the mode of real-time counter.

RTCCL can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-2. Format of Real-time Counter Clock Selection Register (RTCCL)**

Address: FF54H After reset: 00H R/W

Symbol	7	6	5	4	3	2	<1>	<0>
RTCCL	0	0	0	0	0	0	RTCCL1	RTCCL0

RTCCL1	RTCCL0	Control of real-time counter (RTC) input clock ( $f_{RTC}$ )
0	0	$f_{SUB}$
0	1	$f_{PRS}/2^7$
1	0	$f_{PRS}/2^8$
1	1	Setting prohibited

- Remark**
- When  $f_{PRS} = 4.19 \text{ MHz}$ ,  $f_{RTC} = f_{PRS}/2^7 = 32.768 \text{ kHz}$
  - When  $f_{PRS} = 8.38 \text{ MHz}$ ,  $f_{RTC} = f_{PRS}/2^8 = 32.768 \text{ kHz}$

#### (2) Real-time counter control register 0 (RTCC0)

The RTCC0 register is an 8-bit register that is used to start or stop the real-time counter operation, control the RTCCL and RTC1HZ pins, and set a 12- or 24-hour system and the constant-period interrupt function.

RTCC0 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

Figure 9-3. Format of Real-Time Counter Control Register 0 (RTCC0)

Address: FF89H After reset: 00H R/W

Symbol	<7>	6	<5>	<4>	3	2	1	0
RTCC0	RTCE	0	RCLOE1	RCLOE0	AMPM	CT2	CT1	CT0

RTCE	Real-time counter operation control
0	Stops counter operation.
1	Starts counter operation.

RCLOE1	RTC1HZ pin output control
0	Disables output of RTC1HZ pin (1 Hz).
1	Enables output of RTC1HZ pin (1 Hz).

RCLOE0 <sup>Note</sup>	RTCCL pin output control
0	Disables output of RTCCL pin (32.768 kHz).
1	Enables output of RTCCL pin (32.768 kHz).

AMPM	Selection of 12-/24-hour system
0	12-hour system (a.m. and p.m. are displayed.)
1	24-hour system

- To change the value of AMPM, set RWAIT (bit 0 of RTCC1) to 1, and re-set the hour count register (HOUR).
- Table 9-2 shows the displayed time digits that are displayed.

CT2	CT1	CT0	Constant-period interrupt (INTRTC) selection
0	0	0	Does not use constant-period interrupt function.
0	0	1	Once per 0.5 s (synchronized with second count up)
0	1	0	Once per 1 s (same time as second count up)
0	1	1	Once per 1 m (second 00 of every minute)
1	0	0	Once per 1 hour (minute 00 and second 00 of every hour)
1	0	1	Once per 1 day (hour 00, minute 00, and second 00 of every day)
1	1	×	Once per 1 month (Day 1, hour 00 a.m., minute 00, and second 00 of every month)

After changing the values of CT2 to CT0, clear the interrupt request flag.

**Note** RCLOE0 and RCLOE2 must not be enabled at the same time.

**Caution** If RCLOE0 and RCLOE1 are changed when RTCE = 1, a pulse with a narrow width may be generated on the 32.768 kHz and 1 Hz output signals.

**Remark** ×: don't care

**Table 9-2. Displayed Time Digits**

24-Hour System	12-Hour System	24-Hour System	12-Hour System
00	12 (AM12)	12	32 (PM12)
01	01 (AM1)	13	21 (PM1)
02	02 (AM2)	14	22 (PM2)
03	03 (AM3)	15	23 (PM3)
04	04 (AM4)	16	24 (PM4)
05	05 (AM5)	17	25 (PM5)
06	06 (AM6)	18	26 (PM6)
07	07 (AM7)	19	27 (PM7)
08	08 (AM8)	20	28 (PM8)
09	09 (AM9)	21	29 (PM9)
10	10 (AM10)	22	30 (PM10)
11	11 (AM11)	23	31 (PM11)

**(3) Real-time counter control register 1 (RTCC1)**

The RTCC1 register is an 8-bit register that is used to control the alarm interrupt function and the wait time of the counter.

RTCC1 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-4. Format of Real-Time Counter Control Register 1 (RTCC1) (1/2)**

Address: FF8AH After reset: 00H R/W

Symbol	<7>	<6>	5	<4>	<3>	2	<1>	<0>
RTCC1	WALE	WALIE	0	WAFG	RIFG	0	RWST	RWAIT

WALE	Alarm operation control
0	Match operation is invalid.
1	Match operation is valid.
To set the registers of alarm (WALIE flag of RTCC1, ALARMWMM register, ALARMWH register, and ALARMWWW register), disable WALE (clear it to "0").	

WALIE	Control of alarm interrupt (INTRTC) function operation
0	Does not generate interrupt on matching of alarm.
1	Generates interrupt on matching of alarm.

WAFG	Alarm detection status flag
0	Alarm mismatch
1	Detection of matching of alarm
This is a status flag that indicates detection of matching with the alarm. It is valid only when WALE = 1 and is set to "1" one clock (32.768 kHz) after matching of the alarm is detected. This flag is cleared when "0" is written to it. Writing "1" to it is invalid.	

**Figure 9-4. Format of Real-Time Counter Control Register 1 (RTCC1) (2/2)**

RIFG	Constant-period interrupt status flag
0	Constant-period interrupt is not generated.
1	Constant-period interrupt is generated.

This flag indicates the status of generation of the constant-period interrupt. When the constant-period interrupt is generated, it is set to "1".  
This flag is cleared when "0" is written to it. Writing "1" to it is invalid.

RWST	Wait status flag of real-time counter
0	Counter is operating.
1	Mode to read or write counter value

This status flag indicates whether the setting of RWAIT is valid.  
Before reading or writing the counter value, confirm that the value of this flag is 1.

RWAIT	Wait control of real-time counter
0	Sets counter operation.
1	Stops SEC to YEAR counters. Mode to read or write counter value

This bit controls the operation of the counter.  
Be sure to write "1" to it to read or write the counter value.  
Because RSUBC continues operation, complete reading or writing of it in 1 second, and clear this bit back to 0.  
When RWAIT = 1, it takes up to 1 clock (32.768 kHz) until the counter value can be read or written.  
If RSUBC overflows when RWAIT = 1, it counts up after RWAIT = 0. If the second count register is written, however, it does not count up because RSUBC is cleared.

**Caution** If writing is performed to the WAFG flag with a 1-bit manipulation instruction, the RIFG flag may be cleared. Therefore, to perform writing to the WAFG flag, be sure to use an 8-bit manipulation instruction, and at this time, set 1 to the RIFG flag to invalidate writing. In the same way, to perform writing to the RIFG flag, use an 8-bit manipulation instruction and set 1 the WAFR flag.

**Remark** Fixed-cycle interrupts and alarm match interrupts use the same interrupt source (INTRTC). When using these two types of interrupts at the same time, which interrupt occurred can be judged by checking the fixed-cycle interrupt status flag (RIFG) and the alarm detection status flag (WAFG) upon INTRTC occurrence.

**(4) Real-time counter control register 2 (RTCC2)**

The RTCC2 register is an 8-bit register that is used to control the interval interrupt function and the RTCDIV pin.

RTCC2 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-5. Format of Real-Time Counter Control Register 2 (RTCC2)**

Address: FF8BH After reset: 00H R/W

Symbol	<7>	<6>	<5>	4	3	2	1	0
RTCC2	RINTE	RCLOE2	RCKDIV	0	0	ICT2	ICT1	ICT0

RINTE	ICT2	ICT1	ICT0	Interval interrupt (INTRTCI) selection
0	×	×	×	Interval interrupt is not generated.
1	0	0	0	$2^6/f_{RTC}$ (1.953125 ms)
1	0	0	1	$2^7/f_{RTC}$ (3.90625 ms)
1	0	1	0	$2^8/f_{RTC}$ (7.8125 ms)
1	0	1	1	$2^9/f_{RTC}$ (15.625 ms)
1	1	0	0	$2^{10}/f_{RTC}$ (31.25 ms)
1	1	0	1	$2^{11}/f_{RTC}$ (62.5 ms)
1	1	1	×	$2^{12}/f_{RTC}$ (125 ms)

Change ICT2, ICT1, and ICT0 when RINTE = 0.

RCLOE2 <sup>Note</sup>	RTCDIV pin output control
0	Output of RTCDIV pin is disabled.
1	Output of RTCDIV pin is enabled.

RCKDIV	Selection of RTCDIV pin output frequency
0	RTCDIV pin outputs 512 Hz.
1	RTCDIV pin outputs 16.384 kHz.

**Note** RCLOE0 and RCLOE2 must not be enabled at the same time.

**Caution** When the output from RTCDIV pin is stopped, the output continues after a maximum of two clocks of  $f_{RTC}$  and enters the low level. While 512 Hz is output, and when the output is stopped immediately after entering the high level, a pulse of at least one clock width of  $f_{XT}$  may be generated.

**(5) Sub-count register (RSUBC)**

The RSUBC register is a 16-bit register that counts the reference time of 1 second of the real-time counter. It takes a value of 0000H to 7FFFH and counts 1 second with a clock of 32.768 kHz.

RSUBC can be set by a 16-bit memory manipulation instruction.

Reset signal generation clears this register to 0000H.

- Cautions**
1. When a correction is made by using the SUBCUD register, the value may become 8000H or more.
  2. This register is also cleared by reset effected by writing the second count register.
  3. The value read from this register is not guaranteed if it is read during operation, because a value that is changing is read.

**Figure 9-6. Format of Sub-Count Register (RSUBC)**

Address: FF60H After reset: 0000H R

Symbol	7	6	5	4	3	2	1	0
RSUBC	SUBC7	SUBC6	SUBC5	SUBC4	SUBC3	SUBC2	SUBC1	SUBC0

Address: FF61H After reset: 0000H R

Symbol	7	6	5	4	3	2	1	0
RSUBC	SUBC15	SUBC14	SUBC13	SUBC12	SUBC11	SUBC10	SUBC9	SUBC8

**(6) Second count register (SEC)**

The SEC register is an 8-bit register that takes a value of 0 to 59 (decimal) and indicates the count value of seconds.

It counts up when the sub-counter overflows.

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 00 to 59 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

SEC can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-7. Format of Second Count Register (SEC)**

Address: FF62H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
SEC	0	SEC40	SEC20	SEC10	SEC8	SEC4	SEC2	SEC1

**(7) Minute count register (MIN)**

The MIN register is an 8-bit register that takes a value of 0 to 59 (decimal) and indicates the count value of minutes.

It counts up when the second counter overflows.

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 00 to 59 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

MIN can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-8. Format of Minute Count Register (MIN)**

Address: FF63H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
MIN	0	MIN40	MIN20	MIN10	MIN8	MIN4	MIN2	MIN1

**(8) Hour count register (HOUR)**

The HOUR register is an 8-bit register that takes a value of 0 to 23 or 1 to 12 (decimal) and indicates the count value of hours.

It counts up when the minute counter overflows.

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 00 to 23, 01 to 12, or 21 to 32 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

HOUR can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 12H.

However, the value of this register is 00H if the AMPM bit is set to 1 after reset.

**Figure 9-9. Format of Hour Count Register (HOUR)**

Address: FF64H After reset: 12H R/W

Symbol	7	6	5	4	3	2	1	0
HOUR	0	0	HOUR20	HOUR10	HOUR8	HOUR4	HOUR2	HOUR1

**Caution** Bit 5 (HOUR20) of HOUR indicates AM(0)/PM(1) if AMPM = 0 (if the 12-hour system is selected).



**(9) Day count register (DAY)**

The DAY register is an 8-bit register that takes a value of 1 to 31 (decimal) and indicates the count value of days.

It counts up when the hour counter overflows.

This counter counts as follows.

- 01 to 31 (January, March, May, July, August, October, December)
- 01 to 30 (April, June, September, November)
- 01 to 29 (February, leap year)
- 01 to 28 (February, normal year)

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 00 to 31 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

DAY can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 01H.

**Figure 9-10. Format of Day Count Register (DAY)**

Address: FF66H    After reset: 01H    R/W

Symbol	7	6	5	4	3	2	1	0
DAY	0	0	DAY20	DAY10	DAY8	DAY4	DAY2	DAY1

**(10) Week count register (WEEK)**

The WEEK register is an 8-bit register that takes a value of 0 to 6 (decimal) and indicates the count value of weekdays.

It counts up in synchronization with the day counter.

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 00 to 06 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

WEEK can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-11. Format of Week Count Register (WEEK)**

Address: FF65H    After reset: 00H    R/W

Symbol	7	6	5	4	3	2	1	0
WEEK	0	0	0	0	0	WEEK4	WEEK2	WEEK1

**(11) Month count register (MONTH)**

The MONTH register is an 8-bit register that takes a value of 1 to 12 (decimal) and indicates the count value of months.

It counts up when the day counter overflows.

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 01 to 12 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

MONTH can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 01H.

**Figure 9-12. Format of Month Count Register (MONTH)**

Address: FF67H After reset: 01H R/W

Symbol	7	6	5	4	3	2	1	0
MONTH	0	0	0	MONTH10	MONTH8	MONTH4	MONTH2	MONTH1

**(12) Year count register (YEAR)**

The YEAR register is an 8-bit register that takes a value of 0 to 99 (decimal) and indicates the count value of years.

It counts up when the month counter overflows.

Values 00, 04, 08, ..., 92, and 96 indicate a leap year.

When data is written to this register, it is written to a buffer and then to the counter up to 2 clocks (32.768 kHz) later. Set a decimal value of 00 to 99 to this register in BCD code. If a value outside this range is set, the register value returns to the normal value after 1 period.

YEAR can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 9-13. Format of Year Count Register (YEAR)**

Address: FF68H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
YEAR	YEAR80	YEAR40	YEAR20	YEAR10	YEAR8	YEAR4	YEAR2	YEAR1

**(13) Watch error correction register (SUBCUD)**

This register is used to correct the count value of the sub-count register (RSUBC).  
 SUBCUD can be set by an 8-bit memory manipulation instruction.  
 Reset signal generation clears this register to 00H.

**Figure 9-14. Format of Watch Error Correction Register (SUBCUD)**

Address: FF82H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
SUBCUD	DEV	F6	F5	F4	F3	F2	F1	F0

DEV	Setting of watch error correction timing
0	Corrects watch error when the second digits are at 00, 20, or 40.
1	Corrects watch error only when the second digits are at 00.

F6	Setting of watch error correction method
0	Increases by $\{(F5, F4, F3, F2, F1, F0) - 1\} \times 2$ .
1	Decreases by $\{(/F5, /F4, /F3, /F2, /F1, /F0) + 1\} \times 2$ .
When (F6, F5, F4, F3, F2, F1, F0) = (*, 0, 0, 0, 0, 0, *), the watch error is not corrected. /F5 to /F0 are the inverted values of the corresponding bits (000011 when 111100).	

**(14) Alarm minute register (ALARMWM)**

This register is used to set minutes of alarm.  
 ALARMWM can be set by an 8-bit memory manipulation instruction.  
 Reset signal generation clears this register to 00H.

**Caution** Set a decimal value of 00 to 59 to this register in BCD code. If a value outside the range is set, the alarm is not detected.

**Figure 9-15. Format of Alarm Minute Register (ALARMWM)**

Address: FF86H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ALARMWM	0	WM40	WM20	WM10	WM8	WM4	WM2	WM1

**(15) Alarm hour register (ALARMWH)**

This register is used to set hours of alarm.

ALARMWH can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 12H.

**Caution** Set a decimal value of 00 to 23, 01 to 12, or 21 to 32 to this register in BCD code. If a value outside the range is set, the alarm is not detected.

**Figure 9-16. Format of Alarm Hour Register (ALARMWH)**

Address: FF87H After reset: 12H R/W

Symbol	7	6	5	4	3	2	1	0
ALARMWH	0	0	WH20	WH10	WH8	WH4	WH2	WH1

**Caution** Bit 5 (WH20) of ALARMWH indicates AM(0)/PM(1) if AMPM = 0 (if the 12-hour system is selected).

**(16) Alarm week register (ALARMWW)**

This register is used to set date of alarm.

ALARMWW can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Caution** Set a decimal value of 00 to 23, 01 to 12, or 21 to 32 to this register in BCD code. If a value outside the range is set, the alarm is not detected.

**Figure 9-17. Format of Alarm Week Register (ALARMWW)**

Address: FF88H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ALARMWW	0	WW6	WW5	WW4	WW3	WW2	WW1	WW0


Here is an example of setting the alarm.

Time of Alarm	Day							12-Hour Display				24-Hour Display			
	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Hour 10	Hour 1	Minute 10	Minute 1	Hour 10	Hour 1	Minute 10	Minute 1
	W 0	W 1	W 2	W 3	W 4	W 5	W 6								
Every day, 0:00 a.m.	1	1	1	1	1	1	1	1	2	0	0	0	0	0	0
Every day, 1:30 a.m.	1	1	1	1	1	1	1	0	1	3	0	0	1	3	0
Every day, 11:59 a.m.	1	1	1	1	1	1	1	1	1	5	9	1	1	5	9
Monday through Friday, 0:00 p.m.	0	1	1	1	1	1	0	3	2	0	0	1	2	0	0
Sunday, 1:30 p.m.	1	0	0	0	0	0	0	2	1	3	0	1	3	3	0
Monday, Wednesday, Friday, 11:59 p.m.	0	1	0	1	0	1	0	3	1	5	9	2	3	5	9

9.4 Real-Time Counter Operation

9.4.1 Starting operation of real-time counter

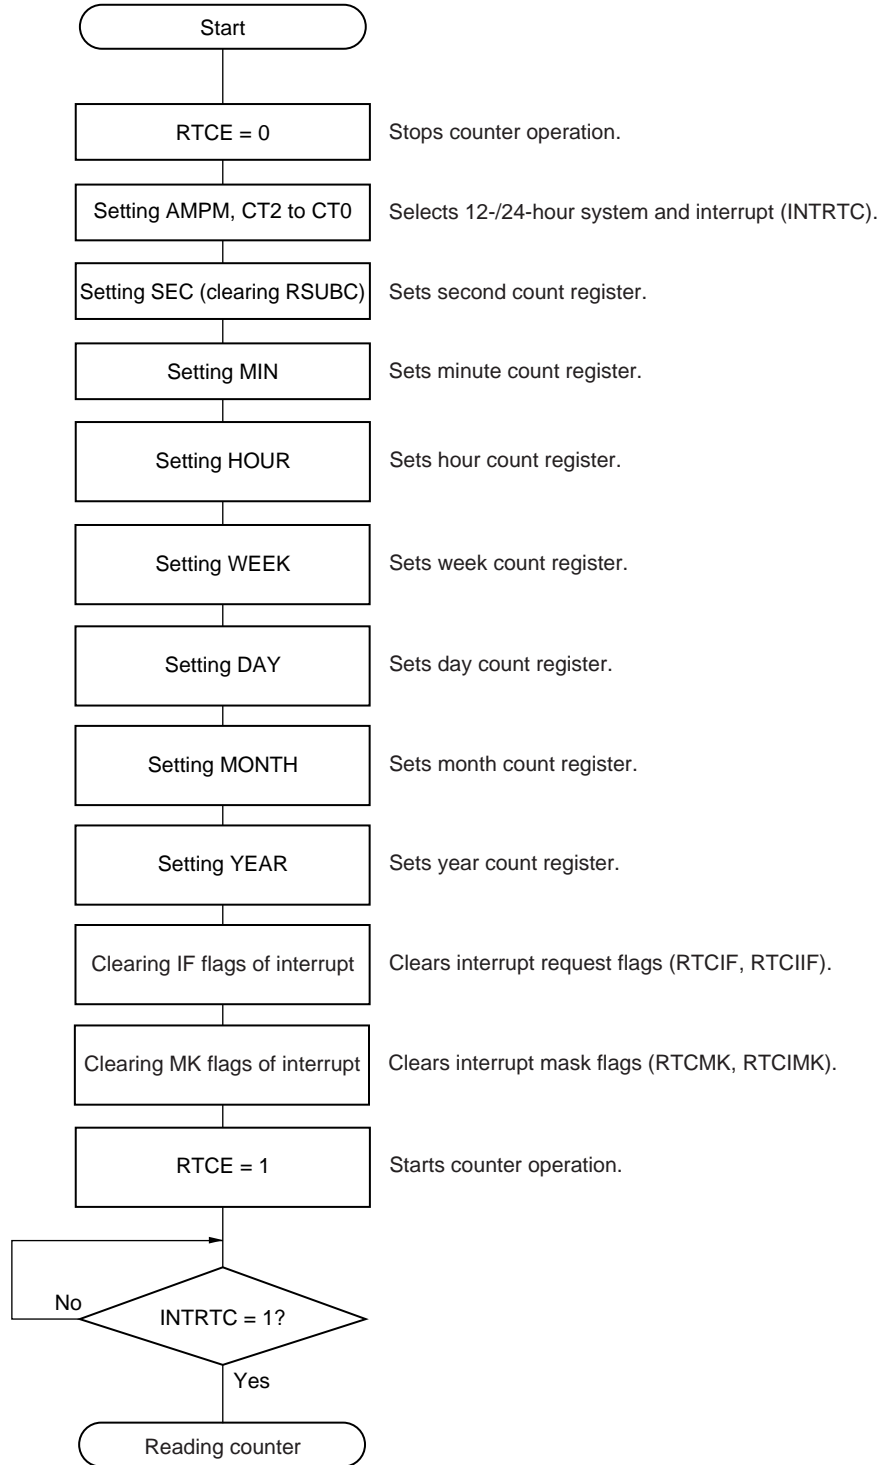
Figure 9-18. Procedure for Starting Operation of Real-Time Counter



9.4.2 Reading/writing real-time counter

Read or write the counter when RWAIT = 1.

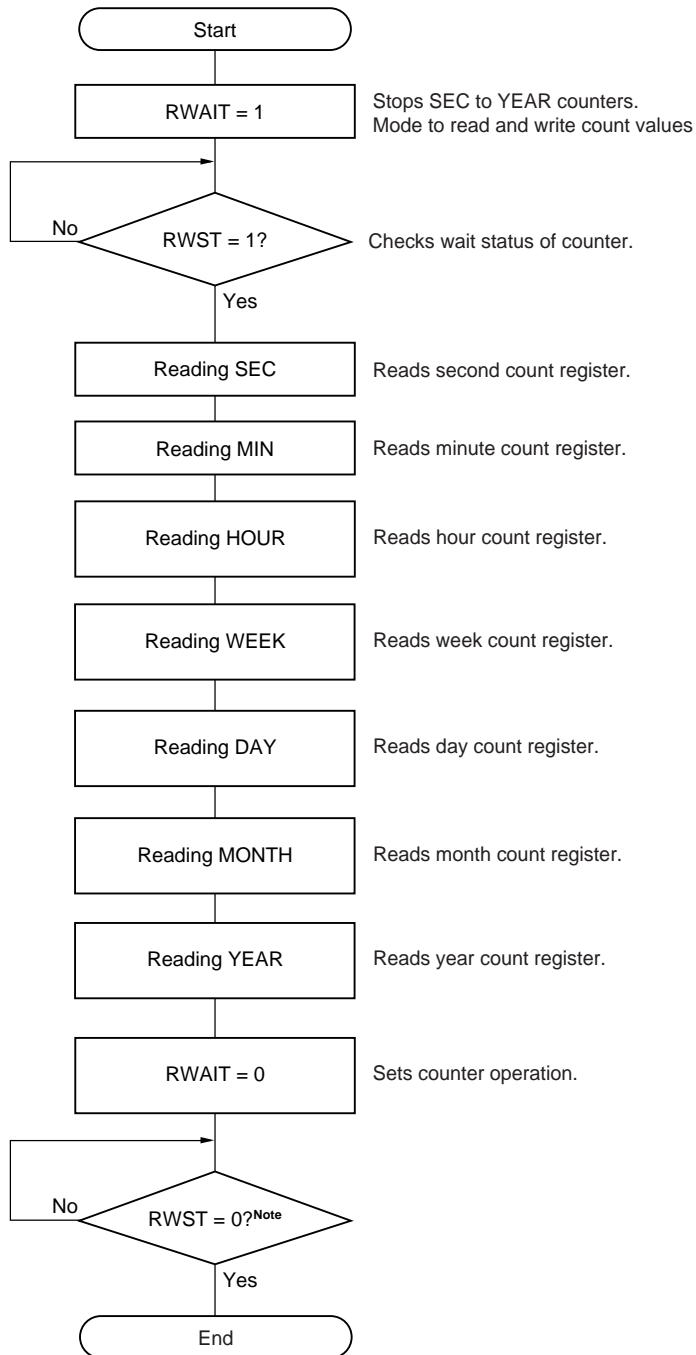Figure 9-19. Procedure for Reading Real-Time Counter




**Note** Be sure to confirm that RWST = 0 before setting STOP mode.

**Caution** Complete the series of operations of setting RWAIT to 1 to clearing RWAIT to 0 within 1 second.

**Remark** SEC, MIN, HOUR, WEEK, DAY, MONTH, and YEAR may be read in any sequence. All the registers do not have to be set and only some registers may be read.

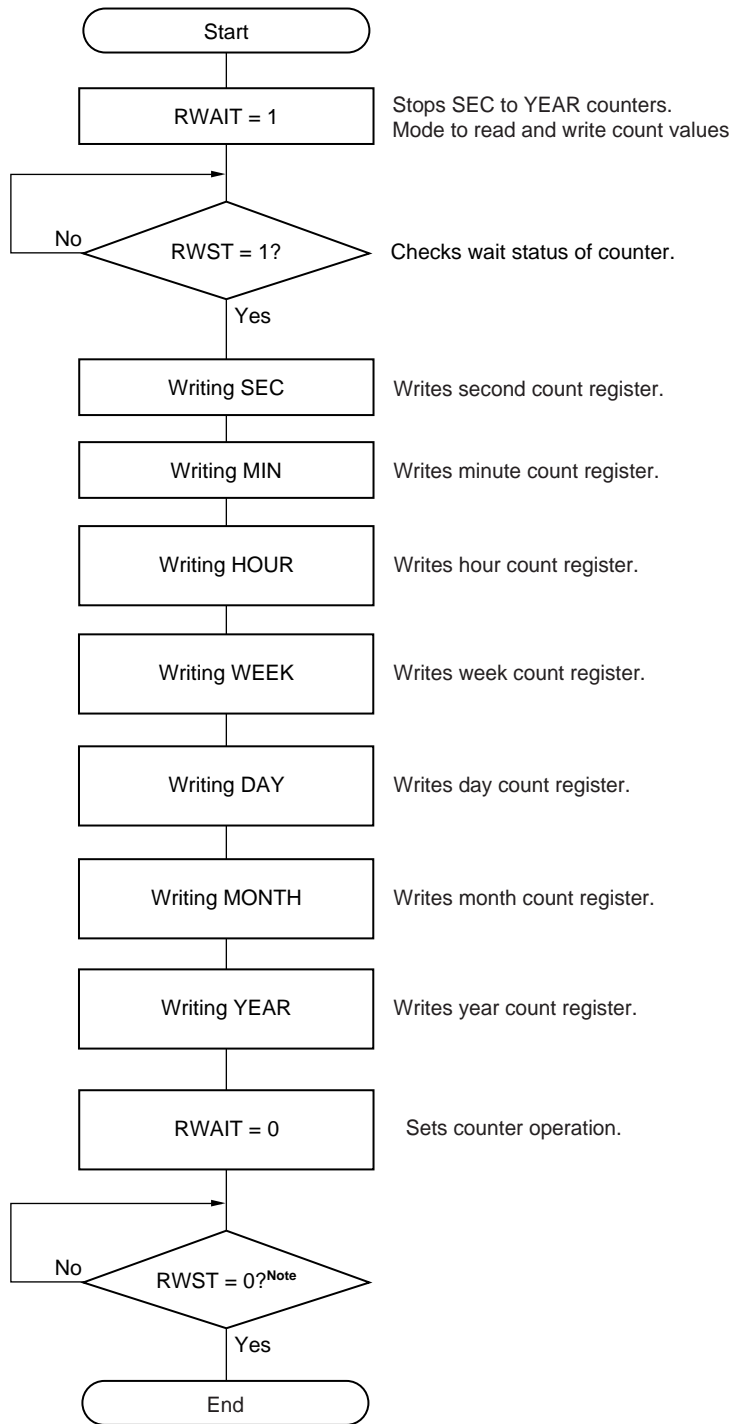Figure 9-20. Procedure for Writing Real-Time Counter



**Note** Be sure to confirm that RWST = 0 before setting STOP mode.

**Caution** Complete the series of operations of setting RWAIT to 1 to clearing RWAIT to 0 within 1 second.


**Remark** SEC, MIN, HOUR, WEEK, DAY, MONTH, and YEAR may be written in any sequence. All the registers do not have to be set and only some registers may be written.



## 9.4.3 Setting alarm of real-time counter

Set time of alarm when WALE = 0.

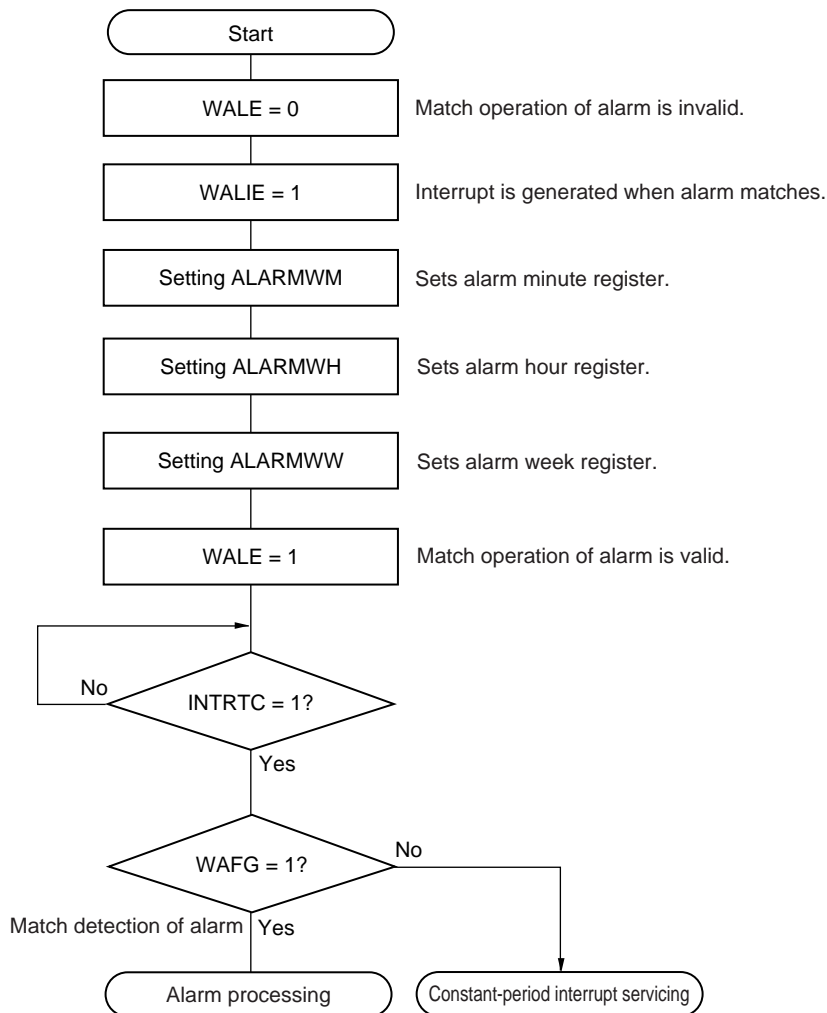Figure 9-21. Alarm Setting Procedure



**Remarks 1.** ALARMWM, ALARMWH, and ALARMWW may be written in any sequence.

- 2.** Fixed-cycle interrupts and alarm match interrupts use the same interrupt source (INTRTC). When using these two types of interrupts at the same time, which interrupt occurred can be judged by checking the fixed-cycle interrupt status flag (RIFG) and the alarm detection status flag (WAFG) upon INTRTC occurrence.

## CHAPTER 10 WATCHDOG TIMER

### 10.1 Functions of Watchdog Timer

The watchdog timer operates on the internal low-speed oscillation clock.

The watchdog timer is used to detect an inadvertent program loop. If a program loop is detected, an internal reset signal is generated.

Program loop is detected in the following cases.

- If the watchdog timer counter overflows
- If a 1-bit manipulation instruction is executed on the watchdog timer enable register (WDTE)
- If data other than "ACH" is written to WDTE
- If data is written to WDTE during a window close period
- If the instruction is fetched from an area not set by the IMS register (detection of an invalid check while the CPU hangs up)
- If the CPU accesses an area that is not set by the IMS register (excluding FB00H to FFFFH) by executing a read/write instruction (detection of an abnormal access during a CPU program loop)

When a reset occurs due to the watchdog timer, bit 4 (WDTRF) of the reset control flag register (RESF) is set to 1. For details of RESF, see **CHAPTER 20 RESET FUNCTION**.

## 10.2 Configuration of Watchdog Timer

The watchdog timer includes the following hardware.

**Table 10-1. Configuration of Watchdog Timer**

Item	Configuration
Control register	Watchdog timer enable register (WDTE)


How the counter operation is controlled, overflow time, and window open period are set by the option byte.

**Table 10-2. Setting of Option Bytes and Watchdog Timer**

Setting of Watchdog Timer	Option Byte (0080H)
Window open period	Bits 6 and 5 (WINDOW1, WINDOW0)
Controlling counter operation of watchdog timer	Bit 4 (WDTON)
Overflow time of watchdog timer	Bits 3 to 1 (WDCS2 to WDCS0)

**Remark** For the option byte, see **CHAPTER 23 OPTION BYTE**.

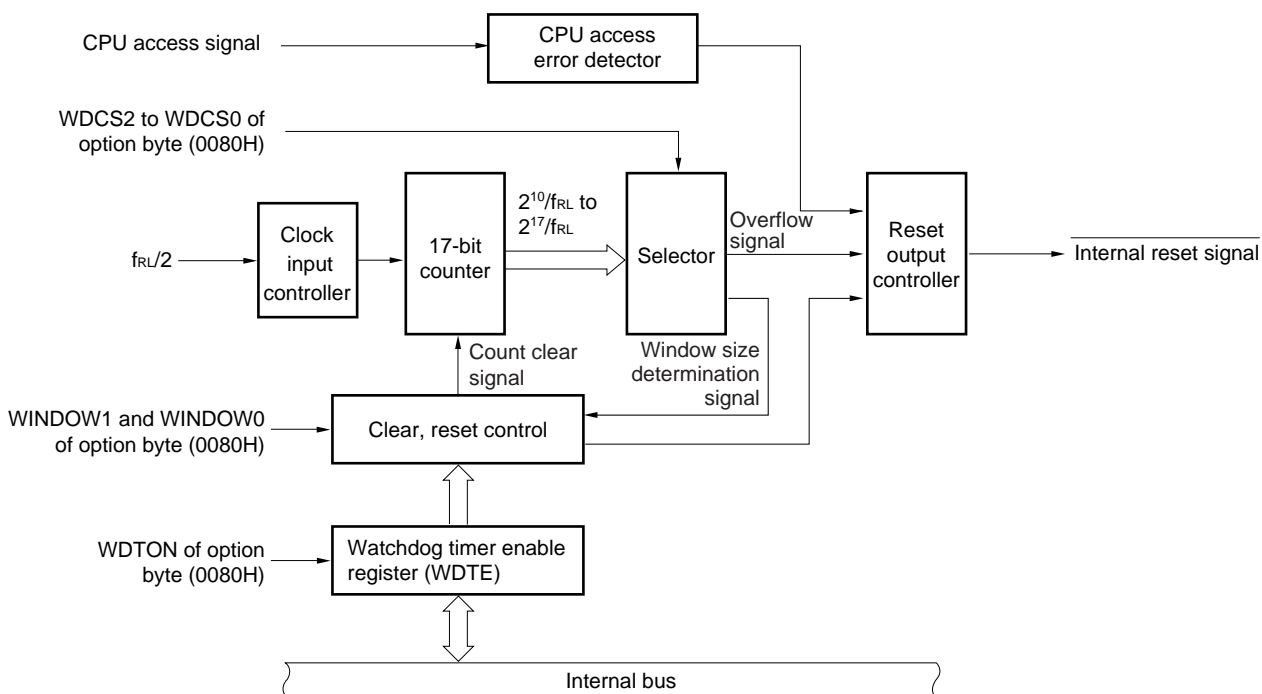**Figure 10-1. Block Diagram of Watchdog Timer**



### 10.3 Register Controlling Watchdog Timer

The watchdog timer is controlled by the watchdog timer enable register (WDTE).


#### (1) Watchdog timer enable register (WDTE)

Writing ACH to WDTE clears the watchdog timer counter and starts counting again.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 9AH or 1AH<sup>Note</sup>.

**Figure 10-2. Format of Watchdog Timer Enable Register (WDTE)**



**Note** The WDTE reset value differs depending on the WDTON setting value of the option byte (0080H). To operate watchdog timer, set WDTON to 1.

WDTON Setting Value	WDTE Reset Value
0 (watchdog timer count operation disabled)	1AH
1 (watchdog timer count operation enabled)	9AH

- Cautions**
1. If a value other than ACH is written to WDTE, an internal reset signal is generated. If the source clock to the watchdog timer is stopped, however, an internal reset signal is generated when the source clock to the watchdog timer resumes operation.
  2. If a 1-bit memory manipulation instruction is executed for WDTE, an internal reset signal is generated. If the source clock to the watchdog timer is stopped, however, an internal reset signal is generated when the source clock to the watchdog timer resumes operation.
  3. The value read from WDTE is 9AH/1AH (this differs from the written value (ACH)).

## 10.4 Operation of Watchdog Timer

### 10.4.1 Controlling operation of watchdog timer

1. When the watchdog timer is used, its operation is specified by the option byte (0080H).
  - Enable counting operation of the watchdog timer by setting bit 4 (WDTON) of the option byte (0080H) to 1 (the counter starts operating after a reset release) (for details, see **CHAPTER 23**).

WDTON	Operation Control of Watchdog Timer Counter/Illegal Access Detection
0	Counter operation disabled (counting stopped after reset), illegal access detection operation disabled
1	Counter operation enabled (counting started after reset), illegal access detection operation enabled

- Set an overflow time by using bits 3 to 1 (WDCS2 to WDCS0) of the option byte (0080H) (for details, see **10.4.2** and **CHAPTER 23**).
  - Set a window open period by using bits 6 and 5 (WINDOW1 and WINDOW0) of the option byte (0080H) (for details, see **10.4.3** and **CHAPTER 23**).
2. After a reset release, the watchdog timer starts counting.
  3. By writing “ACH” to WDTE after the watchdog timer starts counting and before the overflow time set by the option byte, the watchdog timer is cleared and starts counting again.
  4. After that, write WDTE the second time or later after a reset release during the window open period. If WDTE is written during a window close period, an internal reset signal is generated.
  5. If the overflow time expires without “ACH” written to WDTE, an internal reset signal is generated. An internal reset signal is generated in the following cases.
    - If a 1-bit manipulation instruction is executed on the watchdog timer enable register (WDTE)
    - If data other than “ACH” is written to WDTE
    - If the instruction is fetched from an area not set by the IMS register (detection of an invalid check during a CPU program loop)
    - If the CPU accesses an area not set by the IMS register (excluding FB00H to FFFFH) by executing a read/write instruction (detection of an abnormal access during a CPU program loop)

- Cautions**
1. **The first writing to WDTE after a reset release clears the watchdog timer, if it is made before the overflow time regardless of the timing of the writing, and the watchdog timer starts counting again.**
  2. **If the watchdog timer is cleared by writing “ACH” to WDTE, the actual overflow time may be different from the overflow time set by the option byte by up to  $2/f_{RL}$  seconds.**
  3. **The watchdog timer can be cleared immediately before the count value overflows (FFFFH).**

**Cautions 4.** The operation of the watchdog timer in the HALT and STOP modes differs as follows depending on the set value of bit 0 (LSROSC) of the option byte.

	LSROSC = 0 (Internal Low-Speed Oscillator Can Be Stopped by Software)	LSROSC = 1 (Internal Low-Speed Oscillator Cannot Be Stopped)
In HALT mode	Watchdog timer operation stops.	Watchdog timer operation continues.
In STOP mode		

If LSROSC = 0, the watchdog timer resumes counting after the HALT or STOP mode is released. At this time, the counter is not cleared to 0 but starts counting from the value at which it was stopped.

If oscillation of the internal low-speed oscillator is stopped by setting LSRSTOP (bit 1 of the internal oscillation mode register (RCM) = 1) when LSROSC = 0, the watchdog timer stops operating. At this time, the counter is not cleared to 0.

- 5. The watchdog timer continues its operation during self-programming and EEPROM™ emulation of the flash memory. During processing, the interrupt acknowledge time is delayed. Set the overflow time and window size taking this delay into consideration.

**10.4.2 Setting overflow time of watchdog timer**

Set the overflow time of the watchdog timer by using bits 3 to 1 (WDCS2 to WDCS0) of the option byte (0080H).

If an overflow occurs, an internal reset signal is generated. The present count is cleared and the watchdog timer starts counting again by writing “ACH” to WDTE during the window open period before the overflow time.

The following overflow time is set.

**Table 10-3. Setting of Overflow Time of Watchdog Timer**

WDCS2	WDCS1	WDCS0	Overflow Time of Watchdog Timer
0	0	0	$2^{10}/f_{RL}$ (3.88 ms)
0	0	1	$2^{11}/f_{RL}$ (7.76 ms)
0	1	0	$2^{12}/f_{RL}$ (15.52 ms)
0	1	1	$2^{13}/f_{RL}$ (31.03 ms)
1	0	0	$2^{14}/f_{RL}$ (62.06 ms)
1	0	1	$2^{15}/f_{RL}$ (124.12 ms)
1	1	0	$2^{16}/f_{RL}$ (248.24 ms)
1	1	1	$2^{17}/f_{RL}$ (496.48 ms)

**Cautions 1.** The combination of WDCS2 = WDCS1 = WDCS0 = 0 and WINDOW1 = WINDOW0 = 0 is prohibited.

- 2. The watchdog timer continues its operation during self-programming and EEPROM emulation of the flash memory. During processing, the interrupt acknowledge time is delayed. Set the overflow time and window size taking this delay into consideration.


**Remarks 1.**  $f_{RL}$ : Internal low-speed oscillation clock frequency  
 2. ( ):  $f_{RL}$  = 264 kHz (MAX.)

### 10.4.3 Setting window open period of watchdog timer

Set the window open period of the watchdog timer by using bits 6 and 5 (WINDOW1, WINDOW0) of the option byte (0080H). The outline of the window is as follows.

- If “ACH” is written to WDTE during the window open period, the watchdog timer is cleared and starts counting again.
- Even if “ACH” is written to WDTE during the window close period, an abnormality is detected and an internal reset signal is generated.

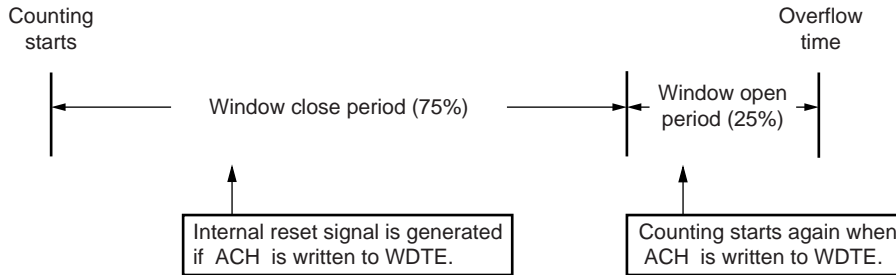**Example:** If the window open period is 25%



**Caution** The first writing to WDTE after a reset release clears the watchdog timer, if it is made before the overflow time regardless of the timing of the writing, and the watchdog timer starts counting again.

The window open period to be set is as follows.

**Table 10-4. Setting Window Open Period of Watchdog Timer**

WINDOW1	WINDOW0	Window Open Period of Watchdog Timer
0	0	25%
0	1	50%
1	0	75%
1	1	100%

- Cautions**
1. The combination of WDCS2 = WDCS1 = WDCS0 = 0 and WINDOW1 = WINDOW0 = 0 is prohibited.
  2. The watchdog timer continues its operation during self-programming and EEPROM emulation of the flash memory. During processing, the interrupt acknowledge time is delayed. Set the overflow time and window size taking this delay into consideration.

**Remark** If the overflow time is set to  $2^{10}/f_{RL}$ , the window close time and open time are as follows.

	Setting of Window Open Period			
	25%	50%	75%	100%
Window close time	0 to 3.56 ms	0 to 2.37 ms	0 to 0.119 ms	None
Window open time	3.56 to 3.88 ms	2.37 to 3.88 ms	0.119 to 3.88 ms	0 to 3.88 ms

<When window open period is 25%>

- Overflow time:  
 $2^{10}/f_{RL} (\text{MAX.}) = 2^{10}/264 \text{ kHz} (\text{MAX.}) = 3.88 \text{ ms}$
- Window close time:  
 $0 \text{ to } 2^{10}/f_{RL} (\text{MIN.}) \times (1 - 0.25) = 0 \text{ to } 2^{10}/216 \text{ kHz} (\text{MIN.}) \times 0.75 = 0 \text{ to } 3.56 \text{ ms}$
- Window open time:  
 $2^{10}/f_{RL} (\text{MIN.}) \times (1 - 0.25) \text{ to } 2^{10}/f_{RL} (\text{MAX.}) = 2^{10}/216 \text{ kHz} (\text{MIN.}) \times 0.75 \text{ to } 2^{10}/264 \text{ kHz} (\text{MAX.})$   
 $= 3.56 \text{ to } 3.88 \text{ ms}$




## CHAPTER 11 BUZZER OUTPUT CONTROLLER

### 11.1 Functions of Buzzer Output Controller

The buzzer output is intended for square-wave output of buzzer frequency selected with CKS. Figure 11-1 shows the block diagram of buzzer output controller.

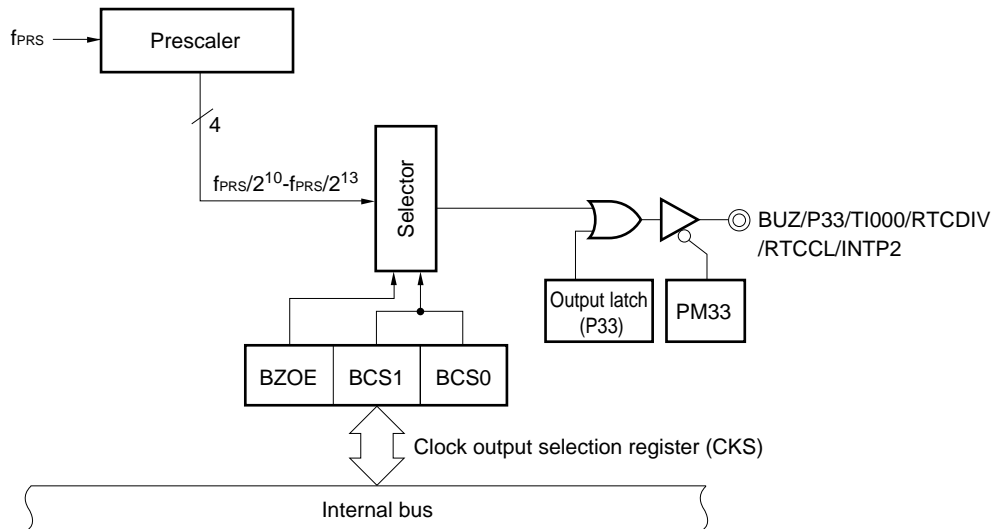Figure 11-1. Block Diagram of Buzzer Output Controller



## 11.2 Configuration of Buzzer Output Controller

The buzzer output controller includes the following hardware.

**Table 11-1. Configuration of Buzzer Output Controller**

Item	Configuration
Control registers	Clock output selection register (CKS) Port mode register 3 (PM3) Port register 3 (P3)

## 11.3 Registers Controlling Buzzer Output Controller

The following two registers are used to control the buzzer output controller.

- Clock output selection register (CKS)
- Port mode register 3 (PM3)

### (1) Clock output selection register (CKS)

This register sets output enable/disable for the buzzer frequency output (BUZ), and sets the output clock.

CKS is set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears CKS to 00H.

Figure 11-2. Format of Clock Output Selection Register (CKS)

Address: FF40H After reset: 00H R/W

Symbol	<7>	6	5	4	3	2	1	0
CKS	BZOE	BCS1	BCS0	0	0	0	0	0

BZOE	BUZ output enable/disable specification
0	Clock division circuit operation stopped. BUZ fixed to low level.
1	Clock division circuit operation enabled. BUZ output enabled.

BCS1	BCS0	BUZ output clock selection		
			f <sub>PRS</sub> = 5 MHz	f <sub>PRS</sub> = 10 MHz
0	0	f <sub>PRS</sub> /2 <sup>10</sup>	4.88 kHz	9.77 kHz
0	1	f <sub>PRS</sub> /2 <sup>11</sup>	2.44 kHz	4.88 kHz
1	0	f <sub>PRS</sub> /2 <sup>12</sup>	1.22 kHz	2.44 kHz
1	1	f <sub>PRS</sub> /2 <sup>13</sup>	0.61 kHz	1.22 kHz

**Caution** Set BCS1 and BCS0 when the buzzer output operation is stopped (BZOE = 0).

**Remark** f<sub>PRS</sub>: Peripheral hardware clock frequency

**(2) Port mode register 3 (PM3)**

This register sets port 3 input/output in 1-bit units.

When using the P33/TI000/RTCDIV/RTCCL/BUZ/INTP2 pin for buzzer output, clear PM33 and the output latches of P33 to 0.

PM3 is set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PM3 to FFH.

**Figure 11-3. Format of Port Mode Register 3 (PM3)**

Address: FF23H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	1	1	PM34	PM33	PM32	PM31	1

PM3n	P3n pin I/O mode selection (n = 1 to 4)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

**11.4 Operations of Buzzer Output Controller**

The buzzer frequency is output as the following procedure.

- <1> Select the buzzer output frequency with bits 5 and 6 (BCS0, BCS1) of the clock output selection register (CKS) (buzzer output in disabled status).
- <2> Set bit 7 (BZOE) of CKS to 1 to enable buzzer output.

## CHAPTER 12 10-BIT SUCCESSIVE APPROXIMATION TYPE A/D CONVERTER ( $\mu$ PD78F041x only)

### 12.1 Function of 10-Bit Successive Approximation Type A/D Converter


The 10-bit successive approximation type A/D converter converts an analog input signal into a digital value, and consists of up to 6 channels (ANI0 to ANI5) with a resolution of 10 bits.

The A/D converter has the following function.

- **10-bit resolution A/D conversion**

10-bit resolution A/D conversion is carried out repeatedly for one analog input channel selected from ANI0 to ANI5. Each time an A/D conversion operation ends, an interrupt request (INTAD) is generated.

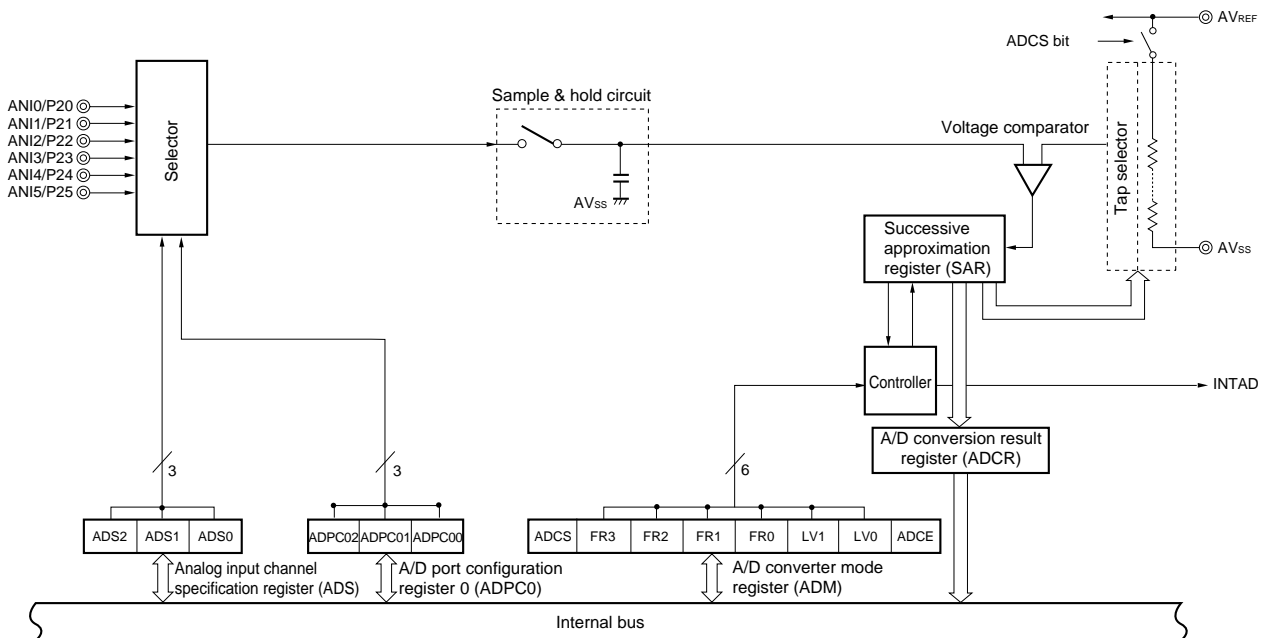**Figure 12-1. Block Diagram of 10-Bit Successive Approximation type A/D Converter**



## 12.2 Configuration of 10-Bit Successive Approximation Type A/D Converter

The 10-bit successive approximation type A/D converter includes the following hardware.

### (1) ANI0 to ANI5 pins

These are the 6-channel analog input pins of the 10-bit successive approximation type A/D converter. They input analog signals to be converted into digital signals. Pins other than the one selected as the analog input pin can be used as I/O port pins or segment output pins.


### (2) Sample & hold circuit

The sample & hold circuit samples the input voltage of the analog input pin selected by the selector when A/D conversion is started, and holds the sampled voltage value during A/D conversion.

### (3) Series resistor string

The series resistor string is connected between  $AV_{REF}$  and  $AV_{SS}$ , and generates a voltage to be compared with the sampled voltage value.

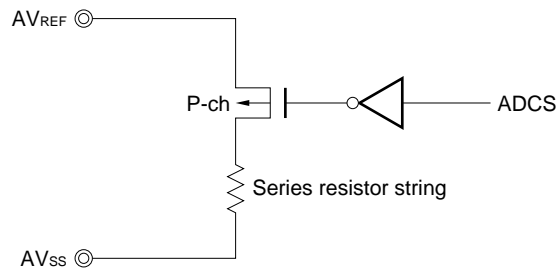Figure 12-2. Circuit Configuration of Series Resistor String



### (4) Voltage comparator

The voltage comparator compares the sampled voltage value and the output voltage of the series resistor string.

### (5) Successive approximation register (SAR)

This register converts the result of comparison by the voltage comparator, starting from the most significant bit (MSB).

When the voltage value is converted into a digital value down to the least significant bit (LSB) (end of A/D conversion), the contents of the SAR register are transferred to the A/D conversion result register (ADCR).

### (6) 10-bit A/D conversion result register (ADCR)

The A/D conversion result is loaded from the successive approximation register to this register each time A/D conversion is completed, and the ADCR register holds the A/D conversion result in its higher 10 bits (the lower 6 bits are fixed to 0).

**(7) 8-bit A/D conversion result register (ADCRH)**

The A/D conversion result is loaded from the successive approximation register to this register each time A/D conversion is completed, and the ADCRH register stores the higher 8 bits of the A/D conversion result.

**Caution** When data is read from ADCR and ADCRH, a wait cycle is generated. Do not read data from ADCR and ADCRH when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

**(8) Controller**

This circuit controls the conversion time of an input analog signal that is to be converted into a digital signal, as well as starting and stopping of the conversion operation. When A/D conversion has been completed, this controller generates INTAD.

**(9) AV<sub>REF</sub> pin**

This pin inputs an analog power/reference voltage to the A/D converter. When using at least one port of port 2 as a digital port or for segment output, set it to the same potential as the V<sub>DD</sub> pin.

The signal input to ANI0 to ANI5 is converted into a digital signal, based on the voltage applied across AV<sub>REF</sub> and AV<sub>SS</sub>.

**(10) AV<sub>SS</sub> pin**

This is the ground potential pin of the A/D converter. Always use this pin at the same potential as that of the V<sub>SS</sub> pin even when the A/D converter is not used.

**(11) A/D converter mode register (ADM)**

This register is used to set the conversion time of the analog input signal to be converted, and to start or stop the conversion operation.

**(12) A/D port configuration register 0 (ADPC0)**

This register switches the ANI0/P20 to ANI5/P25 pins to analog input of 10-bit successive approximation type A/D converter or digital I/O of port.

**(13) Analog input channel specification register (ADS)**

This register is used to specify the port that inputs the analog voltage to be converted into a digital signal.

**(14) Port mode register 2 (PM2)**

This register switches the ANI0/P20 to ANI5/P25 pins to input or output.

**(15) Port function register 2 (PF2)**

This register switches the ANI0/P20 to ANI5/P25 pins to I/O of port, analog input of A/D converter, or segment output.

### 12.3 Registers Used in 10-Bit Successive Approximation Type A/D Converter

The A/D converter uses the following seven registers.

- A/D converter mode register (ADM)
- A/D port configuration register 0 (ADPC0)
- Analog input channel specification register (ADS)
- Port function register 2 (PF2)
- Port mode register 2 (PM2)
- 10-bit A/D conversion result register (ADCR)
- 8-bit A/D conversion result register (ADCRH)

#### (1) A/D converter mode register (ADM)

This register sets the conversion time for analog input to be A/D converted, and starts/stops conversion. ADM can be set by a 1-bit or 8-bit memory manipulation instruction. Reset signal generation clears this register to 00H.

**Figure 12-3. Format of A/D Converter Mode Register (ADM)**

Address: FF8DH After reset: 00H R/W

Symbol	<7>	6	5	4	3	2	1	<0>
ADM	ADCS	FR3 <sup>Note 1</sup>	FR2 <sup>Note 1</sup>	FR1 <sup>Note 1</sup>	FR0 <sup>Note 1</sup>	LV1 <sup>Note 1</sup>	LV0 <sup>Note 1</sup>	ADCE

ADCS	A/D conversion operation control
0	Stops conversion operation
1	Enables conversion operation

ADCE	Comparator operation control <sup>Note 2</sup>
0	Stops comparator operation
1	Enables comparator operation

- Notes**
1. For details of FR3 to FR0, LV1, LV0, and A/D conversion, see **Table 12-2 A/D Conversion Time Selection**.
  2. The operation of the comparator is controlled by ADCS and ADCE, and it takes 1  $\mu$ s from operation start to operation stabilization. Therefore, when ADCS is set to 1 after 1  $\mu$ s or more has elapsed from the time ADCE is set to 1, the conversion result at that time has priority over the first conversion result. Otherwise, ignore data of the first conversion.


**Table 12-1. Settings of ADCS and ADCE**

ADCS	ADCE	A/D Conversion Operation
0	0	Stop status (DC power consumption path does not exist)
0	1	Conversion waiting mode (comparator operation, only comparator consumes power)
1	0	Conversion mode (comparator operation stopped <sup>Note</sup> )
1	1	Conversion mode (comparator operation)

**Note** Ignore data of the first conversion.



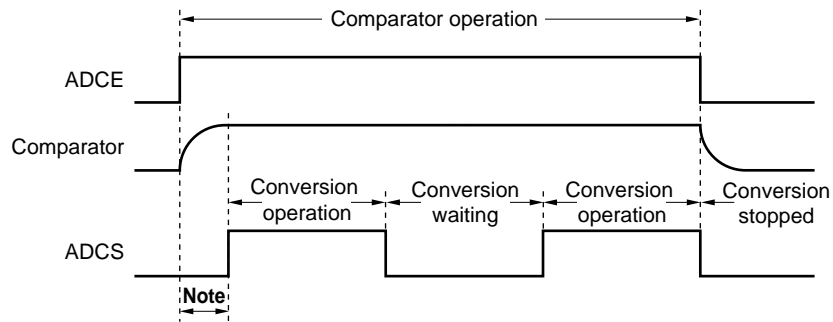Figure 12-4. Timing Chart When Comparator Is Used



**Note** To stabilize the internal circuit, the time from the rising of the ADCE bit to the falling of the ADCS bit must be 1  $\mu$ s or longer.

- Cautions**
1. A/D conversion must be stopped before rewriting bits FR0 to FR3, LV1, and LV0 to values other than the identical data.
  2. If data is written to ADM, a wait cycle is generated. Do not write data to ADM when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

Table 12-2. A/D Conversion Time Selection

(1)  $2.7\text{ V} \leq \text{AV}_{\text{REF}} \leq 5.5\text{ V}$ 

A/D Converter Mode Register (ADM)						Conversion Time Selection			Conversion Clock ( $f_{\text{AD}}$ )	
FR3	FR2	FR1	FR0	LV1	LV0	$f_{\text{PRS}} =$ 2 MHz	$f_{\text{PRS}} =$ 8 MHz	$f_{\text{PRS}} =$ 10 MHz		
1	×	×	×	0	0	$352/f_{\text{PRS}}$	Setting prohibited	$44.0\ \mu\text{s}$	$35.2\ \mu\text{s}$	$f_{\text{PRS}}/16$
0	0	0	0	0	$264/f_{\text{PRS}}$	$33.0\ \mu\text{s}$		$26.4\ \mu\text{s}$	$f_{\text{PRS}}/12$	
0	0	0	1	0	$176/f_{\text{PRS}}$	$22.0\ \mu\text{s}$		$17.6\ \mu\text{s}$	$f_{\text{PRS}}/8$	
0	0	1	0	0	$132/f_{\text{PRS}}$	$16.5\ \mu\text{s}$		$13.2\ \mu\text{s}$	$f_{\text{PRS}}/6$	
0	0	1	1	0	0	$88/f_{\text{PRS}}$	$44.0\ \mu\text{s}$	$11.0\ \mu\text{s}^{\text{Note}}$	$8.8\ \mu\text{s}^{\text{Note}}$	$f_{\text{PRS}}/4$
0	1	0	0	0	0	$66/f_{\text{PRS}}$	$33.0\ \mu\text{s}$	$8.3\ \mu\text{s}^{\text{Note}}$	$6.6\ \mu\text{s}^{\text{Note}}$	$f_{\text{PRS}}/3$
0	1	0	1	0	0	$44/f_{\text{PRS}}$	$22.0\ \mu\text{s}$	Setting prohibited	Setting prohibited	$f_{\text{PRS}}/2$
Other than above						Setting prohibited				

**Note** This can be set only when  $4.0\text{ V} \leq \text{AV}_{\text{REF}} \leq 5.5\text{ V}$ .

(2)  $2.3\text{ V} \leq \text{AV}_{\text{REF}} < 2.7\text{ V}$ 


A/D Converter Mode Register (ADM)						Conversion Time Selection			Conversion Clock ( $f_{\text{AD}}$ )	
FR3	FR2	FR1	FR0	LV1	LV0	$f_{\text{PRS}} =$ 2 MHz	$f_{\text{PRS}} =$ 5 MHz	$f_{\text{PRS}} =$ 8 MHz		
0	0	0	0	0	1	$480/f_{\text{PRS}}$	Setting prohibited	Setting prohibited	$60.0\ \mu\text{s}$	$f_{\text{PRS}}/12$
0	0	0	1	0	1	$320/f_{\text{PRS}}$		$64.0\ \mu\text{s}$	$40.0\ \mu\text{s}$	$f_{\text{PRS}}/8$
0	0	1	0	0	1	$240/f_{\text{PRS}}$		$48.0\ \mu\text{s}$	$30.0\ \mu\text{s}$	$f_{\text{PRS}}/6$
0	0	1	1	0	1	$160/f_{\text{PRS}}$		$32.0\ \mu\text{s}$	Setting prohibited	$f_{\text{PRS}}/4$
0	1	0	0	0	1	$120/f_{\text{PRS}}$	$60.0\ \mu\text{s}$	Setting prohibited		$f_{\text{PRS}}/3$
0	1	0	1	0	1	$80/f_{\text{PRS}}$	$40.0\ \mu\text{s}$	Setting prohibited		$f_{\text{PRS}}/2$
Other than above						Setting prohibited				

**Cautions** 1. Set the conversion times with the following conditions.

- $4.0\text{ V} \leq \text{AV}_{\text{REF}} \leq 5.5\text{ V}$ : Sampling + successive conversion time = 5 to  $40\ \mu\text{s}$   
( $f_{\text{AD}} = 0.6$  to  $3.6\text{ MHz}$ )
  - $2.7\text{ V} \leq \text{AV}_{\text{REF}} < 4.0\text{ V}$ : Sampling + successive conversion time = 10 to  $40\ \mu\text{s}$   
( $f_{\text{AD}} = 0.6$  to  $1.8\text{ MHz}$ )
  - $2.3\text{ V} \leq \text{AV}_{\text{REF}} < 2.7\text{ V}$ : Sampling + successive conversion time = 25 to  $75\ \mu\text{s}$   
( $f_{\text{AD}} = 0.6$  to  $1.48\text{ MHz}$ )
2. When rewriting FR3 to FR0, LV1, and LV0 to other than the same data, stop A/D conversion once ( $\text{ADCS} = 0$ ) beforehand.
  3. Change LV1 and LV0 from the default value, when  $2.3\text{ V} \leq \text{AV}_{\text{REF}} < 2.7\text{ V}$ .
  4. The above conversion time does not include clock frequency errors. Select conversion time, taking clock frequency errors into consideration.

**Remark**  $f_{\text{PRS}}$ : Peripheral hardware clock frequency

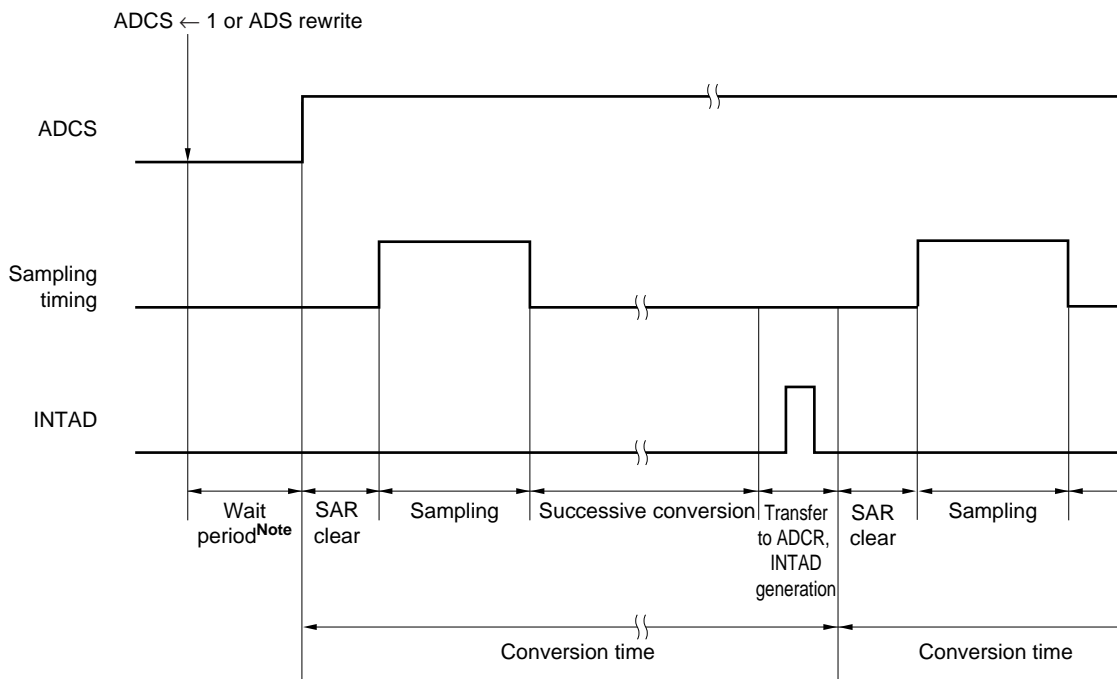Figure 12-5. A/D Converter Sampling and A/D Conversion Timing




**Note** For details of wait period, see CHAPTER 29 CAUTIONS FOR WAIT.

(2) 10-bit A/D conversion result register (ADCR)

This register is a 16-bit register that stores the A/D conversion result. The lower 6 bits are fixed to 0. Each time A/D conversion ends, the conversion result is loaded from the successive approximation register. The higher 8 bits of the conversion result are stored in FF07H and the lower 2 bits are stored in the higher 2 bits of FF06H. ADCR can be read by a 16-bit memory manipulation instruction. Reset signal generation clears this register to 0000H.

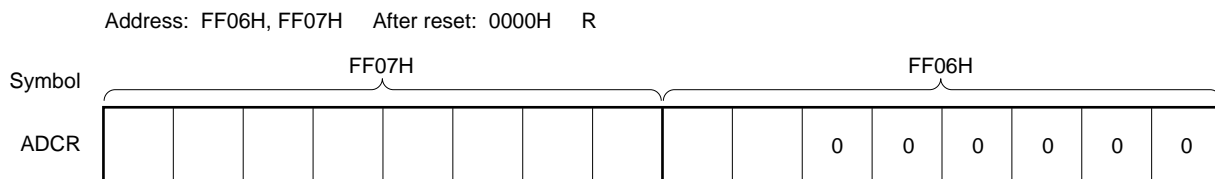Figure 12-6. Format of 10-Bit A/D Conversion Result Register (ADCR)



- Cautions**
1. When writing to the A/D converter mode register (ADM), analog input channel specification register (ADS), and A/D port configuration register 0 (ADPC0), the contents of ADCR may become undefined. Read the conversion result following conversion completion before writing to ADM, ADS, and ADPC0. Using timing other than the above may cause an incorrect conversion result to be read.
  2. If data is read from ADCR, a wait cycle is generated. Do not read data from ADCR when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

**(3) 8-bit A/D conversion result register (ADCRH)**

This register is an 8-bit register that stores the A/D conversion result. The higher 8 bits of 10-bit resolution are stored.

ADCRH can be read by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 12-7. Format of 8-Bit A/D Conversion Result Register (ADCRH)**

Address: FF07H After reset: 00H R

Symbol	7	6	5	4	3	2	1	0
ADCRH								

- Cautions**
1. When writing to the A/D converter mode register (ADM), analog input channel specification register (ADS), and A/D port configuration register 0 (ADPC0), the contents of ADCRH may become undefined. Read the conversion result following conversion completion before writing to ADM, ADS, and ADPC0. Using timing other than the above may cause an incorrect conversion result to be read.
  2. If data is read from ADCRH, a wait cycle is generated. Do not read data from ADCRH when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

**(4) Analog input channel specification register (ADS)**

This register specifies the input channel of the analog voltage to be A/D converted.

ADS can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 12-8. Format of Analog Input Channel Specification Register (ADS)**

Address: FF8EH    After reset: 00H    R/W

Symbol	7	6	5	4	3	2	1	0
ADS	0	0	0	0	0	ADS2	ADS1	ADS0

ADS2	ADS1	ADS0	Analog input channel specification
0	0	0	ANI0
0	0	1	ANI1
0	1	0	ANI2
0	1	1	ANI3
1	0	0	ANI4
1	0	1	ANI5
1	1	0	Setting prohibited
1	1	1	

- Cautions**
1. Be sure to clear bits 3 to 7 to "0".
  2. Set a channel to be used for A/D conversion in the input mode by using port mode register 2 (PM2).
  3. Do not set a pin to be used as a digital I/O pin with ADPC with ADS.
  4. If data is written to ADS, a wait cycle is generated. Do not write data to ADS when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

**(5) A/D port configuration register 0 (ADPC0)**

This register switches the ANI0/P20 to ANI5/P25 pins to analog input (analog input of 16-bit  $\Delta\Sigma$  type A/D converter or analog input of 10-bit successive approximation type A/D converter) or digital I/O of port.

ADPC0 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears this register to 08H.

Figure 12-9. Format of A/D Port Configuration Register 0 (ADPC0)

Address: FF8FH After reset: 08H R/W

Symbol	7	6	5	4	3	2	1	0
ADPC0	0	0	0	0	0	ADPC02	ADPC01	ADPC00

ADPC02	ADPC01	ADPC00	Digital I/O (D)/analog input (A) switching					
			P25 /ANI5	P24 /ANI4	P23 /ANI3	P22 /AN2	P21 /ANI1	P20 /ANI0
0	0	0	A	A	A	A	A	A
0	0	1	A	A	A	A	A	D
0	1	0	A	A	A	A	D	D
0	1	1	A	A	A	D	D	D
1	0	0	A	A	D	D	D	D
1	0	1	A	D	D	D	D	D
1	1	0	D	D	D	D	D	D
Other than above			Setting prohibited					

- Cautions**
1. Set the channel used for A/D conversion to the input mode by using port mode register 2 (PM2).
  2. Do not set the pin set by ADPC0 as digital I/O by ADS, ADDS1, or ADDS0.
  3. If data is written to ADPC0, a wait cycle is generated. Do not write data to ADPC0 when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.
  4. If pins ANI0/P20/SEG21 to ANI5/P25/SEG16 are set to segment output via the PF2 register, output is set to segment output, regardless of the ADPC0 setting.

**(6) Port mode register 2 (PM2)**

When using the ANI0/P20 to ANI5/P25 pins for analog input port, set PM20 to PM25 to 1. The output latches of P20 to P25 at this time may be 0 or 1.

If PM20 to PM25 are set to 0, they cannot be used as analog input port pins.

PM2 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to FFH.

**Figure 12-10. Format of Port Mode Register 2 (PM2)**

Address: FF8FH After reset: 08H R/W

Symbol	7	6	5	4	3	2	1	0
PM2	1	1	PM25	PM24	PM23	PM22	PM21	PM20

PM2n	P2n pin I/O mode selection (n = 0 to 5)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

ANI0/P20 to ANI5/P25 pins are as shown below depending on the settings of PF2, ADPC0, PM2, and ADS.

**Table 12-3. Setting Functions of P20/ANI0 to P25/ANI5 Pins**

PF2	ADPC0	PM2	ADS	P20/SEG21/ANI0 to P25/SEG16/ANI5 Pins
Digital/Analog selection	Analog input selection	Input mode	Does not select ANI.	Analog input (not to be converted)
			Selects ANI.	Analog input (to be converted by successive approximation type A/D converter)
	Digital I/O selection	Output mode	–	Setting prohibited
		Input mode	–	Digital input
		Output mode	–	Digital output
SEG output selection	–	–	–	Segment output

## 12.4 10-Bit Successive Approximation Type A/D Converter Operations

### 12.4.1 Basic operations of A/D converter

- <1> Set bit 0 (ADCE) of the A/D converter mode register (ADM) to 1 to start the operation of the comparator.
- <2> Set channels for A/D conversion to analog input by using the A/D port configuration register (ADPC0) and set to input mode by using port mode register 2 (PM2).
- <3> Set A/D conversion time by using bits 6 to 1 (FR3 to FR0, LV1, and LV0) of ADM.
- <4> Select one channel for A/D conversion using the analog input channel specification register (ADS).
- <5> Start the conversion operation by setting bit 7 (ADCS) of ADM to 1.  
(<6> to <12> are operations performed by hardware.)
- <6> The voltage input to the selected analog input channel is sampled by the sample & hold circuit.
- <7> When sampling has been done for a certain time, the sample & hold circuit is placed in the hold state and the sampled voltage is held until the A/D conversion operation has ended.
- <8> Bit 9 of the successive approximation register (SAR) is set. The series resistor string voltage tap is set to  $(1/2) AV_{REF}$  by the tap selector.
- <9> The voltage difference between the series resistor string voltage tap and sampled voltage is compared by the voltage comparator. If the analog input is greater than  $(1/2) AV_{REF}$ , the MSB of SAR remains set to 1. If the analog input is smaller than  $(1/2) AV_{REF}$ , the MSB is reset to 0.
- <10> Next, bit 8 of SAR is automatically set to 1, and the operation proceeds to the next comparison. The series resistor string voltage tap is selected according to the preset value of bit 9, as described below.
  - Bit 9 = 1:  $(3/4) AV_{REF}$
  - Bit 9 = 0:  $(1/4) AV_{REF}$
 The voltage tap and sampled voltage are compared and bit 8 of SAR is manipulated as follows.
  - Analog input voltage  $\geq$  Voltage tap: Bit 8 = 1
  - Analog input voltage  $<$  Voltage tap: Bit 8 = 0
- <11> Comparison is continued in this way up to bit 0 of SAR.
- <12> Upon completion of the comparison of 10 bits, an effective digital result value remains in SAR, and the result value is transferred to the A/D conversion result register (ADCR, ADCRH) and then latched.  
At the same time, the A/D conversion end interrupt request (INTAD) can also be generated.
- <13> Repeat steps <6> to <12>, until ADCS is cleared to 0.  
To stop the A/D converter, clear ADCS to 0.  
To restart A/D conversion from the status of ADCE = 1, start from <5>. To start A/D conversion again when ADCE = 0, set ADCE to 1, wait for 1  $\mu$ s or longer, and start <5>. To change a channel of A/D conversion, start from <4>.


**Caution** Make sure the period of <1> to <5> is 1  $\mu$ s or more.

**Remark** Two types of A/D conversion result registers are available.

- ADCR (16 bits): Store 10-bit A/D conversion value
- ADCRH (8 bits): Store 8-bit A/D conversion value



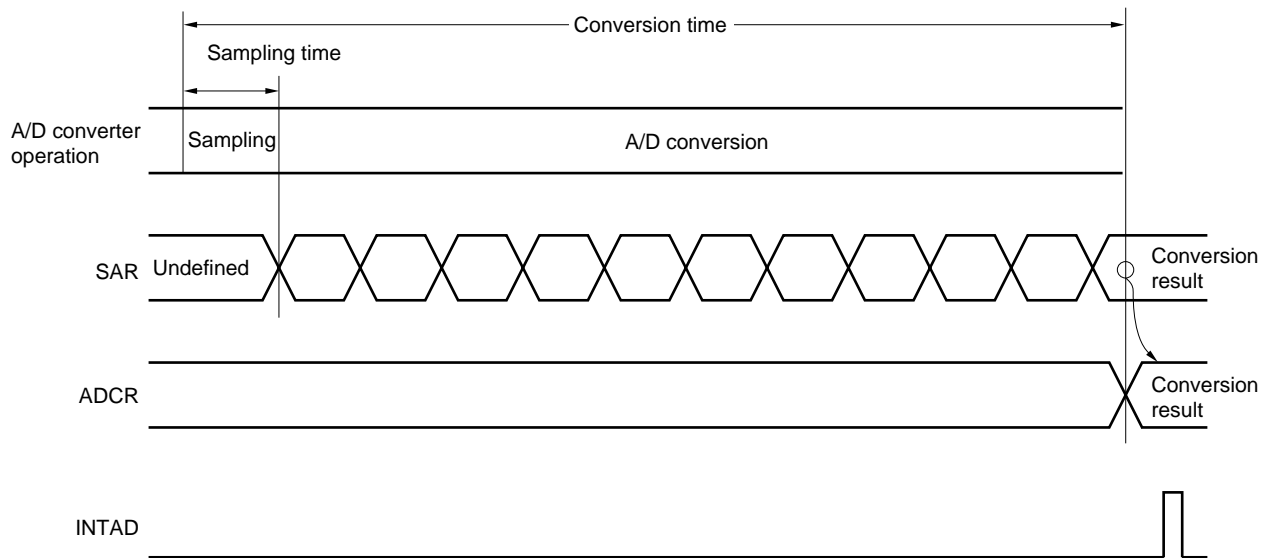Figure 12-11. Basic Operation of A/D Converter



A/D conversion operations are performed continuously until bit 7 (ADCS) of the A/D converter mode register (ADM) is reset (0) by software.

If a write operation is performed to the analog input channel specification register (ADS) during an A/D conversion operation, the conversion operation is initialized, and if the ADCS bit is set (1), conversion starts again from the beginning.

Reset signal generation clears the A/D conversion result register (ADCR, ADCRH) to 0000H or 00H.

**12.4.2 Input voltage and conversion results**

The relationship between the analog input voltage input to the analog input pins (ANI0 to ANI5) and the theoretical A/D conversion result (stored in the 10-bit A/D conversion result register (ADCR)) is shown by the following expression.

$$SAR = INT \left( \frac{V_{AIN}}{AV_{REF}} \times 1024 + 0.5 \right)$$

$$ADCR = SAR \times 64$$

or

$$\left( \frac{ADCR}{64} - 0.5 \right) \times \frac{AV_{REF}}{1024} \leq V_{AIN} < \left( \frac{ADCR}{64} + 0.5 \right) \times \frac{AV_{REF}}{1024}$$

where, INT( ): Function which returns integer part of value in parentheses

$V_{AIN}$ : Analog input voltage


$AV_{REF}$ :  $AV_{REF}$  pin voltage

ADCR: A/D conversion result register (ADCR) value

SAR: Successive approximation register

Figure 12-12 shows the relationship between the analog input voltage and the A/D conversion result.

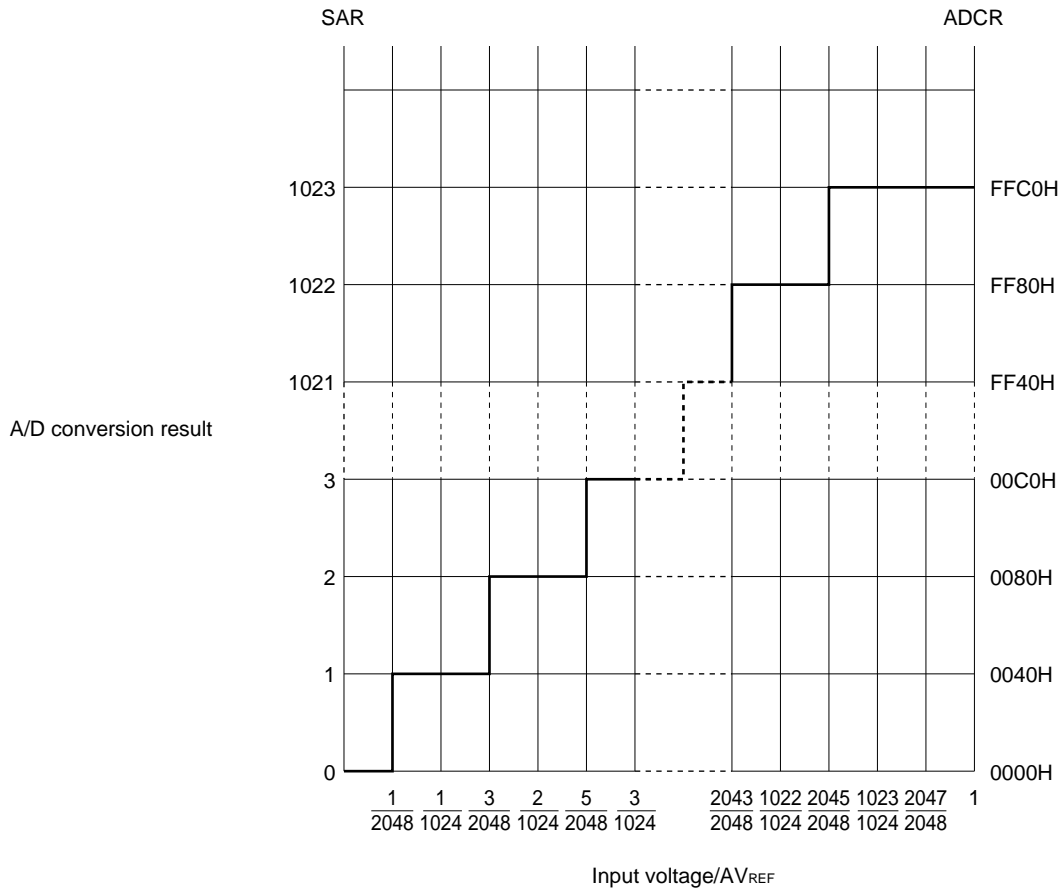**Figure 12-12. Relationship Between Analog Input Voltage and A/D Conversion Result**



### 12.4.3 A/D converter operation mode

The operation mode of the A/D converter is the select mode. One channel of analog input is selected from ANI0 to ANI5 by the analog input channel specification register (ADS) and A/D conversion is executed.

#### (1) A/D conversion operation


By setting bit 7 (ADCS) of the A/D converter mode register (ADM) to 1, the A/D conversion operation of the voltage, which is applied to the analog input pin specified by the analog input channel specification register (ADS), is started.

When A/D conversion has been completed, the result of the A/D conversion is stored in the A/D conversion result register (ADCR), and an interrupt request signal (INTAD) is generated. When one A/D conversion has been completed, the next A/D conversion operation is immediately started.

If ADS is rewritten during A/D conversion, the A/D conversion operation under execution is stopped and restarted from the beginning.

If 0 is written to ADCS during A/D conversion, A/D conversion is immediately stopped. At this time, the conversion result immediately before is retained.

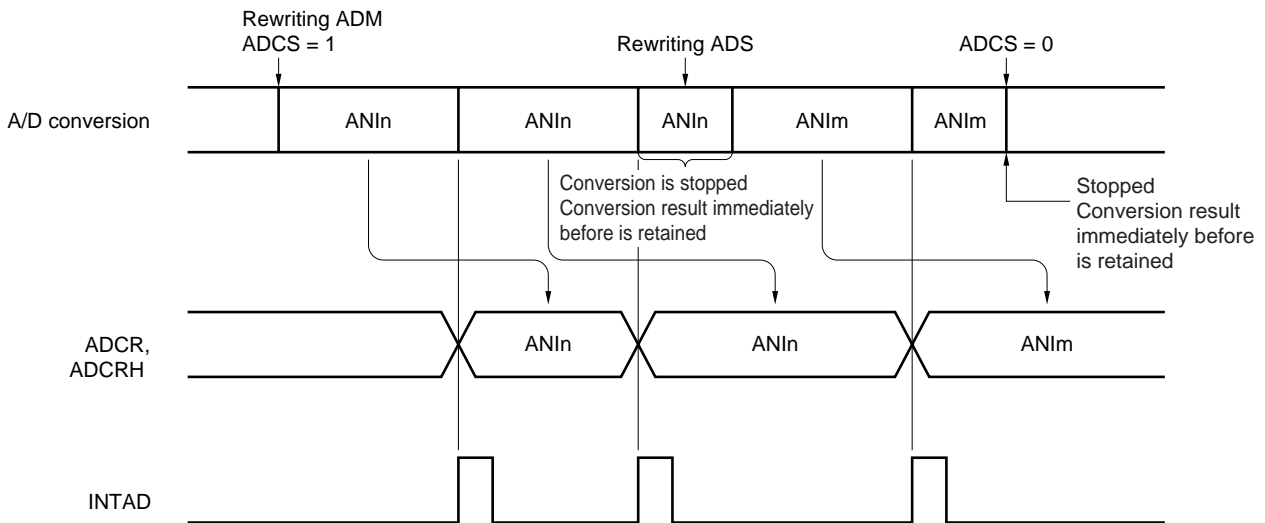Figure 12-13. A/D Conversion Operation



- Remarks 1.** n = 0 to 5  
**2.** m = 0 to 5

The setting methods are described below.

- <1> Set bit 0 (ADCE) of the A/D converter mode register (ADM) to 1.
- <2> Set the channel to be used in the analog input mode by using bits 2 to 0 (ADPC02 to ADPC00) of the A/D port configuration register 0 (ADPC0) and bits 5 to 0 (PM25 to PM20) of port mode register 2 (PM2).
- <3> Select conversion time by using bits 6 to 1 (FR3 to FR0, LV1, and LV0) of ADM.
- <4> Select a channel to be used by using bits 2 to 0 (ADS2 to ADS0) of the analog input channel specification register (ADS).
- <5> Set bit 7 (ADCS) of ADM to 1 to start A/D conversion.
- <6> When one A/D conversion has been completed, an interrupt request signal (INTAD) is generated.
- <7> Transfer the A/D conversion data to the A/D conversion result register (ADCR, ADCRH).

<Change the channel>

- <8> Change the channel using bits 2 to 0 (ADS2 to ADS0) of ADS to start A/D conversion.
- <9> When one A/D conversion has been completed, an interrupt request signal (INTAD) is generated.
- <10> Transfer the A/D conversion data to the A/D conversion result register (ADCR, ADCRH).

<Complete A/D conversion>

- <11> Clear ADCS to 0.
- <12> Clear ADCE to 0.

- Cautions**
1. Make sure the period of <1> to <5> is 1  $\mu$ s or more.
  2. <1> may be done between <2> and <4>.
  3. <1> can be omitted. However, ignore data of the first conversion after <5> in this case.
  4. The period from <6> to <9> differs from the conversion time set using bits 6 to 1 (FR3 to FR0, LV1, LV0) of ADM. The period from <8> to <9> is the conversion time set using FR3 to FR0, LV1, and LV0.

## 12.5 How to Read A/D Converter Characteristics Table

Here, special terms unique to the A/D converter are explained.

### (1) Resolution

This is the minimum analog input voltage that can be identified. That is, the percentage of the analog input voltage per bit of digital output is called 1LSB (Least Significant Bit). The percentage of 1LSB with respect to the full scale is expressed by %FSR (Full Scale Range).

1LSB is as follows when the resolution is 10 bits.

$$\begin{aligned} 1\text{LSB} &= 1/2^{10} = 1/1024 \\ &= 0.098\% \text{FSR} \end{aligned}$$

Accuracy has no relation to resolution, but is determined by overall error.

### (2) Overall error

This shows the maximum error value between the actual measured value and the theoretical value.

Zero-scale error, full-scale error, integral linearity error, and differential linearity errors that are combinations of these express the overall error.

Note that the quantization error is not included in the overall error in the characteristics table.

### (3) Quantization error

When analog values are converted to digital values, a  $\pm 1/2\text{LSB}$  error naturally occurs. In an A/D converter, an analog input voltage in a range of  $\pm 1/2\text{LSB}$  is converted to the same digital code, so a quantization error cannot be avoided.

Note that the quantization error is not included in the overall error, zero-scale error, full-scale error, integral linearity error, and differential linearity error in the characteristics table.

Figure 12-14. Overall Error


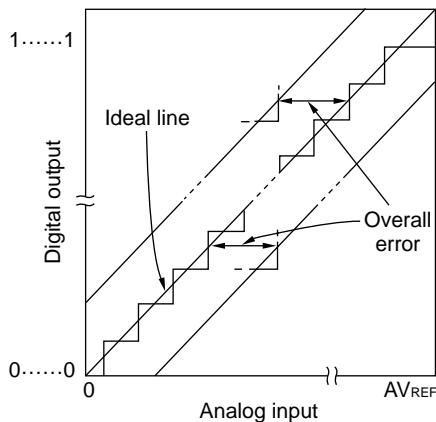


Figure 12-15. Quantization Error

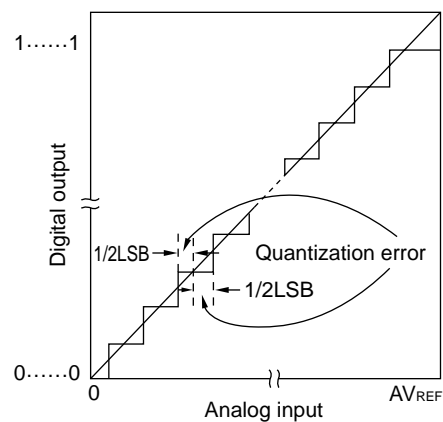

### (4) Zero-scale error

This shows the difference between the actual measurement value of the analog input voltage and the theoretical value ( $1/2\text{LSB}$ ) when the digital output changes from  $0.....000$  to  $0.....001$ .

If the actual measurement value is greater than the theoretical value, it shows the difference between the actual measurement value of the analog input voltage and the theoretical value ( $3/2\text{LSB}$ ) when the digital output changes from  $0.....001$  to  $0.....010$ .

**(5) Full-scale error**

This shows the difference between the actual measurement value of the analog input voltage and the theoretical value (Full-scale – 3/2LSB) when the digital output changes from 1.....110 to 1.....111.


**(6) Integral linearity error**

This shows the degree to which the conversion characteristics deviate from the ideal linear relationship. It expresses the maximum value of the difference between the actual measurement value and the ideal straight line when the zero-scale error and full-scale error are 0.


**(7) Differential linearity error**

While the ideal width of code output is 1LSB, this indicates the difference between the actual measurement value and the ideal value.


**Figure 12-16. Zero-Scale Error**

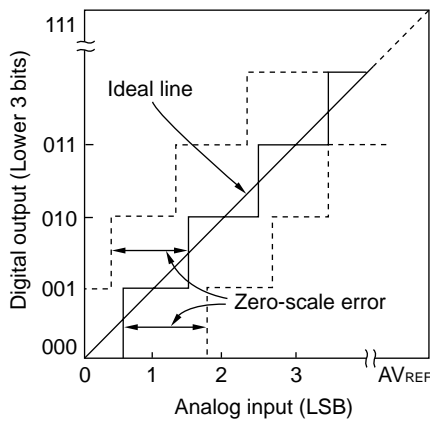


**Figure 12-17. Full-Scale Error**

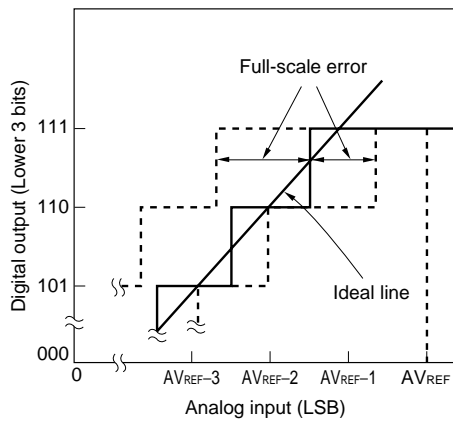

**Figure 12-18. Integral Linearity Error**

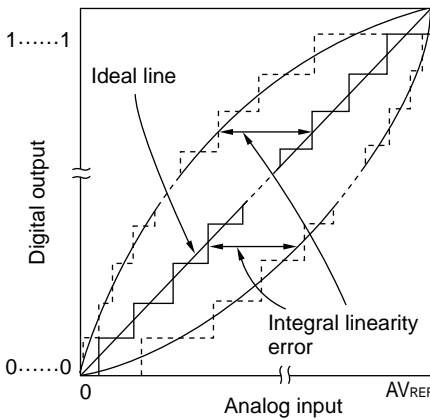

**Figure 12-19. Differential Linearity Error**

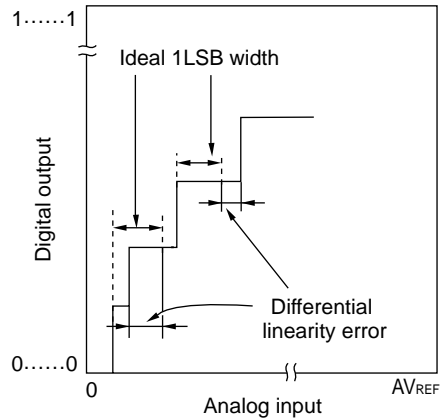


**(8) Conversion time**

This expresses the time from the start of sampling to when the digital output is obtained. The sampling time is included in the conversion time in the characteristics table.

**(9) Sampling time**

This is the time the analog switch is turned on for the analog voltage to be sampled by the sample & hold circuit.



## 12.6 Cautions for 10-Bit Successive Approximation Type A/D Converter

### (1) Operating current in STOP mode

The A/D converter stops operating in the STOP mode. At this time, the operating current can be reduced by clearing bit 7 (ADCS) and bit 0 (ADCE) of the A/D converter mode register (ADM) to 0.

To restart from the standby status, clear bit 0 (ADIF) of interrupt request flag register 1L (IF1L) to 0 and start operation.

### (2) Input range of ANI0 to ANI5

Observe the rated range of the ANI0 to ANI5 input voltage. If a voltage of  $AV_{REF}$  or higher and  $AV_{SS}$  or lower (even in the range of absolute maximum ratings) is input to an analog input channel, the converted value of that channel becomes undefined. In addition, the converted values of the other channels may also be affected.

### (3) Conflicting operations

<1> Conflict between A/D conversion result register (ADCR, ADCRH) write and ADCR or ADCRH read by instruction upon the end of conversion

ADCR or ADCRH read has priority. After the read operation, the new conversion result is written to ADCR or ADCRH.

<2> Conflict between ADCR or ADCRH write and A/D converter mode register (ADM) write, analog input channel specification register (ADS), or A/D port configuration register 0 (ADPC0) write upon the end of conversion

ADM, ADS, or ADPC0 write has priority. ADCR or ADCRH write is not performed, nor is the conversion end interrupt signal (INTAD) generated.

### (4) Noise countermeasures

To maintain the 10-bit resolution, attention must be paid to noise input to the  $AV_{REF}$  pin and pins ANI0 to ANI5.


<1> Connect a capacitor with a low equivalent resistance and a good frequency response to the power supply.

<2> The higher the output impedance of the analog input source, the greater the influence. To reduce the noise, connecting external C as shown in Figure 12-20 is recommended.

<3> Do not switch these pins with other pins during conversion.

<4> The accuracy is improved if the HALT mode is set immediately after the start of conversion.

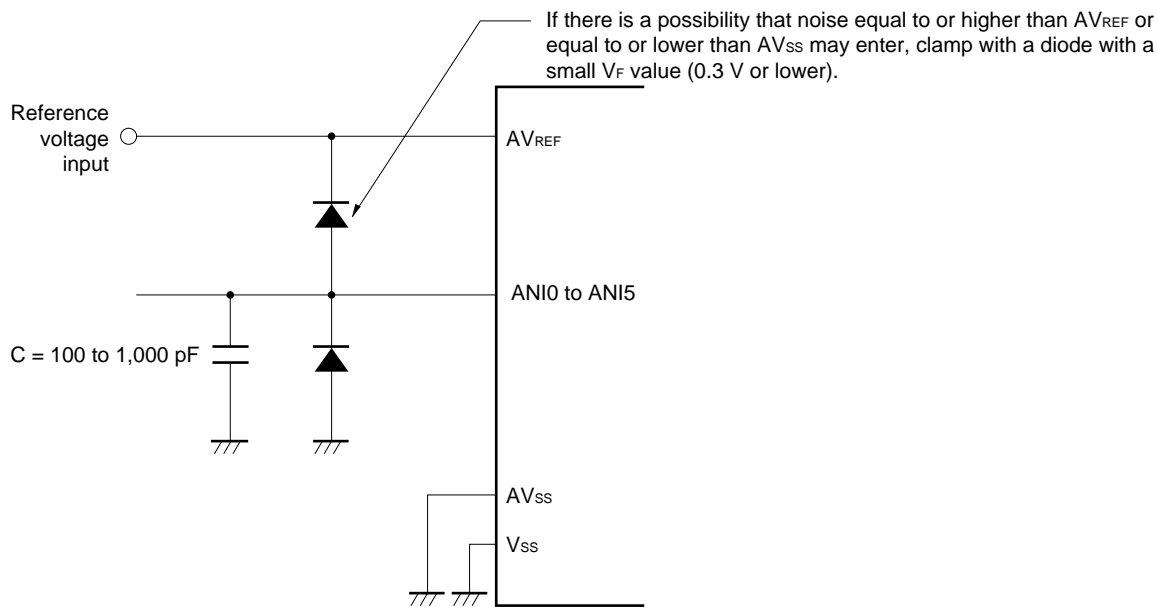Figure 12-20. Analog Input Pin Connection

**(5) ANI0/SEG21/P20 to ANI5/SEG16/P25 pins**

<1> The analog input pins (ANI0 to ANI5) are also used as I/O port pins (P20 to P25).

When A/D conversion is performed with any of ANI0 to ANI5 selected, do not access P20 to P25 while conversion is in progress; otherwise the conversion resolution may be degraded. It is recommended to any pin of P20 to P25 used as digital I/O port starting with the ANI0/P20 that is the furthest from  $AV_{REF}$ .

<2> If a digital pulse is input or output, or segment-output to the pins adjacent to the pins currently used for A/D conversion, the expected value of the A/D conversion may not be obtained due to coupling noise. Therefore, do not input or output a pulse, or segment-output to the pins adjacent to the pin undergoing A/D conversion.

**(6) Input impedance of ANI0 to ANI5 pins**

This A/D converter charges a sampling capacitor for sampling during sampling time.

Therefore, only a leakage current flows when sampling is not in progress, and a current that charges the capacitor flows during sampling. Consequently, the input impedance fluctuates depending on whether sampling is in progress, and on the other states.

To make sure that sampling is effective, however, it is recommended to keep the output impedance of the analog input source to within  $10$  k $\Omega$ , and to connect a capacitor of about  $100$  pF to the ANI0 to ANI5 pins (see **Figure 12-20**).

**(7)  $AV_{REF}$  pin input impedance**

A series resistor string of several tens of k $\Omega$  is connected between the  $AV_{REF}$  and  $AV_{SS}$  pins.

Therefore, if the output impedance of the reference voltage source is high, this will result in a series connection to the series resistor string between the  $AV_{REF}$  and  $AV_{SS}$  pins, resulting in a large reference voltage error.




**(8) Interrupt request flag (ADIF)**

The interrupt request flag (ADIF) is not cleared even if the analog input channel specification register (ADS) is changed.

Therefore, if an analog input pin is changed during A/D conversion, the A/D conversion result and ADIF for the pre-change analog input may be set just before the ADS rewrite. Caution is therefore required since, at this time, when ADIF is read immediately after the ADS rewrite, ADIF is set despite the fact A/D conversion for the post-change analog input has not ended.

When A/D conversion is stopped and then resumed, clear ADIF before the A/D conversion operation is resumed.

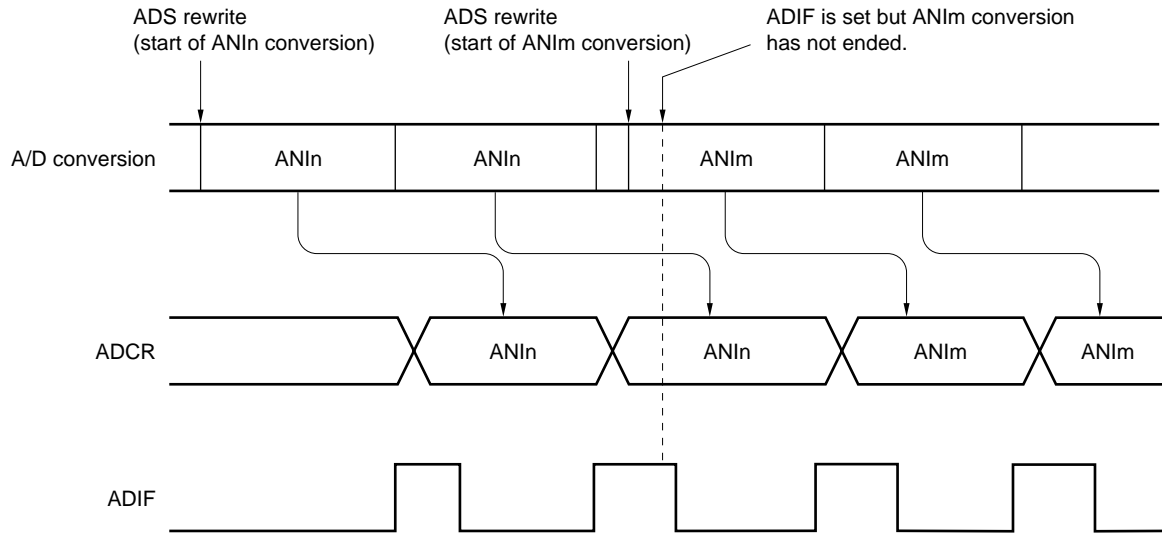**Figure 12-21. Timing of A/D Conversion End Interrupt Request Generation**



- Remarks 1.** n = 0 to 5  
**2.** m = 0 to 5

**(9) Conversion results just after A/D conversion start**

The first A/D conversion value immediately after A/D conversion starts may not fall within the rating range if the ADCS bit is set to 1 within 1  $\mu$ s after the ADCE bit was set to 1, or if the ADCS bit is set to 1 with the ADCE bit = 0. Take measures such as polling the A/D conversion end interrupt request (INTAD) and removing the first conversion result.


**(10) A/D conversion result register (ADCR, ADCRH) read operation**

When a write operation is performed to the A/D converter mode register (ADM), analog input channel specification register (ADS), and A/D port configuration register 0 (ADPC0), the contents of ADCR and ADCRH may become undefined. Read the conversion result following conversion completion before writing to ADM, ADS, and ADPC0. Using a timing other than the above may cause an incorrect conversion result to be read.

**(11) Internal equivalent circuit**

The equivalent circuit of the analog input block is shown below.

**Figure 12-22. Internal Equivalent Circuit of ANIn Pin**

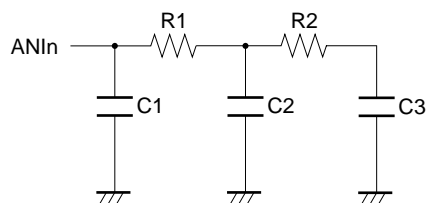

**Table 12-4. Resistance and Capacitance Values of Equivalent Circuit (Reference Values)**

$AV_{REF}$	R1	R2	C1	C2	C3
2.7 V	TBD	TBD	TBD	TBD	TBD
4.5 V	TBD	TBD	TBD	TBD	TBD

- Remarks**
1. The resistance and capacitance values shown in Table 12-4 are not guaranteed values.
  2.  $n = 0$  to 5

## CHAPTER 13 SERIAL INTERFACE UART0

### 13.1 Functions of Serial Interface UART0

Serial interface UART0 has the following two modes.

#### (1) Operation stop mode

This mode is used when serial communication is not executed and can enable a reduction in the power consumption.

For details, see **13.4.1 Operation stop mode**.

#### (2) Asynchronous serial interface (UART) mode

The functions of this mode are outlined below.

For details, see **13.4.2 Asynchronous serial interface (UART) mode** and **13.4.3 Dedicated baud rate generator**.

- Maximum transfer rate: 625 kbps
- Two-pin configuration TxD0: Transmit data output pin  
RxD0: Receive data input pin
- Length of communication data can be selected from 7 or 8 bits.
- Dedicated on-chip 5-bit baud rate generator allowing any baud rate to be set
- Transmission and reception can be performed independently (full-duplex operation).
- Fixed to LSB-first communication

- Cautions**
1. If clock supply to serial interface UART0 is not stopped (e.g., in the HALT mode), normal operation continues. If clock supply to serial interface UART0 is stopped (e.g., in the STOP mode), each register stops operating, and holds the value immediately before clock supply was stopped. The TxD0 pin also holds the value immediately before clock supply was stopped and outputs it. However, the operation is not guaranteed after clock supply is resumed. Therefore, reset the circuit so that POWER0 = 0, RXE0 = 0, and TXE0 = 0.
  2. Set POWER0 = 1 and then set TXE0 = 1 (transmission) or RXE0 = 1 (reception) to start communication.
  3. TXE0 and RXE0 are synchronized by the base clock ( $f_{XCLK0}$ ) set by BRGC0. To enable transmission or reception again, set TXE0 or RXE0 to 1 at least two clocks of base clock after TXE0 or RXE0 has been cleared to 0. If TXE0 or RXE0 is set within two clocks of base clock, the transmission circuit or reception circuit may not be initialized.
  4. Set transmit data to TXS0 at least one base clock ( $f_{XCLK0}$ ) after setting TXE0 = 1.


## 13.2 Configuration of Serial Interface UART0

Serial interface UART0 includes the following hardware.

**Table 13-1. Configuration of Serial Interface UART0**

Item	Configuration
Registers	Receive buffer register 0 (RXB0) Receive shift register 0 (RXS0) Transmit shift register 0 (TXS0)
Control registers	Asynchronous serial interface operation mode register 0 (ASIM0) Asynchronous serial interface reception error status register 0 (ASIS0) Baud rate generator control register 0 (BRGC0) Port function register 1 (PF1) Port mode register 1 (PM1) Port register 1 (P1)

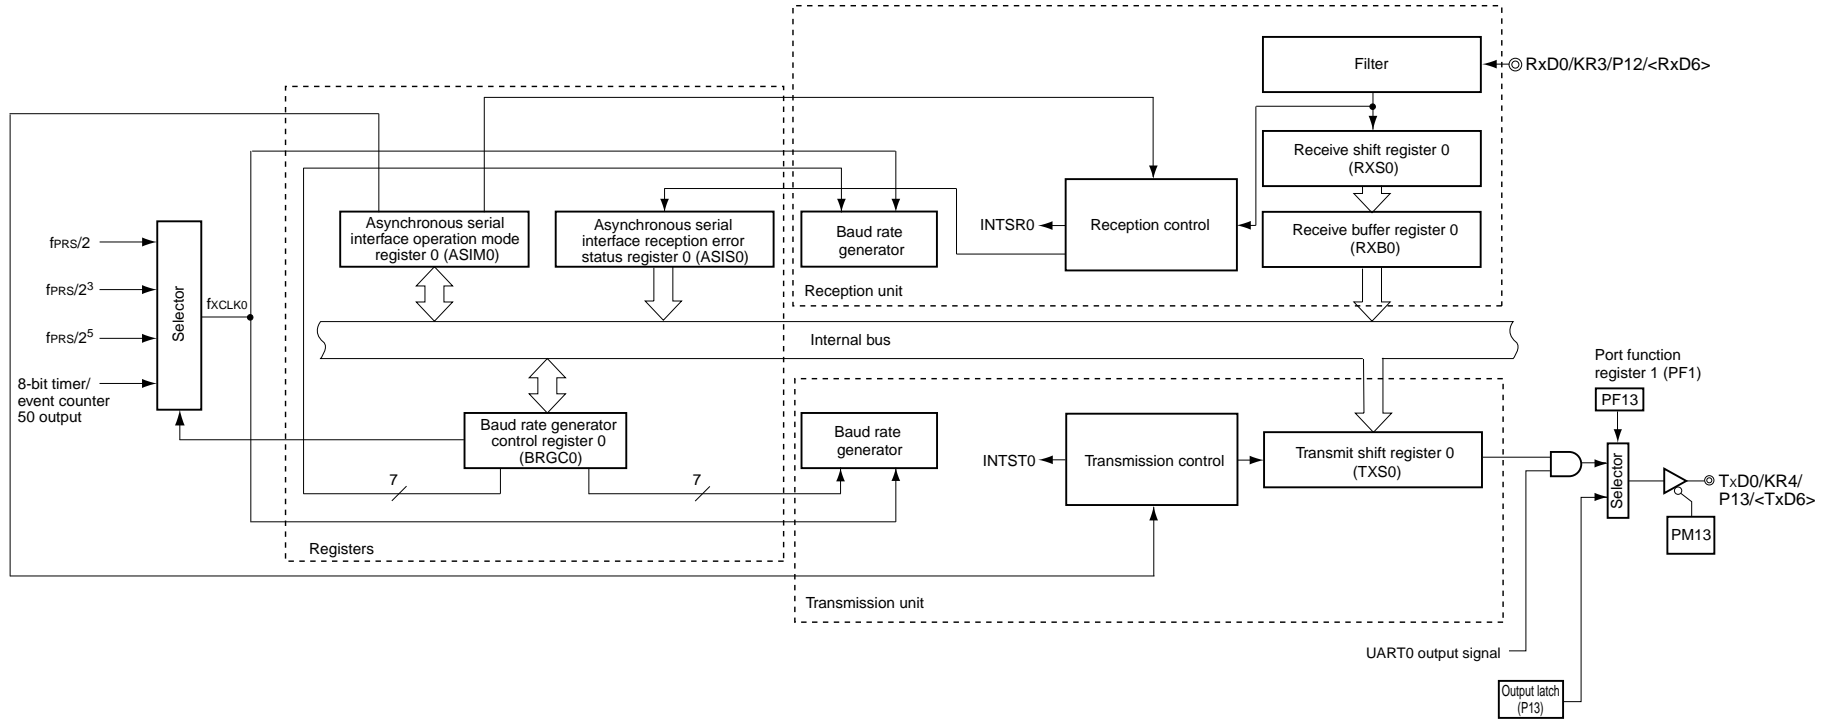Figure 13-1. Block Diagram of Serial Interface UART0



**(1) Receive buffer register 0 (RXB0)**

This 8-bit register stores parallel data converted by receive shift register 0 (RXS0).

Each time 1 byte of data has been received, new receive data is transferred to this register from receive shift register 0 (RXS0).

If the data length is set to 7 bits the receive data is transferred to bits 0 to 6 of RXB0 and the MSB of RXB0 is always 0.

If an overrun error (OVE0) occurs, the receive data is not transferred to RXB0.

RXB0 can be read by an 8-bit memory manipulation instruction. No data can be written to this register.

Reset signal generation and POWER0 = 0 set this register to FFH.

**(2) Receive shift register 0 (RXS0)**

This register converts the serial data input to the RxD0 pin into parallel data.

RXS0 cannot be directly manipulated by a program.

**(3) Transmit shift register 0 (TXS0)**

This register is used to set transmit data. Transmission is started when data is written to TXS0, and serial data is transmitted from the TxD0 pins.

TXS0 can be written by an 8-bit memory manipulation instruction. This register cannot be read.

Reset signal generation, POWER0 = 0, and TXE0 = 0 set this register to FFH.

- Cautions**
- 1. Set transmit data to TXS0 at least one base clock ( $f_{CLK0}$ ) after setting TXE0 = 1.**
  - 2. Do not write the next transmit data to TXS0 before the transmission completion interrupt signal (INTST0) is generated.**

### 13.3 Registers Controlling Serial Interface UART0

Serial interface UART0 is controlled by the following six registers.

- Asynchronous serial interface operation mode register 0 (ASIM0)
- Asynchronous serial interface reception error status register 0 (ASIS0)
- Baud rate generator control register 0 (BRGC0)
- Port function register 1 (PF1)
- Port mode register 1 (PM1)
- Port register 1 (P1)

#### (1) Asynchronous serial interface operation mode register 0 (ASIM0)

This 8-bit register controls the serial communication operations of serial interface UART0.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 01H.

**Figure 13-2. Format of Asynchronous Serial Interface Operation Mode Register 0 (ASIM0) (1/2)**

Address: FF70H After reset: 01H R/W

Symbol	<7>	<6>	<5>	4	3	2	1	0
ASIM0	POWER0	TXE0	RXE0	PS01	PS00	CL0	SL0	1

POWER0	Enables/disables operation of internal operation clock
0 <sup>Note 1</sup>	Disables operation of the internal operation clock (fixes the clock to low level) and asynchronously resets the internal circuit <sup>Note 2</sup> .
1	Enables operation of the internal operation clock.

TXE0	Enables/disables transmission
0	Disables transmission (synchronously resets the transmission circuit).
1	Enables transmission.

RXE0	Enables/disables reception
0	Disables reception (synchronously resets the reception circuit).
1	Enables reception.

- Notes**
1. The input from the RxD0 pin is fixed to high level when POWER0 = 0.
  2. Asynchronous serial interface reception error status register 0 (ASIS0), transmit shift register 0 (TXS0), and receive buffer register 0 (RXB0) are reset.

Figure 13-2. Format of Asynchronous Serial Interface Operation Mode Register 0 (ASIM0) (2/2)

PS01	PS00	Transmission operation	Reception operation
0	0	Does not output parity bit.	Reception without parity
0	1	Outputs 0 parity.	Reception as 0 parity <sup>Note</sup>
1	0	Outputs odd parity.	Judges as odd parity.
1	1	Outputs even parity.	Judges as even parity.

CL0	Specifies character length of transmit/receive data
0	Character length of data = 7 bits
1	Character length of data = 8 bits

SL0	Specifies number of stop bits of transmit data
0	Number of stop bits = 1
1	Number of stop bits = 2

**Note** If “reception as 0 parity” is selected, the parity is not judged. Therefore, bit 2 (PE0) of asynchronous serial interface reception error status register 0 (ASIS0) is not set and the error interrupt does not occur.

- Cautions**
1. To start the transmission, set POWER0 to 1 and then set TXE0 to 1. To stop the transmission, clear TXE0 to 0, and then clear POWER0 to 0.
  2. To start the reception, set POWER0 to 1 and then set RXE0 to 1. To stop the reception, clear RXE0 to 0, and then clear POWER0 to 0.
  3. Set POWER0 to 1 and then set RXE0 to 1 while a high level is input to the RxD0 pin. If POWER0 is set to 1 and RXE0 is set to 1 while a low level is input, reception is started.
  4. TXE0 and RXE0 are synchronized by the base clock (f<sub>CLK0</sub>) set by BRGC0. To enable transmission or reception again, set TXE0 or RXE0 to 1 at least two clocks of base clock after TXE0 or RXE0 has been cleared to 0. If TXE0 or RXE0 is set within two clocks of base clock, the transmission circuit or reception circuit may not be initialized.
  5. Set transmit data to TXS0 at least one base clock (f<sub>CLK0</sub>) after setting TXE0 = 1.
  6. Clear the TXE0 and RXE0 bits to 0 before rewriting the PS01, PS00, and CL0 bits.
  7. Make sure that TXE0 = 0 when rewriting the SL0 bit. Reception is always performed with “number of stop bits = 1”, and therefore, is not affected by the set value of the SL0 bit.
  8. Be sure to set bit 0 to 1.



**(2) Asynchronous serial interface reception error status register 0 (ASIS0)**

This register indicates an error status on completion of reception by serial interface UART0. It includes three error flag bits (PE0, FE0, OVE0).

This register is read-only by an 8-bit memory manipulation instruction.

Reset signal generation, or clearing bit 7 (POWER0) or bit 5 (RXE0) of ASIM0 to 0 clears this register to 00H. 00H is read when this register is read. If a reception error occurs, read ASIS0 and then read receive buffer register 0 (RXB0) to clear the error flag.

**Figure 13-3. Format of Asynchronous Serial Interface Reception Error Status Register 0 (ASIS0)**

Address: FF73H After reset: 00H R

Symbol	7	6	5	4	3	2	1	0
ASIS0	0	0	0	0	0	PE0	FE0	OVE0

PE0	Status flag indicating parity error
0	If POWER0 = 0 or RXE0 = 0, or if ASIS0 register is read.
1	If the parity of transmit data does not match the parity bit on completion of reception.

FE0	Status flag indicating framing error
0	If POWER0 = 0 or RXE0 = 0, or if ASIS0 register is read.
1	If the stop bit is not detected on completion of reception.

OVE0	Status flag indicating overrun error
0	If POWER0 = 0 and RXE0 = 0, or if ASIS0 register is read.
1	If receive data is set to the RXB0 register and the next reception operation is completed before the data is read.

- Cautions**
1. The operation of the PE0 bit differs depending on the set values of the PS01 and PS00 bits of asynchronous serial interface operation mode register 0 (ASIM0).
  2. Only the first bit of the receive data is checked as the stop bit, regardless of the number of stop bits.
  3. If an overrun error occurs, the next receive data is not written to receive buffer register 0 (RXB0) but discarded.
  4. If data is read from ASIS0, a wait cycle is generated. Do not read data from ASIS0 when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

**(3) Baud rate generator control register 0 (BRGC0)**

This register selects the base clock of serial interface UART0 and the division value of the 5-bit counter.

BRGC0 can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 1FH.

**Figure 13-4. Format of Baud Rate Generator Control Register 0 (BRGC0)**

Address: FF71H After reset: 1FH R/W

Symbol	7	6	5	4	3	2	1	0
BRGC0	TPS01	TPS00	0	MDL04	MDL03	MDL02	MDL01	MDL00

TPS01	TPS00	Base clock (f <sub>XCLK0</sub> ) selection <sup>Note 1</sup>				
		f <sub>PRS</sub> = 2 MHz	f <sub>PRS</sub> = 5 MHz	f <sub>PRS</sub> = 8 MHz	f <sub>PRS</sub> = 10 MHz	
0	0	TM50 output <sup>Note 2</sup>				
0	1	f <sub>PRS</sub> /2	1 MHz	2.5 MHz	4 MHz	5 MHz
1	0	f <sub>PRS</sub> /2 <sup>3</sup>	250 kHz	625 kHz	1 MHz	1.25 MHz
1	1	f <sub>PRS</sub> /2 <sup>5</sup>	62.5 kHz	156.25 kHz	250 kHz	312.5 kHz

MDL04	MDL03	MDL02	MDL01	MDL00	k	Selection of 5-bit counter output clock
0	0	×	×	×	×	Setting prohibited
0	1	0	0	0	8	f <sub>XCLK0</sub> /8
0	1	0	0	1	9	f <sub>XCLK0</sub> /9
0	1	0	1	0	10	f <sub>XCLK0</sub> /10
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
1	1	0	1	0	26	f <sub>XCLK0</sub> /26
1	1	0	1	1	27	f <sub>XCLK0</sub> /27
1	1	1	0	0	28	f <sub>XCLK0</sub> /28
1	1	1	0	1	29	f <sub>XCLK0</sub> /29
1	1	1	1	0	30	f <sub>XCLK0</sub> /30
1	1	1	1	1	31	f <sub>XCLK0</sub> /31

- Notes**
1. If the peripheral hardware clock (f<sub>PRS</sub>) operates on the high-speed system clock (f<sub>XH</sub>) (XSEL = 1), the f<sub>PRS</sub> operating frequency varies depending on the supply voltage.
    - V<sub>DD</sub> = 2.7 to 5.5 V: f<sub>PRS</sub> ≤ 10 MHz
    - V<sub>DD</sub> = 1.8 to 2.7 V: f<sub>PRS</sub> ≤ 5 MHz
  2. When selecting the TM50 output as the base clock, Start the operation of 8-bit timer/event counter 50 first and then enable the timer F/F inversion operation (TMC501 = 1).

- Cautions**
1. Make sure that bit 6 (TXE0) and bit 5 (RXE0) of the ASIM0 register = 0 when rewriting the MDL04 to MDL00 bits.
  2. The baud rate value is the output clock of the 5-bit counter divided by 2.

- Remarks**
1.  $f_{CLK0}$ : Frequency of base clock selected by the TPS01 and TPS00 bits
  2.  $f_{PRS}$ : Peripheral hardware clock frequency
  3.  $k$ : Value set by the MDL04 to MDL00 bits ( $k = 8, 9, 10, \dots, 31$ )
  4.  $\times$ : Don't care

**(4) Port function register 1 (PF1)**

This register sets the pin functions of P13/TxD0/KR4/<TxD6> pin.

PF1 is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PF1 to 00H.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

**Figure 13-5. Format of Port Function Register 1 (PF1)**

Address: FF20H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PF1	0	0	0	0	PF13	0	0	0

PF13	Port (P13), UART0, and UART6 output specification
0	Used as P13
1	Used as TxD0 or TxD6

**(5) Port mode register 1 (PM1)**

This register sets port 1 input/output in 1-bit units.

When using the P13/TxD0/KR4/<TxD6> pin for serial interface data output, clear PM13 to 0. The output latch of P13 at this time may be 0 or 1.

When using the P12/RxD0/KR3/<RxD6> pin for serial interface data input, set PM12 to 1. The output latch of P12 at this time may be 0 or 1.

PM1 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to FFH.

**Remark** The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

**Figure 13-6. Format of Port Mode Register 1 (PM1)**

Address: FF21H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM1	1	1	1	1	PM13	PM12	1	1

PM1n	P1n pin I/O mode selection (n = 2, 3)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

## 13.4 Operation of Serial Interface UART0

Serial interface UART0 has the following two modes.

- Operation stop mode
- Asynchronous serial interface (UART) mode

### 13.4.1 Operation stop mode

In this mode, serial communication cannot be executed, thus reducing the power consumption. In addition, the pins can be used as ordinary port pins in this mode. To set the operation stop mode, clear bits 7, 6, and 5 (POWER0, TXE0, and RXE0) of ASIM0 to 0.

#### (1) Register used

The operation stop mode is set by asynchronous serial interface operation mode register 0 (ASIM0).

ASIM0 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 01H.

Address: FF70H After reset: 01H R/W

Symbol	<7>	<6>	<5>	4	3	2	1	0
ASIM0	POWER0	TXE0	RXE0	PS01	PS00	CL0	SL0	1

POWER0	Enables/disables operation of internal operation clock
0 <sup>Note 1</sup>	Disables operation of the internal operation clock (fixes the clock to low level) and asynchronously resets the internal circuit <sup>Note 2</sup> .

TXE0	Enables/disables transmission
0	Disables transmission (synchronously resets the transmission circuit).

RXE0	Enables/disables reception
0	Disables reception (synchronously resets the reception circuit).

- Notes**
1. The input from the RxD0 pin is fixed to high level when POWER0 = 0.
  2. Asynchronous serial interface reception error status register 0 (ASIS0), transmit shift register 0 (TXS0), and receive buffer register 0 (RXB0) are reset.

**Caution** Clear POWER0 to 0 after clearing TXE0 and RXE0 to 0 to set the operation stop mode. To start the communication, set POWER0 to 1, and then set TXE0 or RXE0 to 1.

**Remark** To use the RxD0/KR3/<RxD6>/P12 and TxD0/KR4/<TxD6>/P13 pins as general-purpose port pins, see CHAPTER 4 PORT FUNCTIONS.

### 13.4.2 Asynchronous serial interface (UART) mode

In this mode, 1-byte data is transmitted/received following a start bit, and a full-duplex operation can be performed.

A dedicated UART baud rate generator is incorporated, so that communication can be executed at a wide range of baud rates.

#### (1) Registers used

- Asynchronous serial interface operation mode register 0 (ASIM0)
- Asynchronous serial interface reception error status register 0 (ASIS0)
- Baud rate generator control register 0 (BRGC0)
- Port mode register 1 (PM1)
- Port register 1 (P1)

The basic procedure of setting an operation in the UART mode is as follows.

- <1> Set the BRGC0 register (see **Figure 13-4**).
- <2> Set bits 1 to 4 (SL0, CL0, PS00, and PS01) of the ASIM0 register (see **Figure 13-2**).
- <3> Set bit 7 (POWER0) of the ASIM0 register to 1.
- <4> Set bit 6 (TXE0) of the ASIM0 register to 1. → Transmission is enabled.  
Set bit 5 (RXE0) of the ASIM0 register to 1. → Reception is enabled.
- <5> Write data to the TXS0 register. → Data transmission is started.

**Caution** Take relationship with the other party of communication when setting the port mode register and port register.

The relationship between the register settings and pins is shown below.

**Table 13-2. Relationship Between Register Settings and Pins**

POWER0	TXE0	RXE0	PM13	P13	PM12	P12	UART0 Operation	Pin Function	
								TxD0/KR4/P13/<TxD6>	RxD0/KR3/P12/<RxD6>
0	0	0	×	×	×	×	Stop	KR4/P13/<TxD6>	KR3/P12/<RxD6>
1	0	1	×	×	1	×	Reception	KR4/P13	RxD0
	1	0	0	×	×	×	Transmission	TxD0	KR3/P12
	1	1	0	×	1	×	Transmission/ reception	TxD0	RxD0

**Note** Can be set as port function, key interrupt, or serial interface UART6 (only when UART0 is stopped).

- Remarks 1.**
- ×: don't care
  - POWER0: Bit 7 of asynchronous serial interface operation mode register 0 (ASIM0)
  - TXE0: Bit 6 of ASIM0
  - RXE0: Bit 5 of ASIM0
  - PM1×: Port mode register
  - P1×: Port output latch


2. The functions within arrowheads (< >) can be assigned by setting the input switch control register (ISC).

(2) Communication operation

(a) Format and waveform example of normal transmit/receive data

Figures 13-7 and 13-8 show the format and waveform example of the normal transmit/receive data.

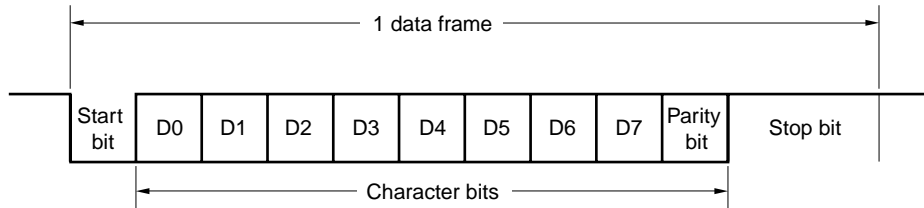Figure 13-7. Format of Normal UART Transmit/Receive Data




One data frame consists of the following bits.

- Start bit ... 1 bit
- Character bits ... 7 or 8 bits (LSB first)
- Parity bit ... Even parity, odd parity, 0 parity, or no parity
- Stop bit ... 1 or 2 bits


The character bit length, parity, and stop bit length in one data frame are specified by asynchronous serial interface operation mode register 0 (ASIM0).

Figure 13-8. Example of Normal UART Transmit/Receive Data Waveform

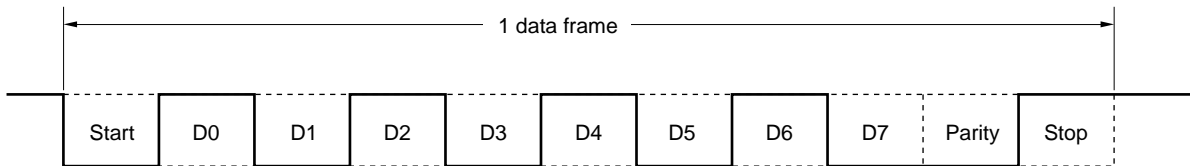
1. Data length: 8 bits, Parity: Even parity, Stop bit: 1 bit, Communication data: 55H



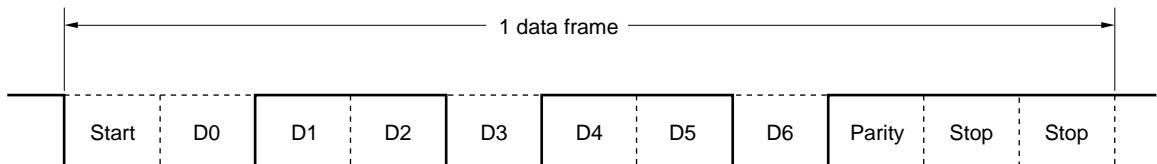2. Data length: 7 bits, Parity: Odd parity, Stop bit: 2 bits, Communication data: 36H



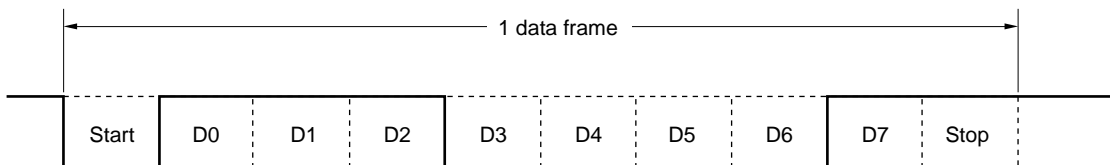3. Data length: 8 bits, Parity: None, Stop bit: 1 bit, Communication data: 87H



**(b) Parity types and operation**

The parity bit is used to detect a bit error in communication data. Usually, the same type of parity bit is used on both the transmission and reception sides. With even parity and odd parity, a 1-bit (odd number) error can be detected. With zero parity and no parity, an error cannot be detected.

**(i) Even parity**

- Transmission

Transmit data, including the parity bit, is controlled so that the number of bits that are “1” is even.

The value of the parity bit is as follows.

If transmit data has an odd number of bits that are “1”: 1

If transmit data has an even number of bits that are “1”: 0

- Reception

The number of bits that are “1” in the receive data, including the parity bit, is counted. If it is odd, a parity error occurs.

**(ii) Odd parity**

- Transmission

Unlike even parity, transmit data, including the parity bit, is controlled so that the number of bits that are “1” is odd.

If transmit data has an odd number of bits that are “1”: 0

If transmit data has an even number of bits that are “1”: 1

- Reception

The number of bits that are “1” in the receive data, including the parity bit, is counted. If it is even, a parity error occurs.

**(iii) 0 parity**

The parity bit is cleared to 0 when data is transmitted, regardless of the transmit data.

The parity bit is not detected when the data is received. Therefore, a parity error does not occur regardless of whether the parity bit is “0” or “1”.

**(iv) No parity**

No parity bit is appended to the transmit data.

Reception is performed assuming that there is no parity bit when data is received. Because there is no parity bit, a parity error does not occur.



**(c) Transmission**

If bit 7 (POWER0) of asynchronous serial interface operation mode register 0 (ASIM0) is set to 1 and bit 6 (TXE0) of ASIM0 is then set to 1, transmission is enabled. Transmission can be started by writing transmit data to transmit shift register 0 (TXS0). The start bit, parity bit, and stop bit are automatically appended to the data.

When transmission is started, the start bit is output from the TxD0 pin, and the transmit data is output followed by the rest of the data in order starting from the LSB. When transmission is completed, the parity and stop bits set by ASIM0 are appended and a transmission completion interrupt request (INTST0) is generated.


Transmission is stopped until the data to be transmitted next is written to TXS0.

Figure 13-9 shows the timing of the transmission completion interrupt request (INTST0). This interrupt occurs as soon as the last stop bit has been output.


**Caution** After transmit data is written to TXS0, do not write the next transmit data before the transmission completion interrupt signal (INTST0) is generated.

**Figure 13-9. Transmission Completion Interrupt Request Timing**

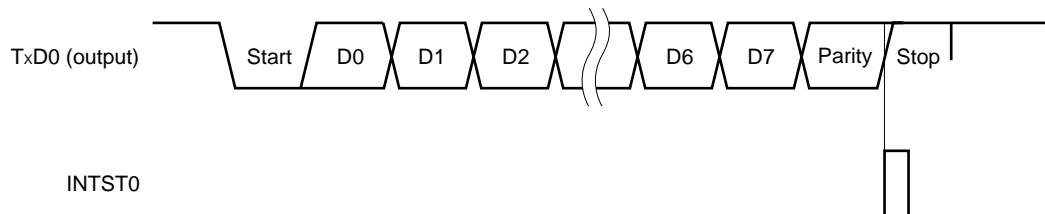**1. Stop bit length: 1**



**2. Stop bit length: 2**

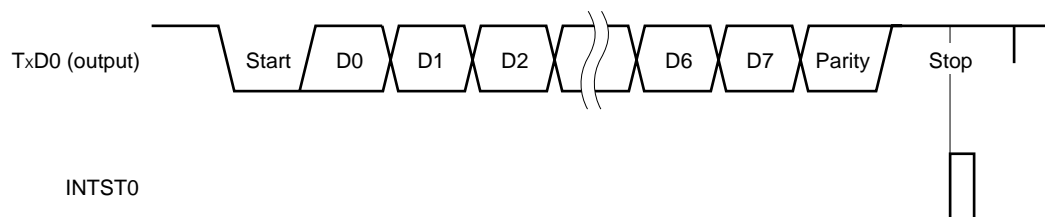

**(d) Reception**


Reception is enabled and the RxD0 pin input is sampled when bit 7 (POWER0) of asynchronous serial interface operation mode register 0 (ASIM0) is set to 1 and then bit 5 (RXE0) of ASIM0 is set to 1.

The 5-bit counter of the baud rate generator starts counting when the falling edge of the RxD0 pin input is detected. When the set value of baud rate generator control register 0 (BRGC0) has been counted, the RxD0 pin input is sampled again ( $\nabla$  in Figure 13-10). If the RxD0 pin is low level at this time, it is recognized as a start bit.

When the start bit is detected, reception is started, and serial data is sequentially stored in receive shift register 0 (RXS0) at the set baud rate. When the stop bit has been received, the reception completion interrupt (INTSR0) is generated and the data of RXS0 is written to receive buffer register 0 (RXB0). If an overrun error (OVE0) occurs, however, the receive data is not written to RXB0.

Even if a parity error (PE0) occurs while reception is in progress, reception continues to the reception position of the stop bit, and an reception error interrupt (INTSR0) is generated after completion of reception. INTSR0 occurs upon completion of reception and in case of a reception error.

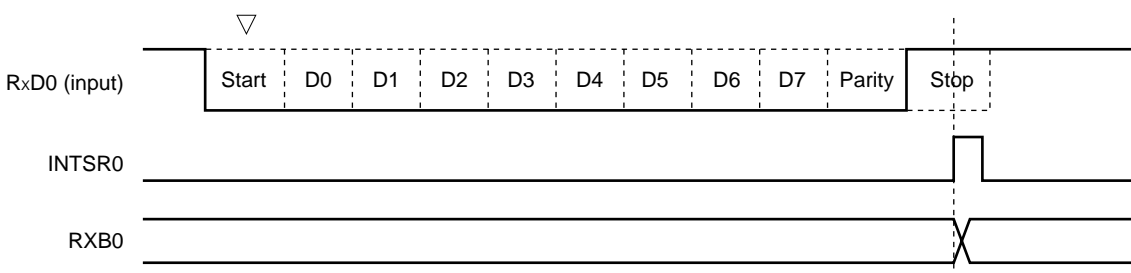**Figure 13-10. Reception Completion Interrupt Request Timing**



- Cautions**
1. If a reception error occurs, read asynchronous serial interface reception error status register 0 (ASIS0) and then read receive buffer register 0 (RXB0) to clear the error flag. Otherwise, an overrun error will occur when the next data is received, and the reception error status will persist.
  2. Reception is always performed with the “number of stop bits = 1”. The second stop bit is ignored.

**(e) Reception error**

Three types of errors may occur during reception: a parity error, framing error, or overrun error. If the error flag of asynchronous serial interface reception error status register 0 (ASIS0) is set as a result of data reception, a reception error interrupt (INTSR0) is generated.

Which error has occurred during reception can be identified by reading the contents of ASIS0 in the reception error interrupt (INTSR0) servicing (see **Figure 13-3**).

The contents of ASIS0 are cleared to 0 when ASIS0 is read.

**Table 13-3. Cause of Reception Error**


Reception Error	Cause
Parity error	The parity specified for transmission does not match the parity of the receive data.
Framing error	Stop bit is not detected.
Overrun error	Reception of the next data is completed before data is read from receive buffer register 0 (RXB0).

**(f) Noise filter of receive data**

The RxD0 signal is sampled using the base clock output by the prescaler block.

If two sampled values are the same, the output of the match detector changes, and the data is sampled as input data.

Because the circuit is configured as shown in Figure 13-11, the internal processing of the reception operation is delayed by two clocks from the external signal status.

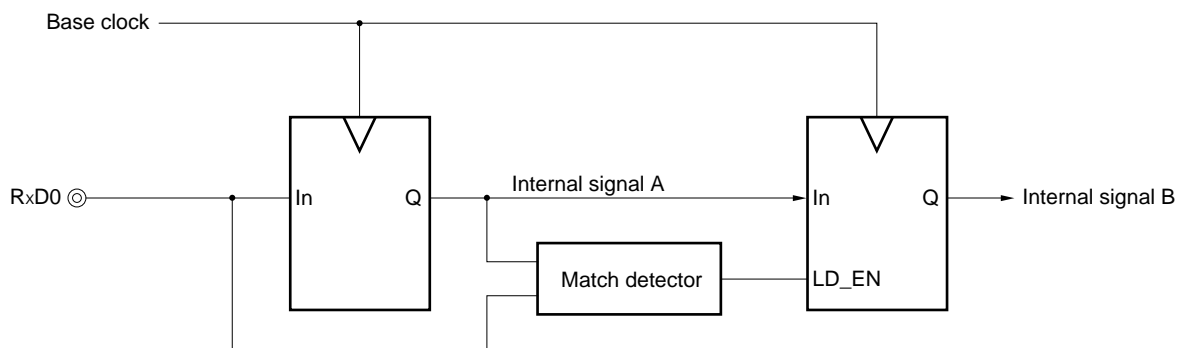**Figure 13-11. Noise Filter Circuit**

### 13.4.3 Dedicated baud rate generator

The dedicated baud rate generator consists of a source clock selector and a 5-bit programmable counter, and generates a serial clock for transmission/reception of UART0.

Separate 5-bit counters are provided for transmission and reception.

#### (1) Configuration of baud rate generator

- Base clock

The clock selected by bits 7 and 6 (TPS01 and TPS00) of baud rate generator control register 0 (BRGC0) is supplied to each module when bit 7 (POWER0) of asynchronous serial interface operation mode register 0 (ASIM0) is 1. This clock is called the base clock and its frequency is called  $f_{CLK0}$ . The base clock is fixed to low level when  $POWER0 = 0$ .

- Transmission counter

This counter stops operation, cleared to 0, when bit 7 (POWER0) or bit 6 (TXE0) of asynchronous serial interface operation mode register 0 (ASIM0) is 0.

It starts counting when  $POWER0 = 1$  and  $TXE0 = 1$ .

The counter is cleared to 0 when the first data transmitted is written to transmit shift register 0 (TXS0).


- Reception counter

This counter stops operation, cleared to 0, when bit 7 (POWER0) or bit 5 (RXE0) of asynchronous serial interface operation mode register 0 (ASIM0) is 0.

It starts counting when the start bit has been detected.

The counter stops operation after one frame has been received, until the next start bit is detected.

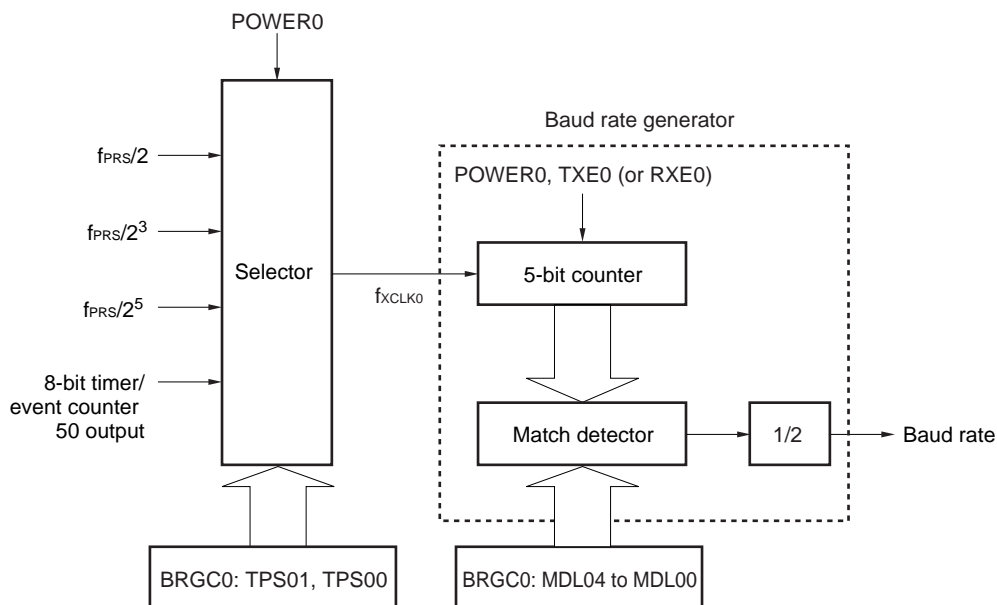**Figure 13-12. Configuration of Baud Rate Generator**



**Remark** POWER0: Bit 7 of asynchronous serial interface operation mode register 0 (ASIM0)  
 TXE0: Bit 6 of ASIM0  
 RXE0: Bit 5 of ASIM0  
 BRGC0: Baud rate generator control register 0

**(2) Generation of serial clock**

A serial clock to be generated can be specified by using baud rate generator control register 0 (BRGC0). Select the clock to be input to the 5-bit counter by using bits 7 and 6 (TPS01 and TPS00) of BRGC0. Bits 4 to 0 (MDL04 to MDL00) of BRGC0 can be used to select the division value ( $f_{XCLK0}/8$  to  $f_{XCLK0}/31$ ) of the 5-bit counter.

**13.4.4 Calculation of baud rate**

**(1) Baud rate calculation expression**

The baud rate can be calculated by the following expression.

- Baud rate =  $\frac{f_{XCLK0}}{2 \times k}$  [bps]

$f_{XCLK0}$ : Frequency of base clock selected by the TPS01 and TPS00 bits of the BRGC0 register

k: Value set by the MDL04 to MDL00 bits of the BRGC0 register (k = 8, 9, 10, ..., 31)

**Table 13-4. Set Value of TPS01 and TPS00**

TPS01	TPS00	Base clock ( $f_{XCLK0}$ ) selection <sup>Note 1</sup>				
		$f_{PRS} = 2$ MHz	$f_{PRS} = 5$ MHz	$f_{PRS} = 8$ MHz	$f_{PRS} = 10$ MHz	
0	0	TM50 output <sup>Note 2</sup>				
0	1	$f_{PRS}/2$	1 MHz	2.5 MHz	4 MHz	5 MHz
1	0	$f_{PRS}/2^3$	250 kHz	625 kHz	1 MHz	1.25 MHz
1	1	$f_{PRS}/2^5$	62.5 kHz	156.25 kHz	250 kHz	312.5 kHz

- Notes**
1. If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) (XSEL = 1), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  2. When selecting the TM50 output as the base clock, start the operation of 8-bit timer/event counter 50 first and then enable the timer F/F inversion operation (TMC501 = 1).

**(2) Error of baud rate**

The baud rate error can be calculated by the following expression.

- Error (%) =  $\left( \frac{\text{Actual baud rate (baud rate with error)}}{\text{Desired baud rate (correct baud rate)}} - 1 \right) \times 100$  [%]

- Cautions**
1. Keep the baud rate error during transmission to within the permissible error range at the reception destination.
  2. Make sure that the baud rate error during reception satisfies the range shown in (4) Permissible baud rate range during reception.

**Example:** Frequency of base clock = 2.5 MHz = 2,500,000 Hz  
 Set value of MDL04 to MDL00 bits of BRGC0 register = 10000B (k = 16)  
 Target baud rate = 76,800 bps

$$\begin{aligned} \text{Baud rate} &= 2.5 \text{ M}/(2 \times 16) \\ &= 2,500,000/(2 \times 16) = 78,125 \text{ [bps]} \end{aligned}$$

$$\begin{aligned} \text{Error} &= (78,125/76,800 - 1) \times 100 \\ &= 1.725 \text{ [%]} \end{aligned}$$

**(3) Example of setting baud rate**

**Table 13-5. Set Data of Baud Rate Generator**

Baud Rate [bps]	f <sub>PRS</sub> = 2.0 MHz				f <sub>PRS</sub> = 5.0 MHz				f <sub>PRS</sub> = 10.0 MHz			
	TPS01, TPS00	k	Calculated Value	ERR [%]	TPS01, TPS00	k	Calculated Value	ERR [%]	TPS01, TPS00	k	Calculated Value	ERR [%]
1200	3H	26	1202	0.16	–	–	–	–	–	–	–	–
2400	3H	13	2404	0.16	–	–	–	–	–	–	–	–
4800	2H	26	4808	0.16	3H	16	4883	1.73	–	–	–	–
9600	2H	13	9615	0.16	3H	8	9766	1.73	3H	16	9766	1.73
10400	2H	12	10417	0.16	2H	30	10417	0.16	3H	15	10417	0.16
19200	1H	26	19231	0.16	2H	16	19531	1.73	3H	8	19531	1.73
24000	1H	21	23810	-0.79	2H	13	24038	0.16	2H	26	24038	0.16
31250	1H	16	31250	0	2H	10	31250	0	2H	20	31250	0
33660	1H	15	33333	-0.79	2H	9	34722	3.34	2H	19	32895	-2.1
38400	1H	13	38462	0.16	2H	8	39063	1.73	2H	16	39063	1.73
56000	1H	9	55556	-0.79	1H	22	56818	1.46	2H	11	56818	1.46
62500	1H	8	62500	0	1H	20	62500	0	2H	10	62500	0
76800	–	–	–	–	1H	16	78125	1.73	2H	8	78125	1.73
115200	–	–	–	–	1H	11	113636	-1.36	1H	22	113636	-1.36
153600	–	–	–	–	1H	8	156250	1.73	1H	16	156250	1.73
312500	–	–	–	–	1H	4	312500	1.73	1H	8	312500	0
625000	–	–	–	–	–	–	–	–	1H	4	625000	0


**Remark** TPS01, TPS00: Bits 7 and 6 of baud rate generator control register 0 (BRGC0) (setting of base clock (f<sub>XCLK0</sub>))  
 k: Value set by the MDL04 to MDL00 bits of BRGC0 (k = 8, 9, 10, ..., 31)  
 f<sub>PRS</sub>: Peripheral hardware clock frequency  
 ERR: Baud rate error

**(4) Permissible baud rate range during reception**

The permissible error from the baud rate at the transmission destination during reception is shown below.

**Caution** Make sure that the baud rate error during reception is within the permissible error range, by using the calculation expression shown below.

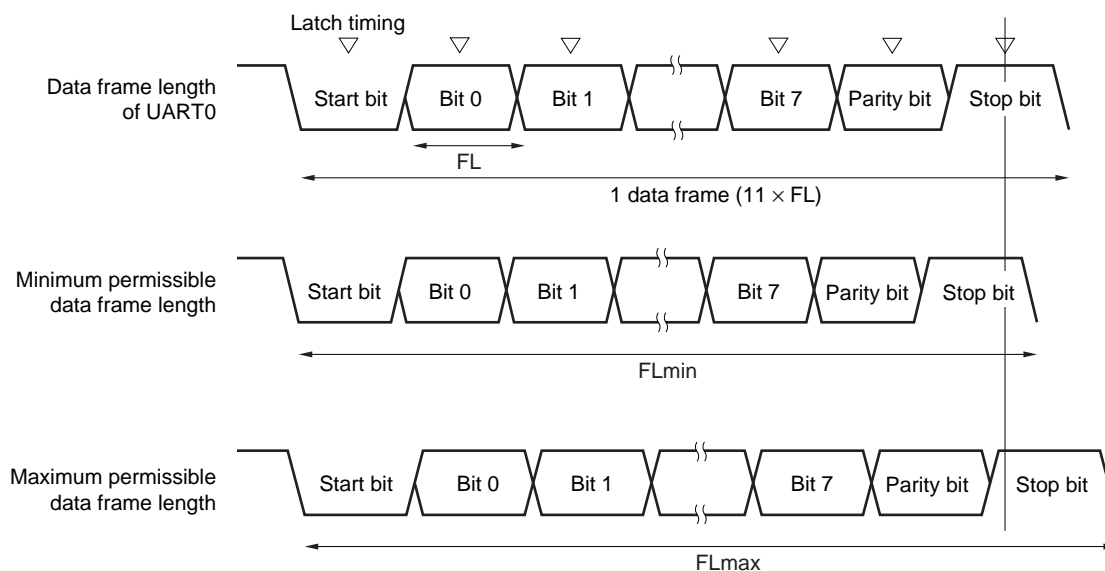**Figure 13-13. Permissible Baud Rate Range During Reception**



As shown in Figure 13-13, the latch timing of the receive data is determined by the counter set by baud rate generator control register 0 (BRGC0) after the start bit has been detected. If the last data (stop bit) meets this latch timing, the data can be correctly received.

Assuming that 11-bit data is received, the theoretical values can be calculated as follows.

$$FL = (\text{Brate})^{-1}$$

Brate: Baud rate of UART0

k: Set value of BRGC0

FL: 1-bit data length

Margin of latch timing: 2 clocks

$$\text{Minimum permissible data frame length: } FL_{\min} = 11 \times FL - \frac{k-2}{2k} \times FL = \frac{21k+2}{2k} FL$$

Therefore, the maximum receivable baud rate at the transmission destination is as follows.

$$BR_{\max} = (FL_{\min}/11)^{-1} = \frac{22k}{21k+2} \text{ Brate}$$

Similarly, the maximum permissible data frame length can be calculated as follows.

$$\frac{10}{11} \times FL_{\max} = 11 \times FL - \frac{k+2}{2 \times k} \times FL = \frac{21k-2}{2 \times k} FL$$

$$FL_{\max} = \frac{21k-2}{20k} FL \times 11$$

Therefore, the minimum receivable baud rate at the transmission destination is as follows.

$$BR_{\min} = (FL_{\max}/11)^{-1} = \frac{20k}{21k-2} \text{ Brate}$$

The permissible baud rate error between UART0 and the transmission destination can be calculated from the above minimum and maximum baud rate expressions, as follows.

**Table 13-6. Maximum/Minimum Permissible Baud Rate Error**

Division Ratio (k)	Maximum Permissible Baud Rate Error	Minimum Permissible Baud Rate Error
8	+3.53%	-3.61%
16	+4.14%	-4.19%
24	+4.34%	-4.38%
31	+4.44%	-4.47%

**Remarks 1.** The permissible error of reception depends on the number of bits in one frame, input clock frequency, and division ratio (k). The higher the input clock frequency and the higher the division ratio (k), the higher the permissible error.

**2.** k: Set value of BRGC0



## CHAPTER 14 SERIAL INTERFACE UART6

### 14.1 Functions of Serial Interface UART6

Serial interface UART6 has the following two modes.

#### (1) Operation stop mode

This mode is used when serial communication is not executed and can enable a reduction in the power consumption.

For details, see **14.4.1 Operation stop mode**.

#### (2) Asynchronous serial interface (UART) mode

This mode supports the LIN (Local Interconnect Network)-bus. The functions of this mode are outlined below.

For details, see **14.4.2 Asynchronous serial interface (UART) mode** and **14.4.3 Dedicated baud rate generator**.

- Maximum transfer rate: 625 kbps
- Two-pin configuration TxD6: Transmit data output pin  
RxD6: Receive data input pin
- TxD6/RxD6 pins can be selected from P112/P113 (default) or P13/P12 by using the registers.
- Data length of communication data can be selected from 7 or 8 bits.
- Dedicated internal 8-bit baud rate generator allowing any baud rate to be set
- Transmission and reception can be performed independently (full duplex operation).
- MSB- or LSB-first communication selectable
- Inverted transmission operation
- Sync break field transmission from 13 to 20 bits
- More than 11 bits can be identified for sync break field reception (SBF reception flag provided).

- Cautions**
1. The TxD6 output inversion function inverts only the transmission side and not the reception side. To use this function, the reception side must be ready for reception of inverted data.
  2. If clock supply to serial interface UART6 is not stopped (e.g., in the HALT mode), normal operation continues. If clock supply to serial interface UART6 is stopped (e.g., in the STOP mode), each register stops operating, and holds the value immediately before clock supply was stopped. The TxD6 pin also holds the value immediately before clock supply was stopped and outputs it. However, the operation is not guaranteed after clock supply is resumed. Therefore, reset the circuit so that POWER6 = 0, RXE6 = 0, and TXE6 = 0.
  3. Set POWER6 = 1 and then set TXE6 = 1 (transmission) or RXE6 = 1 (reception) to start communication.
  4. TXE6 and RXE6 are synchronized by the base clock (f<sub>CLK6</sub>) set by CKSR6. To enable transmission or reception again, set TXE6 or RXE6 to 1 at least two clocks of the base clock after TXE6 or RXE6 has been cleared to 0. If TXE6 or RXE6 is set within two clocks of the base clock, the transmission circuit or reception circuit may not be initialized.
  5. Set transmit data to TXB6 at least one base clock (f<sub>CLK6</sub>) after setting TXE6 = 1.
  6. If data is continuously transmitted, the communication timing from the stop bit to the next start bit is extended two operating clocks of the macro. However, this does not affect the result of communication because the reception side initializes the timing when it has detected a start bit. Do not use the continuous transmission function if the interface is used in LIN communication operation.

**Remark** LIN stands for Local Interconnect Network and is a low-speed (1 to 20 kbps) serial communication protocol intended to aid the cost reduction of an automotive network.

LIN communication is single-master communication, and up to 15 slaves can be connected to one master.

The LIN slaves are used to control the switches, actuators, and sensors, and these are connected to the LIN master via the LIN network.


Normally, the LIN master is connected to a network such as CAN (Controller Area Network).

In addition, the LIN bus uses a single-wire method and is connected to the nodes via a transceiver that complies with ISO9141.

In the LIN protocol, the master transmits a frame with baud rate information and the slave receives it and corrects the baud rate error. Therefore, communication is possible when the baud rate error in the slave is  $\pm 15\%$  or less.

Figures 14-1 and 14-2 outline the transmission and reception operations of LIN.

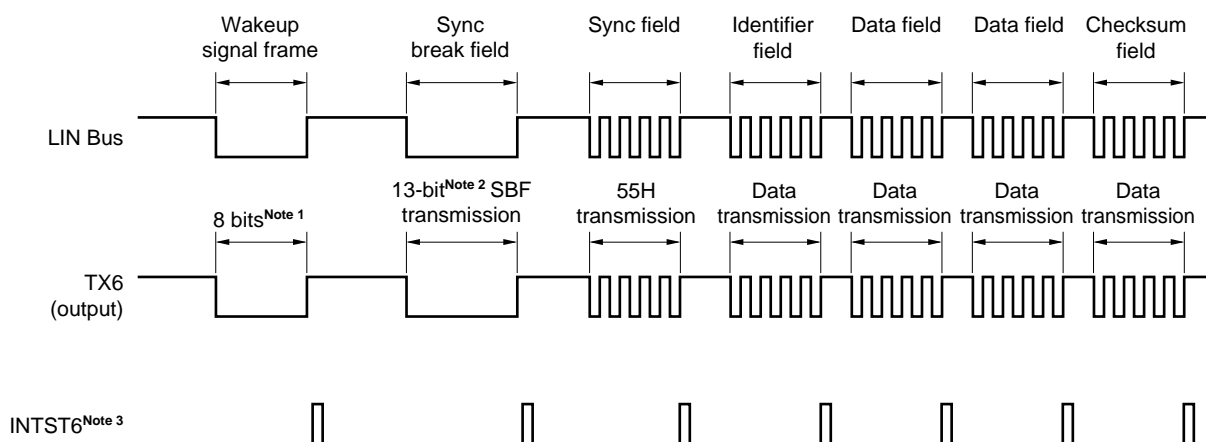
**Figure 14-1. LIN Transmission Operation**



- Notes**
1. The wakeup signal frame is substituted by 80H transmission in the 8-bit mode.
  2. The sync break field is output by hardware. The output width is the bit length set by bits 4 to 2 (SBL62 to SBL60) of asynchronous serial interface control register 6 (ASICL6) (see **14.4.2 (2) (h) SBF transmission**).
  3. INTST6 is output on completion of each transmission. It is also output when SBF is transmitted.

**Remark** The interval between each field is controlled by software.

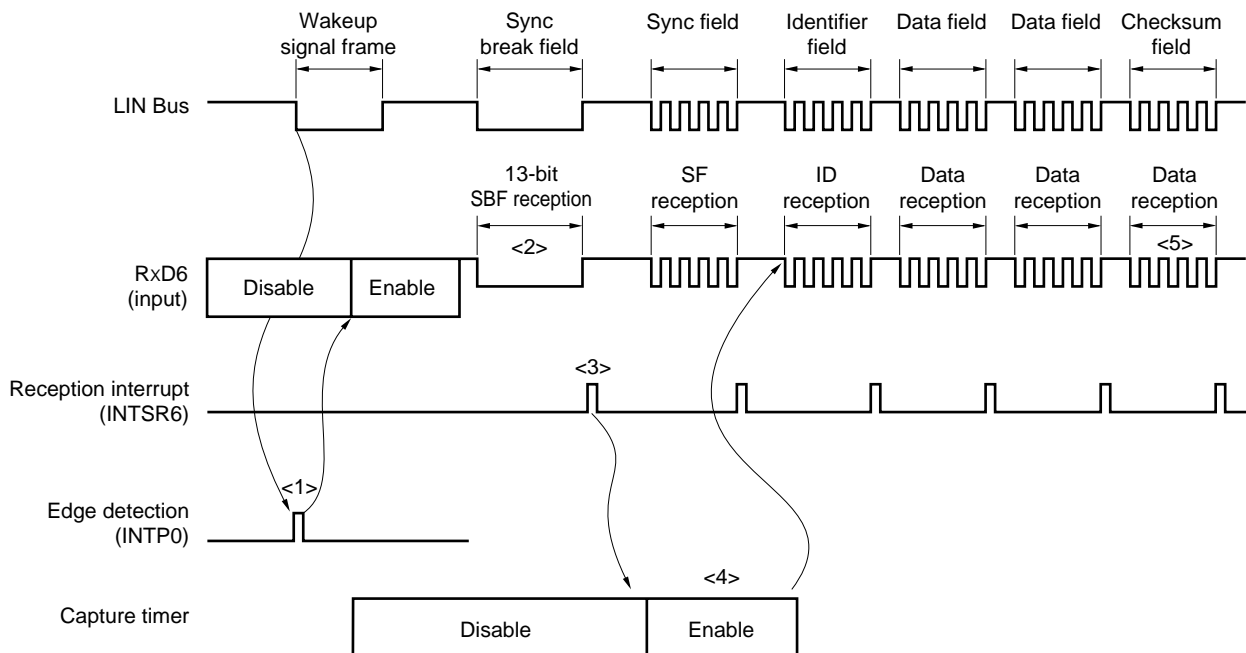Figure 14-2. LIN Reception Operation



Reception processing is as follows.


- <1> The wakeup signal is detected at the edge of the pin, and enables UART6 and sets the SBF reception mode.
- <2> Reception continues until the STOP bit is detected. When an SBF with low-level data of 11 bits or more has been detected, it is assumed that SBF reception has been completed correctly, and an interrupt signal is output. If an SBF with low-level data of less than 11 bits has been detected, it is assumed that an SBF reception error has occurred. The interrupt signal is not output and the SBF reception mode is restored.
- <3> If SBF reception has been completed correctly, an interrupt signal is output. Start 16-bit timer/event counter 00 by the SBF reception end interrupt servicing and measure the bit interval (pulse width) of the sync field (see **6.4.8 Pulse width measurement operation**). Detection of errors OVE6, PE6, and FE6 is suppressed, and error detection processing of UART communication and data transfer of the shift register and RXB6 is not performed. The shift register holds the reset value FFH.
- <4> Calculate the baud rate error from the bit interval of the sync field, disable UART6 after SF reception, and then re-set baud rate generator control register 6 (BRGC6).
- <5> Distinguish the checksum field by software. Also perform processing by software to initialize UART6 after reception of the checksum field and to set the SBF reception mode again.

Figure 14-3 shows the port configuration for LIN reception operation.

The wakeup signal transmitted from the LIN master is received by detecting the edge of the external interrupt (INTP0). The length of the sync field transmitted from the LIN master can be measured using the external event capture operation of 16-bit timer/event counter 00, and the baud rate error can be calculated.

The input source of the reception port input (RxD6) can be input to the external interrupt (INTP0) and 16-bit timer/event counter 00 by port input switch control (ISC0/ISC1), without connecting RxD6 and INTP0/TI000 externally.

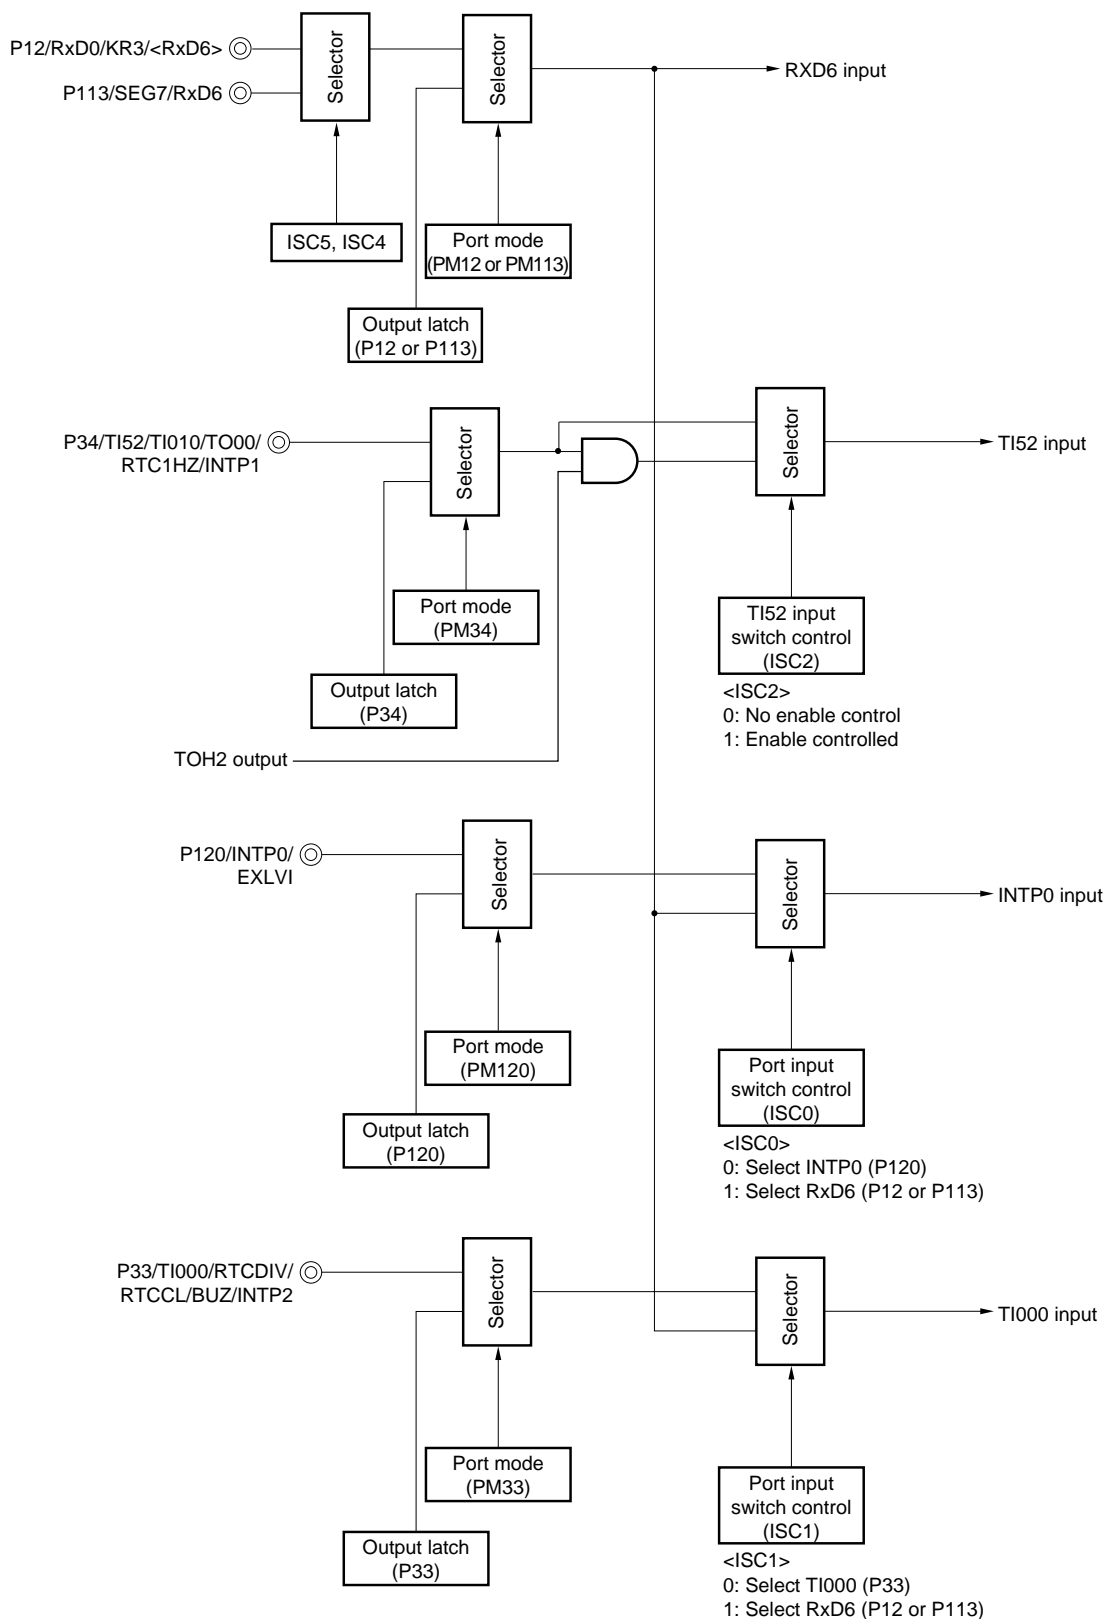Figure 14-3. Port Configuration for LIN Reception Operation



**Remark** ISC0, ISC1, ISC2, ISC4, ISC5: Bits 0, 1, 2, 4 and 5 of the input switch control register (ISC) (see Figure 14-11)

The peripheral functions used in the LIN communication operation are shown below.

<Peripheral functions used>

- External interrupt (INTP0); wakeup signal detection  
Use: Detects the wakeup signal edges and detects start of communication.
- 16-bit timer/event counter 00 (TI000); baud rate error detection  
Use: Detects the baud rate error (measures the TI000 input edge interval in the capture mode) by detecting the sync field (SF) length and divides it by the number of bits.
- Serial interface UART6


## 14.2 Configuration of Serial Interface UART6

Serial interface UART6 includes the following hardware.

**Table 14-1. Configuration of Serial Interface UART6**

Item	Configuration
Registers	Receive buffer register 6 (RXB6) Receive shift register 6 (RXS6) Transmit buffer register 6 (TXB6) Transmit shift register 6 (TXS6)
Control registers	Asynchronous serial interface operation mode register 6 (ASIM6) Asynchronous serial interface reception error status register 6 (ASIS6) Asynchronous serial interface transmission status register 6 (ASIF6) Clock selection register 6 (CKSR6) Baud rate generator control register 6 (BRGC6) Asynchronous serial interface control register 6 (ASICL6) Input switch control register (ISC) Port function register 1 (PF1) Port mode register 1 (PM1) Port register 1 (P1) Port mode register 11 (PM11) Port register 11 (P11)

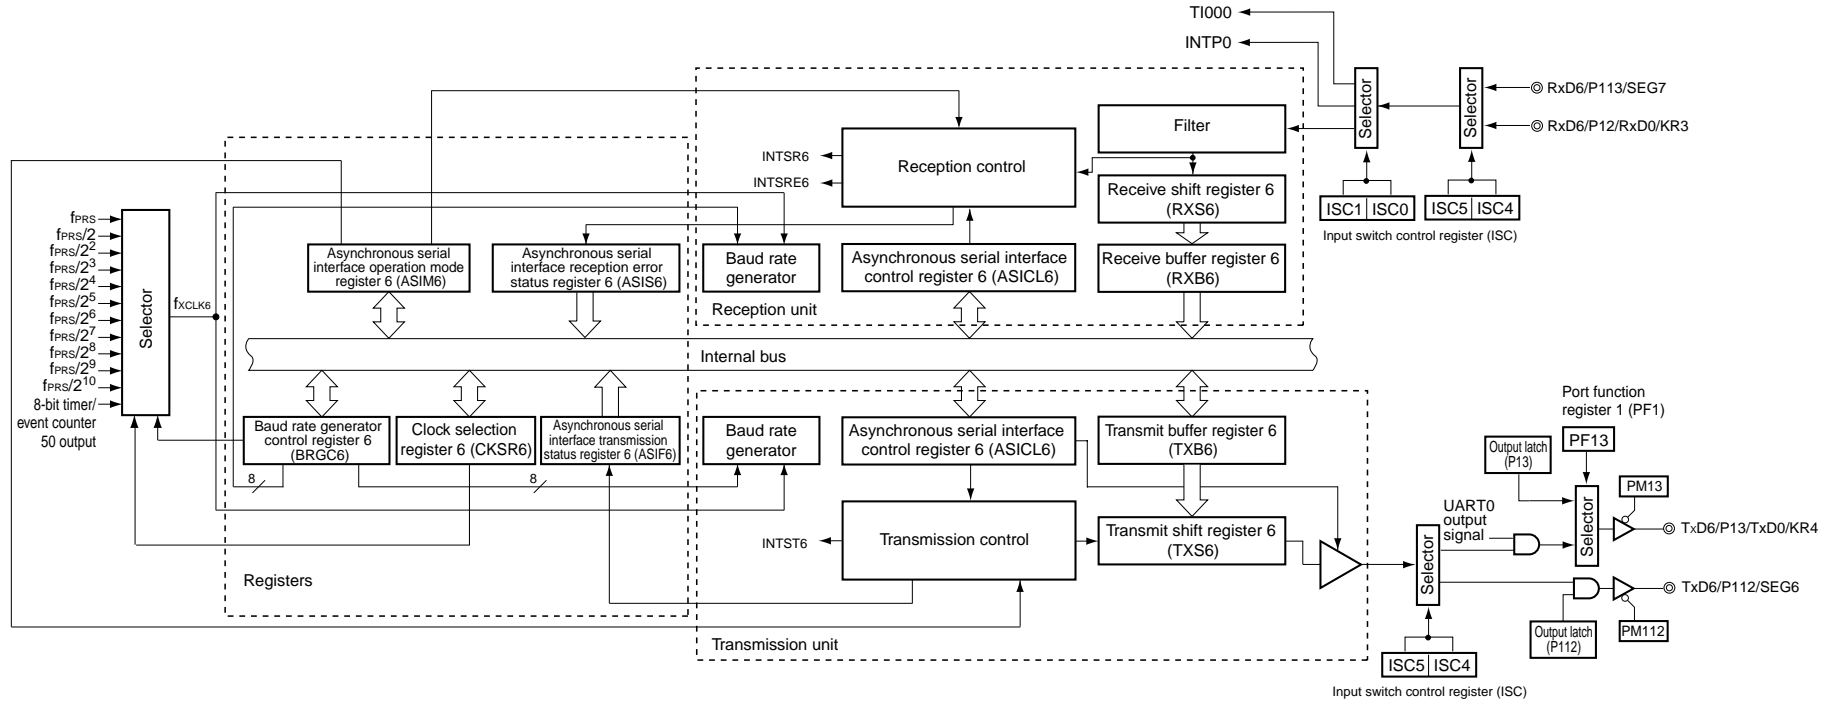Figure 14-4. Block Diagram of Serial Interface UART6



**(1) Receive buffer register 6 (RXB6)**

This 8-bit register stores parallel data converted by receive shift register 6 (RXS6).

Each time 1 byte of data has been received, new receive data is transferred to this register from RXS6. If the data length is set to 7 bits, data is transferred as follows.

- In LSB-first reception, the receive data is transferred to bits 0 to 6 of RXB6 and the MSB of RXB6 is always 0.
- In MSB-first reception, the receive data is transferred to bits 1 to 7 of RXB6 and the LSB of RXB6 is always 0.

If an overrun error (OVE6) occurs, the receive data is not transferred to RXB6.

RXB6 can be read by an 8-bit memory manipulation instruction. No data can be written to this register.

Reset signal generation sets this register to FFH.

**(2) Receive shift register 6 (RXS6)**

This register converts the serial data input to the RxD6 pin into parallel data.

RXS6 cannot be directly manipulated by a program.

**(3) Transmit buffer register 6 (TXB6)**

This buffer register is used to set transmit data. Transmission is started when data is written to TXB6.

This register can be read or written by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to FFH.

- Cautions**
1. Do not write data to TXB6 when bit 1 (TXBF6) of asynchronous serial interface transmission status register 6 (ASIF6) is 1.
  2. Do not refresh (write the same value to) TXB6 by software during a communication operation (when bits 7 and 6 (POWER6, TXE6) of asynchronous serial interface operation mode register 6 (ASIM6) are 1 or when bits 7 and 5 (POWER6, RXE6) of ASIM6 are 1).
  3. Set transmit data to TXB6 at least one base clock ( $f_{CLK6}$ ) after setting TXE6 = 1.

**(4) Transmit shift register 6 (TXS6)**

This register transmits the data transferred from TXB6 from the TxD6 pin as serial data. Data is transferred from TXB6 immediately after TXB6 is written for the first transmission, or immediately before INTST6 occurs after one frame was transmitted for continuous transmission. Data is transferred from TXB6 and transmitted from the TxD6 pin at the falling edge of the base clock.

TXS6 cannot be directly manipulated by a program.

### 14.3 Registers Controlling Serial Interface UART6

Serial interface UART6 is controlled by the following twelve registers.

- Asynchronous serial interface operation mode register 6 (ASIM6)
- Asynchronous serial interface reception error status register 6 (ASIS6)
- Asynchronous serial interface transmission status register 6 (ASIF6)
- Clock selection register 6 (CKSR6)
- Baud rate generator control register 6 (BRGC6)
- Asynchronous serial interface control register 6 (ASICL6)
- Input switch control register (ISC)
- Port function register 1 (PF1)
- Port mode register 1 (PM1)
- Port register 1 (P1)
- Port mode register 11 (PM11)
- Port register 11 (P11)

#### (1) Asynchronous serial interface operation mode register 6 (ASIM6)

This 8-bit register controls the serial communication operations of serial interface UART6.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 01H.

**Remark** ASIM6 can be refreshed (the same value is written) by software during a communication operation (when bits 7 and 6 (POWER6, TXE6) of ASIM6 = 1 or bits 7 and 5 (POWER6, RXE6) of ASIM6 = 1).

**Figure 14-5. Format of Asynchronous Serial Interface Operation Mode Register 6 (ASIM6) (1/2)**

Address: FF50H After reset: 01H R/W

Symbol	<7>	<6>	<5>	4	3	2	1	0
ASIM6	POWER6	TXE6	RXE6	PS61	PS60	CL6	SL6	ISRM6
POWER6	Enables/disables operation of internal operation clock							
0 <sup>Note 1</sup>	Disables operation of the internal operation clock (fixes the clock to low level) and asynchronously resets the internal circuit <sup>Note 2</sup> .							
1	Enables operation of the internal operation clock							
TXE6	Enables/disables transmission							
0	Disables transmission (synchronously resets the transmission circuit).							
1	Enables transmission							
RXE6	Enables/disables reception							
0	Disables reception (synchronously resets the reception circuit).							
1	Enables reception							

- Notes**
1. The output of the TxD6 pin goes high level and the input from the RxD6 pin is fixed to the high level when POWER6 = 0 during transmission.
  2. Asynchronous serial interface reception error status register 6 (ASIS6), asynchronous serial interface transmission status register 6 (ASIF6), bit 7 (SBRF6) and bit 6 (SBRT6) of asynchronous serial interface control register 6 (ASICL6), and receive buffer register 6 (RXB6) are reset.



Figure 14-5. Format of Asynchronous Serial Interface Operation Mode Register 6 (ASIM6) (2/2)

PS61	PS60	Transmission operation	Reception operation
0	0	Does not output parity bit.	Reception without parity
0	1	Outputs 0 parity.	Reception as 0 parity <sup>Note</sup>
1	0	Outputs odd parity.	Judges as odd parity.
1	1	Outputs even parity.	Judges as even parity.

CL6	Specifies character length of transmit/receive data
0	Character length of data = 7 bits
1	Character length of data = 8 bits

SL6	Specifies number of stop bits of transmit data
0	Number of stop bits = 1
1	Number of stop bits = 2

ISRM6	Enables/disables occurrence of reception completion interrupt in case of error
0	"INTSRE6" occurs in case of error (at this time, INTSR6 does not occur).
1	"INTSR6" occurs in case of error (at this time, INTSRE6 does not occur).

**Note** If "reception as 0 parity" is selected, the parity is not judged. Therefore, bit 2 (PE6) of asynchronous serial interface reception error status register 6 (ASIS6) is not set and the error interrupt does not occur.

- Cautions**
1. To start the transmission, set **POWER6** to 1 and then set **TXE6** to 1. To stop the transmission, clear **TXE6** to 0, and then clear **POWER6** to 0.
  2. To start the reception, set **POWER6** to 1 and then set **RXE6** to 1. To stop the reception, clear **RXE6** to 0, and then clear **POWER6** to 0.
  3. Set **POWER6** to 1 and then set **RXE6** to 1 while a high level is input to the RxD6 pin. If **POWER6** is set to 1 and **RXE6** is set to 1 while a low level is input, reception is started.
  4. **TXE6** and **RXE6** are synchronized by the base clock ( $f_{XCLK6}$ ) set by **CKSR6**. To enable transmission or reception again, set **TXE6** or **RXE6** to 1 at least two clocks of the base clock after **TXE6** or **RXE6** has been cleared to 0. If **TXE6** or **RXE6** is set within two clocks of the base clock, the transmission circuit or reception circuit may not be initialized.
  5. Set transmit data to **TXB6** at least one base clock ( $f_{XCLK6}$ ) after setting **TXE6** = 1.
  6. Clear the **TXE6** and **RXE6** bits to 0 before rewriting the **PS61**, **PS60**, and **CL6** bits.
  7. Fix the **PS61** and **PS60** bits to 0 when used in LIN communication operation.
  8. Clear **TXE6** to 0 before rewriting the **SL6** bit. Reception is always performed with "the number of stop bits = 1", and therefore, is not affected by the set value of the **SL6** bit.
  9. Make sure that **RXE6** = 0 when rewriting the **ISRM6** bit.

**(2) Asynchronous serial interface reception error status register 6 (ASIS6)**

This register indicates an error status on completion of reception by serial interface UART6. It includes three error flag bits (PE6, FE6, OVE6).

This register is read-only by an 8-bit memory manipulation instruction.

Reset signal generation, or clearing bit 7 (POWER6) or bit 5 (RXE6) of ASIM6 to 0 clears this register to 00H. 00H is read when this register is read. If a reception error occurs, read ASIS6 and then read receive buffer register 6 (RXB6) to clear the error flag.

**Figure 14-6. Format of Asynchronous Serial Interface Reception Error Status Register 6 (ASIS6)**

Address: FF53H After reset: 00H R

Symbol	7	6	5	4	3	2	1	0
ASIS6	0	0	0	0	0	PE6	FE6	OVE6

PE6	Status flag indicating parity error
0	If POWER6 = 0 or RXE6 = 0, or if ASIS6 register is read
1	If the parity of transmit data does not match the parity bit on completion of reception

FE6	Status flag indicating framing error
0	If POWER6 = 0 or RXE6 = 0, or if ASIS6 register is read
1	If the stop bit is not detected on completion of reception

OVE6	Status flag indicating overrun error
0	If POWER6 = 0 or RXE6 = 0, or if ASIS6 register is read
1	If receive data is set to the RXB6 register and the next reception operation is completed before the data is read.

- Cautions**
1. The operation of the PE6 bit differs depending on the set values of the PS61 and PS60 bits of asynchronous serial interface operation mode register 6 (ASIM6).
  2. For the stop bit of the receive data, only the first stop bit is checked regardless of the number of stop bits.
  3. If an overrun error occurs, the next receive data is not written to receive buffer register 6 (RXB6) but discarded.
  4. If data is read from ASIS6, a wait cycle is generated. Do not read data from ASIS6 when the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped. For details, see CHAPTER 29 CAUTIONS FOR WAIT.

**(3) Asynchronous serial interface transmission status register 6 (ASIF6)**

This register indicates the status of transmission by serial interface UART6. It includes two status flag bits (TXBF6 and TXSF6).

Transmission can be continued without disruption even during an interrupt period, by writing the next data to the TXB6 register after data has been transferred from the TXB6 register to the TXS6 register.

This register is read-only by an 8-bit memory manipulation instruction.

Reset signal generation, or clearing bit 7 (POWER6) or bit 6 (TXE6) of ASIM6 to 0 clears this register to 00H.

**Figure 14-7. Format of Asynchronous Serial Interface Transmission Status Register 6 (ASIF6)**

Address: FF55H After reset: 00H R

Symbol	7	6	5	4	3	2	1	0
ASIF6	0	0	0	0	0	0	TXBF6	TXSF6

TXBF6	Transmit buffer data flag
0	If POWER6 = 0 or TXE6 = 0, or if data is transferred to transmit shift register 6 (TXS6)
1	If data is written to transmit buffer register 6 (TXB6) (if data exists in TXB6)

TXSF6	Transmit shift register data flag
0	If POWER6 = 0 or TXE6 = 0, or if the next data is not transferred from transmit buffer register 6 (TXB6) after completion of transfer
1	If data is transferred from transmit buffer register 6 (TXB6) (if data transmission is in progress)

- Cautions**
- 1. To transmit data continuously, write the first transmit data (first byte) to the TXB6 register. Be sure to check that the TXBF6 flag is “0”. If so, write the next transmit data (second byte) to the TXB6 register. If data is written to the TXB6 register while the TXBF6 flag is “1”, the transmit data cannot be guaranteed.**
  - 2. To initialize the transmission unit upon completion of continuous transmission, be sure to check that the TXSF6 flag is “0” after generation of the transmission completion interrupt, and then execute initialization. If initialization is executed while the TXSF6 flag is “1”, the transmit data cannot be guaranteed.**

**(4) Clock selection register 6 (CKSR6)**

This register selects the base clock of serial interface UART6.

CKSR6 can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 00H.

**Remark** CKSR6 can be refreshed (the same value is written) by software during a communication operation (when bits 7 and 6 (POWER6, TXE6) of ASIM6 = 1 or bits 7 and 5 (POWER6, RXE6) of ASIM6 = 1).

**Figure 14-8. Format of Clock Selection Register 6 (CKSR6)**

Address: FF56H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CKSR6	0	0	0	0	TPS63	TPS62	TPS61	TPS60

TPS63	TPS62	TPS61	TPS60	Base clock ( $f_{CLK6}$ ) selection <sup>Note 1</sup>				
				$f_{PRS} =$ 2 MHz	$f_{PRS} =$ 5 MHz	$f_{PRS} =$ 8 MHz	$f_{PRS} =$ 10 MHz	
0	0	0	0	$f_{PRS}$ <sup>Note 2</sup>	2 MHz	5 MHz	8 MHz	10 MHz
0	0	0	1	$f_{PRS}/2$	1 MHz	2.5 MHz	4 MHz	5 MHz
0	0	1	0	$f_{PRS}/2^2$	500 kHz	1.25 MHz	2 MHz	2.5 MHz
0	0	1	1	$f_{PRS}/2^3$	250 kHz	625 kHz	1 MHz	1.25 MHz
0	1	0	0	$f_{PRS}/2^4$	125 kHz	312.5 kHz	500 kHz	625 kHz
0	1	0	1	$f_{PRS}/2^5$	62.5 kHz	156.25 kHz	250 kHz	312.5 kHz
0	1	1	0	$f_{PRS}/2^6$	31.25 kHz	78.13 kHz	125 kHz	156.25 kHz
0	1	1	1	$f_{PRS}/2^7$	15.625 kHz	39.06 kHz	62.5 kHz	78.13 kHz
1	0	0	0	$f_{PRS}/2^8$	7.813 kHz	19.53 kHz	31.25 kHz	39.06 kHz
1	0	0	1	$f_{PRS}/2^9$	3.906 kHz	9.77 kHz	15.625 kHz	19.53 kHz
1	0	1	0	$f_{PRS}/2^{10}$	1.953 kHz	4.88 kHz	7.513 kHz	9.77 kHz
1	0	1	1	TM50 output <sup>Note 3</sup>				
Other than above				Setting prohibited				

- Notes**
- If the peripheral hardware clock ( $f_{PRS}$ ) operates on the high-speed system clock ( $f_{XH}$ ) ( $XSEL = 1$ ), the  $f_{PRS}$  operating frequency varies depending on the supply voltage.
    - $V_{DD} = 2.7$  to  $5.5$  V:  $f_{PRS} \leq 10$  MHz
    - $V_{DD} = 1.8$  to  $2.7$  V:  $f_{PRS} \leq 5$  MHz
  - If the peripheral hardware clock ( $f_{PRS}$ ) operates on the internal high-speed oscillation clock ( $f_{RH}$ ) ( $XSEL = 0$ ), when  $1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$ , the setting of  $TPS63 = TPS62 = TPS61 = TPS60 = 0$  (base clock:  $f_{PRS}$ ) is prohibited.
  - When selecting the TM50 output as the base clock. Start the operation of 8-bit timer/event counter 50 first and then enable the timer F/F inversion operation ( $TMC501 = 1$ ).

**Caution** Make sure **POWER6 = 0** when rewriting **TPS63** to **TPS60**.

**Remark**  $f_{PRS}$ : Peripheral hardware clock frequency

**(5) Baud rate generator control register 6 (BRGC6)**

This register sets the division value of the 8-bit counter of serial interface UART6.

BRGC6 can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to FFH.

**Remark** BRGC6 can be refreshed (the same value is written) by software during a communication operation (when bits 7 and 6 (POWER6, TXE6) of ASIM6 = 1 or bits 7 and 5 (POWER6, RXE6) of ASIM6 = 1).

**Figure 14-9. Format of Baud Rate Generator Control Register 6 (BRGC6)**

Address: FF57H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
BRGC6	MDL67	MDL66	MDL65	MDL64	MDL63	MDL62	MDL61	MDL60

MDL67	MDL66	MDL65	MDL64	MDL63	MDL62	MDL61	MDL60	k	Output clock selection of 8-bit counter
0	0	0	0	0	0	×	×	×	Setting prohibited
0	0	0	0	0	1	0	0	4	$f_{CLK6}/4$
0	0	0	0	0	1	0	1	5	$f_{CLK6}/5$
0	0	0	0	0	1	1	0	6	$f_{CLK6}/6$
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
1	1	1	1	1	1	0	0	252	$f_{CLK6}/252$
1	1	1	1	1	1	0	1	253	$f_{CLK6}/253$
1	1	1	1	1	1	1	0	254	$f_{CLK6}/254$
1	1	1	1	1	1	1	1	255	$f_{CLK6}/255$

- Cautions**
1. Make sure that bit 6 (TXE6) and bit 5 (RXE6) of the ASIM6 register = 0 when rewriting the MDL67 to MDL60 bits.
  2. The baud rate is the output clock of the 8-bit counter divided by 2.

- Remarks**
1.  $f_{CLK6}$ : Frequency of base clock selected by the TPS63 to TPS60 bits of CKSR6 register
  2. k: Value set by MDL67 to MDL60 bits (k = 4, 5, 6, ..., 255)
  3. ×: Don't care

**(6) Asynchronous serial interface control register 6 (ASICL6)**

This register controls the serial communication operations of serial interface UART6.

ASICL6 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 16H.

**Caution** ASICL6 can be refreshed (the same value is written) by software during a communication operation (when bits 7 and 6 (POWER6, TXE6) of ASIM6 = 1 or bits 7 and 5 (POWER6, RXE6) of ASIM6 = 1). However, do not set both SBRT6 and SBTT6 to 1 by a refresh operation during SBF reception (SBRT6 = 1) or SBF transmission (until INTST6 occurs since SBTT6 has been set (1)), because it may re-trigger SBF reception or SBF transmission.

**Figure 14-10. Format of Asynchronous Serial Interface Control Register 6 (ASICL6) (1/2)**

Address: FF58H After reset: 16H R/W<sup>Note</sup>

Symbol	<7>	<6>	5	4	3	2	1	0
ASICL6	SBRF6	SBRT6	SBTT6	SBL62	SBL61	SBL60	DIR6	TXDLV6

SBRF6	SBF reception status flag
0	If POWER6 = 0 and RXE6 = 0 or if SBF reception has been completed correctly
1	SBF reception in progress

SBRT6	SBF reception trigger
0	–
1	SBF reception trigger

SBTT6	SBF transmission trigger
0	–
1	SBF transmission trigger

**Note** Bit 7 is read-only.

Figure 14-10. Format of Asynchronous Serial Interface Control Register 6 (ASICL6) (2/2)

SBL62	SBL61	SBL60	SBF transmission output width control
1	0	1	SBF is output with 13-bit length.
1	1	0	SBF is output with 14-bit length.
1	1	1	SBF is output with 15-bit length.
0	0	0	SBF is output with 16-bit length.
0	0	1	SBF is output with 17-bit length.
0	1	0	SBF is output with 18-bit length.
0	1	1	SBF is output with 19-bit length.
1	0	0	SBF is output with 20-bit length.

DIR6	First-bit specification
0	MSB
1	LSB

TXDLV6	Enables/disables inverting TxD6 output
0	Normal output of TxD6
1	Inverted output of TxD6

- Cautions**
1. In the case of an SBF reception error, the mode returns to the SBF reception mode. The status of the SBRF6 flag is held (1).
  2. Before setting the SBRT6 bit, make sure that bit 7 (POWER6) and bit 5 (RXE6) of ASIM6 = 1. After setting the SBRT6 bit to 1, do not clear it to 0 before SBF reception is completed (before an interrupt request signal is generated).
  3. The read value of the SBRT6 bit is always 0. SBRT6 is automatically cleared to 0 after SBF reception has been correctly completed.
  4. Before setting the SBTT6 bit to 1, make sure that bit 7 (POWER6) and bit 6 (TXE6) of ASIM6 = 1. After setting the SBTT6 bit to 1, do not clear it to 0 before SBF transmission is completed (before an interrupt request signal is generated).
  5. The read value of the SBTT6 bit is always 0. SBTT6 is automatically cleared to 0 at the end of SBF transmission.
  6. Do not set the SBRT6 bit to 1 during reception, and do not set the SBTT6 bit to 1 during transmission.
  7. Before rewriting the DIR6 and TXDLV6 bits, clear the TXE6 and RXE6 bits to 0.

**(7) Input switch control register (ISC)**

By setting ISC5 to 1, the UART6 I/O pins are switched from P113/SEG7/RxD6 and P112/SEG6/TxD6 to P12/RxD0/KR3/RxD6 and P13/TxD0/KR4/TxD6.

By setting ISC3 to 1, the P113/SEG7/RxD6 pin is enabled for input. When ISC3 is cleared to 0, external input is not acknowledged. Thus, after release of reset, a generation of a through current due to an undetermined input state until an output setting is performed is prevented.

The input switch control register (ISC) is used to receive a status signal transmitted from the master during LIN (Local Interconnect Network) reception.

By setting ISC0 and ISC1 to 1, the input sources of INTP0 and TI000 are switched to input signals from the P12/RxD0/KR3/RxD6 or P113/SEG7/RxD6 pin.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 00H.

**Figure 14-11. Format of Input Switch Control Register (ISC)**

Address: FF4FH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ISC	0	0	ISC5	ISC4	ISC3	ISC2	ISC1	ISC0

ISC5	ISC4	TxD6, RxD6 input source selection
0	0	TxD6:P112, RxD6: P113
1	0	TxD6:P13, RxD6: P12
Other than above		Setting prohibited

ISC3	RxD6/P113 input enabled/disabled
0	RxD6/P113 input disabled
1	RxD6/P113 input enabled

ISC2	TI52 input source control
0	No enable control of TI52 input (P34)
1	Enable controlled of TI52 input (P34) <sup>Note 1</sup>

ISC1	TI000 input source selection
0	TI000 (P33)
1	RxD6 (P12 or P113) <sup>Note 2</sup>

ISC0	INTP0 input source selection
0	INTP0 (P120)
1	RxD6 (P12 or P113) <sup>Note 2</sup>

- Notes 1.** TI52 input is controlled by TOH2 output signal.  
**2.** TI000 and INTP0 input can be selected by ISC5 and ISC4.



**Caution** When using the P113/SEG7/RxD6 pin as the P113 or RxD6 pin, set PF11ALL to 0 and ISC3 to 1, after release of reset.  
 When using the P113/SEG7/RxD6 pin as the SEG7 pin, set PF11ALL to 1 and ISC3 to 0, after release of reset.

**(8) Port function register 1 (PF1)**

This register sets the pin functions of P13/TxD0/KR4/TxD6 pin.  
 PF1 is set using a 1-bit or 8-bit memory manipulation instruction.  
 Reset signal generation sets PF1 to 00H.

**Figure 14-12. Format of Port Function Register 1 (PF1)**

Address: FF20H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PF1	0	0	0	0	PF13	0	0	0

PF13	Port (P13), key interrupt (KR4), UART0, UART6 output specification
0	Used as P13 or KR4
1	Used as TxD0 or TxD6

**(9) Port mode register 1 (PM1)**

This register sets port 1 input/output in 1-bit units.  
 When using the P13/TxD0/KR4/TxD6 pin for serial interface data output, clear PM13 to 0. The output latch of P13 at this time may be 0 or 1.  
 When using the P12/RxD0/KR3/RxD6 pin for serial interface data input, set PM12 to 1. The output latch of P12 at this time may be 0 or 1.  
 PM1 can be set by a 1-bit or 8-bit memory manipulation instruction.  
 Reset signal generation sets this register to FFH.

**Figure 14-13. Format of Port Mode Register 1 (PM1)**

Address: FF21H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM1	1	1	1	1	PM13	PM12	1	1

PM1n	P1n pin I/O mode selection (n = 2, 3)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

**(10) Port mode register 11 (PM11)**

This register sets port 11 input/output in 1-bit units.

When using the P112/SEG6/TxD6 pin for serial interface data output, clear PM112 to 0 and set the output latch of P112 to 1.

When using the P113/SEG7/RxD6 pin for serial interface data input, set PM113 to 1. The output latch of P113 at this time may be 0 or 1.

PM11 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to FFH.

**Figure 14-14. Format of Port Mode Register 11 (PM11)**

Address: FF2BH After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM11	1	1	1	1	PM113	PM112	1	1

PM11n	P11n pin I/O mode selection (n = 2, 3)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

## 14.4 Operation of Serial Interface UART6

Serial interface UART6 has the following two modes.

- Operation stop mode
- Asynchronous serial interface (UART) mode

### 14.4.1 Operation stop mode

In this mode, serial communication cannot be executed; therefore, the power consumption can be reduced. In addition, the pins can be used as ordinary port pins in this mode. To set the operation stop mode, clear bits 7, 6, and 5 (POWER6, TXE6, and RXE6) of ASIM6 to 0.

#### (1) Register used

The operation stop mode is set by asynchronous serial interface operation mode register 6 (ASIM6).

ASIM6 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 01H.

Address: FF50H After reset: 01H R/W

Symbol	<7>	<6>	<5>	4	3	2	1	0
ASIM6	POWER6	TXE6	RXE6	PS61	PS60	CL6	SL6	ISRM6
POWER6	Enables/disables operation of internal operation clock							
0 <sup>Note 1</sup>	Disables operation of the internal operation clock (fixes the clock to low level) and asynchronously resets the internal circuit <sup>Note 2</sup> .							
TXE6	Enables/disables transmission							
0	Disables transmission operation (synchronously resets the transmission circuit).							
RXE6	Enables/disables reception							
0	Disables reception (synchronously resets the reception circuit).							

- Notes**
1. The output of the TxD6 pin goes high and the input from the RxD6 pin is fixed to high level when POWER6 = 0 during transmission.
  2. Asynchronous serial interface reception error status register 6 (ASIS6), asynchronous serial interface transmission status register 6 (ASIF6), bit 7 (SBRF6) and bit 6 (SBRT6) of asynchronous serial interface control register 6 (ASICL6), and receive buffer register 6 (RXB6) are reset.

**Caution** Clear POWER6 to 0 after clearing TXE6 and RXE6 to 0 to stop the operation.  
To start the communication, set POWER6 to 1, and then set TXE6 or RXE6 to 1.

**Remark** To use the RxD6/P12 and TxD6/P13 or RxD6/P113 and TxD6/P112 pins as general-purpose port pins, see CHAPTER 4 PORT FUNCTIONS.

### 14.4.2 Asynchronous serial interface (UART) mode

In this mode, data of 1 byte is transmitted/received following a start bit, and a full-duplex operation can be performed.

A dedicated UART baud rate generator is incorporated, so that communication can be executed at a wide range of baud rates.

#### (1) Registers used

- Asynchronous serial interface operation mode register 6 (ASIM6)
- Asynchronous serial interface reception error status register 6 (ASIS6)
- Asynchronous serial interface transmission status register 6 (ASIF6)
- Clock selection register 6 (CKSR6)
- Baud rate generator control register 6 (BRGC6)
- Asynchronous serial interface control register 6 (ASICL6)
- Input switch control register (ISC)
- Port mode register 1 (PM1)
- Port register 1 (P1)
- Port mode register 11 (PM11)
- Port register 11 (P11)

The basic procedure of setting an operation in the UART mode is as follows.

- <1> Set the CKSR6 register (see **Figure 14-8**).
- <2> Set the BRGC6 register (see **Figure 14-9**).
- <3> Set bits 0 to 4 (ISRM6, SL6, CL6, PS60, PS61) of the ASIM6 register (see **Figure 14-5**).
- <4> Set bits 0 and 1 (TXDLV6, DIR6) of the ASICL6 register (see **Figure 14-10**).
- <5> Set bit 7 (POWER6) of the ASIM6 register to 1.
- <6> Set bit 6 (TXE6) of the ASIM6 register to 1. → Transmission is enabled.  
Set bit 5 (RXE6) of the ASIM6 register to 1. → Reception is enabled.
- <7> Write data to transmit buffer register 6 (TXB6). → Data transmission is started.

**Caution** Take relationship with the other party of communication when setting the port mode register and port register.

The relationship between the register settings and pins is shown below.

**Table 14-2. Relationship Between Register Settings and Pins**

**(a) When the P12 and P13 are selected as the UART6 pins using the bits 4, 5 (ISC4, ISC5) of the ISC register**

POWER6	TXE6	RXE6	PM13	P13	PM12	P12	UART6 Operation	Pin Function	
								TxD6/KR4/TxD0/P13	RxD6/KR3/RxD0/P12
0	0	0	× <sup>Note</sup>	× <sup>Note</sup>	× <sup>Note</sup>	× <sup>Note</sup>	Stop	KR4/TxD0/P13	KR3/RxD0/P12
1	0	1	× <sup>Note</sup>	× <sup>Note</sup>	1	×	Reception	KR4/P13	RxD6
	1	0	0	×	× <sup>Note</sup>	× <sup>Note</sup>	Transmission	TxD6	KR3/P12
	1	1	0	×	1	×	Transmission/reception	TxD6	RxD6

**Note** Can be set as port function, key interrupt, or serial interface UART0 (only when UART6 is stopped).

**Caution** TxD6/SEG6/P112 and RxD6/SEG7/P113 pins function as the SEG6/P112 and SEG7/P113.

**Remark** ×: don't care

POWER6: Bit 7 of asynchronous serial interface operation mode register 6 (ASIM6)

TXE6: Bit 6 of ASIM6

RXE6: Bit 5 of ASIM6

PM1×: Port mode register

P1×: Port output latch

**(b) When the P112 and P113 are selected as the UART6 pins using the bits 4, 5 (ISC4, ISC5) of the ISC register**

POWER6	TXE6	RXE6	PM112	P112	PM113	P113	UART6 Operation	Pin Function	
								TxD6/SEG6/P112	RxD6/SEG7/P113
0	0	0	× <sup>Note</sup>	× <sup>Note</sup>	× <sup>Note</sup>	× <sup>Note</sup>	Stop	SEG6/P112	SEG7/P113
1	0	1	× <sup>Note</sup>	× <sup>Note</sup>	1	×	Reception	SEG6/P112	RxD6
	1	0	0	1	× <sup>Note</sup>	× <sup>Note</sup>	Transmission	TxD6	SEG7/P113
	1	1	0	1	1	×	Transmission/reception	TxD6	RxD6

**Note** Can be set as port function or segment output.

**Caution** TxD6/KR4/TxD0/P13 and RxD6/KR3/RxD0/P12 pins function as the KR4/TxD0/P13 and KR3/RxD0/P12.

**Remark** ×: don't care

POWER6: Bit 7 of asynchronous serial interface operation mode register 6 (ASIM6)

TXE6: Bit 6 of ASIM6

RXE6: Bit 5 of ASIM6



PM11×: Port mode register

P11×: Port output latch

**(2) Communication operation****(a) Format and waveform example of normal transmit/receive data**

Figures 14-15 and 14-16 show the format and waveform example of the normal transmit/receive data.

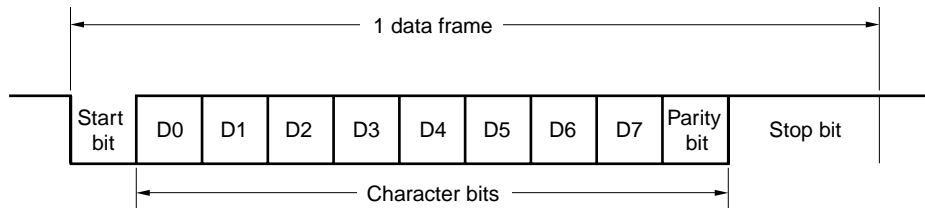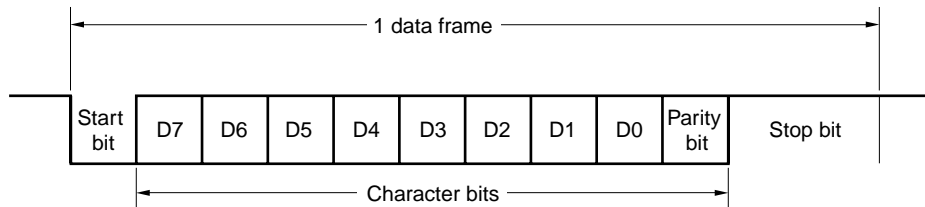**Figure 14-15. Format of Normal UART Transmit/Receive Data**

**1. LSB-first transmission/reception****2. MSB-first transmission/reception**

One data frame consists of the following bits.

- Start bit ... 1 bit
- Character bits ... 7 or 8 bits
- Parity bit ... Even parity, odd parity, 0 parity, or no parity
- Stop bit ... 1 or 2 bits


The character bit length, parity, and stop bit length in one data frame are specified by asynchronous serial interface operation mode register 6 (ASIM6).

Whether data is communicated with the LSB or MSB first is specified by bit 1 (DIR6) of asynchronous serial interface control register 6 (ASICL6).


Whether the Tx/D6 pin outputs normal or inverted data is specified by bit 0 (TXDLV6) of ASICL6.

Figure 14-16. Example of Normal UART Transmit/Receive Data Waveform

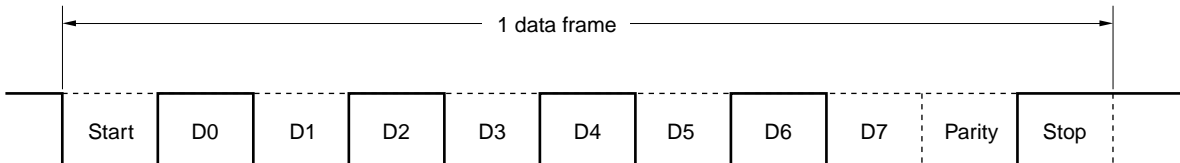
1. Data length: 8 bits, LSB first, Parity: Even parity, Stop bit: 1 bit, Communication data: 55H



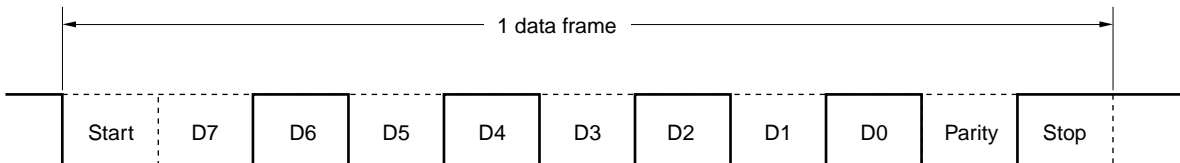
2. Data length: 8 bits, MSB first, Parity: Even parity, Stop bit: 1 bit, Communication data: 55H



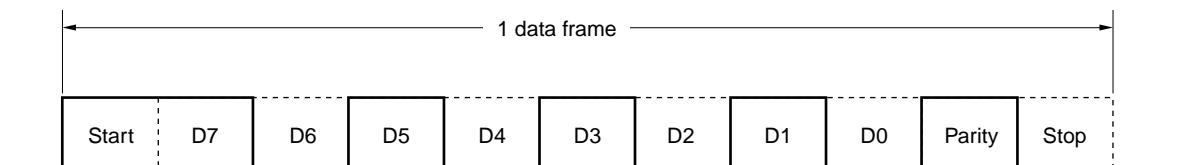
3. Data length: 8 bits, MSB first, Parity: Even parity, Stop bit: 1 bit, Communication data: 55H, Tx/D6 pin inverted output



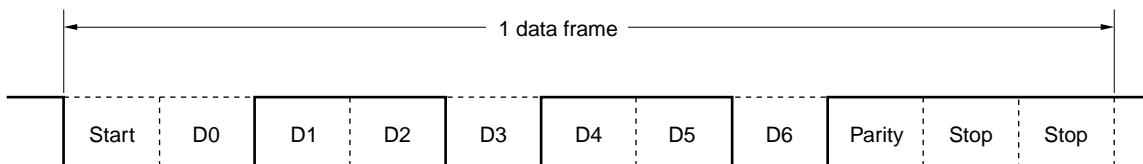4. Data length: 7 bits, LSB first, Parity: Odd parity, Stop bit: 2 bits, Communication data: 36H



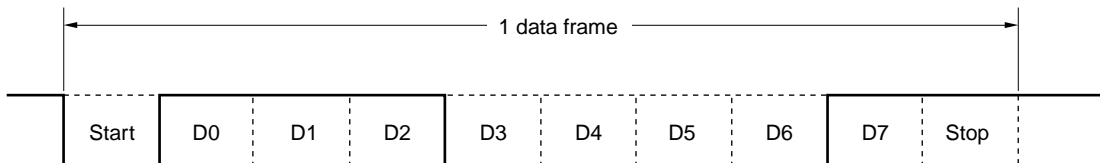5. Data length: 8 bits, LSB first, Parity: None, Stop bit: 1 bit, Communication data: 87H



**(b) Parity types and operation**

The parity bit is used to detect a bit error in communication data. Usually, the same type of parity bit is used on both the transmission and reception sides. With even parity and odd parity, a 1-bit (odd number) error can be detected. With zero parity and no parity, an error cannot be detected.

**Caution** Fix the PS61 and PS60 bits to 0 when the device is used in LIN communication operation.

**(i) Even parity**

- Transmission

Transmit data, including the parity bit, is controlled so that the number of bits that are “1” is even. The value of the parity bit is as follows.

If transmit data has an odd number of bits that are “1”: 1

If transmit data has an even number of bits that are “1”: 0

- Reception

The number of bits that are “1” in the receive data, including the parity bit, is counted. If it is odd, a parity error occurs.

**(ii) Odd parity**

- Transmission

Unlike even parity, transmit data, including the parity bit, is controlled so that the number of bits that are “1” is odd.

If transmit data has an odd number of bits that are “1”: 0

If transmit data has an even number of bits that are “1”: 1

- Reception

The number of bits that are “1” in the receive data, including the parity bit, is counted. If it is even, a parity error occurs.

**(iii) 0 parity**

The parity bit is cleared to 0 when data is transmitted, regardless of the transmit data.

The parity bit is not detected when the data is received. Therefore, a parity error does not occur regardless of whether the parity bit is “0” or “1”.

**(iv) No parity**

No parity bit is appended to the transmit data.

Reception is performed assuming that there is no parity bit when data is received. Because there is no parity bit, a parity error does not occur.



**(c) Normal transmission**



When bit 7 (POWER6) of asynchronous serial interface operation mode register 6 (ASIM6) is set to 1 and bit 6 (TXE6) of ASIM6 is then set to 1, transmission is enabled. Transmission can be started by writing transmit data to transmit buffer register 6 (TXB6). The start bit, parity bit, and stop bit are automatically appended to the data.

When transmission is started, the data in TXB6 is transferred to transmit shift register 6 (TXS6). After that, the transmit data is sequentially output from TXS6 to the TxD6 pin. When transmission is completed, the parity and stop bits set by ASIM6 are appended and a transmission completion interrupt request (INTST6) is generated.

Transmission is stopped until the data to be transmitted next is written to TXB6.

Figure 14-17 shows the timing of the transmission completion interrupt request (INTST6). This interrupt occurs as soon as the last stop bit has been output.

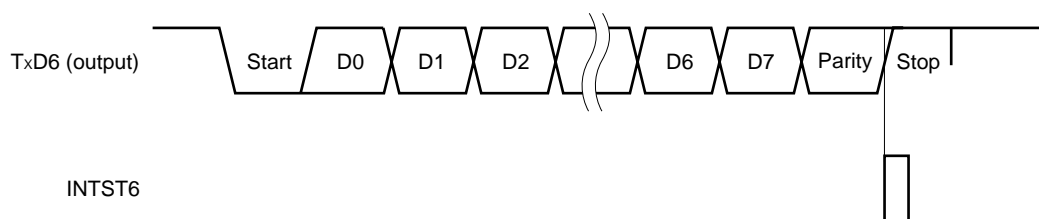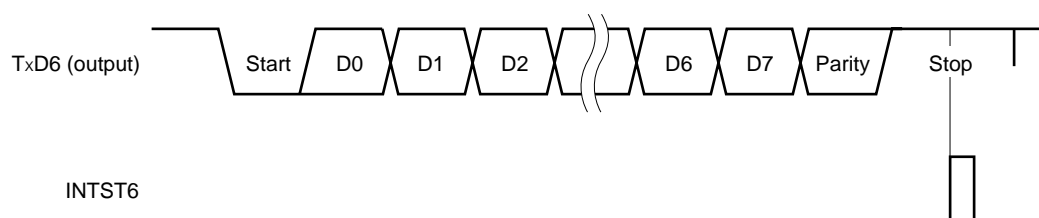**Figure 14-17. Normal Transmission Completion Interrupt Request Timing**

**1. Stop bit length: 1****2. Stop bit length: 2**

**(d) Continuous transmission**

The next transmit data can be written to transmit buffer register 6 (TXB6) as soon as transmit shift register 6 (TXS6) has started its shift operation. Consequently, even while the INTST6 interrupt is being serviced after transmission of one data frame, data can be continuously transmitted and an efficient communication rate can be realized. In addition, the TXB6 register can be efficiently written twice (2 bytes) without having to wait for the transmission time of one data frame, by reading bit 0 (TXSF6) of asynchronous serial interface transmission status register 6 (ASIF6) when the transmission completion interrupt has occurred.

To transmit data continuously, be sure to reference the ASIF6 register to check the transmission status and whether the TXB6 register can be written, and then write the data.

- Cautions**
- 1. The TXBF6 and TXSF6 flags of the ASIF6 register change from “10” to “11”, and to “01” during continuous transmission. To check the status, therefore, do not use a combination of the TXBF6 and TXSF6 flags for judgment. Read only the TXBF6 flag when executing continuous transmission.**
  - 2. When the device is use in LIN communication operation, the continuous transmission function cannot be used. Make sure that asynchronous serial interface transmission status register 6 (ASIF6) is 00H before writing transmit data to transmit buffer register 6 (TXB6).**

TXBF6	Writing to TXB6 Register
0	Writing enabled
1	Writing disabled

**Caution** To transmit data continuously, write the first transmit data (first byte) to the TXB6 register. Be sure to check that the TXBF6 flag is “0”. If so, write the next transmit data (second byte) to the TXB6 register. If data is written to the TXB6 register while the TXBF6 flag is “1”, the transmit data cannot be guaranteed.


The communication status can be checked using the TXSF6 flag.

TXSF6	Transmission Status
0	Transmission is completed.
1	Transmission is in progress.

- Cautions**
- 1. To initialize the transmission unit upon completion of continuous transmission, be sure to check that the TXSF6 flag is “0” after generation of the transmission completion interrupt, and then execute initialization. If initialization is executed while the TXSF6 flag is “1”, the transmit data cannot be guaranteed.**
  - 2. During continuous transmission, the next transmission may complete before execution of INTST6 interrupt servicing after transmission of one data frame. As a countermeasure, detection can be performed by developing a program that can count the number of transmit data and by referencing the TXSF6 flag.**

Figure 14-18 shows an example of the continuous transmission processing flow.

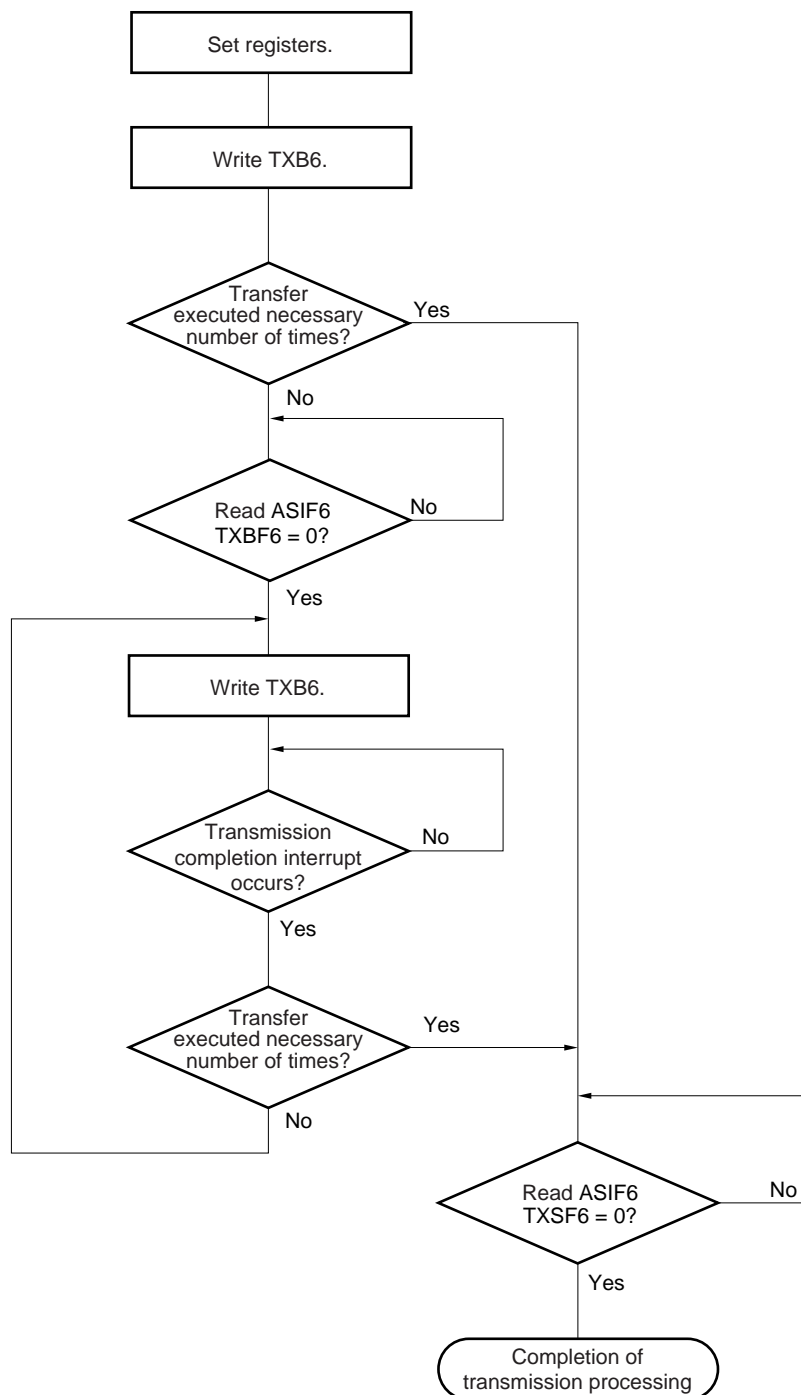
**Figure 14-18. Example of Continuous Transmission Processing Flow**



**Remark** TXB6: Transmit buffer register 6  
 ASIF6: Asynchronous serial interface transmission status register 6  
 TXBF6: Bit 1 of ASIF6 (transmit buffer data flag)  
 TXSF6: Bit 0 of ASIF6 (transmit shift register data flag)

Figure 14-19 shows the timing of starting continuous transmission, and Figure 14-20 shows the timing of ending continuous transmission.

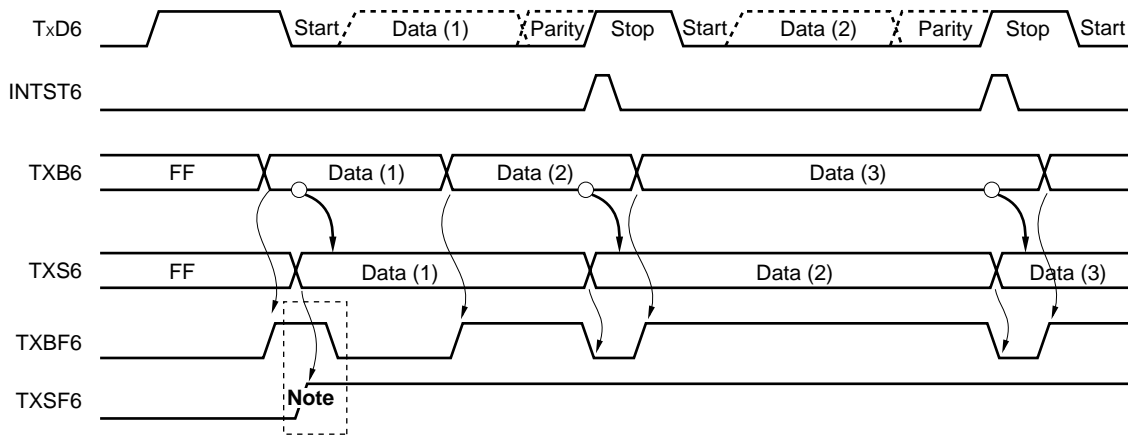**Figure 14-19. Timing of Starting Continuous Transmission**




**Note** When ASIF6 is read, there is a period in which TXBF6 and TXSF6 = 1, 1. Therefore, judge whether writing is enabled using only the TXBF6 bit.

**Remark**

- TxD6: TxD6 pin (output)
- INTST6: Interrupt request signal
- TXB6: Transmit buffer register 6
- TXS6: Transmit shift register 6
- ASIF6: Asynchronous serial interface transmission status register 6
- TXBF6: Bit 1 of ASIF6
- TXSF6: Bit 0 of ASIF6

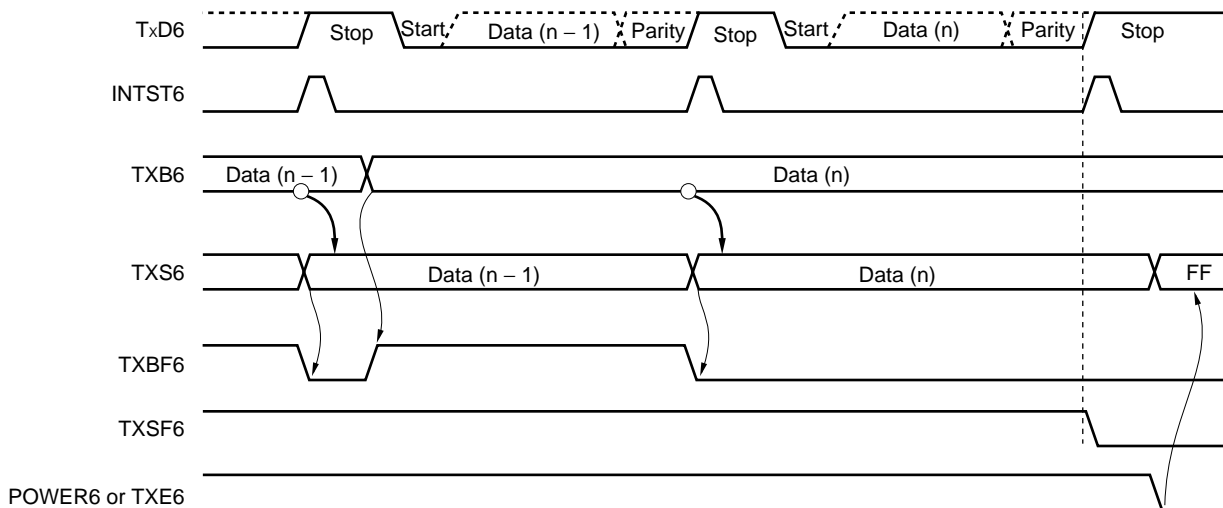Figure 14-20. Timing of Ending Continuous Transmission



<b>Remark</b>	TxD6:	TxD6 pin (output)
	INTST6:	Interrupt request signal
	TXB6:	Transmit buffer register 6
	TXS6:	Transmit shift register 6
	ASIF6:	Asynchronous serial interface transmission status register 6
	TXBF6:	Bit 1 of ASIF6
	TXSF6:	Bit 0 of ASIF6
	POWER6:	Bit 7 of asynchronous serial interface operation mode register (ASIM6)
	TXE6:	Bit 6 of asynchronous serial interface operation mode register (ASIM6)

**(e) Normal reception**


Reception is enabled and the RxD6 pin input is sampled when bit 7 (POWER6) of asynchronous serial interface operation mode register 6 (ASIM6) is set to 1 and then bit 5 (RXE6) of ASIM6 is set to 1.

The 8-bit counter of the baud rate generator starts counting when the falling edge of the RxD6 pin input is detected. When the set value of baud rate generator control register 6 (BRGC6) has been counted, the RxD6 pin input is sampled again ( $\nabla$  in Figure 14-21). If the RxD6 pin is low level at this time, it is recognized as a start bit.

When the start bit is detected, reception is started, and serial data is sequentially stored in the receive shift register (RXS6) at the set baud rate. When the stop bit has been received, the reception completion interrupt (INTSR6) is generated and the data of RXS6 is written to receive buffer register 6 (RXB6). If an overrun error (OVE6) occurs, however, the receive data is not written to RXB6.

Even if a parity error (PE6) occurs while reception is in progress, reception continues to the reception position of the stop bit, and a reception error interrupt (INTSR6/INTSRE6) is generated on completion of reception.

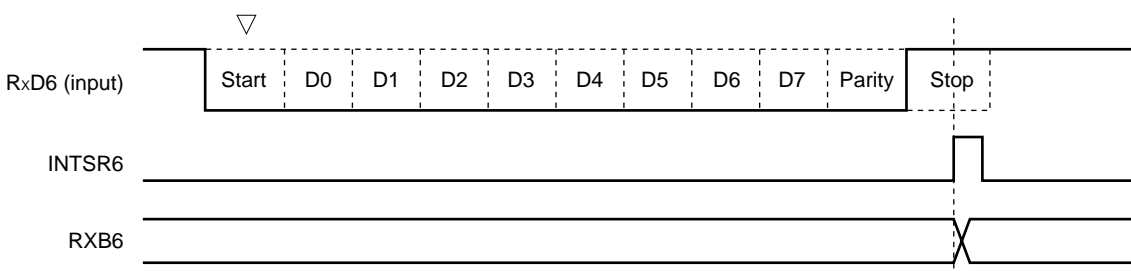**Figure 14-21. Reception Completion Interrupt Request Timing**



- Cautions**
1. If a reception error occurs, read ASIS6 and then RXB6 to clear the error flag. Otherwise, an overrun error will occur when the next data is received, and the reception error status will persist.
  2. Reception is always performed with the “number of stop bits = 1”. The second stop bit is ignored.
  3. Be sure to read asynchronous serial interface reception error status register 6 (ASIS6) before reading RXB6.

**(f) Reception error**

Three types of errors may occur during reception: a parity error, framing error, or overrun error. If the error flag of asynchronous serial interface reception error status register 6 (ASIS6) is set as a result of data reception, a reception error interrupt request (INTSR6/INTSRE6) is generated.

Which error has occurred during reception can be identified by reading the contents of ASIS6 in the reception error interrupt (INTSR6/INTSRE6) servicing (see **Figure 14-6**).

The contents of ASIS6 are cleared to 0 when ASIS6 is read.

**Table 14-3. Cause of Reception Error**


Reception Error	Cause
Parity error	The parity specified for transmission does not match the parity of the receive data.
Framing error	Stop bit is not detected.
Overrun error	Reception of the next data is completed before data is read from receive buffer register 6 (RXB6).

The reception error interrupt can be separated into reception completion interrupt (INTSR6) and error interrupt (INTSRE6) by clearing bit 0 (ISRM6) of asynchronous serial interface operation mode register 6 (ASIM6) to 0.


**Figure 14-22. Reception Error Interrupt**

**1. If ISRM6 is cleared to 0 (reception completion interrupt (INTSR6) and error interrupt (INTSRE6) are separated)**

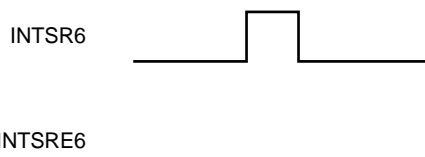**(a) No error during reception**




**(b) Error during reception**

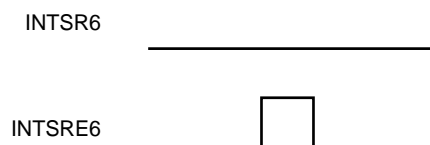


**2. If ISRM6 is set to 1 (error interrupt is included in INTSR6)**

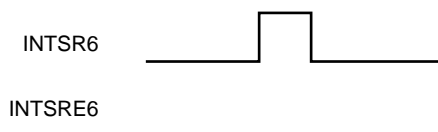**(a) No error during reception**



**(b) Error during reception**

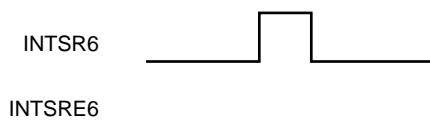


**(g) Noise filter of receive data**

The RxD6 signal is sampled with the base clock output by the prescaler block.

If two sampled values are the same, the output of the match detector changes, and the data is sampled as input data.

Because the circuit is configured as shown in Figure 14-23, the internal processing of the reception operation is delayed by two clocks from the external signal status.

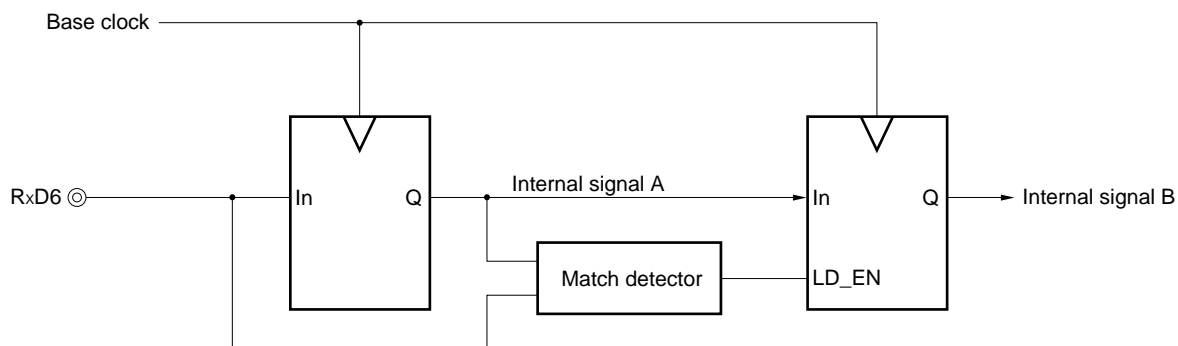**Figure 14-23. Noise Filter Circuit**

**(h) SBF transmission**


When the device is used in LIN communication operation, the SBF (Synchronous Break Field) transmission control function is used for transmission. For the transmission operation of LIN, see **Figure 14-1 LIN Transmission Operation**.

When bit 7 (POWER6) of asynchronous serial interface mode register 6 (ASIM6) is set to 1, the TxD6 pin outputs high level. Next, when bit 6 (TXE6) of ASIM6 is set to 1, the transmission enabled status is entered, and SBF transmission is started by setting bit 5 (SBTT6) of asynchronous serial interface control register 6 (ASICL6) to 1.

Thereafter, a low level of bits 13 to 20 (set by bits 4 to 2 (SBL62 to SBL60) of ASICL6) is output. Following the end of SBF transmission, the transmission completion interrupt request (INTST6) is generated and SBTT6 is automatically cleared. Thereafter, the normal transmission mode is restored.

Transmission is suspended until the data to be transmitted next is written to transmit buffer register 6 (TXB6), or until SBTT6 is set to 1.

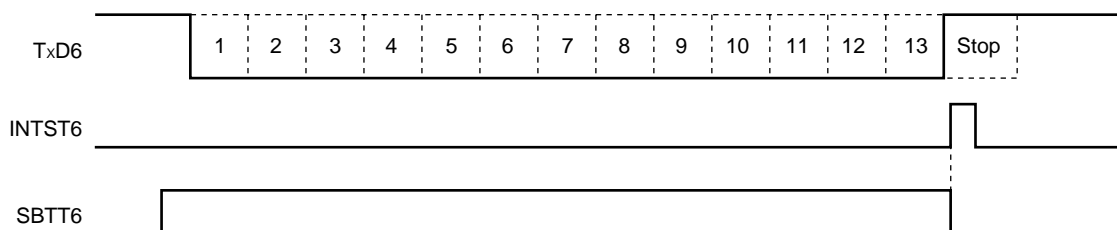**Figure 14-24. SBF Transmission**



**Remark** TxD6: TxD6 pin (output)

INTST6: Transmission completion interrupt request

SBTT6: Bit 5 of asynchronous serial interface control register 6 (ASICL6)



**(i) SBF reception**


When the device is used in LIN communication operation, the SBF (Synchronous Break Field) reception control function is used for reception. For the reception operation of LIN, see **Figure 14-2 LIN Reception Operation**.

Reception is enabled when bit 7 (POWER6) of asynchronous serial interface operation mode register 6 (ASIM6) is set to 1 and then bit 5 (RXE6) of ASIM6 is set to 1. SBF reception is enabled when bit 6 (SBRT6) of asynchronous serial interface control register 6 (ASICL6) is set to 1. In the SBF reception enabled status, the RxD6 pin is sampled and the start bit is detected in the same manner as the normal reception enable status.


When the start bit has been detected, reception is started, and serial data is sequentially stored in the receive shift register 6 (RXS6) at the set baud rate. When the stop bit is received and if the width of SBF is 11 bits or more, a reception completion interrupt request (INTSR6) is generated as normal processing. At this time, the SBRF6 and SBRT6 bits are automatically cleared, and SBF reception ends. Detection of errors, such as OVE6, PE6, and FE6 (bits 0 to 2 of asynchronous serial interface reception error status register 6 (ASIS6)) is suppressed, and error detection processing of UART communication is not performed. In addition, data transfer between receive shift register 6 (RXS6) and receive buffer register 6 (RXB6) is not performed, and the reset value of FFH is retained. If the width of SBF is 10 bits or less, an interrupt does not occur as error processing after the stop bit has been received, and the SBF reception mode is restored. In this case, the SBRF6 and SBRT6 bits are not cleared.

**Figure 14-25. SBF Reception**

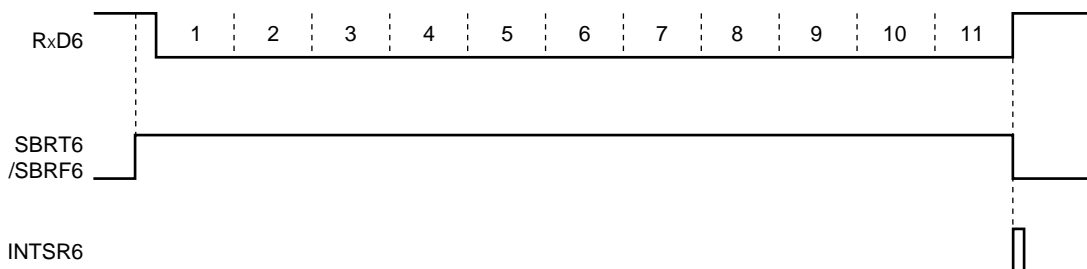**1. Normal SBF reception (stop bit is detected with a width of more than 10.5 bits)**



**2. SBF reception error (stop bit is detected with a width of 10.5 bits or less)**

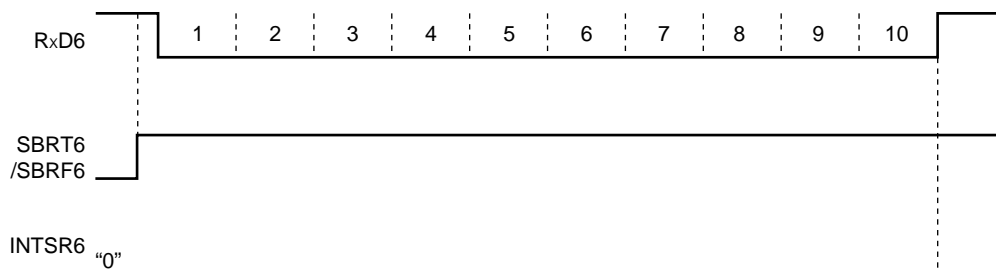

**Remark** RxD6: RxD6 pin (input)  
 SBRT6: Bit 6 of asynchronous serial interface control register 6 (ASICL6)  
 SBRF6: Bit 7 of ASICL6  
 INTSR6: Reception completion interrupt request

### 14.4.3 Dedicated baud rate generator

The dedicated baud rate generator consists of a source clock selector and an 8-bit programmable counter, and generates a serial clock for transmission/reception of UART6.

Separate 8-bit counters are provided for transmission and reception.

#### (1) Configuration of baud rate generator

- Base clock

The clock selected by bits 3 to 0 (TPS63 to TPS60) of clock selection register 6 (CKSR6) is supplied to each module when bit 7 (POWER6) of asynchronous serial interface operation mode register 6 (ASIM6) is 1. This clock is called the base clock and its frequency is called  $f_{CLK6}$ . The base clock is fixed to low level when POWER6 = 0.

- Transmission counter

This counter stops operation, cleared to 0, when bit 7 (POWER6) or bit 6 (TXE6) of asynchronous serial interface operation mode register 6 (ASIM6) is 0.

It starts counting when POWER6 = 1 and TXE6 = 1.

The counter is cleared to 0 when the first data transmitted is written to transmit buffer register 6 (TXB6).

If data are continuously transmitted, the counter is cleared to 0 again when one frame of data has been completely transmitted. If there is no data to be transmitted next, the counter is not cleared to 0 and continues counting until POWER6 or TXE6 is cleared to 0.


- Reception counter

This counter stops operation, cleared to 0, when bit 7 (POWER6) or bit 5 (RXE6) of asynchronous serial interface operation mode register 6 (ASIM6) is 0.

It starts counting when the start bit has been detected.

The counter stops operation after one frame has been received, until the next start bit is detected.

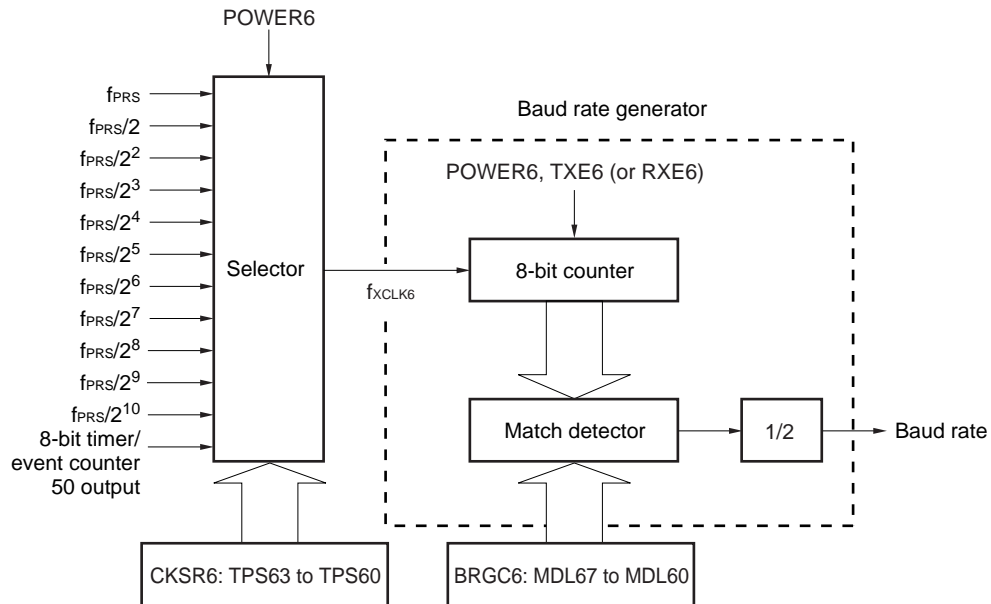Figure 14-26. Configuration of Baud Rate Generator



**Remark** POWER6: Bit 7 of asynchronous serial interface operation mode register 6 (ASIM6)

TXE6: Bit 6 of ASIM6

RXE6: Bit 5 of ASIM6

CKSR6: Clock selection register 6

BRGC6: Baud rate generator control register 6

## (2) Generation of serial clock

A serial clock to be generated can be specified by using clock selection register 6 (CKSR6) and baud rate generator control register 6 (BRGC6).

The clock to be input to the 8-bit counter can be set by bits 3 to 0 (TPS63 to TPS60) of CKSR6 and the division value ( $f_{XCLK6}/4$  to  $f_{XCLK6}/255$ ) of the 8-bit counter can be set by bits 7 to 0 (MDL67 to MDL60) of BRGC6.

#### 14.4.4 Calculation of baud rate

##### (1) Baud rate calculation expression

The baud rate can be calculated by the following expression.

- Baud rate =  $\frac{f_{\text{CLK6}}}{2 \times k}$  [bps]

$f_{\text{CLK6}}$ : Frequency of base clock selected by TPS63 to TPS60 bits of CKSR6 register

k: Value set by MDL67 to MDL60 bits of BRGC6 register (k = 4, 5, 6, ..., 255)

**Table 14-4. Set Value of TPS63 to TPS60**

TPS63	TPS62	TPS61	TPS60	Base Clock ( $f_{\text{CLK6}}$ ) Selection <sup>Note 1</sup>				
				$f_{\text{PRS}} =$ 2 MHz	$f_{\text{PRS}} =$ 5 MHz	$f_{\text{PRS}} =$ 8 MHz	$f_{\text{PRS}} =$ 10 MHz	
0	0	0	0	$f_{\text{PRS}}$ <sup>Note 2</sup>	2 MHz	5 MHz	8 MHz	10 MHz
0	0	0	1	$f_{\text{PRS}}/2$	1 MHz	2.5 MHz	4 MHz	5 MHz
0	0	1	0	$f_{\text{PRS}}/2^2$	500 kHz	1.25 MHz	2 MHz	2.5 MHz
0	0	1	1	$f_{\text{PRS}}/2^3$	250 kHz	625 kHz	1 MHz	1.25 MHz
0	1	0	0	$f_{\text{PRS}}/2^4$	125 kHz	312.5 kHz	500 kHz	625 kHz
0	1	0	1	$f_{\text{PRS}}/2^5$	62.5 kHz	156.25 kHz	250 kHz	312.5 kHz
0	1	1	0	$f_{\text{PRS}}/2^6$	31.25 kHz	78.13 kHz	125 kHz	156.25 kHz
0	1	1	1	$f_{\text{PRS}}/2^7$	15.625 kHz	39.06 kHz	62.5 kHz	78.13 kHz
1	0	0	0	$f_{\text{PRS}}/2^8$	7.813 kHz	19.53 kHz	31.25 kHz	39.06 kHz
1	0	0	1	$f_{\text{PRS}}/2^9$	3.906 kHz	9.77 kHz	15.625 kHz	19.53 kHz
1	0	1	0	$f_{\text{PRS}}/2^{10}$	1.953 kHz	4.88 kHz	7.813 kHz	9.77 kHz
1	0	1	1	TM50 output <sup>Note 3</sup>				
Other than above				Setting prohibited				

- Notes**
1. If the peripheral hardware clock ( $f_{\text{PRS}}$ ) operates on the high-speed system clock ( $f_{\text{XH}}$ ) (XSEL = 1), the  $f_{\text{PRS}}$  operating frequency varies depending on the supply voltage.
    - $V_{\text{DD}} = 2.7$  to  $5.5$  V:  $f_{\text{PRS}} \leq 10$  MHz
    - $V_{\text{DD}} = 1.8$  to  $2.7$  V:  $f_{\text{PRS}} \leq 5$  MHz
  2. If the peripheral hardware clock ( $f_{\text{PRS}}$ ) operates on the internal high-speed oscillation clock ( $f_{\text{RH}}$ ) (XSEL = 0), when  $1.8 \text{ V} \leq V_{\text{DD}} < 2.7 \text{ V}$ , the setting of TPS63 = TPS62 = TPS61 = TPS60 = 0 (base clock:  $f_{\text{PRS}}$ ) is prohibited.
  3. When selecting the TM50 output as the base clock, Start the operation of 8-bit timer/event counter 50 first and then enable the timer F/F inversion operation (TMC501 = 1).

**(2) Error of baud rate**

The baud rate error can be calculated by the following expression.

- Error (%) =  $\left( \frac{\text{Actual baud rate (baud rate with error)}}{\text{Desired baud rate (correct baud rate)}} - 1 \right) \times 100$  [%]

**Cautions 1. Keep the baud rate error during transmission to within the permissible error range at the reception destination.**

**2. Make sure that the baud rate error during reception satisfies the range shown in (4) Permissible baud rate range during reception.**

**Example:** Frequency of base clock = 10 MHz = 10,000,000 Hz

Set value of MDL67 to MDL60 bits of BRGC6 register = 00100001B (k = 33)

Target baud rate = 153600 bps

$$\begin{aligned} \text{Baud rate} &= 10 \text{ M} / (2 \times 33) \\ &= 10000000 / (2 \times 33) = 151,515 \text{ [bps]} \end{aligned}$$

$$\begin{aligned} \text{Error} &= (151515/153600 - 1) \times 100 \\ &= -1.357 \text{ [%]} \end{aligned}$$

## (3) Example of setting baud rate

Table 14-5. Set Data of Baud Rate Generator

Baud Rate [bps]	f <sub>PRS</sub> = 2.0 MHz				f <sub>PRS</sub> = 5.0 MHz				f <sub>PRS</sub> = 10.0 MHz			
	TPS63-TPS60	k	Calculated Value	ERR [%]	TPS63-TPS60	k	Calculated Value	ERR [%]	TPS63-TPS60	k	Calculated Value	ERR [%]
300	8H	13	301	0.16	7H	65	301	0.16	8H	65	301	0.16
600	7H	13	601	0.16	6H	65	601	0.16	7H	65	601	0.16
1200	6H	13	1202	0.16	5H	65	1202	0.16	6H	65	1202	0.16
2400	5H	13	2404	0.16	4H	65	2404	0.16	5H	65	2404	0.16
4800	4H	13	4808	0.16	3H	65	4808	0.16	4H	65	4808	0.16
9600	3H	13	9615	0.16	2H	65	9615	0.16	3H	65	9615	0.16
19200	2H	13	19231	0.16	1H	65	19231	0.16	2H	65	19231	0.16
24000	1H	21	23810	-0.79	3H	13	24038	0.16	4H	13	24038	0.16
31250	1H	16	31250	0	4H	5	31250	0	5H	5	31250	0
38400	1H	13	38462	0.16	0H	65	38462	0.16	1H	65	38462	0.16
48000	0H	21	47619	-0.79	2H	13	48077	0.16	3H	13	48077	0.16
76800	0H	13	76923	0.16	0H	33	75758	-1.36	0H	65	76923	0.16
115200	0H	9	111111	-3.55	1H	11	113636	-1.36	0H	43	116279	0.94
153600	-	-	-	-	1H	8	156250	1.73	0H	33	151515	-1.36
312500	-	-	-	-	0H	8	312500	0	1H	8	312500	0
625000	-	-	-	-	0H	4	625000	0	1H	4	625000	0


**Remark** TPS63 to TPS60: Bits 3 to 0 of clock selection register 6 (CKSR6) (setting of base clock (f<sub>CLK6</sub>))  
k: Value set by MDL67 to MDL60 bits of baud rate generator control register 6 (BRGC6) (k = 4, 5, 6, ..., 255)  
f<sub>PRS</sub>: Peripheral hardware clock frequency  
ERR: Baud rate error

**(4) Permissible baud rate range during reception**

The permissible error from the baud rate at the transmission destination during reception is shown below.

**Caution** Make sure that the baud rate error during reception is within the permissible error range, by using the calculation expression shown below.

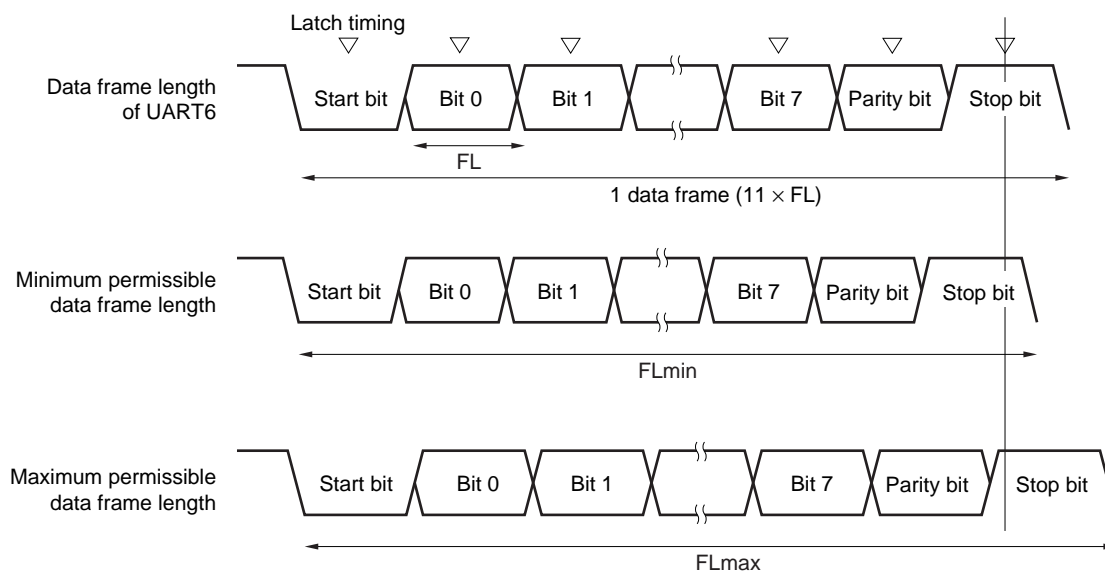**Figure 14-27. Permissible Baud Rate Range During Reception**



As shown in Figure 14-27, the latch timing of the receive data is determined by the counter set by baud rate generator control register 6 (BRGC6) after the start bit has been detected. If the last data (stop bit) meets this latch timing, the data can be correctly received.

Assuming that 11-bit data is received, the theoretical values can be calculated as follows.

$$FL = (\text{Brate})^{-1}$$

Brate: Baud rate of UART6

k: Set value of BRGC6

FL: 1-bit data length

Margin of latch timing: 2 clocks

$$\text{Minimum permissible data frame length: } FL_{\min} = 11 \times FL - \frac{k-2}{2k} \times FL = \frac{21k+2}{2k} FL$$

Therefore, the maximum receivable baud rate at the transmission destination is as follows.

$$BR_{\max} = (FL_{\min}/11)^{-1} = \frac{22k}{21k+2} \text{ Brate}$$

Similarly, the maximum permissible data frame length can be calculated as follows.

$$\frac{10}{11} \times FL_{\max} = 11 \times FL - \frac{k+2}{2 \times k} \times FL = \frac{21k-2}{2 \times k} FL$$

$$FL_{\max} = \frac{21k-2}{20k} FL \times 11$$

Therefore, the minimum receivable baud rate at the transmission destination is as follows.

$$BR_{\min} = (FL_{\max}/11)^{-1} = \frac{20k}{21k-2} \text{ Brate}$$

The permissible baud rate error between UART6 and the transmission destination can be calculated from the above minimum and maximum baud rate expressions, as follows.

**Table 14-6. Maximum/Minimum Permissible Baud Rate Error**

Division Ratio (k)	Maximum Permissible Baud Rate Error	Minimum Permissible Baud Rate Error
4	+2.33%	-2.44%
8	+3.53%	-3.61%
20	+4.26%	-4.31%
50	+4.56%	-4.58%
100	+4.66%	-4.67%
255	+4.72%	-4.73%


- Remarks**
1. The permissible error of reception depends on the number of bits in one frame, input clock frequency, and division ratio (k). The higher the input clock frequency and the higher the division ratio (k), the higher the permissible error.
  2. k: Set value of BRGC6



**(5) Data frame length during continuous transmission**

When data is continuously transmitted, the data frame length from a stop bit to the next start bit is extended by two clocks of base clock from the normal value. However, the result of communication is not affected because the timing is initialized on the reception side when the start bit is detected.

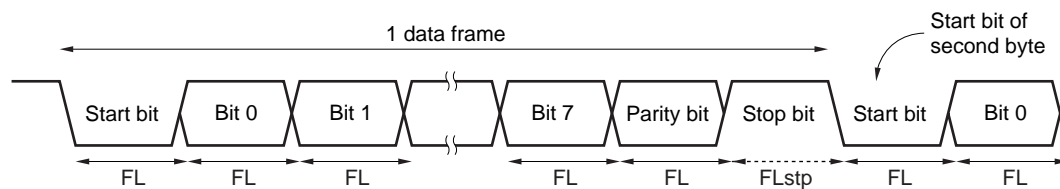**Figure 14-28. Data Frame Length During Continuous Transmission**



Where the 1-bit data length is  $FL$ , the stop bit length is  $FL_{stp}$ , and base clock frequency is  $f_{CLK6}$ , the following expression is satisfied.

$$FL_{stp} = FL + 2/f_{CLK6}$$

Therefore, the data frame length during continuous transmission is:

$$\text{Data frame length} = 11 \times FL + 2/f_{CLK6}$$

## CHAPTER 15 LCD CONTROLLER/DRIVER

### 15.1 Functions of LCD Controller/Driver

The functions of the LCD controller/driver in the 78K0/LC3 are as follows.






- (1) The LCD driver voltage generator can switch external resistance division and internal resistance division.
- (2) Automatic output of segment and common signals based on automatic display data memory read
- (3) Six different display modes:
  - Static
  - 1/2 duty (1/2 bias)
  - 1/3 duty (1/2 bias)
  - 1/3 duty (1/3 bias)
  - 1/4 duty (1/3 bias)
  - 1/8 duty (1/4 bias)
- (4) Six different frame frequencies, selectable in each display mode
- (5) Segment signal outputs: 22<sup>Note</sup> (SEG0 to SEG21), Common signal outputs: 8<sup>Note</sup> (COM0 to COM7)

**Note** The four segment signal outputs (SEG0 to SEG3) and four common signal outputs (COM4 to COM7) are alternate-function pins. COM4 to COM7 can be used only when eight-time-slice mode is selected by the setting of the LCD display mode register (LCDM).

Table 15-1 lists the maximum number of pixels that can be displayed in each display mode.

**Table 15-1. Maximum Number of Pixels**

LCD Driver Voltage Generator	Bias Mode	Number of Time Slices	Common Signals Used	Number of Segments	Maximum Number of Pixels
<ul style="list-style-type: none"> <li>• External resistance division</li> <li>• Internal resistance division</li> </ul>	–	Static	COM0 (COM1 to COM3)	22	22 (22 segment signals, 1 common signal) <sup>Note 1</sup>
	1/2	2	COM0, COM1		44 (22 segment signals, 2 common signals) <sup>Note 2</sup>
		3	COM0 to COM2		66 (22 segment signals, 3 common signals) <sup>Note 3</sup>
	1/3	3	COM0 to COM2		88 (22 segment signals, 4 common signals) <sup>Note 4</sup>
		4	COM0 to COM3		
	1/4	8	COM0 to COM7	18	144 (18 segment signals, 8 common signals) <sup>Note 5</sup>

- Notes**
1. 2-digit LCD panel, each digit having an 8-segment  configuration.
  2. 5-digit LCD panel, each digit having a 4-segment  configuration.
  3. 7-digit LCD panel, each digit having a 3-segment  configuration.
  4. 11-digit LCD panel, each digit having a 2-segment  configuration.
  5. 18-digit LCD panel, each digit having a 1-segment  configuration.

## 15.2 Configuration of LCD Controller/Driver


The LCD controller/driver consists of the following hardware.

**Table 15-2. Configuration of LCD Controller/Driver**

Item	Configuration
Display outputs	22 segment signals <sup>Note</sup> (SEG0 to SEG21), 8 common signals <sup>Note</sup> (COM0 to COM7)
Control registers	LCD mode register (LCDMD) LCD display mode register (LCDM) LCD clock control register (LCDC0) Port function register 2 (PF2) Port function register ALL (PFALL)

**Note** The four segment signal outputs (SEG0 to SEG3) and four common signal outputs (COM4 to COM7) are alternate-function pins. COM4 to COM7 can be used only when eight-time-slice mode is selected by the setting of the LCD display mode register.

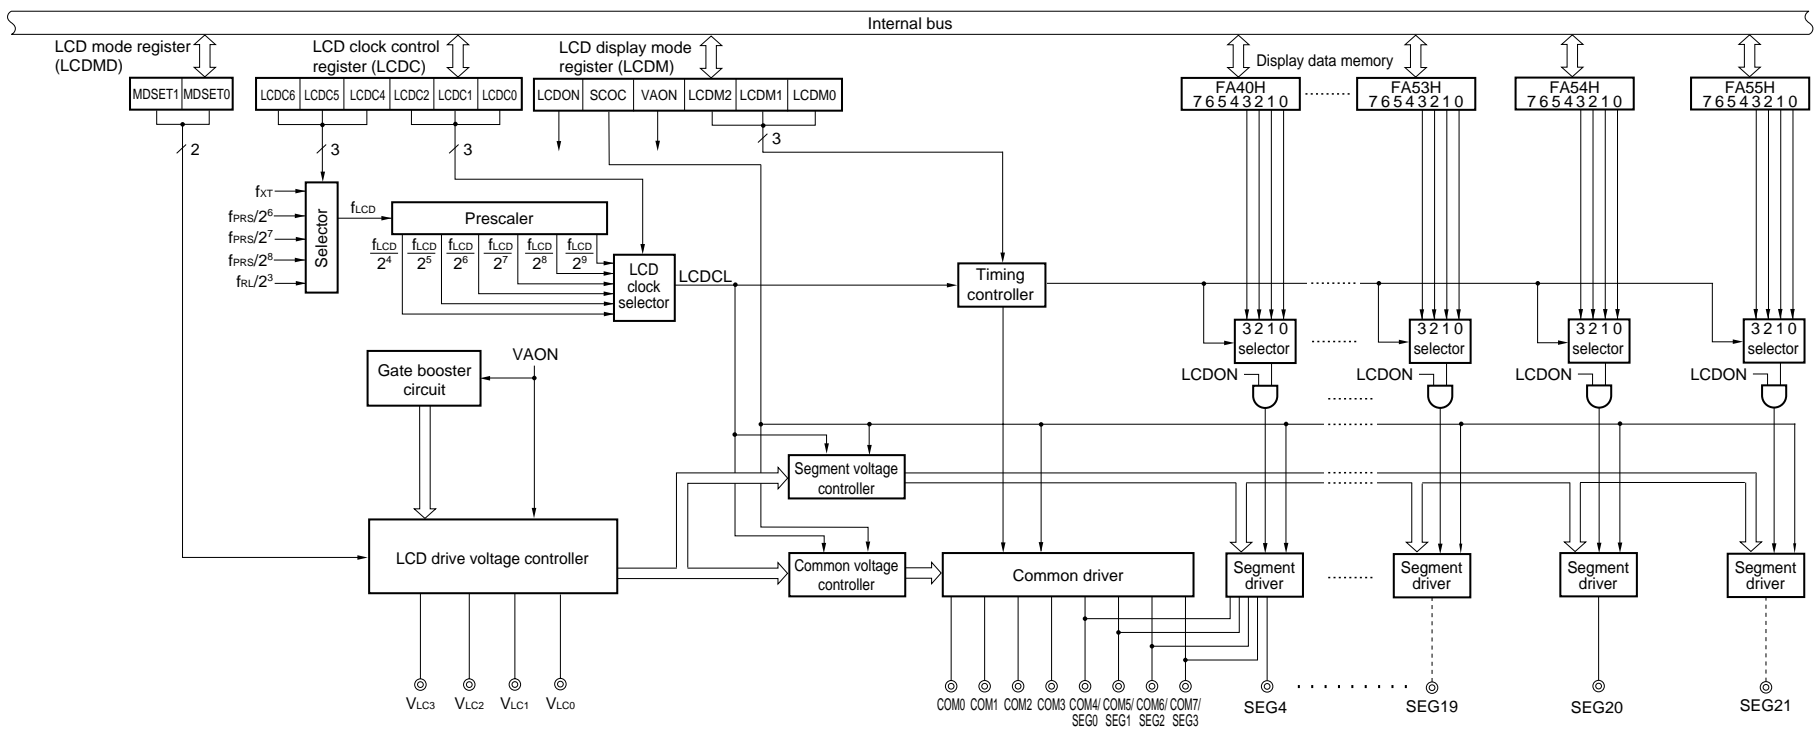Figure 15-1. Block Diagram of LCD Controller/Driver



### 15.3 Registers Controlling LCD Controller/Driver

The following five registers are used to control the LCD controller/driver.

- LCD mode register (LCDMD)
- LCD display mode register (LCDM)
- LCD clock control register (LCDC0)
- Port function register 2 (PF2)
- Port function register ALL (PFALL)

#### (1) LCD mode register (LCDMD)

LCDMD sets the LCD drive voltage generator.

LCDMD is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets LCDMD to 00H.

**Figure 15-2. Format of LCD Mode Register**

Address: FFB0H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
LCDMD	0	0	MDSET1	MDSET0	0	0	0	0

MDSET1	MDSET0	LCD drive voltage generator selection
0	0	External resistance division method
0	1	Internal resistance division method (no step-down transforming) (Used when $V_{LCD} = V_{DD}$ )
1	1	Internal resistance division method (step-down transforming) (Used when $V_{LCD} = 3/5V_{DD}$ )
Other than above		Setting prohibited

**Caution** Bits 0 to 3, 6 and 7 must be set to 0.

**(2) LCD display mode register (LCDM)**

LCDM specifies whether to enable display operation. It also specifies whether to enable segment pin/common pin output, gate booster circuit control, and the display mode.

LCDM is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets LCDM to 00H.

**Figure 15-3. Format of LCD Display Mode Register**

Address: FFB1H After reset: 00H R/W

Symbol	<7>	<6>	5	<4>	3	2	1	0
LCDM	LCDON	SCOC	0	VAON	0	LCDM2	LCDM1	LCDM0

LCDON	LCD display enable/disable
0	Display off (all segment outputs are deselected.)
1	Display on

SCOC	Segment pin/common pin output control <sup>Note 1</sup>
0	Output ground level to segment/common pin
1	Output deselect level to segment pin and LCD waveform to common pin

VAON	Gate booster circuit control <sup>Notes 1, 2</sup>
0	No gate voltage boosting
1	Gate voltage boosting

LCDM2	LCDM1	LCDM0	LCD controller/driver display mode selection	
			Resistance division method	
			Number of time slices	Bias mode
1	1	1	8	1/4 <sup>Note 3</sup>
0	0	0	4	1/3
0	0	1	3	1/3
0	1	0	2	1/2
0	1	1	3	1/2
1	0	0	Static	
Other than above			Setting prohibited	

(Note and Caution are listed on the next page.)

- Notes 1.** When LCD display is not performed or necessary, set SCOC and VAON to 0, in order to reduce power consumption.
- 2.** This bit is used to control boosting of the internal gate signal of the LCD controller/driver. If set to "Internal gate voltage boosting", the LCD drive performance can be enhanced. Set VAON based on the following conditions.
- <When set to the static display mode>
- When  $2.0\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
  - When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1
- <When set to the 1/3 bias method>
- When  $2.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
  - When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1
- <When set to the 1/2 bias method>
- When  $2.7\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
  - When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1
- <When set to the 1/4 bias method>
- When  $4.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
- 3.** When the P40/KR0/V<sub>LC3</sub> pin is set to the 1/4 bias method, it is used as V<sub>LC3</sub>. When the pin is set to another bias method, it is used for the port function (P40) or the key interrupt function (KR0). Use the pin at  $4.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$  when set to the 1/4 bias method.

**Caution Bits 3 and 5 must be set to 0.**



**(3) LCD clock control register (LCDC0)**

LCDC0 specifies the LCD source clock and LCD clock.

The frame frequency is determined according to the LCD clock and the number of time slices.

LCDC0 is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets LCDC0 to 00H.

**Figure 15-4. Format of LCD Clock Control Register**

Address: FFB2H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
LCDC0	0	LCDC6	LCDC5	LCDC4	0	LCDC2	LCDC1	LCDC0

LCDC6	LCDC5	LCDC4	LCD source clock ( $f_{LCD}$ ) selection
0	0	0	$f_{XT}$ (32.768 kHz)
0	0	1	$f_{PRS}/2^6$
0	1	0	$f_{PRS}/2^7$
0	1	1	$f_{PRS}/2^8$
1	0	0	$f_{RL}/2^3$
Other than above			Setting prohibited

LCDC2	LCDC1	LCDC0	LCD clock (LCDCL) selection
0	0	0	$f_{LCD}/2^4$
0	0	1	$f_{LCD}/2^5$
0	1	0	$f_{LCD}/2^6$
0	1	1	$f_{LCD}/2^7$
1	0	0	$f_{LCD}/2^8$
1	0	1	$f_{LCD}/2^9$
Other than above			Setting prohibited

**Caution** Bits 3 and 7 must be set to 0.

- Remarks**
1.  $f_{XT}$ : XT1 clock oscillation frequency
  2.  $f_{PRS}$ : Peripheral hardware clock frequency
  3.  $f_{RL}$ : Internal low-speed oscillation clock frequency

**(4) Port function register 2 (PF2)**

This register sets whether to use pins P20 to P25 as port pins (other than segment output pins) or segment output pins.

PF2 is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PF2 to 00H.

**Figure 15-5. Format of Port Function Register 2**

Address: FFB5H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PF2	0	0	PF25	PF24	PF23	PF22	PF21	PF20

PF2n	Port/segment output specification
0	Used as port (other than segment output)
1	Used as segment output

**Remark** n = 0 to 5

**(5) Port function register ALL (PFALL)**

This register sets whether to use pins P10, P11, P14 or P15 as port pins (other than segment output pins) or segment output pins.

PFALL is set using a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PFALL to 00H.

**Figure 15-6. Format of Port Function Register ALL**

Address: FFB6H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PFALL	0	PF15ALL	PF14ALL	0	PF11ALL	PF10ALL	0	0

PFnALL	Port/segment output specification
0	Used as port (other than segment output)
1	Used as segment output

**Remark** n = 10, 11, 14 or 15

## 15.4 Setting LCD Controller/Driver

Set the LCD controller/driver using the following procedure.

- <1> Set (VAON = 1) internal gate voltage boosting (bit 4 of the LCD display mode register (LCDM))
- <2> Set the resistance division method via MDSET0 and MDSET1 (bits 4 and 5 of the LCD mode register (LCDMD)) (MDSET0 = 0: external resistance division method, MDSET0 = 1: internal resistance division method).
- <3> Set the pins to be used as segment outputs to the port function registers (PF2m, PFnALL).
- <4> Set LCD display RAM to the initial value.
- <5> Set the number of time slices via LCDM0 to LCDM2 (bits 0 to 2 of the LCD display mode register (LCDM)).
- <6> Set the LCD source clock and LCD clock via LCD clock control register 0 (LCDC0).
- <7> Set (SCOC = 1) SCOC (bit 6 of the LCD display mode register (LCDM)).  
Non-selected waveforms are output from all the segment and common pins, and the non-display status is entered.
- <8> Start output corresponding to each data memory by setting (LCDON = 1) LCDON (bit 7 of LCDM).

Subsequent to this procedure, set the data to be displayed in the data memory.

**Note** Set VAON based on the following conditions.

- <When set to the static display mode>
  - When  $2.0\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
  - When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1
- <When set to the 1/3 bias method>
  - When  $2.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
  - When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1
- <When set to the 1/2 bias method>
  - When  $2.7\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0
  - When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1
- <When set to the 1/4 bias method>
  - When  $4.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0

**Remark** m = 0 to 5, n = 10, 11, 14 or 15


### 15.5 LCD Display Data Memory

The LCD display data memory is mapped at addresses FA40H to FA55H. Data in the LCD display data memory can be displayed on the LCD panel using the LCD controller/driver.

Figure 15-7 shows the relationship between the contents of the LCD display data memory and the segment/common outputs.

The areas not to be used for display can be used as normal RAM.

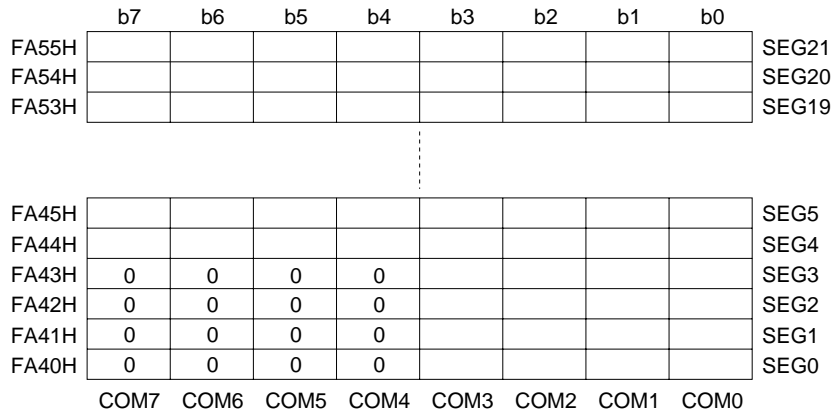**Figure 15-7. Relationship Between LCD Display Data Memory Contents and Segment/Common Outputs**



**Caution** No memory is allocated to the higher 4 bits of FA40H to FA43H. Be sure to set these bits to 0.

## 15.6 Common and Segment Signals

Each pixel of the LCD panel turns on when the potential difference between the corresponding common and segment signals becomes higher than a specific voltage (LCD drive voltage,  $V_{LCD}$ ). The pixels turn off when the potential difference becomes lower than  $V_{LCD}$ .

Applying DC voltage to the common and segment signals of an LCD panel causes deterioration. To avoid this problem, this LCD panel is driven by AC voltage.

### (1) Common signals

Each common signal is selected sequentially according to a specified number of time slices at the timing listed in Table 15-3. In the static display mode, the same signal is output to COM0 to COM3.

In the two-time-slice mode, leave the COM2 and COM3 pins open. In the three-time-slice mode, leave the COM3 pin open.

Use the COM4 to COM7 pins other than in the eight-time-slice mode as open or segment pins.

**Table 15-3. COM Signals**

COM Signal Number of Time Slices	COM0	COM1	COM2	COM3	COM4	COM5	COM6	COM7
Static display mode					Note	Note	Note	Note
Two-time-slice mode			Open	Open	Note	Note	Note	Note
Three-time-slice mode			Open	Open	Note	Note	Note	Note
Four-time-slice mode			Open	Open	Note	Note	Note	Note
eight-time-slice mode			Open	Open	Open	Open	Open	Open

**Note** Use the pins as open or segment pins.

### (2) Segment signals

The segment signals correspond to 22 bytes of LCD display data memory (FA40H to FA55H). Bits 0, 1, 2, and 3 of each byte are read in synchronization with COM0, COM1, COM2, and COM3, respectively. If a bit is 1, it is converted to the select voltage, and if it is 0, it is converted to the deselect voltage. The conversion results are output to the segment pins (SEG0 to SEG21).

Check, with the information given above, what combination of front-surface electrodes (corresponding to the segment signals) and rear-surface electrodes (corresponding to the common signals) forms display patterns in the LCD display data memory, and write the bit data that corresponds to the desired display pattern on a one-to-one basis.

LCD display data memory bits 1 to 3, bits 2 and 3, and bit 3 are not used for LCD display in the static display, two-time slot, and three-time slot modes, respectively. So these bits can be used for purposes other than display.

The higher 4 bits of FA40H to FA43H are fixed to 0.

**(3) Output waveforms of common and segment signals**

The voltages listed in Table 15-4 are output as common and segment signals.

When both common and segment signals are at the select voltage, a display on-voltage of  $\pm V_{LCD}$  is obtained.

The other combinations of the signals correspond to the display off-voltage.

**Table 15-4. LCD Drive Voltage**

**(a) Static display mode**

Segment Signal		Select Signal Level	Deselect Signal Level
		$LV_{SS}/V_{LC0}$	$V_{LC0}/LV_{SS}$
Common Signal			
	$V_{LC0}/LV_{SS}$	$-V_{LCD}/+V_{LCD}$	0 V/0 V

**(b) 1/2 bias method**

Segment Signal		Select Signal Level	Deselect Signal Level
		$LV_{SS}/V_{LC0}$	$V_{LC0}/LV_{SS}$
Common Signal			
Select signal level	$V_{LC0}/LV_{SS}$	$-V_{LCD}/+V_{LCD}$	0 V/0 V
Deselect signal level	$V_{LC1} = V_{LC2}$	$-\frac{1}{2}V_{LCD}/+\frac{1}{2}V_{LCD}$	$+\frac{1}{2}V_{LCD}/-\frac{1}{2}V_{LCD}$

**(c) 1/3 bias method**

Segment Signal		Select Signal Level	Deselect Signal Level
		$LV_{SS}/V_{LC0}$	$V_{LC1}/V_{LC2}$
Common Signal			
Select signal level	$V_{LC0}/LV_{SS}$	$-V_{LCD}/+V_{LCD}$	$-\frac{1}{3}V_{LCD}/+\frac{1}{3}V_{LCD}$
Deselect signal level	$V_{LC2}/V_{LC1}$	$-\frac{1}{3}V_{LCD}/+\frac{1}{3}V_{LCD}$	$+\frac{1}{3}V_{LCD}/-\frac{1}{3}V_{LCD}$


**(d) 1/4 bias method**

Segment Signal		Select Signal Level	Deselect Signal Level
		$V_{LC0}/LV_{SS}$	$V_{LC1}/V_{LC2}$
Common Signal			
Select signal level	$LV_{SS}/V_{LC0}$	$+V_{LCD}/-V_{LCD}$	$+\frac{1}{2}V_{LCD}/-\frac{1}{2}V_{LCD}$
Deselect signal level	$V_{LC1}/V_{LC3}$	$+\frac{1}{4}V_{LCD}/-\frac{1}{4}V_{LCD}$	$-\frac{1}{4}V_{LCD}/+\frac{1}{4}V_{LCD}$

Figure 15-8 shows the common signal waveforms, and Figure 15-9 shows the voltages and phases of the common and segment signals.


**Figure 15-8. Common Signal Waveforms**

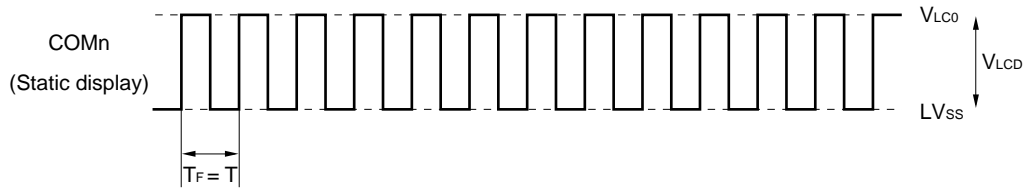**(a) Static display mode**




T: One LCD clock period       $T_F$ : Frame frequency

**(b) 1/2 bias method**

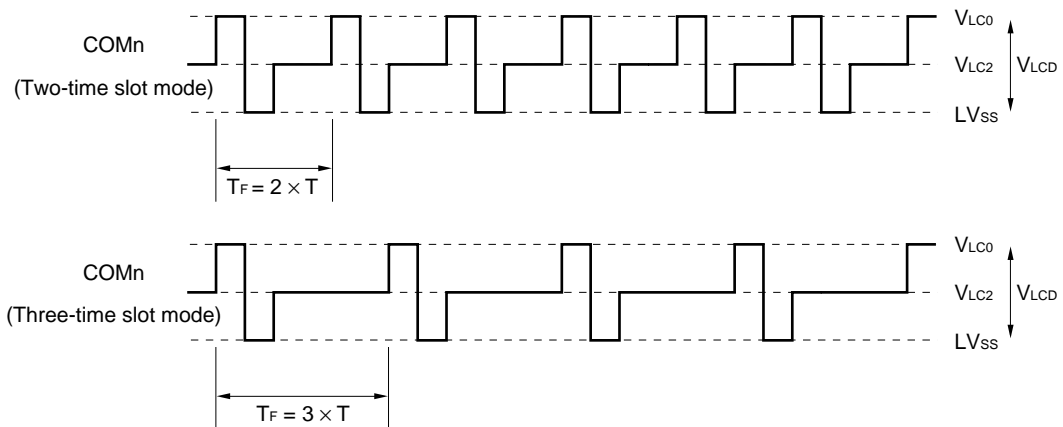


T: One LCD clock period       $T_F$ : Frame frequency

**(c) 1/3 bias method**

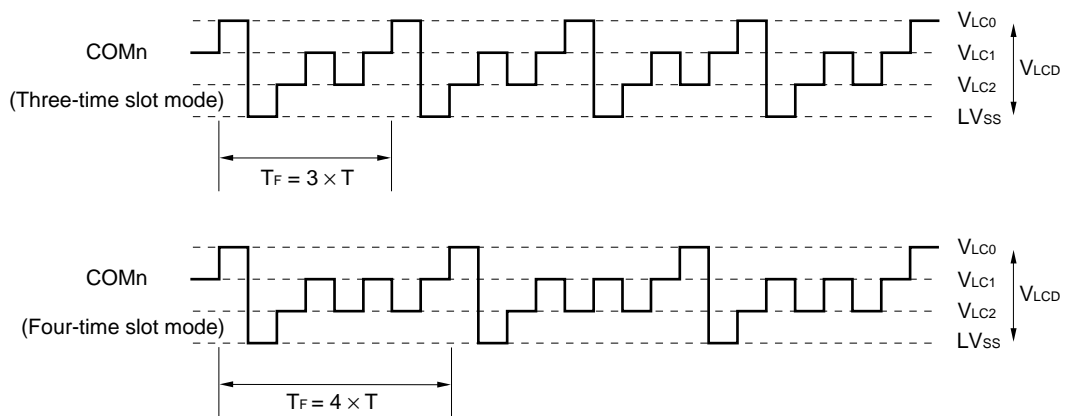

T: One LCD clock period       $T_F$ : Frame frequency

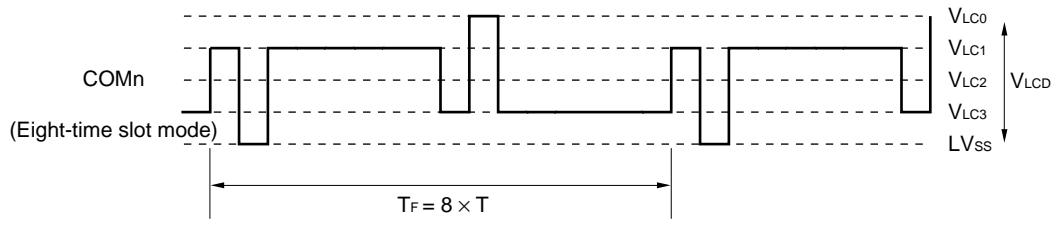(d) 1/4 bias method




T: One LCD clock period

$T_F$ : Frame frequency




Figure 15-9. Voltages and Phases of Common and Segment Signals

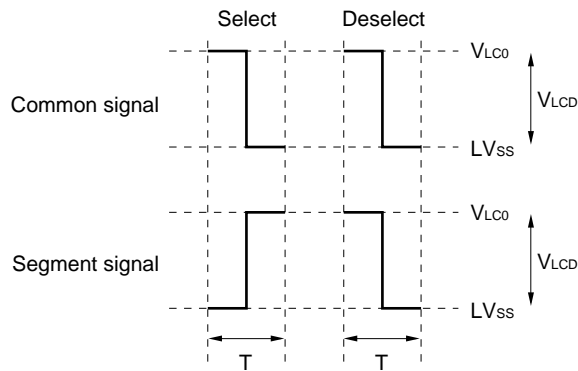(a) Static display mode




T: One LCD clock period

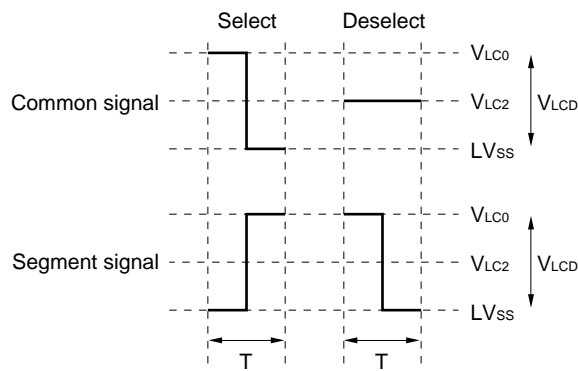(b) 1/2 bias method




T: One LCD clock period

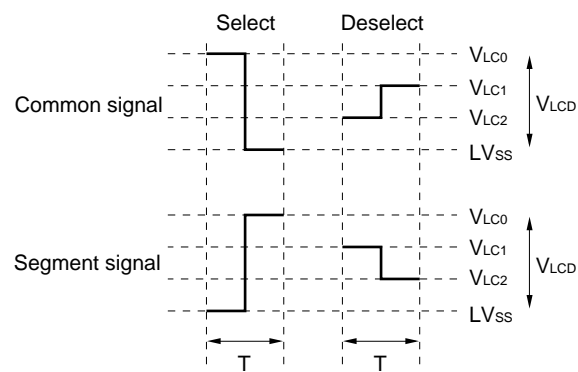(c) 1/3 bias method



T: One LCD clock period

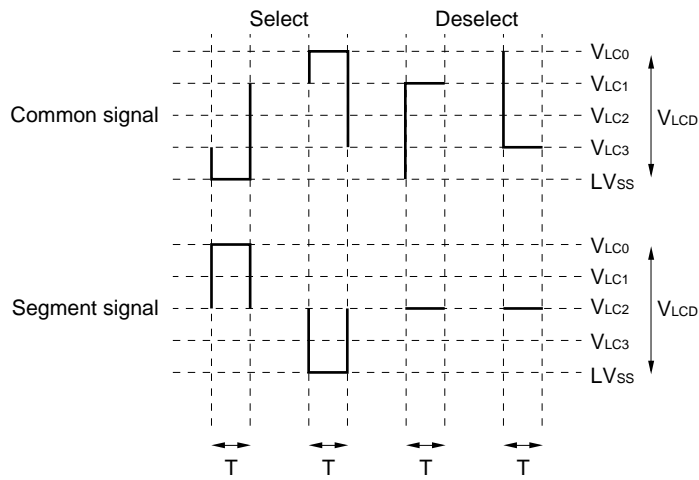(d) 1/4 bias method



T: One LCD clock period

## 15.7 Display Modes

### 15.7.1 Static display example

Figure 15-11 shows how the three-digit LCD panel having the display pattern shown in Figure 15-10 is connected to the segment signals (SEG0 to SEG21) and the common signal (COM0) of the 78K0/LC3 chip. This example displays data "2.3" in the LCD panel. The contents of the display data memory (FA40H to FA55H) correspond to this display.

The following description focuses on numeral "2." ( 2.) displayed in the second digit. To display "2." in the LCD panel, it is necessary to apply the select or deselect voltage to the SEG8 to SEG15 pins according to Table 15-5 at the timing of the common signal COM0; see **Figure 15-10** for the relationship between the segment signals and LCD segments.

**Table 15-5. Select and Deselect Voltages (COM0)**


Segment	SEG8	SEG9	SEG10	SEG11	SEG12	SEG13	SEG14	SEG15
Common								
COM0	Select	Deselect	Select	Select	Deselect	Select	Select	Select

According to Table 15-5, it is determined that the bit-0 pattern of the display data memory locations (FA48H to FA4FH) must be 10110111.

Figure 15-12 shows the LCD drive waveforms of SEG11 and SEG12, and COM0. When the select voltage is applied to SEG11 at the timing of COM0, an alternate rectangle waveform,  $+V_{LCD}/-V_{LCD}$ , is generated to turn on the corresponding LCD segment.

COM1 to COM3 are supplied with the same waveform as for COM0. So, COM0 to COM3 may be connected together to increase the driving capacity.

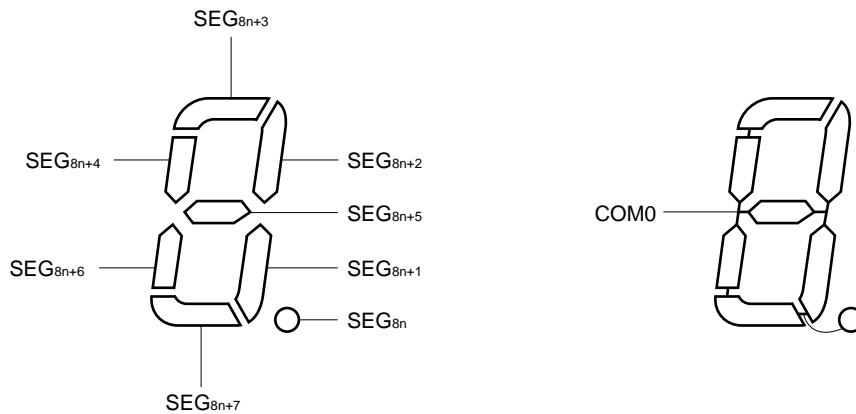**Figure 15-10. Static LCD Display Pattern and Electrode Connections**



**Remark** n = 0, 2

Figure 15-11. Example of Connecting Static LCD Panel


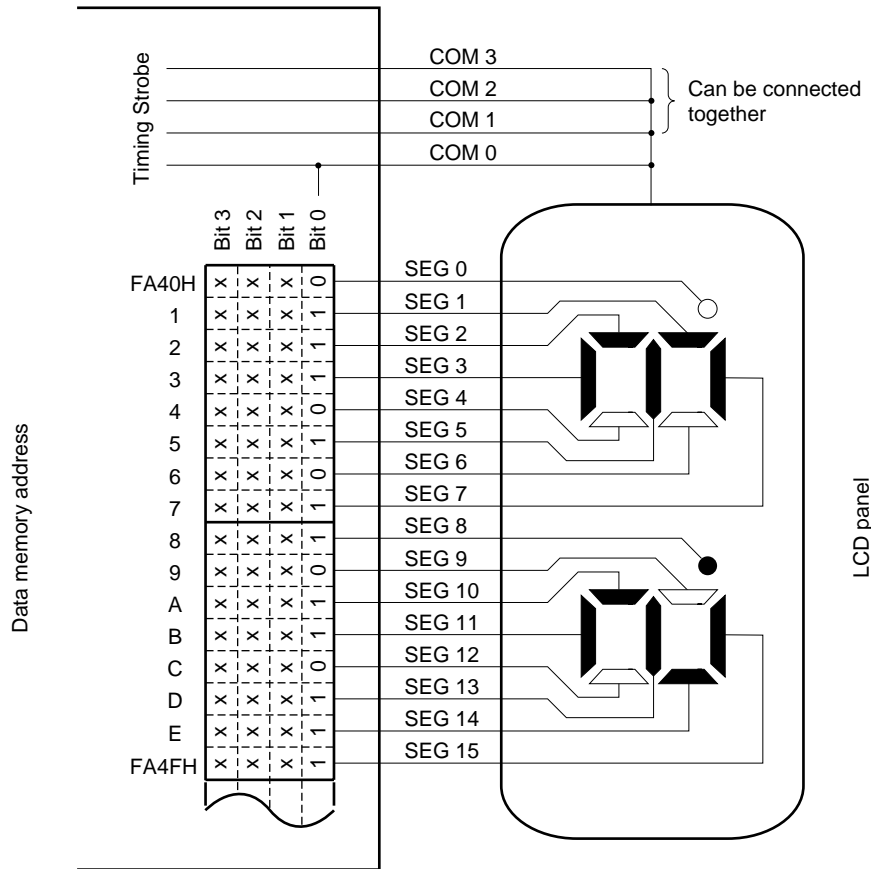


Figure 15-12. Static LCD Drive Waveform Examples

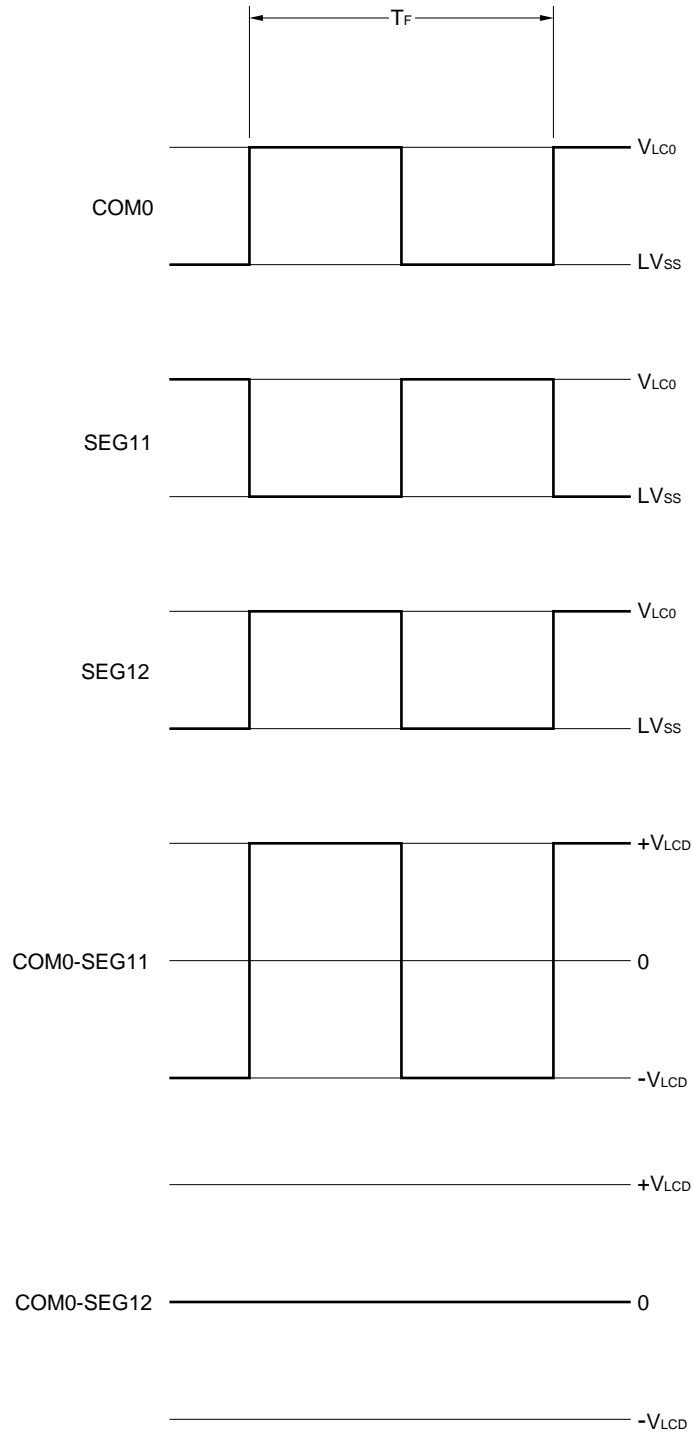

**15.7.2 Two-time-slice display example**

Figure 15-14 shows how the 6-digit LCD panel having the display pattern shown in Figure 15-13 is connected to the segment signals (SEG0 to SEG22) and the common signals (COM0 and COM1) of the 78K0/LC3 chip. This example displays data "2345.6" in the LCD panel. The contents of the display data memory (FA40H to FA55H) correspond to this display.

The following description focuses on numeral "3" ( 3 ) displayed in the fourth digit. To display "3" in the LCD panel, it is necessary to apply the select or deselect voltage to the SEG12 to SEG15 pins according to Table 15-6 at the timing of the common signals COM0 and COM1; see Figure 15-13 for the relationship between the segment signals and LCD segments.


**Table 15-6. Select and Deselect Voltages (COM0 and COM1)**

Segment	SEG12	SEG13	SEG14	SEG15
Common				
COM0	Select	Select	Deselect	Deselect
COM1	Deselect	Select	Select	Select

According to Table 15-6, it is determined that the display data memory location (FA4FH) that corresponds to SEG15 must contain xx10.


Figure 15-15 shows examples of LCD drive waveforms between the SEG15 signal and each common signal. When the select voltage is applied to SEG15 at the timing of COM1, an alternate rectangle waveform, +V<sub>LCD</sub>/-V<sub>LCD</sub>, is generated to turn on the corresponding LCD segment.

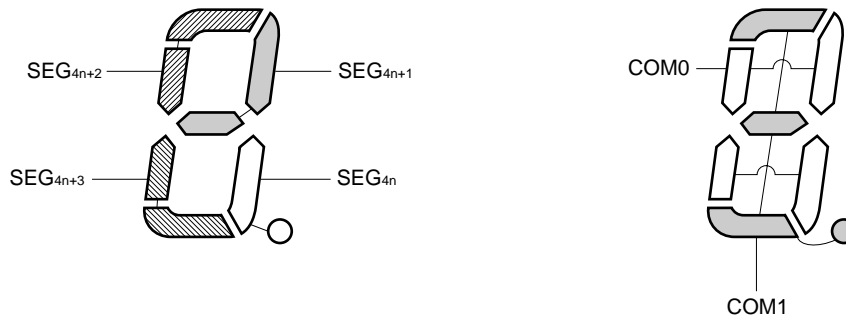**Figure 15-13. Two-Time-Slice LCD Display Pattern and Electrode Connections**




**Remark** n = 0 to 4

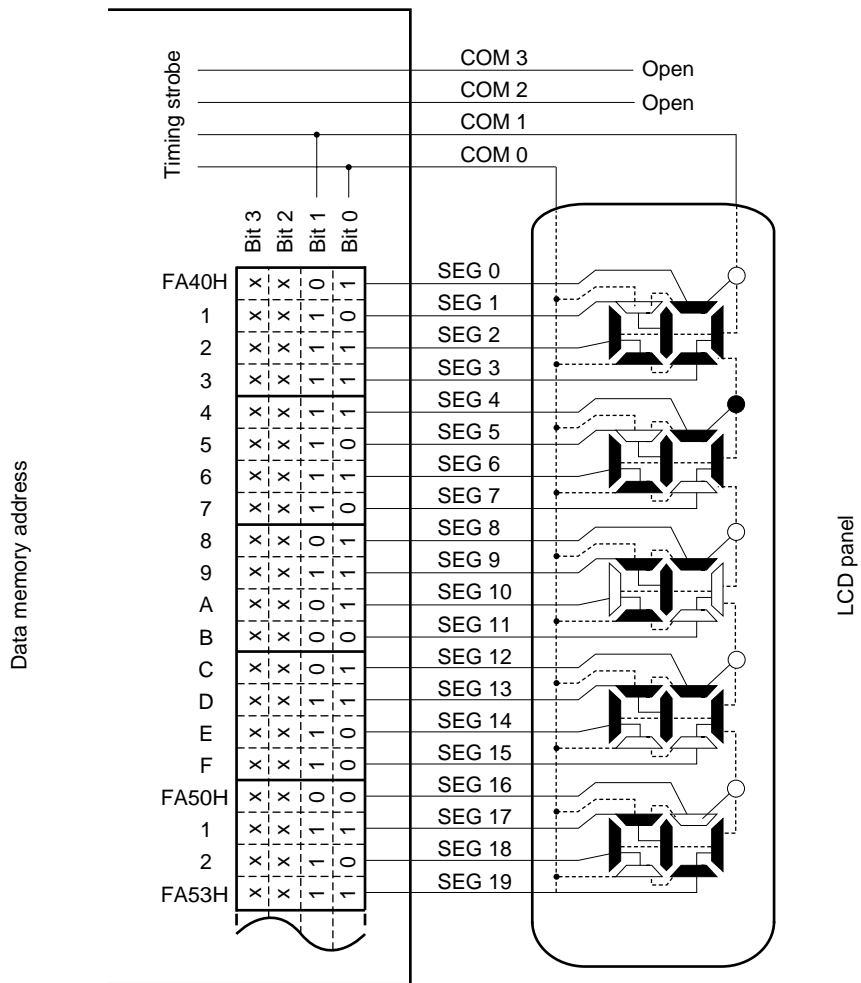Figure 15-14. Example of Connecting Two-Time-Slice LCD Panel



x: Can always be used to store any data because the two-time-slice mode is being used.

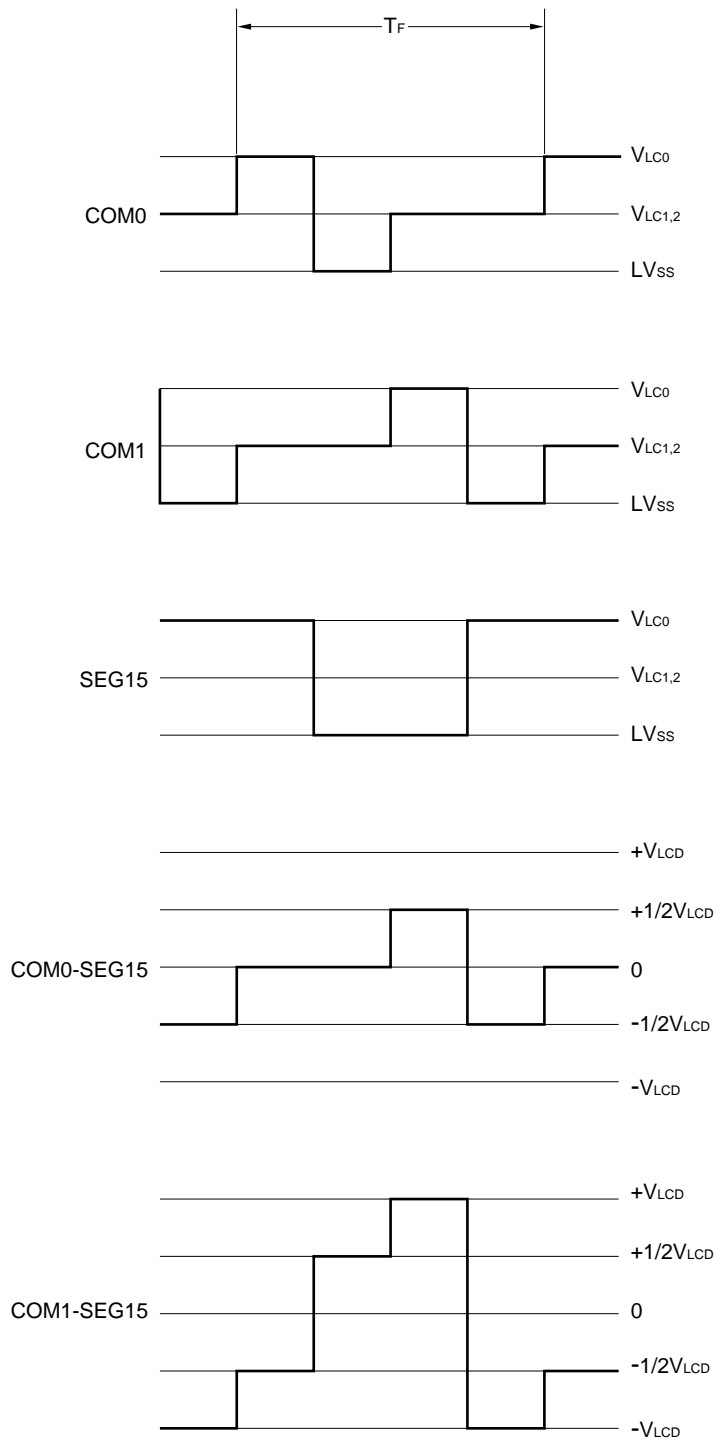Figure 15-15. Two-Time-Slice LCD Drive Waveform Examples (1/2 Bias Method)





**15.7.3 Three-time-slice display example**

Figure 15-17 shows how the 8-digit LCD panel having the display pattern shown in Figure 15-16 is connected to the segment signals (SEG0 to SEG22) and the common signals (COM0 to COM2) of the 78K0/LC3 chip. This example displays data "23456.78" in the LCD panel. The contents of the display data memory (addresses FA40H to FA55H) correspond to this display.

The following description focuses on numeral "6." ( ̄. ) displayed in the third digit. To display "6." in the LCD panel, it is necessary to apply the select or deselect voltage to the SEG6 to SEG8 pins according to Table 15-7 at the timing of the common signals COM0 to COM2; see Figure 15-16 for the relationship between the segment signals and LCD segments.


**Table 15-7. Select and Deselect Voltages (COM0 to COM2)**

Segment \ Common	SEG6	SEG7	SEG8
COM0	Deselect	Select	Select
COM1	Select	Select	Select
COM2	Select	Select	–

According to Table 15-7, it is determined that the display data memory location (FA46H) that corresponds to SEG6 must contain x110.


Figures 15-18 and 15-19 show examples of LCD drive waveforms between the SEG6 signal and each common signal in the 1/2 and 1/3 bias methods, respectively. When the select voltage is applied to SEG6 at the timing of COM1 or COM2, an alternate rectangle waveform,  $+V_{LCD}/-V_{LCD}$ , is generated to turn on the corresponding LCD segment.

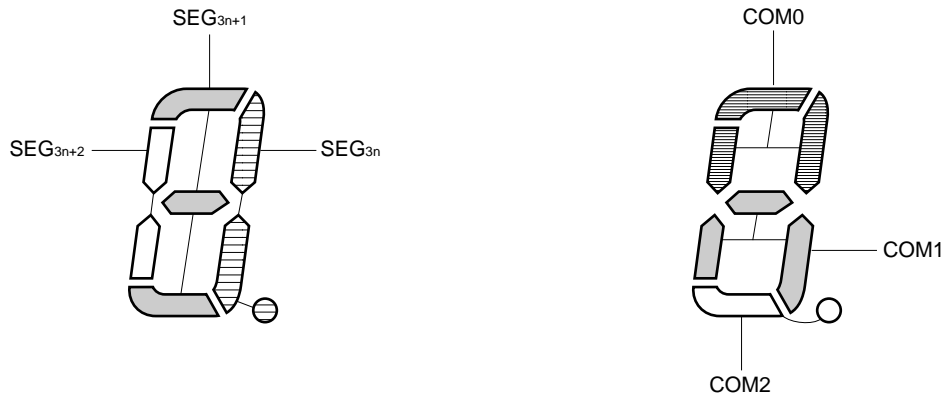**Figure 15-16. Three-Time-Slice LCD Display Pattern and Electrode Connections**



**Remark** n = 0 to 6

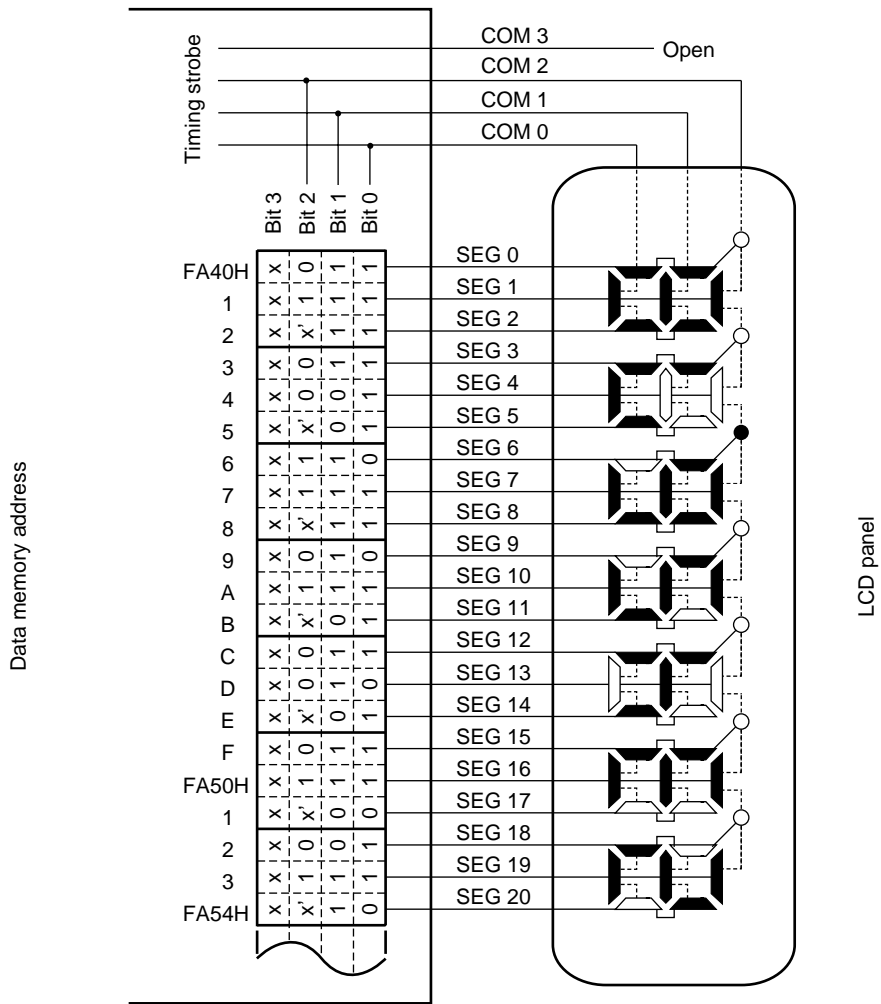Figure 15-17. Example of Connecting Three-Time-Slice LCD Panel



x': Can be used to store any data because there is no corresponding segment in the LCD panel.

x: Can always be used to store any data because the three-time-slice mode is being used.

Figure 15-18. Three-Time-Slice LCD Drive Waveform Examples (1/2 Bias Method)


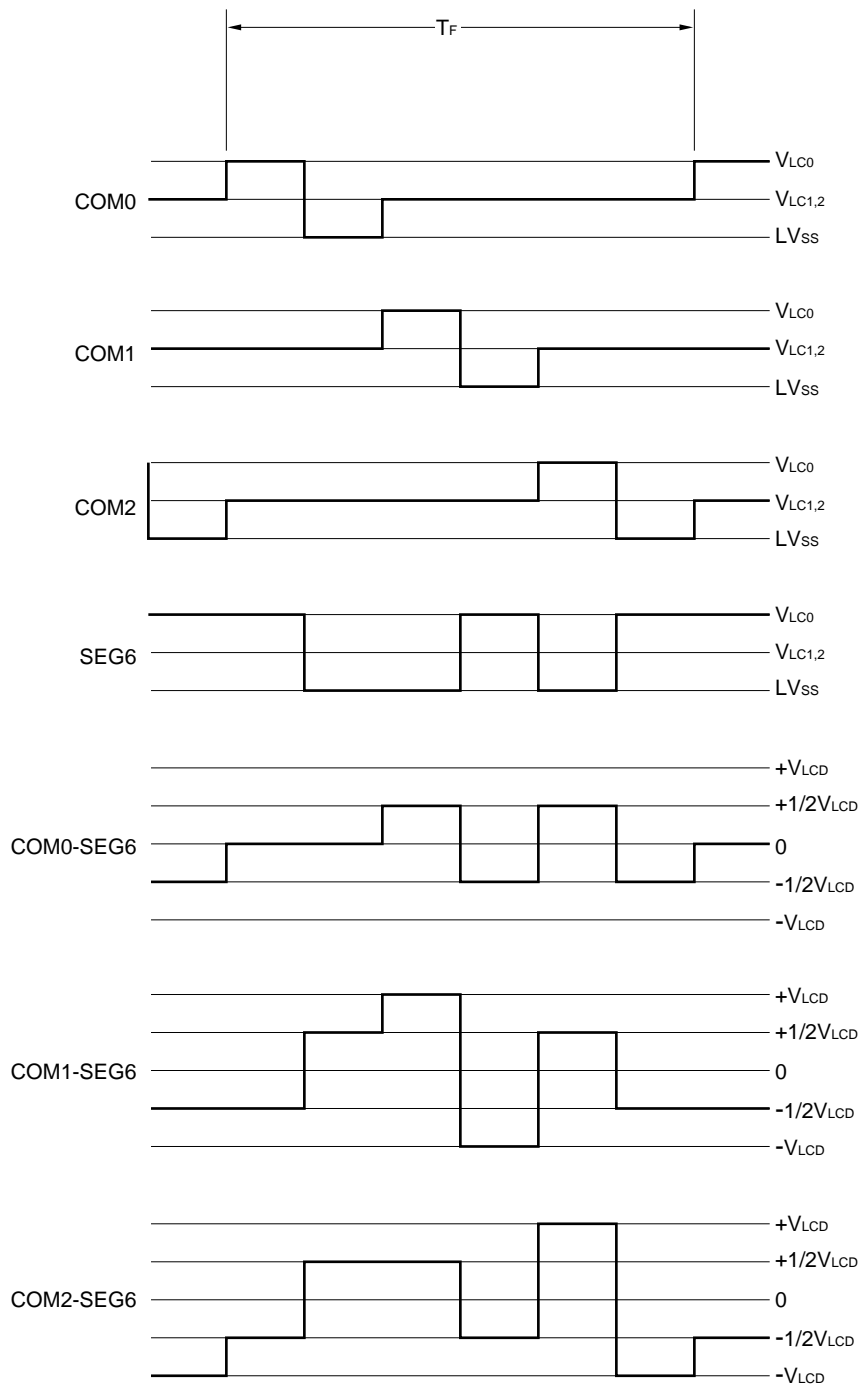


Figure 15-19. Three-Time-Slice LCD Drive Waveform Examples (1/3 Bias Method)

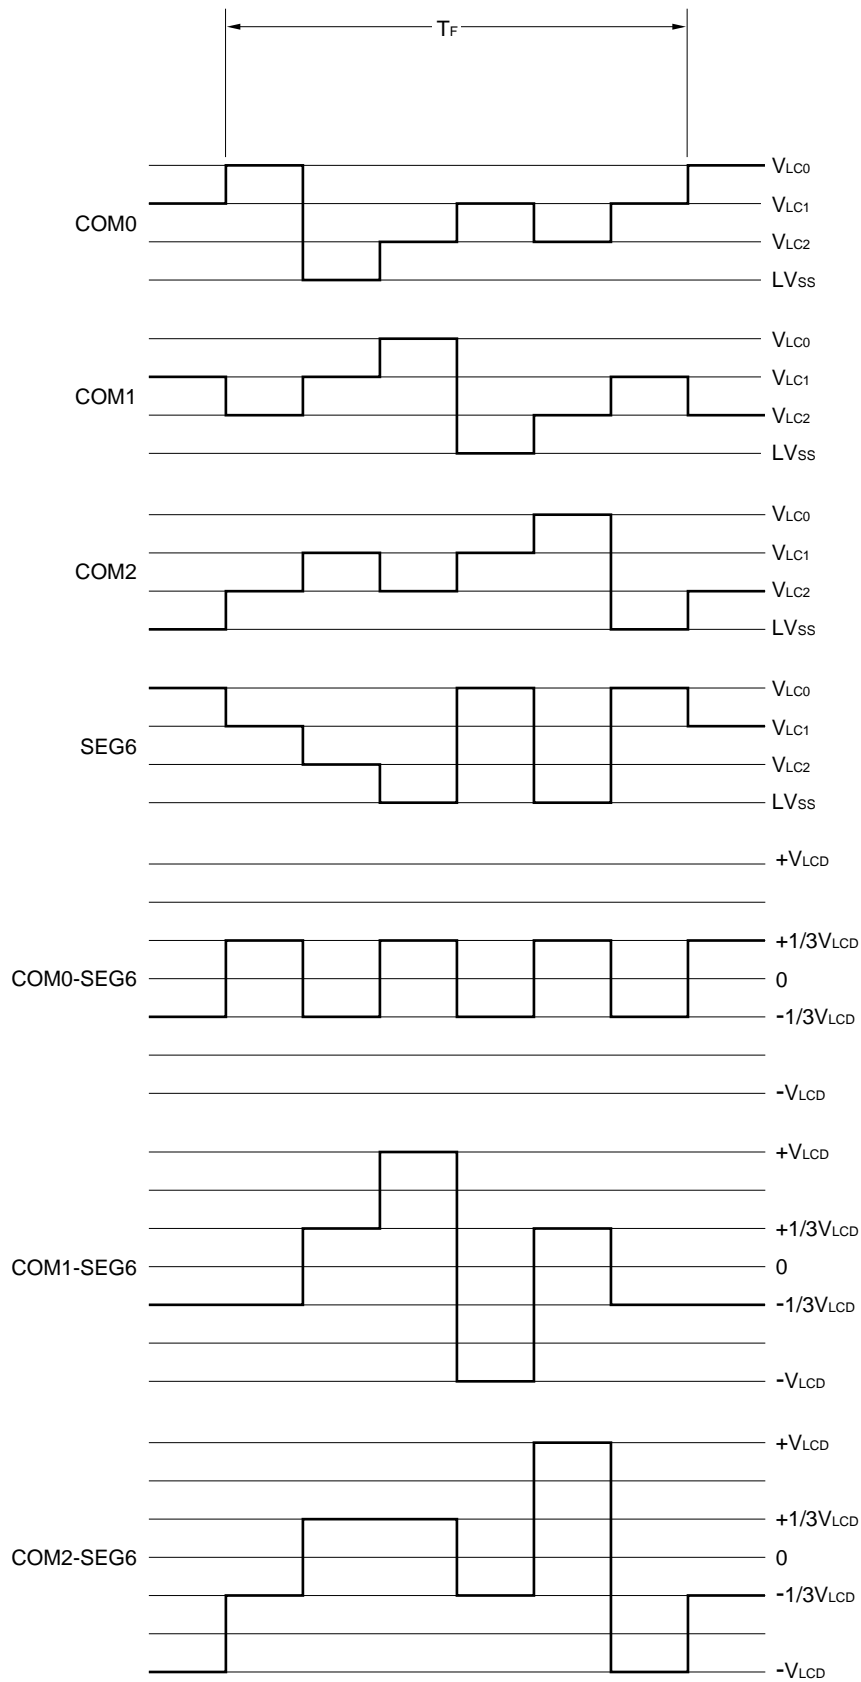

**15.7.4 Four-time-slice display example**

Figure 15-21 shows how the 12-digit LCD panel having the display pattern shown in Figure 15-20 is connected to the segment signals (SEG0 to SEG21) and the common signals (COM0 to COM3) of the 78K0/LC3 chip. This example displays data "23456.789012" in the LCD panel. The contents of the display data memory (addresses FA40H to FA55H) correspond to this display.

The following description focuses on numeral "6." ( ̄. ) displayed in the seventh digit. To display "6." in the LCD panel, it is necessary to apply the select or deselect voltage to the SEG12 and SEG13 pins according to Table 15-8 at the timing of the common signals COM0 to COM3; see Figure 15-20 for the relationship between the segment signals and LCD segments.


**Table 15-8. Select and Deselect Voltages (COM0 to COM3)**

Segment \ Common	SEG12	SEG13
COM0	Select	Select
COM1	Deselect	Select
COM2	Select	Select
COM3	Select	Select

According to Table 15-8, it is determined that the display data memory location (FA4CH) that corresponds to SEG12 must contain 1101.

Figure 15-22 shows examples of LCD drive waveforms between the SEG12 signal and each common signal. When the select voltage is applied to SEG12 at the timing of COM0, an alternate rectangle waveform,  $+V_{LCD}/-V_{LCD}$ , is generated to turn on the corresponding LCD segment.

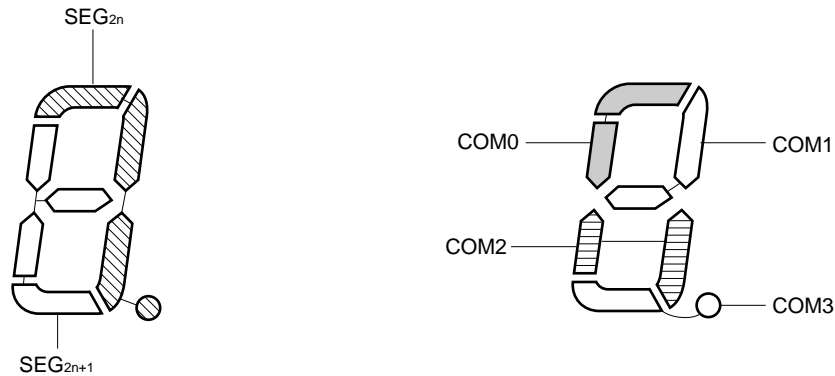**Figure 15-20. Four-Time-Slice LCD Display Pattern and Electrode Connections**



**Remark** n = 0 to 10

Figure 15-21. Example of Connecting Four-Time-Slice LCD Panel


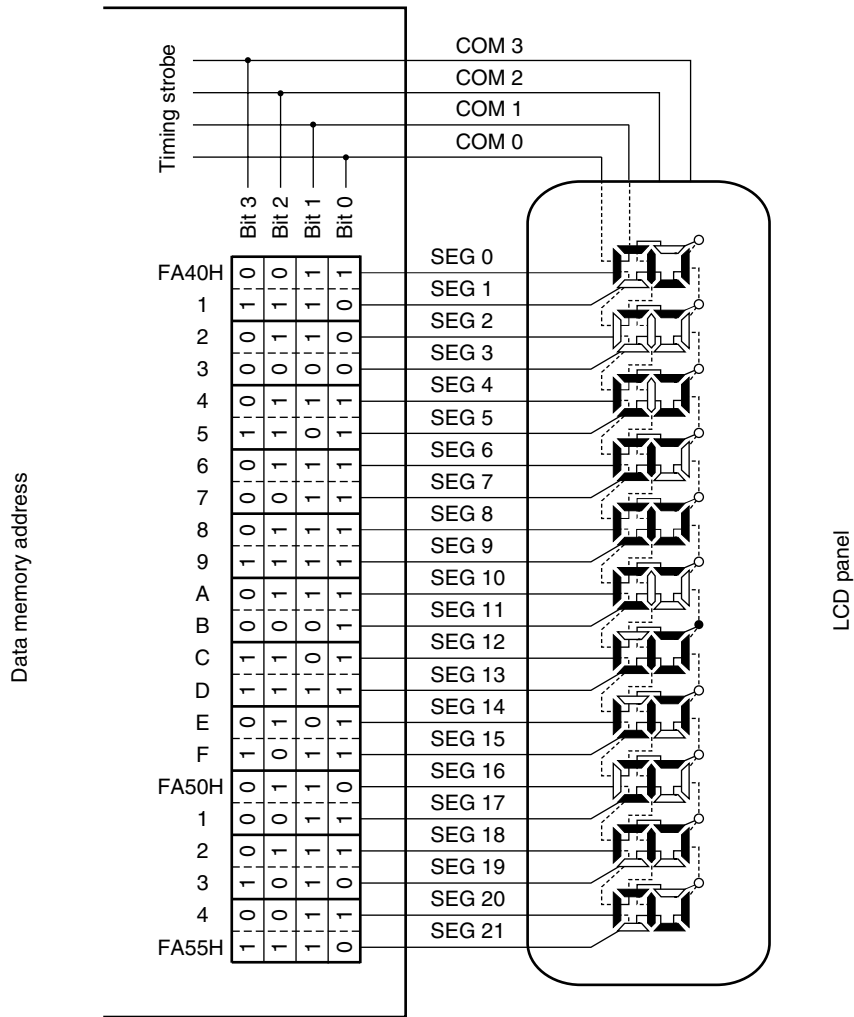


Figure 15-22. Four-Time-Slice LCD Drive Waveform Examples (1/3 Bias Method)

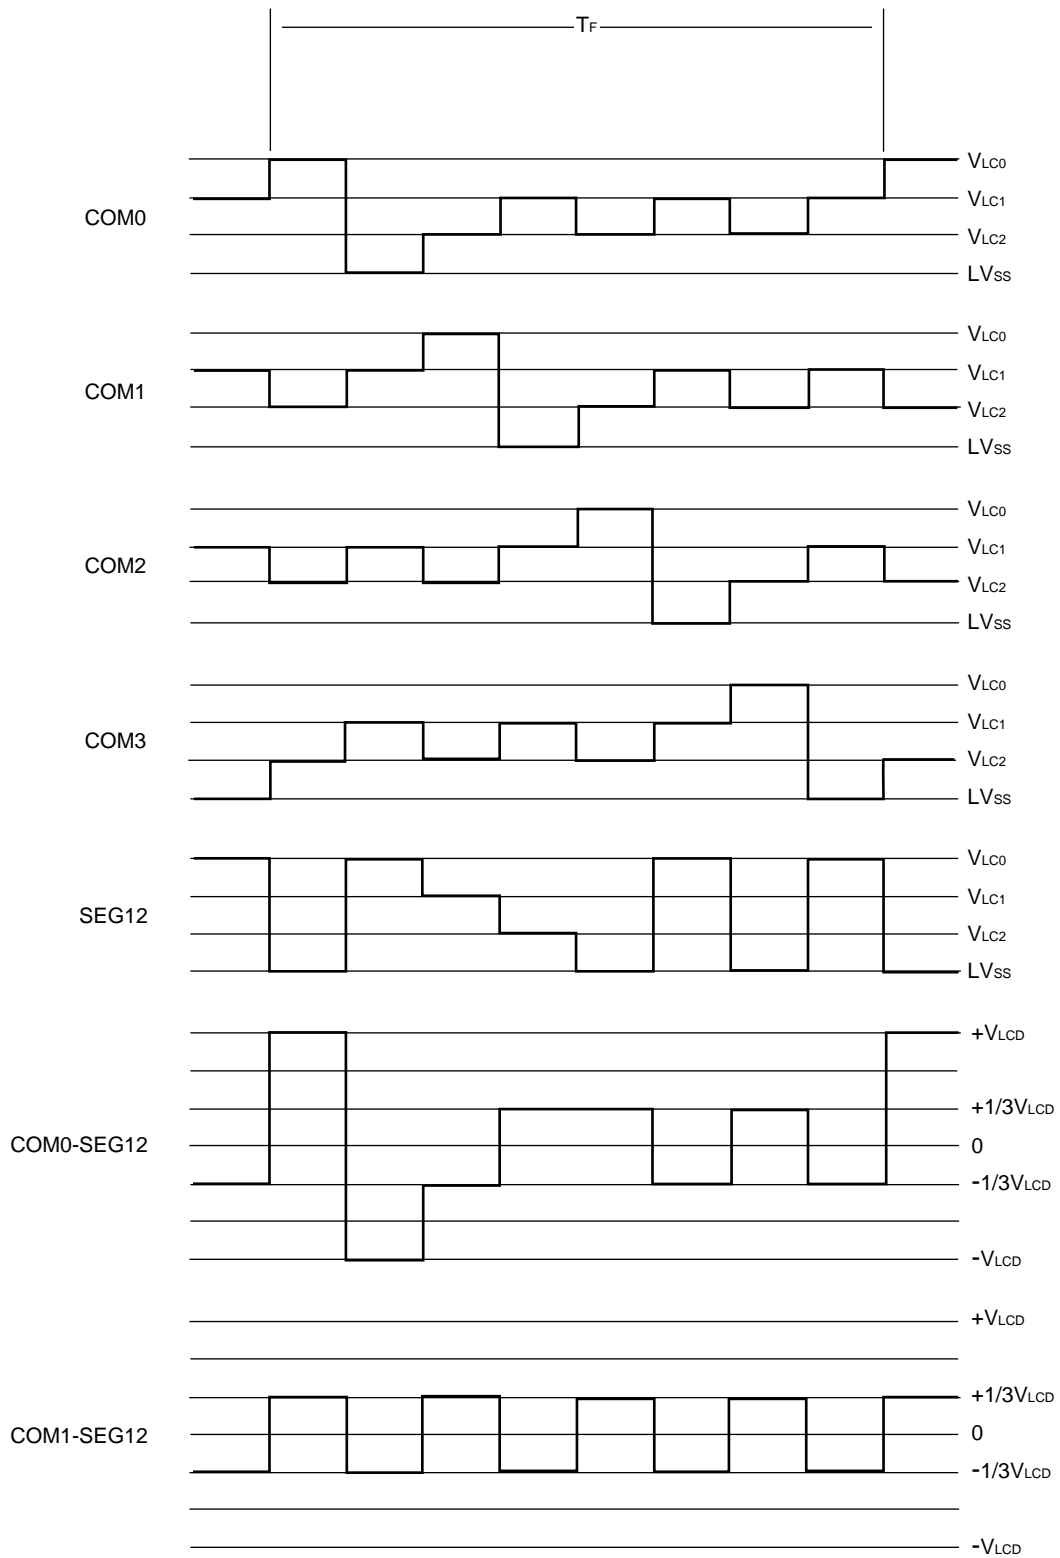

**Remark** The waveforms for COM2 to SEG12 and COM3 to SEG12 are omitted.

### 15.8 Supplying LCD Drive Voltages $V_{LC0}$ , $V_{LC1}$ , $V_{LC2}$ and $V_{LC3}$

With the 78K0/LC3, a LCD drive power supply can be generated using either of two types of methods: internal resistance division method or external resistance division method.

#### 15.8.1 Internal resistance division method

The 78K0/LC3 incorporates voltage divider resistors for generating LCD drive power supplies. Using internal voltage divider resistors, a LCD drive power supply that meet each bias method listed in Table 15-9 can be generated, without using external voltage divider resistors.

**Table 15-9. LCD Drive Voltages (with On-Chip Voltage Divider Resistors)**


Bias Method / LCD Drive Voltage Pin	No Bias (Static)	1/2 Bias Method	1/3 Bias Method	1/4 Bias Method
$V_{LC0}$	$V_{LCD}$	$V_{LCD}$	$V_{LCD}$	$V_{LCD}$
$V_{LC1}$	$\frac{2}{3}V_{LCD}$	$\frac{1}{2}V_{LCD}$ <sup>Note</sup>	$\frac{2}{3}V_{LCD}$	$\frac{3}{4}V_{LCD}$
$V_{LC2}$	$\frac{1}{3}V_{LCD}$		$\frac{1}{3}V_{LCD}$	$\frac{2}{4}V_{LCD}$
$V_{LC3}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$\frac{1}{4}V_{LCD}$

**Note** For the 1/2 bias method, it is necessary to connect the  $V_{LC1}$  and  $V_{LC2}$  pins externally.


Figure 15-23 shows examples of generating LCD drive voltages internally according to Table 15-9.

**Figure 15-23. Examples of LCD Drive Power Connections (Internal Resistance Division Method) (1/2)**

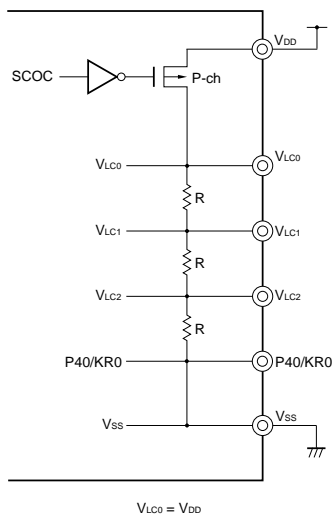**(a) 1/3 bias method and static display mode (MDSET1, MDSET0 = 0, 1)**  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )



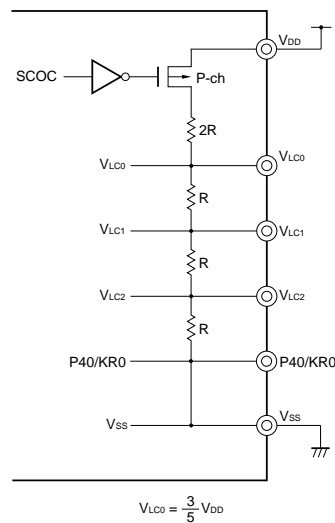**(b) 1/3 bias method and static display mode (MDSET1, MDSET0 = 1, 1)**  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 3\text{ V}$ )

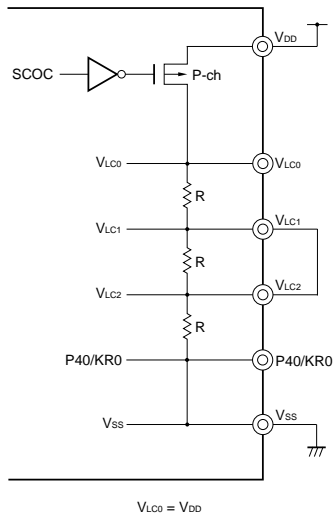


**Remark** It is recommended to use the external resistance division method when using the static display mode, in order to reduce power consumed by the voltage divider resistor.

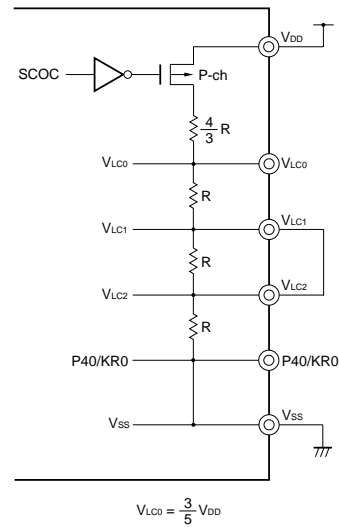


Figure 15-23. Examples of LCD Drive Power Connections (Internal Resistance Division Method) (2/2)

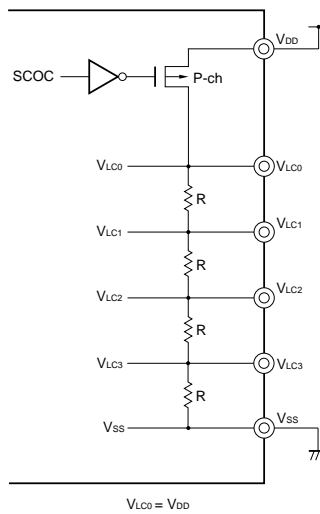
(c) 1/2 bias method  
(MDSET1, MDSET0 = 0, 1)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )



(d) 1/4 bias method  
(MDSET1, MDSET0 = 1, 1)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 3\text{ V}$ )



(e) 1/4 bias method  
(MDSET1, MDSET0 = 0, 1)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )




15.8.2 External resistance division method


The 78K0/LC3 can also use external voltage divider resistors for generating LCD drive power supplies, without using internal resistors. Figure 15-24 shows examples of LCD drive voltage connection, corresponding to each bias method.

Figure 15-24. Examples of LCD Drive Power Connections (External Resistance Division Method) (1/2)

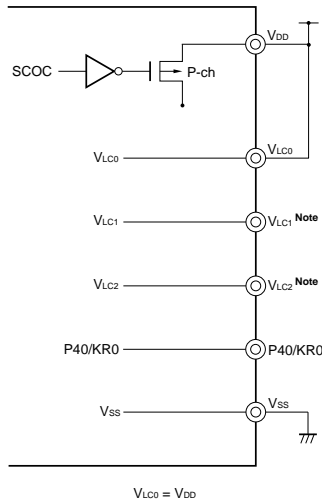(a) Static display mode  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )




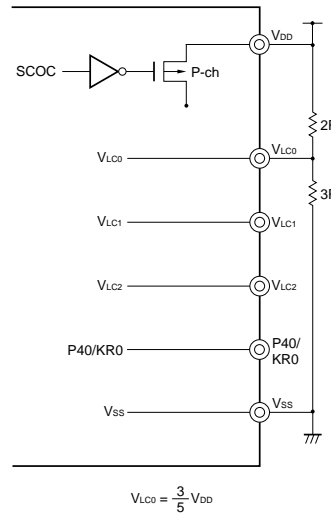(b) Static display mode  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 3\text{ V}$ )



**Note** Connect  $V_{LC1}$  and  $V_{LC2}$  directly to GND or  $V_{LC0}$ .

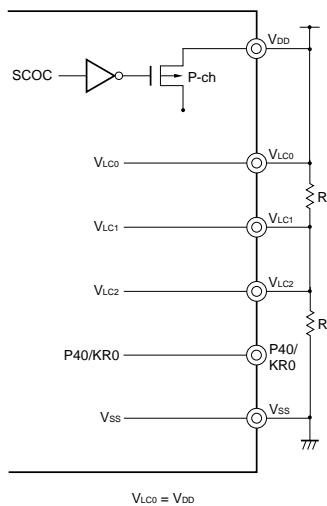(c) 1/2 bias method  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )



(d) 1/2 bias method  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 3\text{ V}$ )



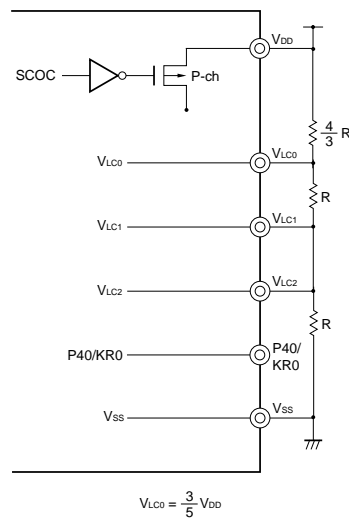


Figure 15-24. Examples of LCD Drive Power Connections (External Resistance Division Method) (2/2)

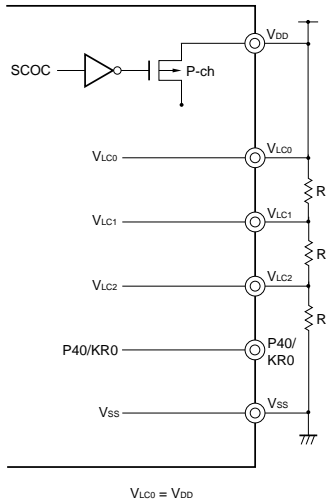
(e) 1/3 bias method  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )



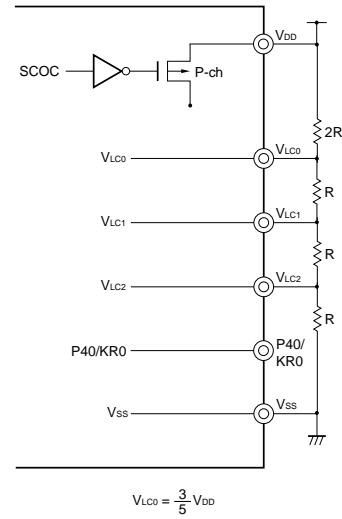
(f) 1/3 bias method  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 3\text{ V}$ )



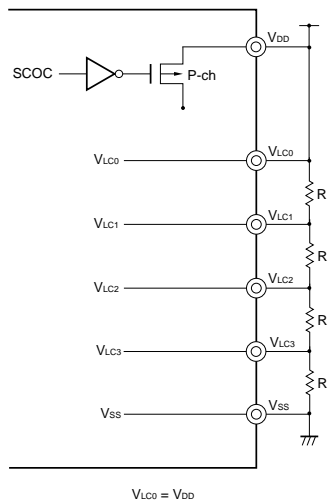(g) 1/4 bias method  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 5\text{ V}$ )



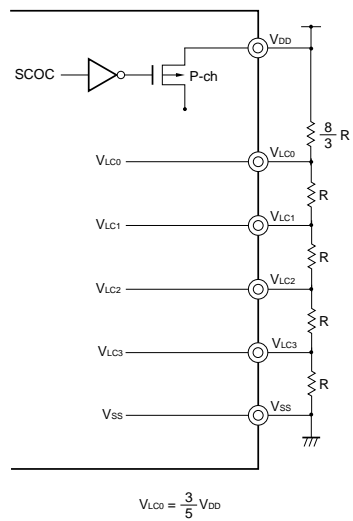(h) 1/4 bias method  
(MDSET1, MDSET0 = 0, 0)  
(example of  $V_{DD} = 5\text{ V}$ ,  $V_{LC0} = 3\text{ V}$ )



## CHAPTER 16 MANCHESTER CODE GENERATOR

### 16.1 Functions of Manchester Code Generator

The following three types of modes are available for the Manchester code generator.

**(1) Operation stop mode**

This mode is used when output by the Manchester code generator/bit sequential buffer is not performed. This mode reduces the power consumption.

For details, refer to **16.4.1 Operation stop mode**.

**(2) Manchester code generator mode**

This mode is used to transmit Manchester code from the MCGO pin.

The transfer bit length can be set and transfers of various bit lengths are enabled. Also, the output level of the data transfer and LSB- or MSB-first can be set for 8-bit transfer data.

**(3) Bit sequential buffer mode**

This mode is used to transmit bit sequential data from the MCGO pin.

The transfer bit length can be set and transfers of various bit lengths are enabled. Also, the output level of the data transfer and LSB- or MSB-first can be set for 8-bit transfer data.


### 16.2 Configuration of Manchester Code Generator

The Manchester code generator includes the following hardware.

**Table 16-1. Configuration of Manchester Code Generator**


Item	Configuration
Registers	MCG transmit buffer register (MC0TX) MCG transmit bit count specification register (MC0BIT)
Control registers	MCG control register 0 (MC0CTL0) MCG control register 1 (MC0CTL1) MCG control register 2 (MC0CTL2) MCG status register (MC0STR) Port mode register 3 (PM3) Port register 3 (P3)

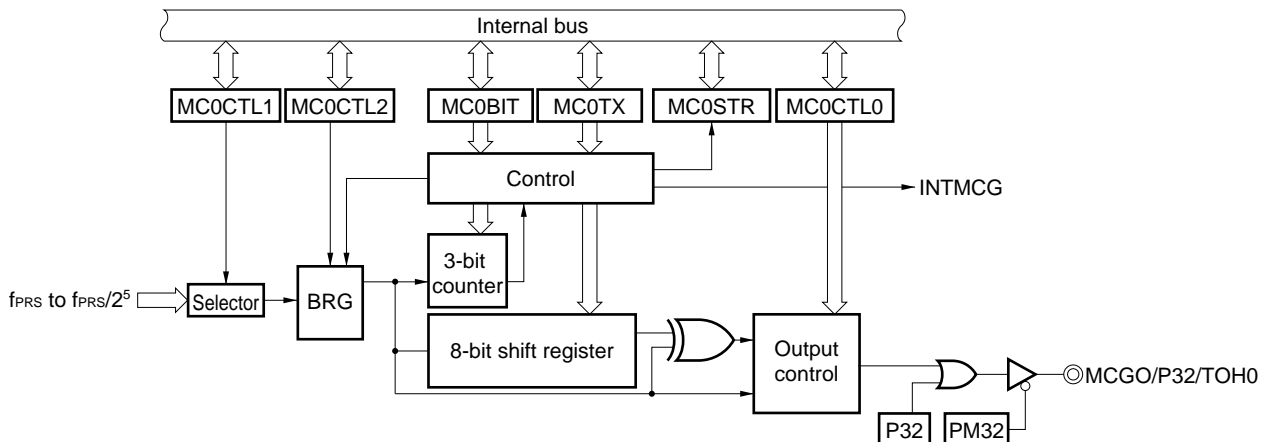Figure 16-1. Block Diagram of Manchester Code Generator



**Remark** BRG: Baud rate generator  
 $f_{PRS}$ : Peripheral hardware clock frequency  
 MC0BIT: MCG transmit bit count specification register  
 MC0CTL2 to MC0CTL0: MCG control registers 2 to 0  
 MC0STR: MCG status register  
 MC0TX: MCG transmit buffer register

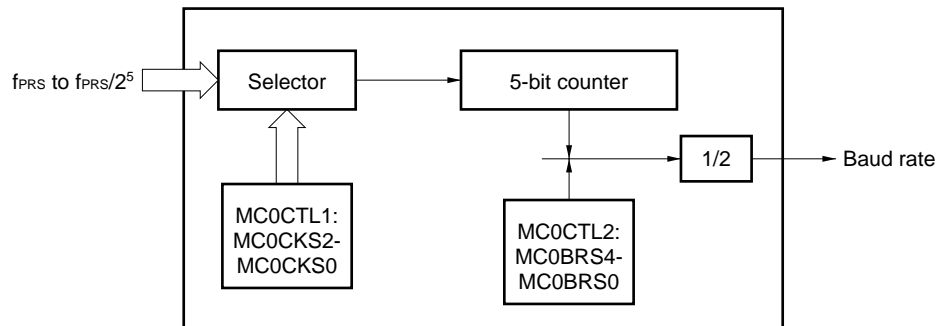Figure 16-2. Block Diagram of Baud Rate Generator



**Remark**  $f_{PRS}$ : Peripheral hardware clock frequency  
 MC0CTL2, MC0CTL 1: MCG control registers 2, 1  
 MC0CKS2 to MC0CKS0: Bits 2 to 0 of MC0CTL1 register  
 MC0BRS4 to MC0BRS0: Bits 4 to 0 of MC0CTL2 register

**(1) MCG transmit buffer register (MC0TX)**

This register is used to set the transmit data. A transmit operation starts when data is written to MC0TX while bit 7 (MC0PWR) of MCG control register 0 (MC0CTL0) is 1.

The data written to MC0TX is converted into serial data by the 8-bit shift register, and output to the MCGO pin.

Manchester code or bit sequential data can be set as the output code using bit 1 (MC0OSL) of MCG control register 0 (MC0CTL0).

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to FFH.

**(2) MCG transmit bit count specification register (MC0BIT)**

This register is used to set the number of transmit bits.

Set the transmit bit count to this register before setting the transmit data to MC0TX.

In continuous transmission, the number of transmit bits to be transmitted next needs to be written after the occurrence of a transmission start interrupt (INTMCG). However, if the next transmit count is the same number as the previous transmit count, this register does not need to be written.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 07H.

**Figure 16-3. Format of MCG Transmit Bit Count Specification Register (MC0BIT)**



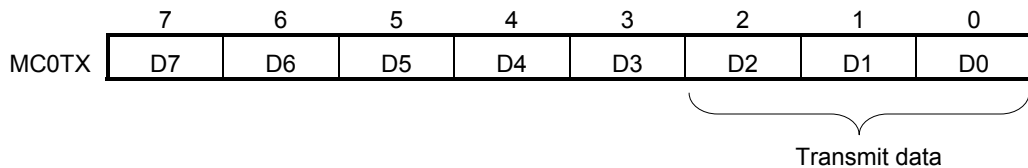
Address: FF4BH After reset: 07H R/W

Symbol	7	6	5	4	3	<2>	<1>	<0>
MC0BIT	0	0	0	0	0	MC0BIT2	MC0BIT1	MC0BIT0

MC0BIT2	MC0BIT1	MC0BIT0	Transmit bit count setting
0	0	0	1 bit
0	0	1	2 bits
0	1	0	3 bits
0	1	1	4 bits
1	0	0	5 bits
1	0	1	6 bits
1	1	0	7 bits
1	1	1	8 bits

**Remark** When the number of transmit bits is set as 7 bits or smaller, the lower bits are always transmitted regardless of MSB/LSB settings as the transmission start bit.

ex. When the number of transmit bits is set as 3 bits, and D7 to D0 are written to MCG transmit buffer register (MC0TX)



### 16.3 Registers Controlling Manchester Code Generator

The following six types of registers are used to control the Manchester code generator.

- MCG control register 0 (MC0CTL0)
- MCG control register 1 (MC0CTL1)
- MCG control register 2 (MC0CTL2)
- MCG status register (MC0STR)
- Port mode register 3 (PM3)
- Port register 3 (P3)

#### (1) MCG control register 0 (MC0CTL0)

This register is used to set the operation mode and to enable/disable the operation.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 10H.

**Figure 16-4. Format of MCG Control Register 0 (MC0CTL0)**

Address: FF4CH After reset: 10H R/W

Symbol	<7>	6	5	<4>	3	2	<1>	<0>
MC0CTL0	MC0PWR	0	0	MC0DIR	0	0	MC0OSL	MC0OLV

MC0PWR	Operation control
0	Operation stopped
1	Operation enabled

MC0DIR	First bit specification
0	MSB
1	LSB

MC0OSL	Data format
0	Manchester code
1	Bit sequential data

MC0OLV	Output level when transmission suspended
0	Low level
1	High level

**Caution** Clear (0) the MC0PWR bit before rewriting the MC0DIR, MC0OSL, and MC0OLV bits (it is possible to rewrite these bits by an 8-bit memory manipulation instruction at the same time when the MC0PWR bit is set (1)).

**(2) MCG control register 1 (MC0CTL1)**

This register is used to set the base clock of the Manchester code generator.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

**Figure 16-5. Format of MCG Control Register 1 (MC0CTL1)**

Address: FF4DH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
MC0CTL1	0	0	0	0	0	MC0CKS2	MC0CKS1	MC0CKS0

MC0CKS2	MC0CKS1	MC0CKS0	Base clock (f <sub>CLK</sub> ) selection <sup>Note 1</sup>
0	0	0	f <sub>PRS</sub> <sup>Note 2</sup> (10 MHz)
0	0	1	f <sub>PRS</sub> /2 (5 MHz)
0	1	0	f <sub>PRS</sub> /2 <sup>2</sup> (2.5 MHz)
0	1	1	f <sub>PRS</sub> /2 <sup>3</sup> (1.25 MHz)
1	0	0	f <sub>PRS</sub> /2 <sup>4</sup> (625 kHz)
1	0	1	f <sub>PRS</sub> /2 <sup>5</sup> (312.5 kHz)
1	1	0	Setting prohibited
1	1	1	

**Notes 1.** If the peripheral hardware clock (f<sub>PRS</sub>) operates on the high-speed system clock (f<sub>XH</sub>) (XSEL = 1), the f<sub>PRS</sub> operating frequency varies depending on the supply voltage.

- V<sub>DD</sub> = 2.7 to 5.5 V: f<sub>PRS</sub> ≤ 10 MHz
- V<sub>DD</sub> = 1.8 to 2.7 V: f<sub>PRS</sub> ≤ 5 MHz

**2.** If the peripheral hardware clock (f<sub>PRS</sub>) operates on the internal high-speed oscillation clock (f<sub>RH</sub>) (XSEL = 0), when 1.8 V ≤ V<sub>DD</sub> < 2.7 V, the setting of MC0CKS2 = MC0CKS1 = MC0CKS0 = 0 (base clock: f<sub>PRS</sub>) is prohibited.

**Caution** Clear bit 7 (MC0PWR) of the MC0CTL0 register to 0 before rewriting the MC0CKS2 to MC0CKS0 bits.

- Remarks 1.** f<sub>PRS</sub>: Peripheral hardware clock frequency
- 2.** Figures in parentheses are for operation with f<sub>PRS</sub> = 10 MHz.



**(3) MCG control register 2 (MC0CTL2)**

This register is used to set the transmit baud rate.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 1FH.

**Figure 16-6. Format of MCG Control Register 2 (MC0CTL2)**

Address: FF4EH After reset: 1FH R/W

Symbol	7	6	5	4	3	2	1	0
MC0CTL2	0	0	0	MC0BRS4	MC0BRS3	MC0BRS2	MC0BRS1	MC0BRS0

MC0BRS4	MC0BRS3	MC0BRS2	MC0BRS1	MC0BRS0	k	Output clock selection of 5-bit counter
0	0	0	×	×	4	$f_{XCLK}/4$
0	0	1	0	0	4	$f_{XCLK}/4$
0	0	1	0	1	5	$f_{XCLK}/5$
0	0	1	1	0	6	$f_{XCLK}/6$
0	0	1	1	1	7	$f_{XCLK}/7$
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
1	1	1	0	0	28	$f_{XCLK}/28$
1	1	1	0	1	29	$f_{XCLK}/29$
1	1	1	1	0	30	$f_{XCLK}/30$
1	1	1	1	1	31	$f_{XCLK}/31$

- Cautions**
1. Clear bit 7 (MC0PWR) of the MC0CTL0 register to 0 before rewriting the MC0BRS4 to MC0BRS0 bits.
  2. The value from further dividing the output clock of the 5-bit counter by 2 is the baud rate value.

- Remarks**
1.  $f_{XCLK}$ : Frequency of the base clock selected by the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register
  2. k: Value set by the MC0BRS4 to MC0BRS0 bits (k = 4, 5, 6, 7, ..., 31)
  3. ×: Don't care

**(4) MCG status register (MC0STR)**

This register is used to indicate the operation status of the Manchester code generator.

This register can be read by a 1-bit or 8-bit memory manipulation instruction. Writing to this register is not possible.

Reset signal generation or setting MC0PWR = 0 clears this register to 00H.

Figure 16-7. Format of MCG Status Register (MC0STR)

Address: FF47H After reset: 00H R

Symbol	<7>	6	5	4	3	2	1	0
MC0STR	MC0TSF	0	0	0	0	0	0	0

MC0TSF	Data transmission status
0	<ul style="list-style-type: none"> <li>Reset signal generation</li> <li>MC0PWR = 0</li> <li>If the next transfer data is not written to MC0TX when a transmission is completed</li> </ul>
1	Transmission operation in progress

**Caution** This flag always indicates 1 during continuous transmission. Do not initialize a transmission operation without confirming that this flag has been cleared.

## 16.4 Operation of Manchester Code Generator

The Manchester code generator has the three modes described below.

- Operation stop mode
- Manchester code generator mode
- Bit sequential buffer mode

### 16.4.1 Operation stop mode

Transmissions are not performed in the operation stop mode. Therefore, the power consumption can be reduced. In addition, the P32/TOH0/MCGO pin is used as an ordinary I/O port in this mode.

#### (1) Register description

MCG control register 0 (MC0CTL0) is used to set the operation stop mode.

To set the operation stop mode, clear bit 7 (MC0PWR) of MC0CTL0 to 0.

##### (a) MCG control register 0 (MC0CTL0)

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 10H.

Address: FF4CH After reset: 10H R/W

Symbol	<7>	6	5	<4>	3	2	<1>	<0>
MC0CTL0	MC0PWR	0	0	MC0DIR	0	0	MC0OSL	MC0OLV

MC0PWR	Operation control
0	Operation stopped

### 16.4.2 Manchester code generator mode

This mode is used to transmit data in Manchester code format using the MCGO pin.

#### (1) Register description

MCG control register 0 (MC0CTL0), MCG control register 1 (MC0CTL1), and MCG control register 2 (MC0CTL2) are used to set the Manchester code generator mode.

##### (a) MCG control register 0 (MC0CTL0)

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 10H.

Address: FF4CH After reset: 10H R/W

Symbol	<7>	6	5	<4>	3	2	<1>	<0>
MC0CTL0	MC0PWR	0	0	MC0DIR	0	0	MC0OSL	MC0OLV

MC0PWR	Operation control
0	Operation stopped
1	Operation enabled

MC0DIR	First bit specification
0	MSB
1	LSB

MC0OSL	Data format
0	Manchester code
1	Bit sequential data

MC0OLV	Output level when transmission suspended
0	Low level
1	High level

**Caution** Clear (0) the MC0PWR bit before rewriting the MC0DIR, MC0OSL, and MC0OLV bits (it is possible to rewrite these bits by an 8-bit memory manipulation instruction at the same time when the MC0PWR bit is set (1)).

**(b) MCG control register 1 (MC0CTL1)**

This register is used to set the base clock of the Manchester code generator.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

Address: FF4DH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
MC0CTL1	0	0	0	0	0	MC0CKS2	MC0CKS1	MC0CKS0

MC0CKS2	MC0CKS1	MC0CKS0	Base clock (f <sub>XCLK</sub> ) selection <sup>Note 1</sup>
0	0	0	f <sub>PRS</sub> <sup>Note 2</sup> (10 MHz)
0	0	1	f <sub>PRS</sub> /2 (5 MHz)
0	1	0	f <sub>PRS</sub> /2 <sup>2</sup> (2.5 MHz)
0	1	1	f <sub>PRS</sub> /2 <sup>3</sup> (1.25 MHz)
1	0	0	f <sub>PRS</sub> /2 <sup>4</sup> (625 kHz)
1	0	1	f <sub>PRS</sub> /2 <sup>5</sup> (312.5 kHz)
1	1	0	Setting prohibited
1	1	1	

**Notes 1.** If the peripheral hardware clock (f<sub>PRS</sub>) operates on the high-speed system clock (f<sub>XH</sub>) (XSEL = 1), the f<sub>PRS</sub> operating frequency varies depending on the supply voltage.

- V<sub>DD</sub> = 2.7 to 5.5 V: f<sub>PRS</sub> ≤ 10 MHz
- V<sub>DD</sub> = 1.8 to 2.7 V: f<sub>PRS</sub> ≤ 5 MHz

**2.** If the peripheral hardware clock (f<sub>PRS</sub>) operates on the internal high-speed oscillation clock (f<sub>RH</sub>) (XSEL = 0), when 1.8 V ≤ V<sub>DD</sub> < 2.7 V, the setting of MC0CKS2 = MC0CKS1 = MC0CKS0 = 0 (base clock: f<sub>PRS</sub>) is prohibited.

**Caution** Clear bit 7 (MC0PWR) of the MC0CTL0 register to 0 before rewriting the MC0CKS2 to MC0CKS0 bits.

**Remarks 1.** f<sub>PRS</sub>: Peripheral hardware clock frequency

**2.** Figures in parentheses are for operation with f<sub>PRS</sub> = 10 MHz.

**(c) MCG control register 2 (MC0CTL2)**

This register is used to set the transmit baud rate.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 1FH.

Address: FF4EH After reset: 1FH R/W

Symbol	7	6	5	4	3	2	1	0
MC0CTL2	0	0	0	MC0BRS4	MC0BRS3	MC0BRS2	MC0BRS1	MC0BRS0

MC0BRS4	MC0BRS3	MC0BRS2	MC0BRS1	MC0BRS0	k	Output clock selection of 5-bit counter
0	0	0	×	×	4	$f_{XCLK}/4$
0	0	1	0	0	4	$f_{XCLK}/4$
0	0	1	0	1	5	$f_{XCLK}/5$
0	0	1	1	0	6	$f_{XCLK}/6$
0	0	1	1	1	7	$f_{XCLK}/7$
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
1	1	1	0	0	28	$f_{XCLK}/28$
1	1	1	0	1	29	$f_{XCLK}/29$
1	1	1	1	0	30	$f_{XCLK}/30$
1	1	1	1	1	31	$f_{XCLK}/31$

**Cautions 1.** Clear bit 7 (MC0PWR) of the MC0CTL0 register to 0 before rewriting the MC0BRS4 to MC0BRS0 bits.

**2.** The value from further dividing the output clock of the 5-bit counter by 2 is the baud rate value.

**Remarks 1.**  $f_{XCLK}$ : Frequency of the base clock selected by the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

**2.** k: Value set by the MC0BRS4 to MC0BRS0 bits (k = 4, 5, 6, 7, ..., 31)

**3.** ×: Don't care

**<1> Baud rate**

The baud rate can be calculated by the following expression.

- Baud rate =  $\frac{f_{XCLK}}{2 \times k}$  [bps]

$f_{XCLK}$ : Frequency of base clock selected by the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

k: Value set by the MC0BRS4 to MC0BRS0 bits of the MC0CTL2 register (k = 4, 5, 6, ..., 31)

<2> Error of baud rate

The baud rate error can be calculated by the following expression.

- $$\text{Error (\%)} = \left( \frac{\text{Actual baud rate (baud rate with error)}}{\text{Desired baud rate (correct baud rate)}} - 1 \right) \times 100 \text{ [\%]}$$

**Caution** Keep the baud rate error during transmission to within the permissible error range at the reception destination.

**Example:** Frequency of base clock = 2.5 MHz = 2,500,000 Hz  
 Set value of MC0BRS4 to MC0BRS0 bits of MC0CTL2 register = 10000B (k = 16)  
 Target baud rate = 76,800 bps

$$\begin{aligned} \text{Baud rate} &= 2.5 \text{ M}/(2 \times 16) \\ &= 2,500,000/(2 \times 16) = 78125 \text{ [bps]} \end{aligned}$$

$$\begin{aligned} \text{Error} &= (78,125/76,800 - 1) \times 100 \\ &= 1.725 \text{ [\%]} \end{aligned}$$

<3> Example of setting baud rate

Baud Rate [bps]	f <sub>PRS</sub> = 10.0 MHz				f <sub>PRS</sub> = 8.38 MHz				f <sub>PRS</sub> = 8.0 MHz				f <sub>PRS</sub> = 6.0 MHz			
	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]
4800	–	–	–	–	5, 6, or 7	27	4850	1.03	5, 6, or 7	26	4808	0.16	5, 6, or 7	20	4688	–2.34
9600	5, 6, or 7	16	9766	1.73	4	27	9699	1.03	5, 6, or 7	13	9615	0.16	4	20	9375	–2.34
19200	5	8	19531	1.73	3	27	19398	1.03	4	13	19231	0.16	4	10	18750	–2.34
31250	4	10	31250	0	2	17	30809	–1.41	4	8	31250	0	2	24	31250	0
38400	4	8	39063	1.73	2	27	38796	1.03	3	13	38462	0.16	2	20	37500	–2.34
56000	3	11	56818	1.46	2	19	55132	–1.55	3	9	55556	–0.79	1	27	55556	–0.79
62500	2	20	62500	0	2	17	61618	–1.41	3	8	62500	0	2	12	62500	0
76800	2	16	78125	1.73	1	27	77592	1.03	2	13	76923	0.16	2	10	75000	–2.34
115200	1	22	113636	–1.36	2	9	116389	1.03	1	17	117647	2.12	1	13	115385	0.16
125000	1	20	125000	0	1	17	123235	–1.41	1	16	125000	0	1	12	125000	0
153600	1	16	156250	1.73	2	7	149643	–2.58	1	13	153846	0.16	1	10	150000	–2.34
250000	1	10	250000	0	1	8	261875	4.75	1	8	250000	0	1	6	250000	0
					0	17	246471	–1.41								

**Remark** MC0CKS2 to MC0CKS0: Bits 2 to 0 of MCG control register 1 (MC0CTL1) (setting of base clock (f<sub>CLK</sub>))  
 k: Value set by bits 4 to 0 (MC0BRS4 to MC0BRS0) of MCG control register 2 (MC0CTL2) (k = 4, 5, 6, ..., 31)  
 f<sub>PRS</sub>: Peripheral hardware clock frequency  
 ERR: Baud rate error

**(d) Port mode register 3 (PM3)**

This register sets port 3 input/output in 1-bit units.

When using the P32/TOH0/MCGO pin for Manchester code output, clear PM32 to 0 and clear the output latch of P32 to 0.

PM3 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets these registers to FFH.

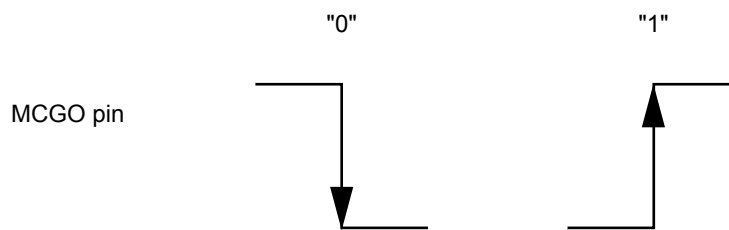
Address: FF23H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	1	1	PM34	PM33	PM32	PM31	1

PM3n	P3n pin I/O mode selection (n = 1 to 4)
0	Output mode (output buffer on)
1	Input mode (output buffer off)

**(2) Format of "0" and "1" of Manchester code output**

The format of "0" and "1" of Manchester code output in 78K0/LC3 is as follows.



**(3) Transmit operation**

In Manchester code generator mode, data is transmitted in 1- to 8-bit units. Data bits are transmitted in Manchester code format. Transmission is enabled if bit 7 (MC0PWR) of MCG control register 0 (MC0CTL0) is set to 1.

The output value while a transmission is suspended can be set by using bit 0 (MC0OLV) of the MC0CTL0 register.

A transmission starts by writing a value to the MCG transmit buffer register (MC0TX) after setting the transmit data bit length to the MCG transmit bit count specification register (MC0BIT). At the transmission start timing, the MC0BIT value is transferred to the 3-bit counter and the data of MC0TX is transferred to the 8-bit shift register. An interrupt request signal (INTMCG) occurs at the timing that the MC0TX value is transferred to the 8-bit shift register. The 8-bit shift register is continuously shifted by the baud rate clock, and signal that is XORed with the baud rate clock is output from the MCGO pin.

When continuous transmission is executed, the next data is set to MC0BIT and MC0TX during data transmission after INTMCG occurs.

To transmit continuously, writing the next transfer data to MC0TX must be complete within the period (3) and (4) in Figure 16-8. Rewrite the MC0BIT before writing to MC0TX during continuous transmission.

**Figure 16-8. Timing of Manchester Code Generator Mode (LSB First) (1/4)**

**(1) Transmit timing (MC0OLV = 1, total transmit bit length = 8 bits)**

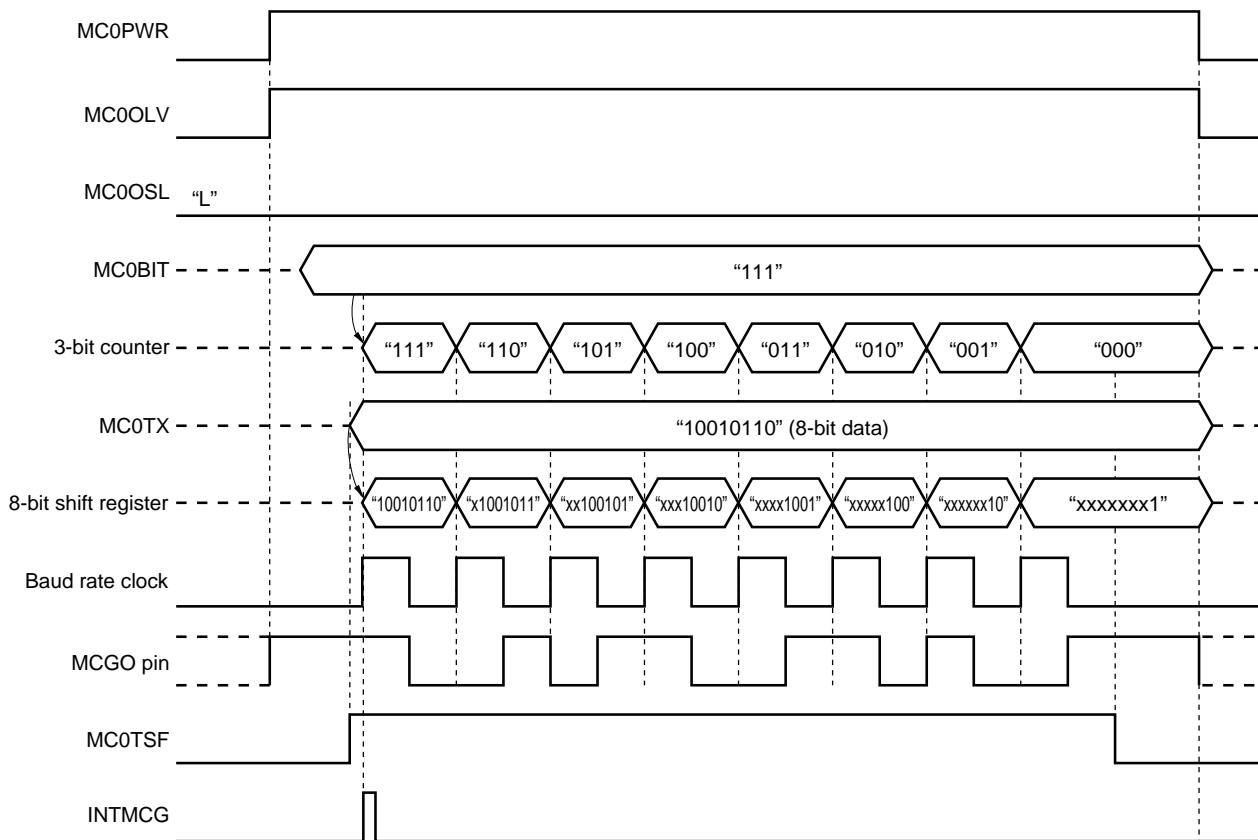




Figure 16-8. Timing of Manchester Code Generator Mode (LSB First) (2/4)

(2) Transmit timing (MC0OLV = 0, total transmit bit length = 8 bits)


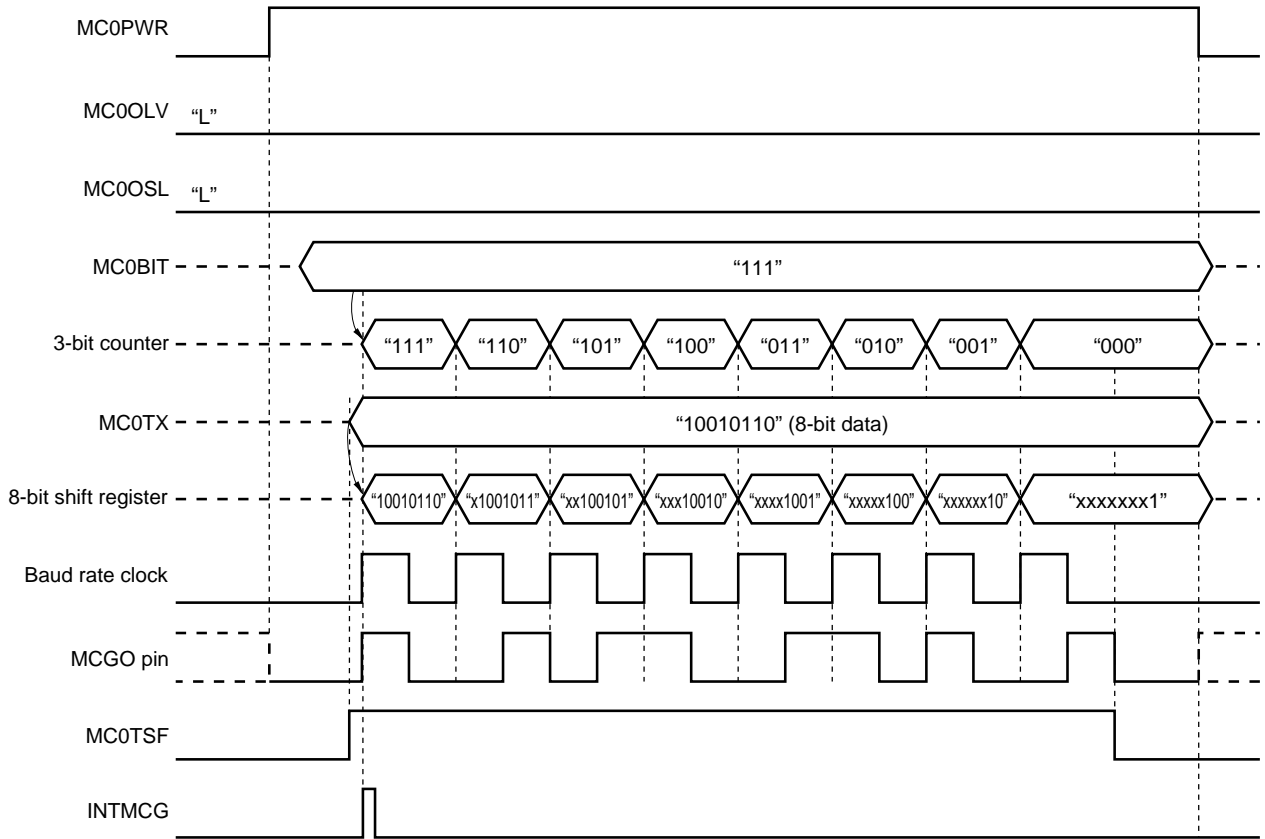


Figure 16-8. Timing of Manchester Code Generator Mode (LSB First) (3/4)

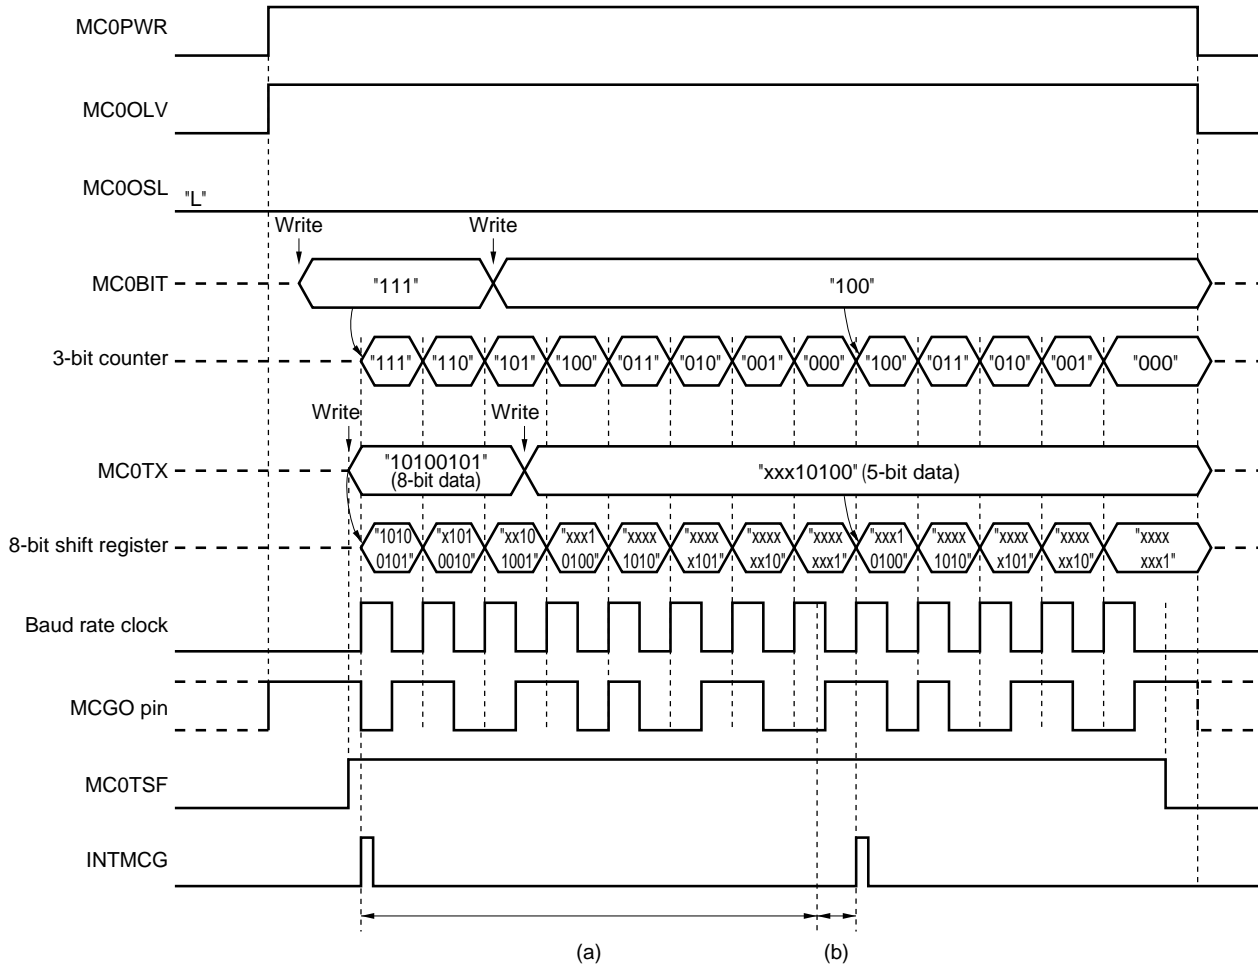(3) Transmit timing (MC0OLV = 1, total transmit bit length = 13 bits)



(a): "8-bit transfer period" – (b)

(b): "1/2 cycle of baud rate" + 1 clock ( $f_{CLK}$ ) before the last bit of transmit data


$f_{CLK}$ : Frequency of the operation base clock selected by using the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

Last bit: Transfer bit when 3-bit counter = 000

**Caution** Writing the next transmit data to MC0TX must be complete within the period (a) during continuous transmission. If writing the next transmit data to MC0TX is executed in the period (b), the next data transmission starts 2 clocks ( $f_{CLK}$ ) after the last bit has been transmitted. Rewrite the MC0BIT before writing to MC0TX during continuous transmission.

Figure 16-8. Timing of Manchester Code Generator Mode (LSB First) (4/4)

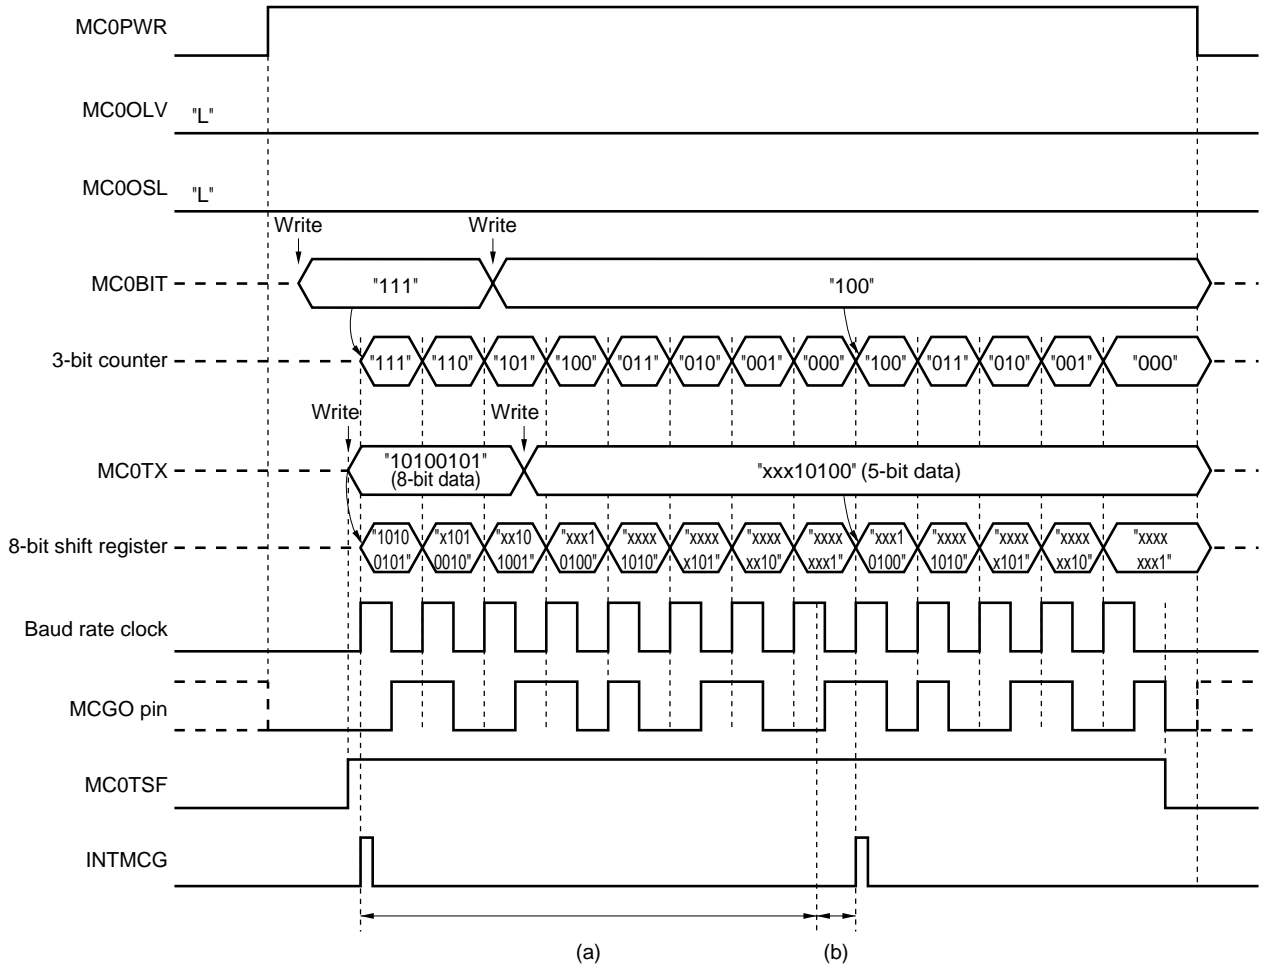(4) Transmit timing (MC0OLV = 0, total transmit bit length = 13 bits)



(a): "8-bit transfer period" – (b)

(b): "1/2 cycle of baud rate" + 1 clock ( $f_{XCLK}$ ) before the last bit of transmit data

$f_{XCLK}$ : Frequency of the operation base clock selected by using the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

Last bit: Transfer bit when 3-bit counter = 000

**Caution** Writing the next transmit data to MC0TX must be complete within the period (a) during continuous transmission. If writing the next transmit data to MC0TX is executed in the period (b), the next data transmission starts 2 clocks ( $f_{XCLK}$ ) after the last bit has been transmitted. Rewrite the MC0BIT before writing to MC0TX during continuous transmission.

### 16.4.3 Bit sequential buffer mode

The bit sequential buffer mode is used to output sequential signals using the MCGO pin.

#### (1) Register description

The MCG control register 0 (MC0CTL0), MCG control register 1 (MC0CTL1), and MCG control register 2 (MC0CTL2) are used to set the bit sequential buffer mode.

##### (a) MCG control register 0 (MC0CTL0)

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets this register to 10H.

Address: FF4CH After reset: 10H R/W

Symbol	<7>	6	5	<4>	3	2	<1>	<0>
MC0CTL0	MC0PWR	0	0	MC0DIR	0	0	MC0OSL	MC0OLV

MC0PWR	Operation control
0	Operation stopped
1	Operation enabled

MC0DIR	First bit specification
0	MSB
1	LSB

MC0OSL	Data format
0	Manchester code
1	Bit sequential data

MC0OLV	Output level when transmission suspended
0	Low level
1	High level

**Caution** Clear (0) the MC0PWR bit before rewriting the MC0DIR, MC0OSL, and MC0OLV bits (it is possible to rewrite these bits by an 8-bit memory manipulation instruction at the same time when the MC0PWR bit is set (1)).

**(b) MCG control register 1 (MC0CTL1)**

This register is used to set the base clock of the Manchester code generator.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation clears this register to 00H.

Address: FF4DH After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
MC0CTL1	0	0	0	0	0	MC0CKS2	MC0CKS1	MC0CKS0

MC0CKS2	MC0CKS1	MC0CKS0	Base clock (f <sub>CLK</sub> ) selection
0	0	0	f <sub>PRS</sub> (10 MHz)
0	0	1	f <sub>PRS</sub> /2 (5 MHz)
0	1	0	f <sub>PRS</sub> /2 <sup>2</sup> (2.5 MHz)
0	1	1	f <sub>PRS</sub> /2 <sup>3</sup> (1.25 MHz)
1	0	0	f <sub>PRS</sub> /2 <sup>4</sup> (625 kHz)
1	0	1	f <sub>PRS</sub> /2 <sup>5</sup> (312.5 kHz)
1	1	0	Setting prohibited
1	1	1	

**Caution** Clear bit 7 (MC0PWR) of the MC0CTL0 register to 0 before rewriting the MC0CKS2 to MC0CKS0 bits.

- Remarks**
1. f<sub>PRS</sub>: Peripheral hardware clock frequency
  2. Figures in parentheses are for operation with f<sub>PRS</sub> = 10 MHz.

**(c) MCG control register 2 (MC0CTL2)**

This register is used to set the transmit baud rate.

This register can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets this register to 1FH.

Address: FF4EH After reset: 1FH R/W

Symbol	7	6	5	4	3	2	1	0
MC0CTL2	0	0	0	MC0BRS4	MC0BRS3	MC0BRS2	MC0BRS1	MC0BRS0

MC0BRS4	MC0BRS3	MC0BRS2	MC0BRS1	MC0BRS0	k	Output clock selection of 5-bit counter
0	0	0	×	×	4	$f_{XCLK}/4$
0	0	1	0	0	4	$f_{XCLK}/4$
0	0	1	0	1	5	$f_{XCLK}/5$
0	0	1	1	0	6	$f_{XCLK}/6$
0	0	1	1	1	7	$f_{XCLK}/7$
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
1	1	1	0	0	28	$f_{XCLK}/28$
1	1	1	0	1	29	$f_{XCLK}/29$
1	1	1	1	0	30	$f_{XCLK}/30$
1	1	1	1	1	31	$f_{XCLK}/31$

- Cautions**
1. Clear bit 7 (MC0PWR) of the MC0CTL0 register to 0 before rewriting the MC0BRS4 to MC0BRS0 bits.
  2. The value from further dividing the output clock of the 5-bit counter by 2 is the baud rate value.

- Remarks**
1.  $f_{XCLK}$ : Frequency of the base clock selected by the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register
  2. k: Value set by the MC0BRS4 to MC0BRS0 bits (k = 4, 5, 6, 7, ..., 31)
  3. ×: Don't care

**<1> Baud rate**

The baud rate can be calculated by the following expression.

- $$\text{Baud rate} = \frac{f_{XCLK}}{2 \times k} \text{ [bps]}$$

$f_{XCLK}$ : Frequency of base clock selected by the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

k: Value set by the MC0BRS4 to MC0BRS0 bits of the MC0CTL2 register (k = 4, 5, 6, ..., 31)

**<2> Error of baud rate**

The baud rate error can be calculated by the following expression.

- Error (%) =  $\left( \frac{\text{Actual baud rate (baud rate with error)}}{\text{Desired baud rate (correct baud rate)}} - 1 \right) \times 100$  [%]

**Caution** Keep the baud rate error during transmission to within the permissible error range at the reception destination.

**Example:** Frequency of base clock = 2.5 MHz = 2,500,000 Hz  
 Set value of MC0BRS4 to MC0BRS0 bits of MC0CTL2 register = 10000B (k = 16)  
 Target baud rate = 76,800 bps

$$\begin{aligned} \text{Baud rate} &= 2.5 \text{ M}/(2 \times 16) \\ &= 2,500,000/(2 \times 16) = 78125 \text{ [bps]} \end{aligned}$$

$$\begin{aligned} \text{Error} &= (78,125/76,800 - 1) \times 100 \\ &= 1.725 \text{ [%]} \end{aligned}$$

**<3> Example of setting baud rate**

Baud Rate [bps]	f <sub>PRS</sub> = 10.0 MHz				f <sub>PRS</sub> = 8.38 MHz				f <sub>PRS</sub> = 8.0 MHz				f <sub>PRS</sub> = 6.0 MHz			
	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]	MC0CKS2 to MC0CKS0	k	Calculated Value	ERR [%]
4800	–	–	–	–	5, 6, or 7	27	4850	1.03	5, 6, or 7	26	4808	0.16	5, 6, or 7	20	4688	–2.34
9600	5, 6, or 7	16	9766	1.73	4	27	9699	1.03	5, 6, or 7	13	9615	0.16	4	20	9375	–2.34
19200	5	8	19531	1.73	3	27	19398	1.03	4	13	19231	0.16	4	10	18750	–2.34
31250	4	10	31250	0	2	17	30809	–1.41	4	8	31250	0	2	24	31250	0
38400	4	8	39063	1.73	2	27	38796	1.03	3	13	38462	0.16	2	20	37500	–2.34
56000	3	11	56818	1.46	2	19	55132	–1.55	3	9	55556	–0.79	1	27	55556	–0.79
62500	2	20	62500	0	2	17	61618	–1.41	3	8	62500	0	2	12	62500	0
76800	2	16	78125	1.73	1	27	77592	1.03	2	13	76923	0.16	2	10	75000	–2.34
115200	1	22	113636	–1.36	2	9	116389	1.03	1	17	117647	2.12	1	13	115385	0.16
125000	1	20	125000	0	1	17	123235	–1.41	1	16	125000	0	1	12	125000	0
153600	1	16	156250	1.73	2	7	149643	–2.58	1	13	153846	0.16	1	10	150000	–2.34
250000	1	10	250000	0	1	8	261875	4.75	1	8	250000	0	1	6	250000	0
					0	17	246471	–1.41								

**Remark** MC0CKS2 to MC0CKS0: Bits 2 to 0 of MCG control register 1 (MC0CTL1) (setting of base clock (f<sub>CLK</sub>))  
 k: Value set by bits 4 to 0 (MC0BRS4 to MC0BRS0) of MCG control register 2 (MC0CTL2) (k = 4, 5, 6, ..., 31)  
 f<sub>PRS</sub>: Peripheral hardware clock frequency  
 ERR: Baud rate error

**(d) Port mode register 3 (PM3)**

This register sets port 3 input/output in 1-bit units.

When using the P32/TOH0/MCGO pin for bit sequential data output, clear PM32 to 0 and clear the output latch of P32 to 0.

PM3 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets these registers to FFH.

Address: FF23H After reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	1	1	PM34	PM33	PM32	PM31	1

PM3n	P3n pin I/O mode selection (n = 1 to 4)
0	Output mode (output buffer on)
1	Input mode (output buffer off)



**(2) Transmit operation**

In bit sequential buffer mode, data is transmitted in 1- to 8-bit units. Transmission is enabled if bit 7 (MC0PWR) of MCG control register 0 (MC0CTL0) is set to 1.

The output value while transmission is suspended can be set by using bit 0 (MC0OLV) of the MC0CTL0 register. A transmission starts by writing a value to the MCG transmit buffer register (MC0TX) after setting the transmit data bit length to the MCG transmit bit count specification register (MC0BIT). At the transmission start timing, the MC0BIT value is transferred to the 3-bit counter and data of MC0TX is transferred to the 8-bit shift register. An interrupt request signal (INTMCG) occurs at the timing that the MC0TX value is transferred to the 8-bit shift register. The 8-bit shift register is continuously shifted by the baud rate clock and is output from the MCGO pin. When continuous transmission is executed, the next data is set to MC0BIT and MC0TX during data transmission after INTMCG occurs.

To transmit continuously, writing the next transfer data to MC0TX must be complete within the period (3) and (4) in Figure 16-9. Rewrite MC0BIT before writing to MC0TX during continuous transmission.

**Figure 16-9. Timing of Bit Sequential Buffer Mode (LSB First) (1/4)**

**(1) Transmit timing (MC0OLV = 1, total transmit bit length = 8 bits)**

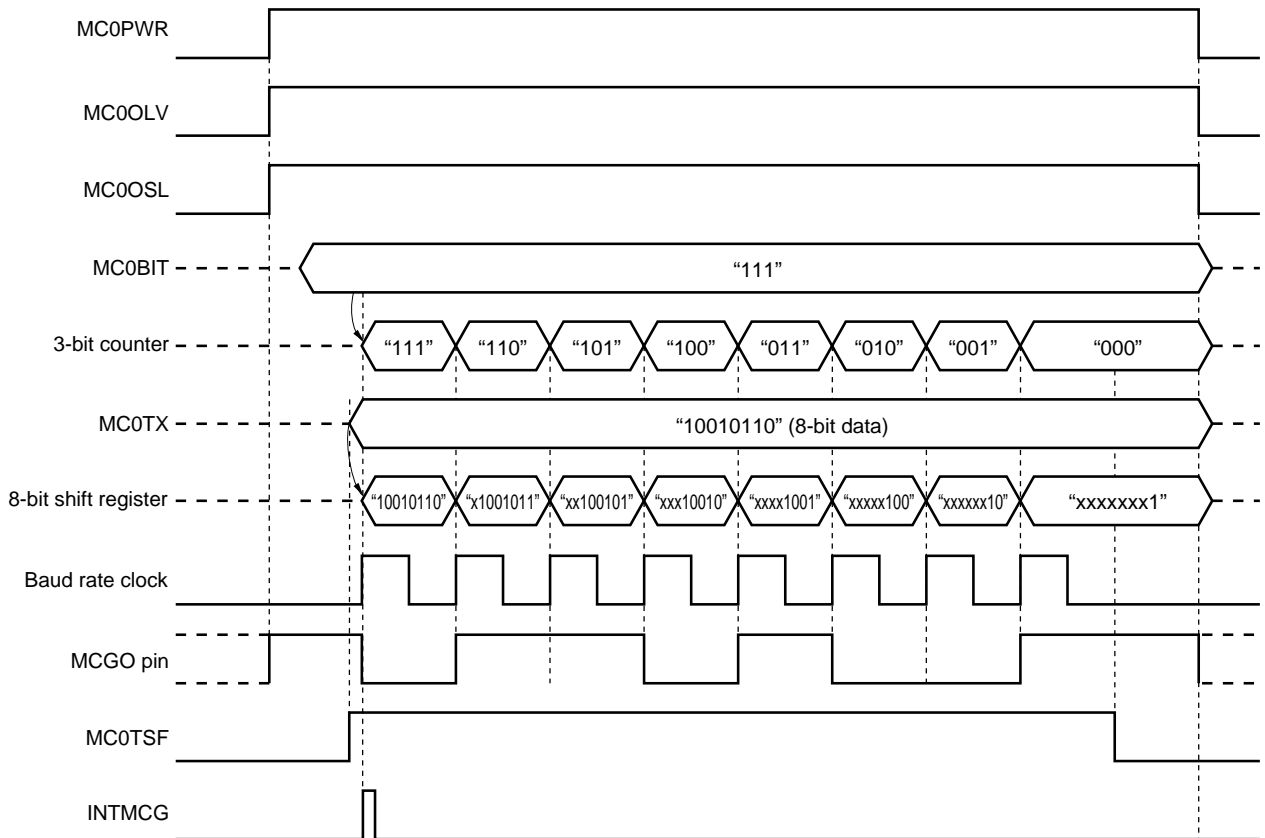


Figure 16-9. Timing of Bit Sequential Buffer Mode (LSB First) (2/4)

(2) Transmit timing (MC0OLV = 0, total transmit bit length = 8 bits)


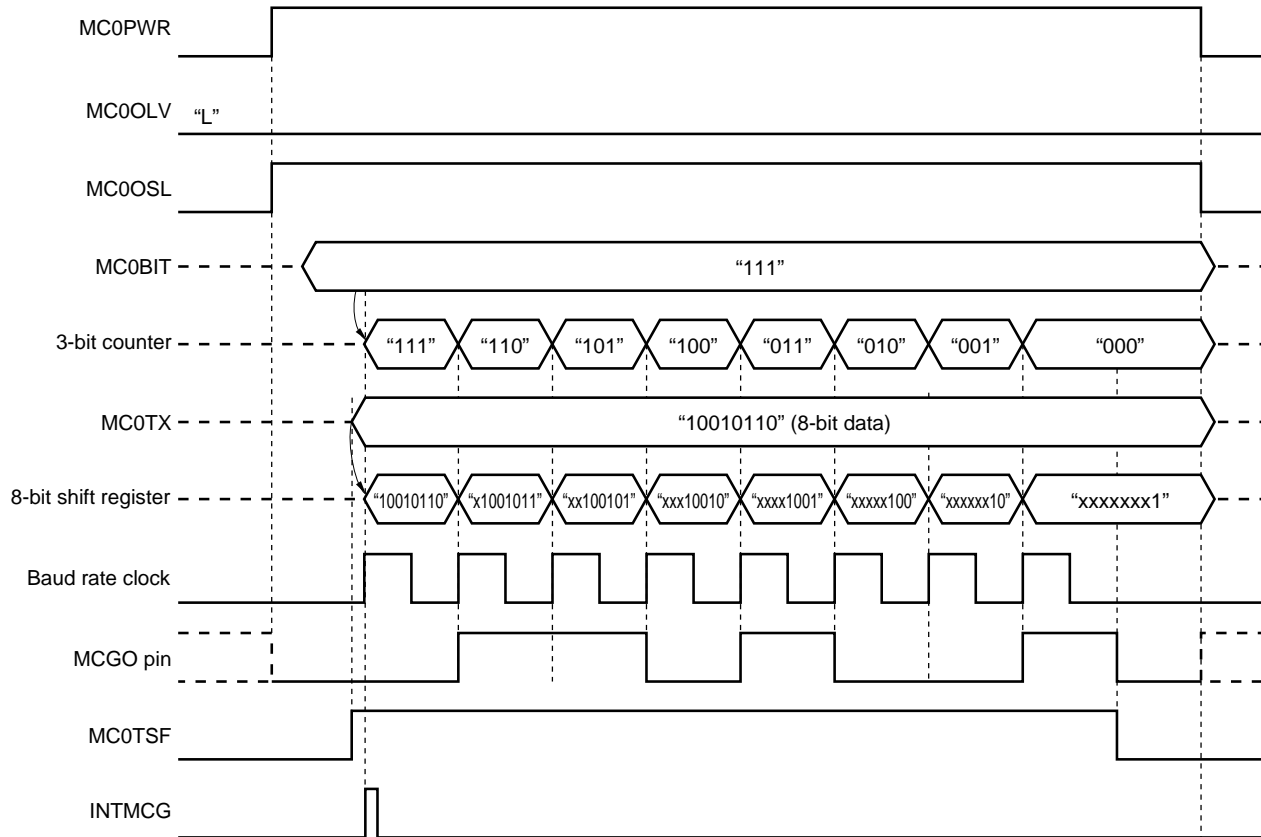


Figure 16-9. Timing of Bit Sequential Buffer Mode (LSB First) (3/4)

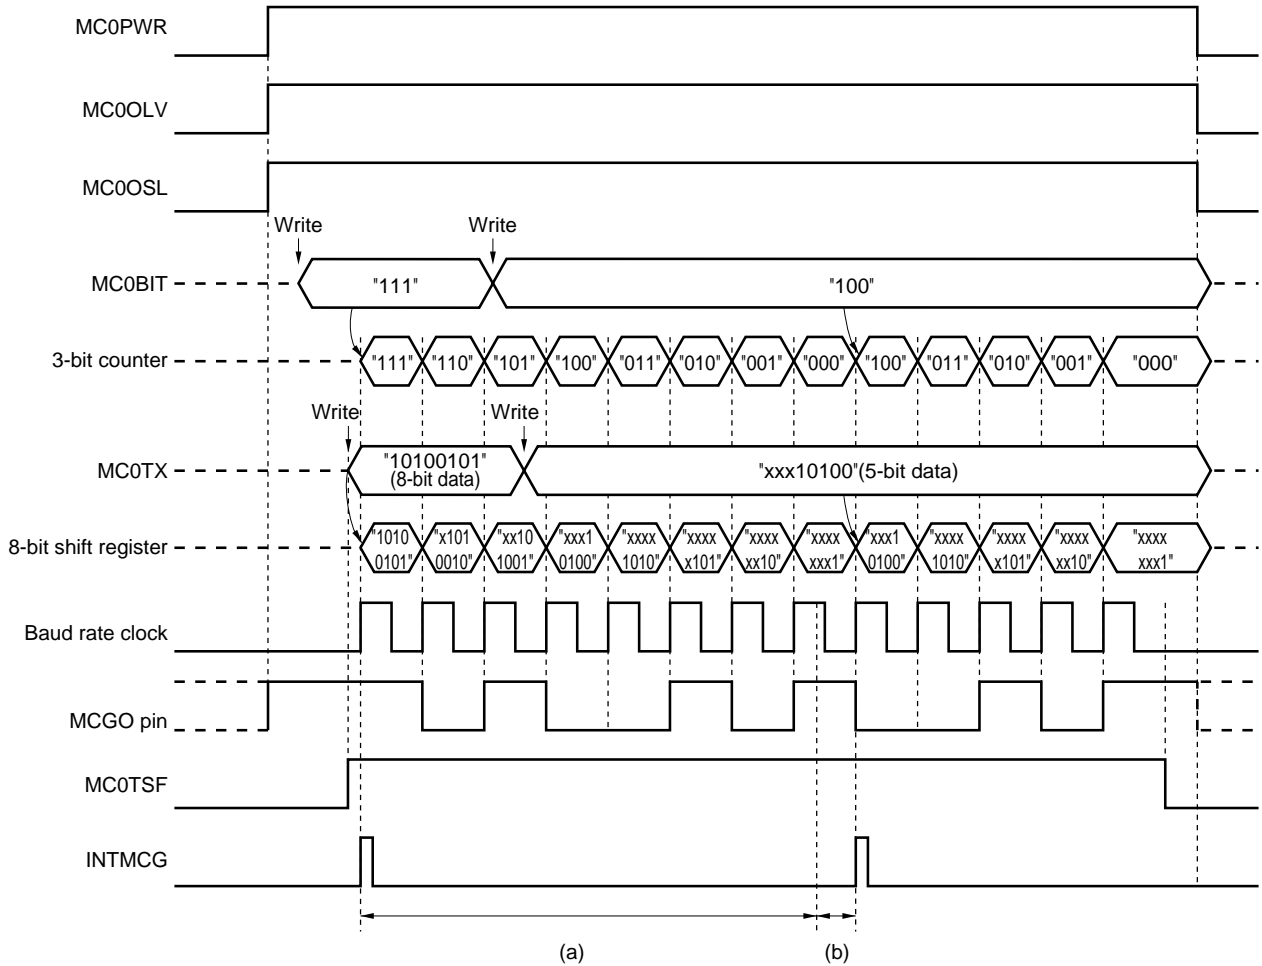(3) Transmit timing (MC0OLV = 1, total transmit bit length = 13 bits)



(a): "8-bit transfer period" – (b)

(b): "1/2 cycle of baud rate" + 1 clock ( $f_{CLK}$ ) before the last bit of transmit data


$f_{CLK}$ : Frequency of operation base clock selected by using the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

Last bit: Transfer bit when 3-bit counter = 000

**Caution** Writing the next transmit data to MC0TX must be complete within the period (a) during continuous transmission. If writing the next transmit data to MC0TX is executed in the period (b), the next data transmission starts 2 clocks ( $f_{CLK}$ ) after the last bit has been transmitted. Rewrite the MC0BIT before writing to MC0TX during continuous transmission.

Figure 16-9. Timing of Bit Sequential Buffer Mode (LSB First) (4/4)

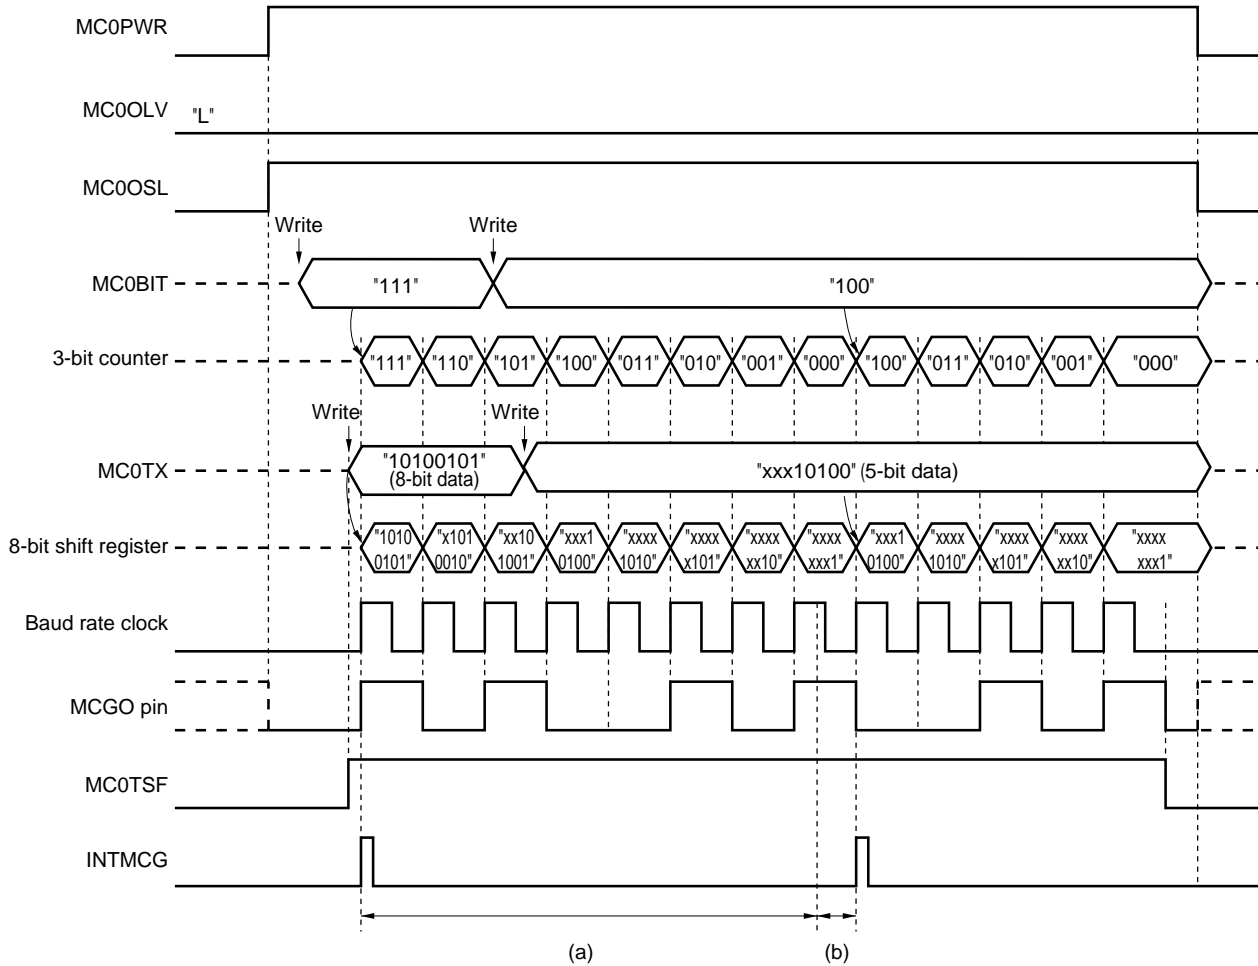(4) Transmit timing (MC0OLV = 0, total transmit bit length = 13 bits)



(a): "8-bit transfer period" – (b)

(b): "1/2 cycle of baud rate" + 1 clock ( $f_{CLK}$ ) before the last bit of transmit data

$f_{CLK}$ : Frequency of operation base clock selected by using the MC0CKS2 to MC0CKS0 bits of the MC0CTL1 register

Last bit: Transfer bit when 3-bit counter = 000

**Caution** Writing the next transmit data to MC0TX must be complete within the period (a) during continuous transmission. If writing the next transmit data to MC0TX is executed in the period (b), the next data transmission starts 2 clocks ( $f_{CLK}$ ) after the last bit has been transmitted. Rewrite the MC0BIT before writing to MC0TX during continuous transmission.

## CHAPTER 17 INTERRUPT FUNCTIONS

### 17.1 Interrupt Function Types

The following two types of interrupt functions are used.

#### (1) Maskable interrupts

These interrupts undergo mask control. Maskable interrupts can be divided into a high interrupt priority group and a low interrupt priority group by setting the priority specification flag registers (PR0L, PR0H, PR1L, PR1H). Multiple interrupt servicing can be applied to low-priority interrupts when high-priority interrupts are generated. If two or more interrupt requests, each having the same priority, are simultaneously generated, then they are processed according to the priority of vectored interrupt servicing. For the priority order, see **Table 17-1**.

A standby release signal is generated and STOP and HALT modes are released.

External interrupt requests and internal interrupt requests are provided as maskable interrupts.

- $\mu$ PD78F040x  
External: 5, internal: 17
- $\mu$ PD78F041x  
External: 5, internal: 18

#### (2) Software interrupt

This is a vectored interrupt generated by executing the BRK instruction. It is acknowledged even when interrupts are disabled. The software interrupt does not undergo interrupt priority control.

### 17.2 Interrupt Sources and Configuration

The  $\mu$ PD78F040x has a total of 23 interrupt sources, and the  $\mu$ PD78F041x has a total of 24 interrupt sources, including maskable interrupts and software interrupts. In addition, they also have up to four reset sources (see **Table 17-1**).

Table 17-1. Interrupt Source List (1/2)

Interrupt Type	Default Priority <sup>Note 1</sup>	Interrupt Source		Internal/ External	Vector Table Address	Basic Configuration Type <sup>Note 2</sup>
		Name	Trigger			
Maskable	0	INTLVI	Low-voltage detection <sup>Note 3</sup>	Internal	0004H	(A)
	1	INTP0	Pin input edge detection	External	0006H	(B)
	2	INTP1			0008H	
	3	INTP2			000AH	
	4	INTP3			000CH	
	5	INTSRE6	UART6 reception error generation	Internal	0012H	(A)
	6	INTSR6	End of UART6 reception		0014H	
	7	INTST6	End of UART6 transmission		0016H	
	8	INTST0	End of UART0 transmission		0018H	
	9	INTTMH1	Match between TMH1 and CMP01 (when compare register is specified)		001AH	
	10	INTTMH0	Match between TMH0 and CMP00 (when compare register is specified)		001CH	
	11	INTTM50	Match between TM50 and CR50 (when compare register is specified)		001EH	
	12	INTTM000	Match between TM00 and CR000 (when compare register is specified), T1010 pin valid edge detection (when capture register is specified)		0020H	
	13	INTTM010	Match between TM00 and CR010 (when compare register is specified), T1000 pin valid edge detection (when capture register is specified)		0022H	
	14	INTAD <sup>Note 5</sup>	End of 10-bit successive approximation type A/D conversion		0024H	
	15	INTSR0	End of UART0 reception or reception error generation		0026H	
	16	INTRTC	Fixed-cycle signal of real-time counter/alarm match detection		0028H	
	17	INTTM51 <sup>Note 4</sup>	Match between TM51 and CR51 (when compare register is specified)	002AH		
	18	INTKR	Key interrupt detection	External	002CH	(C)
19	INTRTCI	Interval signal detection of real-time counter	Internal	002EH	(A)	

- Notes**
1. The default priority determines the sequence of processing vectored interrupts if two or more maskable interrupts occur simultaneously. Zero indicates the highest priority and 22 indicates the lowest priority.
  2. Basic configuration types (A) to (D) correspond to (A) to (D) in Figure 17-1.
  3. When bit 1 (LVIMD) of the low-voltage detection register (LVIM) is cleared to 0.
  4. When 8-bit timer/event counter 51 and 8-bit timer H1 are used in the carrier generator mode, an interrupt is generated upon the timing when the INTTM5H1 signal is generated (see **Figure 8-15 Transfer Timing**).
  5.  $\mu$ PD78F041x only.


Table 17-1. Interrupt Source List (2/2)

Interrupt Type	Default Priority <sup>Note 1</sup>	Interrupt Source		Internal/ External	Vector Table Address	Basic Configuration Type <sup>Note 2</sup>
		Name	Trigger			
Maskable	20	INTTM52	Match between TM52 and CR52 (when compare register is specified)	Internal	0032H	(A)
	21	INTTMH2	Match between TMH2 and CRH2 (when compare register is specified)		0034H	
	22	INTMCG	End of Manchester code reception		0036H	
Software	–	BRK	BRK instruction execution	–	003EH	(D)
Reset	–	RESET	Reset input	–	0000H	–
		POC	Power-on clear			
		LVI	Low-voltage detection <sup>Note 3</sup>			
		WDT	WDT overflow			


- Notes**
1. The default priority determines the sequence of processing vectored interrupts if two or more maskable interrupts occur simultaneously. Zero indicates the highest priority and 22 indicates the lowest priority.
  2. Basic configuration types (A) to (D) correspond to (A) to (D) in Figure 17-1.
  3. When bit 1 (LVIMD) of the low-voltage detection register (LVIM) is set to 1.

Figure 17-1. Basic Configuration of Interrupt Function (1/2)

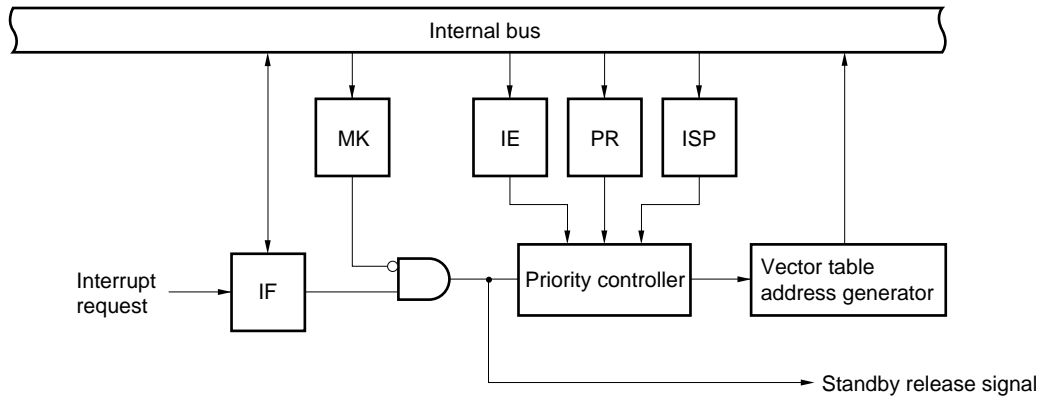(A) Internal maskable interrupt



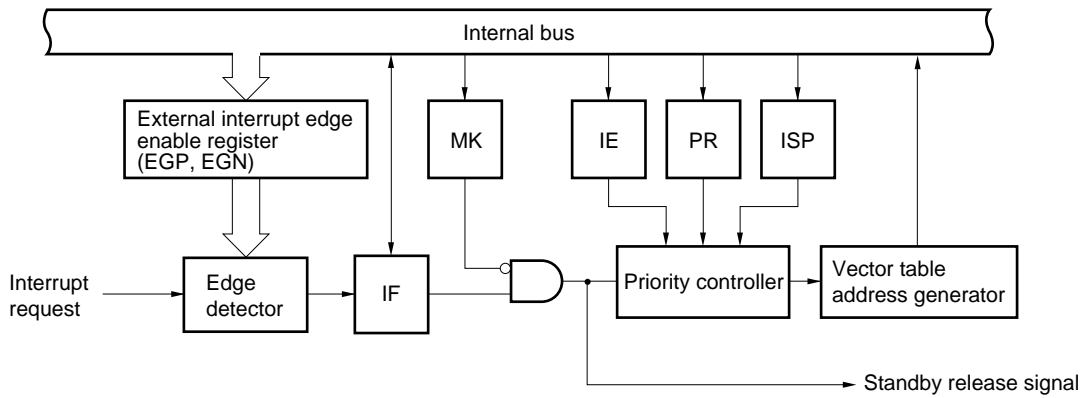(B) External maskable interrupt (INTP0 to INTP3)

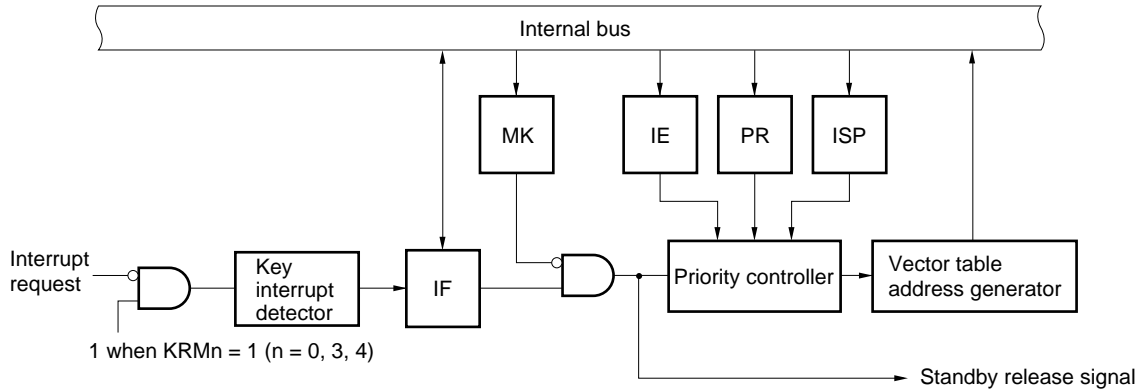


- IF: Interrupt request flag
- IE: Interrupt enable flag
- ISP: In-service priority flag
- MK: Interrupt mask flag
- PR: Priority specification flag

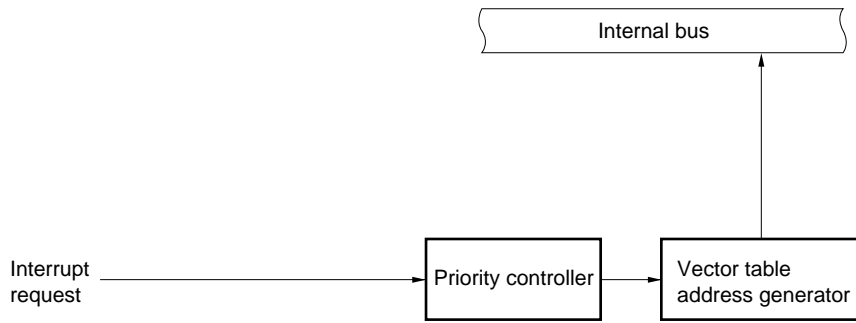


Figure 17-1. Basic Configuration of Interrupt Function (2/2)

(C) External maskable interrupt (INTKR)



(D) Software interrupt



- IF: Interrupt request flag
- IE: Interrupt enable flag
- ISP: In-service priority flag
- MK: Interrupt mask flag
- PR: Priority specification flag
- KRM: Key return mode register

### 17.3 Registers Controlling Interrupt Functions

The following 6 types of registers are used to control the interrupt functions.

- Interrupt request flag register (IF0L, IF0H, IF1L, IF1H)
- Interrupt mask flag register (MK0L, MK0H, MK1L, MK1H)
- Priority specification flag register (PR0L, PR0H, PR1L, PR1H)
- External interrupt rising edge enable register (EGP)
- External interrupt falling edge enable register (EGN)
- Program status word (PSW)

Table 17-2 shows a list of interrupt request flags, interrupt mask flags, and priority specification flags corresponding to interrupt request sources.

**Table 17-2. Flags Corresponding to Interrupt Request Sources**

Interrupt Source	Interrupt Request Flag		Interrupt Mask Flag		Priority Specification Flag	
	Register	Register	Register	Register	Register	Register
INTLVI	LVIF	IF0L	LVIMK	MK0L	LVIPR	PR0L
INTP0	PIF0		PMK0		PPR0	
INTP1	PIF1		PMK1		PPR1	
INTP2	PIF2		PMK2		PPR2	
INTP3	PIF3		PMK3		PPR3	
INTSRE6	SREIF6		SREMK6		SREPR6	
INTSR6	SRIF6	IF0H	SRMK6	MK0H	SRPR6	PR0H
INTST6	STIF6		STMK6		STPR6	
INTST0	STIF0		STMK0		STPR0	
INTTMH1	TMIFH1		TMMKH1		TMPRH1	
INTTMH0	TMIFH0		TMMKH0		TMPRH0	
INTTM50	TMIF50		TMMK50		TMPR50	
INTTM000	TMIF000		TMMK000		TMPR000	
INTTM010	TMIF010		TMMK010		TMPR010	
INTAD <sup>Note 1</sup>	ADIF <sup>Note 1</sup>		IF1L		ADMK <sup>Note 1</sup>	
INTSR0	SRIF0	SRMK0		SRPR0		
INTRTC	RTCIF	RTCMK		RTCPR		
INTTM51 <sup>Note 2</sup>	TMIF51	TMMK51		TMPR51		
INTKR	KRIF	KRMK		KRPR		
INTRTCI	RTCIF	RTCIMK		RTCIPR		
INTTM52	TMIF52	TMMK52		TMPR52		
INTTMH2	TMHIF2	IF1H	TMHMK2	MK1H	TMHPR2	PR1H
INTMCG	MCGIF		MCGMK		MCGPR	

**Notes 1.**  $\mu$ PD78F041x only.

2. When 8-bit timer/event counter 51 and 8-bit timer H1 are used in the carrier generator mode, an interrupt is generated upon the timing when the INTTM5H1 signal is generated (see **Figure 8-15 Transfer Timing**).

**(1) Interrupt request flag registers (IF0L, IF0H, IF1L, IF1H)**

The interrupt request flags are set to 1 when the corresponding interrupt request is generated or an instruction is executed. They are cleared to 0 when an instruction is executed upon acknowledgment of an interrupt request or upon reset signal generation.

When an interrupt is acknowledged, the interrupt request flag is automatically cleared and then the interrupt routine is entered.

IF0L, IF0H, IF1L, and IF1H are set by a 1-bit or 8-bit memory manipulation instruction. When IF0L and IF0H, and IF1L and IF1H are combined to form 16-bit registers IF0 and IF1, they are set by a 16-bit memory manipulation instruction.

Reset signal generation clears these registers to 00H.

**Figure 17-2. Format of Interrupt Request Flag Registers (IF0L, IF0H, IF1L, IF1H)**

Address: FFE0H After reset: 00H R/W

Symbol	<7>	6	5	<4>	<3>	<2>	<1>	<0>
IF0L	SREIF6	0	0	PIF3	PIF2	PIF1	PIF0	LVIF

Address: FFE1H After reset: 00H R/W

Symbol	<7>	<6>	<5>	<4>	<3>	<2>	<1>	<0>
IF0H	TMIF010	TMIF000	TMIF50	TMIFH0	TMIFH1	STIF0	STIF6	SRIF6

Address: FFE2H After reset: 00H R/W

Symbol	<7>	6	<5>	<4>	<3>	<2>	<1>	<0>
IF1L	TMIF52	0	RTCIF	KRIF	TMIF51	RTCIF	SRIF0	ADIF <sup>Note</sup>

Address: FFE3H After reset: 00H R/W

Symbol	7	6	5	4	3	2	<1>	<0>
IF1H	0	0	0	0	0	0	MCGIF	TMHIF2

XXIFX	Interrupt request flag
0	No interrupt request signal is generated
1	Interrupt request is generated, interrupt request status

**Note**  $\mu$ PD78F041x only.

- Cautions**
1. Be sure to clear bits 5 and 6 of IF0L, and bit 6 of IF1L, and bits 2 to 7 of IF1H to 0.
  2. When operating a timer, serial interface, or A/D converter after standby release, operate it once after clearing the interrupt request flag. An interrupt request flag may be set by noise.

**Cautions 3.** When manipulating a flag of the interrupt request flag register, use a 1-bit memory manipulation instruction (CLR1). When describing in C language, use a bit manipulation instruction such as “IF0L.0 = 0;” or “\_asm(“clr1 IF0L, 0”);” because the compiled assembler must be a 1-bit memory manipulation instruction (CLR1).

If a program is described in C language using an 8-bit memory manipulation instruction such as “IF0L &= 0xfe;” and compiled, it becomes the assembler of three instructions.

```
mov a, IF0L
and a, #0FEH
mov IF0L, a
```

In this case, even if the request flag of another bit of the same interrupt request flag register (IF0L) is set to 1 at the timing between “mov a, IF0L” and “mov IF0L, a”, the flag is cleared to 0 at “mov IF0L, a”. Therefore, care must be exercised when using an 8-bit memory manipulation instruction in C language.

**(2) Interrupt mask flag registers (MK0L, MK0H, MK1L, MK1H)**

The interrupt mask flags are used to enable/disable the corresponding maskable interrupt servicing.

MK0L, MK0H, MK1L, and MK1H are set by a 1-bit or 8-bit memory manipulation instruction. When MK0L and MK0H, and MK1L and MK1H are combined to form 16-bit registers MK0 and MK1, they are set by a 16-bit memory manipulation instruction.

Reset signal generation sets these registers to FFH.

**Figure 17-3. Format of Interrupt Mask Flag Registers (MK0L, MK0H, MK1L, MK1H)**

Address: FFE4H After reset: FFH R/W

Symbol	<7>	6	5	<4>	<3>	<2>	<1>	<0>
MK0L	SREMK6	1	1	PMK3	PMK2	PMK1	PMK0	LVIMK

Address: FFE5H After reset: FFH R/W

Symbol	<7>	<6>	<5>	<4>	<3>	<2>	<1>	<0>
MK0H	TMMK010	TMMK000	TMMK50	TMMKH0	TMMKH1	STMK0	STMK6	SRMK6

Address: FFE6H After reset: FFH R/W

Symbol	<7>	6	<5>	<4>	<3>	<2>	<1>	<0>
MK1L	TMMK52	1	RTCMK	KRMK	TMMK51	RTCIMK	SRMK0	ADMK <sup>Note</sup>

Address: FFE7H After reset: FFH R/W

Symbol	7	6	5	4	3	2	<1>	<0>
MK1H	1	1	1	1	1	1	MCGMK	TMHMK2

XXMKX	Interrupt servicing control
0	Interrupt servicing enabled
1	Interrupt servicing disabled

**Note**  $\mu$ PD78F041x only.

**Caution** Be sure to set bits 5 and 6 of MK0L, bit 6 of MK1L, and bits 2 to 7 of MK1H to 1.

**(3) Priority specification flag registers (PR0L, PR0H, PR1L, PR1H)**

The priority specification flag registers are used to set the corresponding maskable interrupt priority order. PR0L, PR0H, PR1L, and PR1H are set by a 1-bit or 8-bit memory manipulation instruction. If PR0L and PR0H, and PR1L and PR1H are combined to form 16-bit registers PR0 and PR1, they are set by a 16-bit memory manipulation instruction. Reset signal generation sets these registers to FFH.

**Figure 17-4. Format of Priority Specification Flag Registers (PR0L, PR0H, PR1L, PR1H)**

Address: FFE8H After reset: FFH R/W

Symbol	<7>	6	5	<4>	<3>	<2>	<1>	<0>
PR0L	SREPR6	1	1	PPR3	PPR2	PPR1	PPR0	LVIPR

Address: FFE9H After reset: FFH R/W

Symbol	<7>	<6>	<5>	<4>	<3>	<2>	<1>	<0>
PR0H	TMPR010	TMPR000	TMPR50	TMPRH0	TMPRH1	STPR0	STPR6	SRPR6

Address: FFEAH After reset: FFH R/W

Symbol	<7>	6	<5>	<4>	<3>	<2>	<1>	<0>
PR1L	TMPR52	1	RTCPR	KRPR	TMPR51	RTCIPR	SRPR0	ADPR <sup>Note</sup>

Address: FFE BH After reset: FFH R/W

Symbol	7	6	5	4	3	2	<1>	<0>
PR1H	1	1	1	1	1	1	MCGPR	TMHPR2

XXPRX	Priority level selection
0	High priority level
1	Low priority level

**Note**  $\mu$ PD78F041x only.

**Caution** Be sure to set bits 5 and 6 of PR0L, bit 6 of PR1L, and bits 2 to 7 of PR1H to 1.

**(4) External interrupt rising edge enable register (EGP), external interrupt falling edge enable register (EGN)**

These registers specify the valid edge for INTP0 to INTP3.

EGP and EGN are set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears these registers to 00H.

**Figure 17-5. Format of External Interrupt Rising Edge Enable Register (EGP) and External Interrupt Falling Edge Enable Register (EGN)**

Address: FF48H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGP	0	0	0	0	EGP3	EGP2	EGP1	EGP0

Address: FF49H After reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGN	0	0	0	0	EGN3	EGN2	EGN1	EGN0

EGPn	EGNn	INTPn pin valid edge selection (n = 0 to 3)
0	0	Edge detection disabled
0	1	Falling edge
1	0	Rising edge
1	1	Both rising and falling edges

Table 17-3 shows the ports corresponding to EGPn and EGNn.

**Table 17-3. Ports Corresponding to EGPn and EGNn**

Detection Enable Register		Edge Detection Port	Interrupt Request Signal
EGP0	EGN0	P120/EXLVI	INTP0
EGP1	EGN1	P34/TI52/TI010/TO00/RTC1HZ	INTP1
EGP2	EGN2	P33/TI000/RTCDIV/RTCCL/BUZ	INTP2
EGP3	EGN3	P31/TOH1	INTP3

**Caution** Select the port mode by clearing EGPn and EGNn to 0 because an edge may be detected when the external interrupt function is switched to the port function.


**Remark** n = 0 to 3

**(5) Program status word (PSW)**

The program status word is a register used to hold the instruction execution result and the current status for an interrupt request. The IE flag that sets maskable interrupt enable/disable and the ISP flag that controls multiple interrupt servicing are mapped to the PSW.

Besides 8-bit read/write, this register can carry out operations using bit manipulation instructions and dedicated instructions (EI and DI). When a vectored interrupt request is acknowledged, if the BRK instruction is executed, the contents of the PSW are automatically saved into a stack and the IE flag is reset to 0. If a maskable interrupt request is acknowledged, the contents of the priority specification flag of the acknowledged interrupt are transferred to the ISP flag. The PSW contents are also saved into the stack with the PUSH PSW instruction. They are restored from the stack with the RETI, RETB, and POP PSW instructions. Reset signal generation sets PSW to 02H.

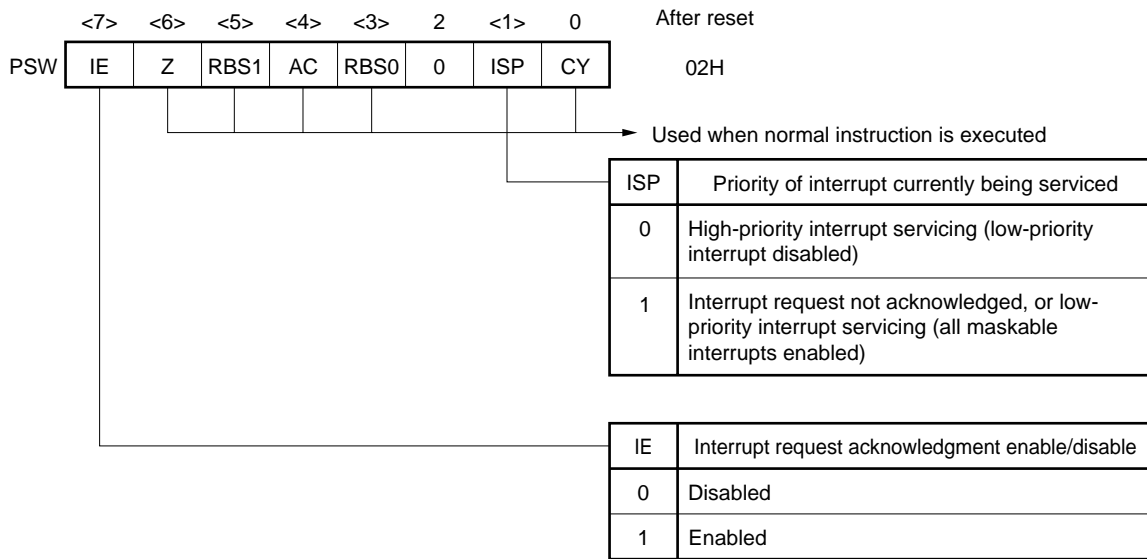**Figure 17-6. Format of Program Status Word**





## 17.4 Interrupt Servicing Operations

### 17.4.1 Maskable interrupt acknowledgment

A maskable interrupt becomes acknowledgeable when the interrupt request flag is set to 1 and the mask (MK) flag corresponding to that interrupt request is cleared to 0. A vectored interrupt request is acknowledged if interrupts are in the interrupt enabled state (when the IE flag is set to 1). However, a low-priority interrupt request is not acknowledged during servicing of a higher priority interrupt request (when the ISP flag is reset to 0).

The times from generation of a maskable interrupt request until vectored interrupt servicing is performed are listed in Table 17-4 below.

For the interrupt request acknowledgment timing, see **Figures 17-8** and **17-9**.

**Table 17-4. Time from Generation of Maskable Interrupt Until Servicing**

	Minimum Time	Maximum Time <sup>Note</sup>
When $\times\times PR = 0$	7 clocks	32 clocks
When $\times\times PR = 1$	8 clocks	33 clocks

**Note** If an interrupt request is generated just before a divide instruction, the wait time becomes longer.

**Remark** 1 clock:  $1/f_{CPU}$  ( $f_{CPU}$ : CPU clock)

If two or more maskable interrupt requests are generated simultaneously, the request with a higher priority level specified in the priority specification flag is acknowledged first. If two or more interrupts requests have the same priority level, the request with the highest default priority is acknowledged first.


An interrupt request that is held pending is acknowledged when it becomes acknowledgeable.

Figure 17-7 shows the interrupt request acknowledgment algorithm.

If a maskable interrupt request is acknowledged, the contents are saved into the stacks in the order of PSW, then PC, the IE flag is reset (0), and the contents of the priority specification flag corresponding to the acknowledged interrupt are transferred to the ISP flag. The vector table data determined for each interrupt request is the loaded into the PC and branched.

Restoring from an interrupt is possible by using the RETI instruction.

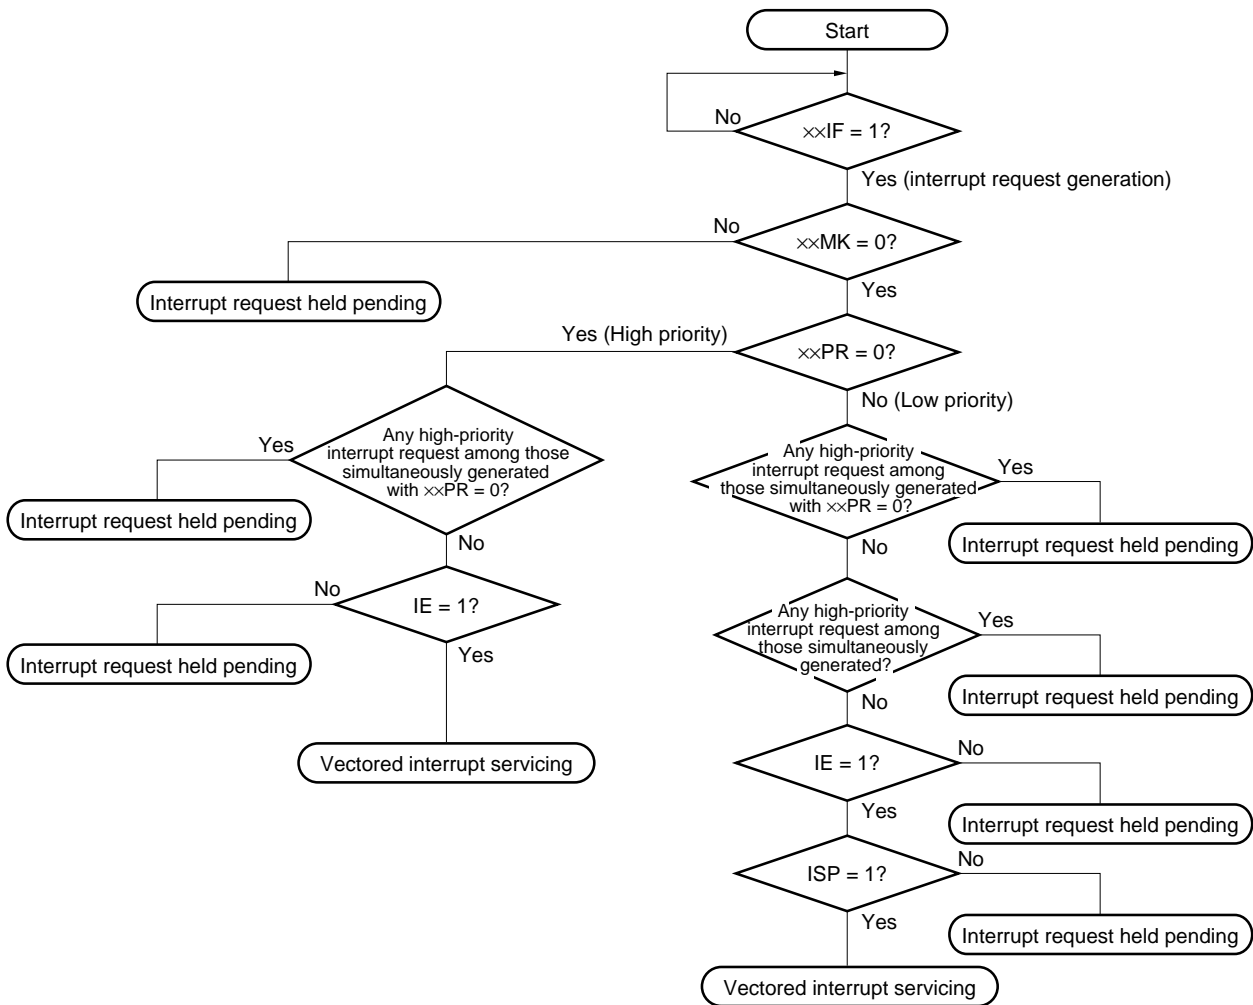Figure 17-7. Interrupt Request Acknowledgment Processing Algorithm



xIF: Interrupt request flag


xMK: Interrupt mask flag

xPR: Priority specification flag

IE: Flag that controls acknowledgment of maskable interrupt request (1 = Enable, 0 = Disable)


ISP: Flag that indicates the priority level of the interrupt currently being serviced (0 = high-priority interrupt servicing, 1 = No interrupt request acknowledged, or low-priority interrupt servicing)

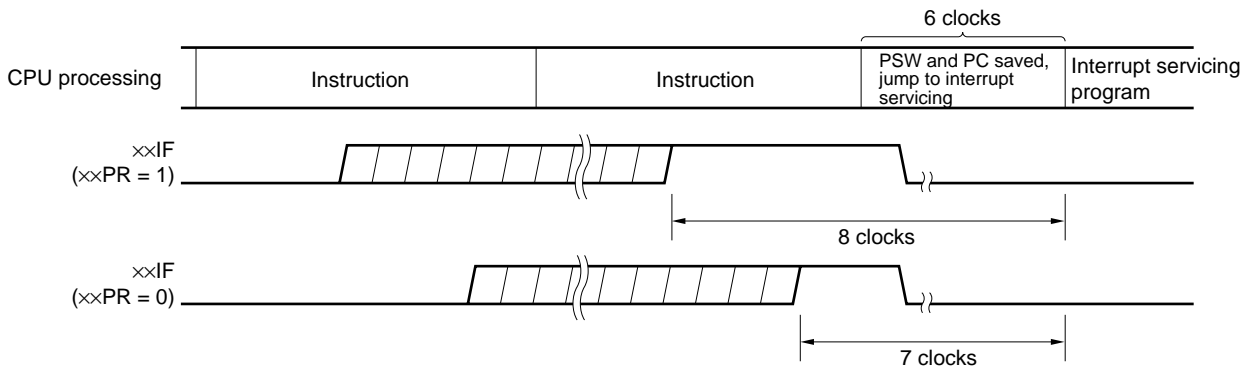**Figure 17-8. Interrupt Request Acknowledgment Timing (Minimum Time)**



**Remark** 1 clock:  $1/f_{CPU}$  ( $f_{CPU}$ : CPU clock)

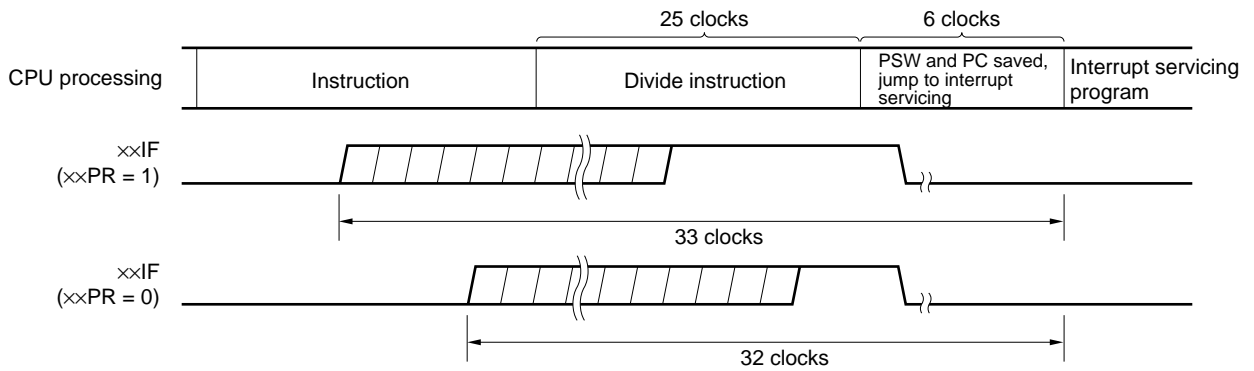**Figure 17-9. Interrupt Request Acknowledgment Timing (Maximum Time)**



**Remark** 1 clock:  $1/f_{CPU}$  ( $f_{CPU}$ : CPU clock)

### 17.4.2 Software interrupt request acknowledgment

A software interrupt acknowledge is acknowledged by BRK instruction execution. Software interrupts cannot be disabled.

If a software interrupt request is acknowledged, the contents are saved into the stacks in the order of the program status word (PSW), then program counter (PC), the IE flag is reset (0), and the contents of the vector table (003EH, 003FH) are loaded into the PC and branched.

Restoring from a software interrupt is possible by using the RETB instruction.

**Caution** Do not use the RETI instruction for restoring from the software interrupt.

**17.4.3 Multiple interrupt servicing**

Multiple interrupt servicing occurs when another interrupt request is acknowledged during execution of an interrupt.

Multiple interrupt servicing does not occur unless the interrupt request acknowledgment enabled state is selected (IE = 1). When an interrupt request is acknowledged, interrupt request acknowledgment becomes disabled (IE = 0). Therefore, to enable multiple interrupt servicing, it is necessary to set (1) the IE flag with the EI instruction during interrupt servicing to enable interrupt acknowledgment.

Moreover, even if interrupts are enabled, multiple interrupt servicing may not be enabled, this being subject to interrupt priority control. Two types of priority control are available: default priority control and programmable priority control. Programmable priority control is used for multiple interrupt servicing.

In the interrupt enabled state, if an interrupt request with a priority equal to or higher than that of the interrupt currently being serviced is generated, it is acknowledged for multiple interrupt servicing. If an interrupt with a priority lower than that of the interrupt currently being serviced is generated during interrupt servicing, it is not acknowledged for multiple interrupt servicing. Interrupt requests that are not enabled because interrupts are in the interrupt disabled state or because they have a lower priority are held pending. When servicing of the current interrupt ends, the pending interrupt request is acknowledged following execution of at least one main processing instruction execution.

Table 17-5 shows relationship between interrupt requests enabled for multiple interrupt servicing and Figure 17-10 shows multiple interrupt servicing examples.


**Table 17-5. Relationship Between Interrupt Requests Enabled for Multiple Interrupt Servicing During Interrupt Servicing**

Multiple Interrupt Request Interrupt Being Serviced		Maskable Interrupt Request				Software Interrupt Request
		PR = 0		PR = 1		
		IE = 1	IE = 0	IE = 1	IE = 0	
Maskable interrupt	ISP = 0	○	×	×	×	○
	ISP = 1	○	×	○	×	○
Software interrupt		○	×	○	×	○

- Remarks**
1. ○: Multiple interrupt servicing enabled
  2. ×: Multiple interrupt servicing disabled
  3. ISP and IE are flags contained in the PSW.  
 ISP = 0: An interrupt with higher priority is being serviced.  
 ISP = 1: No interrupt request has been acknowledged, or an interrupt with a lower priority is being serviced.  
 IE = 0: Interrupt request acknowledgment is disabled.  
 IE = 1: Interrupt request acknowledgment is enabled.
  4. PR is a flag contained in PR0L, PR0H, PR1L, and PR1H.  
 PR = 0: Higher priority level  
 PR = 1: Lower priority level


Figure 17-10. Examples of Multiple Interrupt Servicing (1/2)

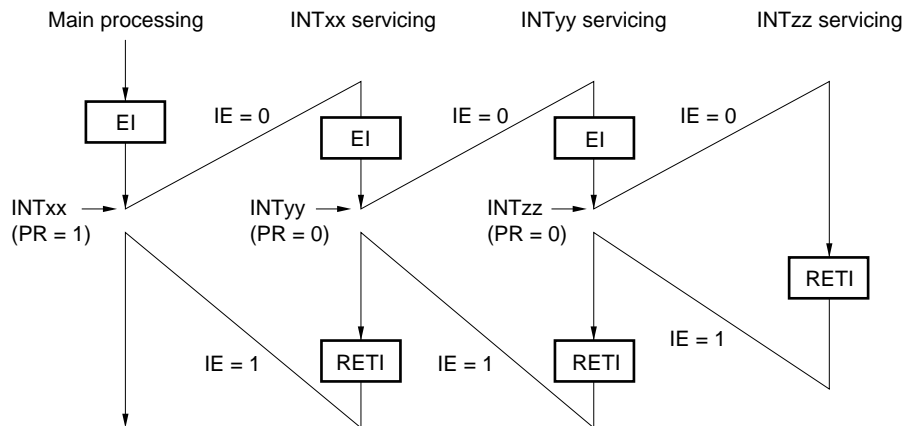**Example 1. Multiple interrupt servicing occurs twice**



During servicing of interrupt INTxx, two interrupt requests, INTyy and INTzz, are acknowledged, and multiple interrupt servicing takes place. Before each interrupt request is acknowledged, the EI instruction must always be issued to enable interrupt request acknowledgment.

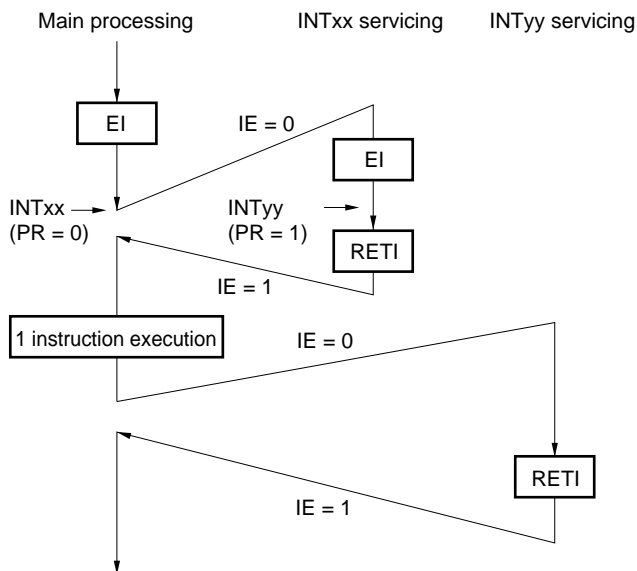
**Example 2. Multiple interrupt servicing does not occur due to priority control**



Interrupt request INTyy issued during servicing of interrupt INTxx is not acknowledged because its priority is lower than that of INTxx, and multiple interrupt servicing does not take place. The INTyy interrupt request is held pending, and is acknowledged following execution of one main processing instruction.

- PR = 0: Higher priority level
- PR = 1: Lower priority level
- IE = 0: Interrupt request acknowledgment disabled

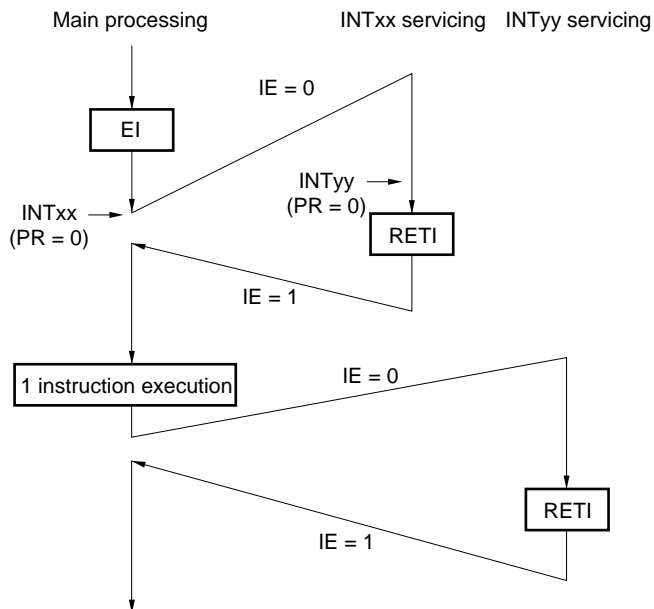Figure 17-10. Examples of Multiple Interrupt Servicing (2/2)

**Example 3. Multiple interrupt servicing does not occur because interrupts are not enabled**

Interrupts are not enabled during servicing of interrupt INTxx (EI instruction is not issued), therefore, interrupt request INTyy is not acknowledged and multiple interrupt servicing does not take place. The INTyy interrupt request is held pending, and is acknowledged following execution of one main processing instruction.

PR = 0: Higher priority level

IE = 0: Interrupt request acknowledgment disabled

#### 17.4.4 Interrupt request hold


There are instructions where, even if an interrupt request is issued for them while another instruction is being executed, request acknowledgment is held pending until the end of execution of the next instruction. These instructions (interrupt request hold instructions) are listed below.

- MOV PSW, #byte
- MOV A, PSW
- MOV PSW, A
- MOV1 PSW. bit, CY
- MOV1 CY, PSW. bit
- AND1 CY, PSW. bit
- OR1 CY, PSW. bit
- XOR1 CY, PSW. bit
- SET1 PSW. bit
- CLR1 PSW. bit
- RETB
- RETI
- PUSH PSW
- POP PSW
- BT PSW. bit, \$addr16
- BF PSW. bit, \$addr16
- BTCLR PSW. bit, \$addr16
- EI
- DI
- Manipulation instructions for the IF0L, IF0H, IF1L, IF1H, MK0L, MK0H, MK1L, MK1H, PR0L, PR0H, PR1L, and PR1H registers.

**Caution** The BRK instruction is not one of the above-listed interrupt request hold instructions. However, the software interrupt activated by executing the BRK instruction causes the IE flag to be cleared. Therefore, even if a maskable interrupt request is generated during execution of the BRK instruction, the interrupt request is not acknowledged.

Figure 17-11 shows the timing at which interrupt requests are held pending.

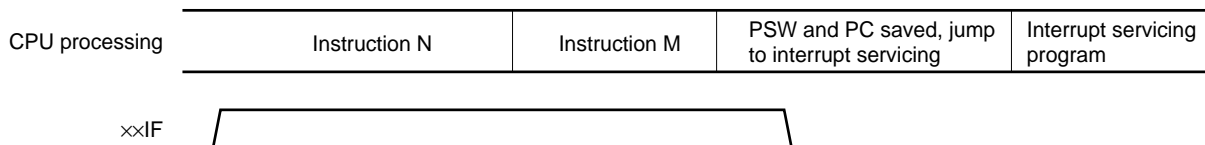**Figure 17-11. Interrupt Request Hold**



- Remarks**
1. Instruction N: Interrupt request hold instruction
  2. Instruction M: Instruction other than interrupt request hold instruction
  3. The  $\times\times$ PR (priority level) values do not affect the operation of  $\times\times$ IF (interrupt request).

## CHAPTER 18 KEY INTERRUPT FUNCTION

### 18.1 Functions of Key Interrupt

A key interrupt (INTKR) can be generated by setting the key return mode register (KRM) and inputting a falling edge to the key interrupt input pins (KR0, KR3, and KR4).

**Table 18-1. Assignment of Key Interrupt Detection Pins**

Flag	Description
KRM0	Controls KR0 signal in 1-bit units.
KRM3	Controls KR3 signal in 1-bit units.
KRM4	Controls KR4 signal in 1-bit units.


### 18.2 Configuration of Key Interrupt

The key interrupt includes the following hardware.

**Table 18-2. Configuration of Key Interrupt**

Item	Configuration
Control register	Key return mode register (KRM)

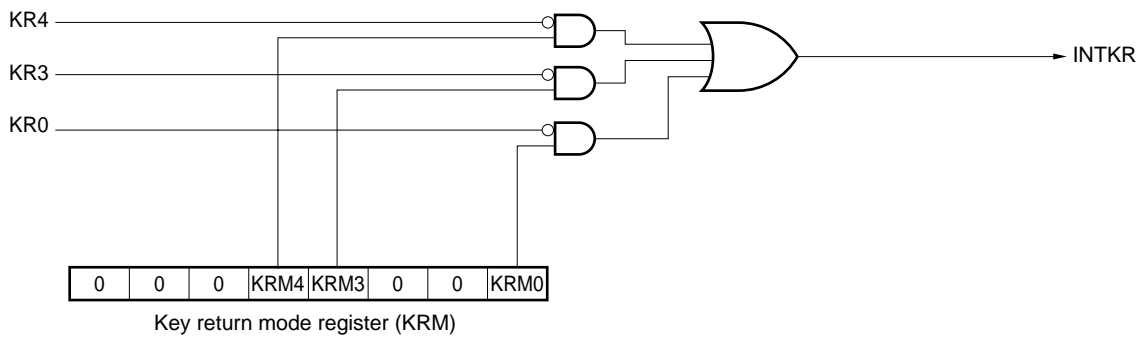**Figure 18-1. Block Diagram of Key Interrupt**





### 18.3 Register Controlling Key Interrupt

#### (1) Key return mode register (KRM)

This register controls the KRM0, KRM3, and KRM4 bits using the KR0, KR3, and KR4 signals, respectively.

KRM is set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation clears KRM to 00H.

**Figure 18-2. Format of Key Return Mode Register (KRM)**

Address: FF6EH    After reset: 00H    R/W

Symbol	7	6	5	4	3	2	1	0
KRM	0	0	0	KRM4	KRM3	0	0	KRM0

KRMn	Key interrupt mode control (n = 0, 3, or 4)
0	Does not detect key interrupt signal
1	Detects key interrupt signal

- Cautions**
1. If any of the KRM0, KRM3, or KRM4 bits used is set to 1, set bit 0 (PU40) of the corresponding pull-up resistor register 4 (PU4), or bits 2 or 3 (PU12 or PU13) of the corresponding pull-up resistor register 1 (PU1) to 1.
  2. If KRM is changed, the interrupt request flag may be set. Therefore, disable interrupts and then change the KRM register. Clear the interrupt request flag and enable interrupts.
  3. The bits not used in the key interrupt mode can be used as normal ports.
  4. When using the P40/KR0/V<sub>LC3</sub> pin for the key interrupt function (KR0), set the LCD display mode register (LCDM) to a setting other than the 1/4 bias method. When the pin is set to the 1/4 bias method, it is used as V<sub>LC3</sub>.

## CHAPTER 19 STANDBY FUNCTION

### 19.1 Standby Function and Configuration

#### 19.1.1 Standby function

The standby function is designed to reduce the operating current of the system. The following two modes are available.

##### (1) HALT mode

HALT instruction execution sets the HALT mode. In the HALT mode, the CPU operation clock is stopped. If the high-speed system clock oscillator, internal high-speed oscillator, internal low-speed oscillator, or subsystem clock oscillator is operating before the HALT mode is set, oscillation of each clock continues. In this mode, the operating current is not decreased as much as in the STOP mode, but the HALT mode is effective for restarting operation immediately upon interrupt request generation and carrying out intermittent operations frequently.

##### (2) STOP mode

STOP instruction execution sets the STOP mode. In the STOP mode, the high-speed system clock oscillator and internal high-speed oscillator stop, stopping the whole system, thereby considerably reducing the CPU operating current.

Because this mode can be cleared by an interrupt request, it enables intermittent operations to be carried out. However, because a wait time is required to secure the oscillation stabilization time after the STOP mode is released when the X1 clock is selected, select the HALT mode if it is necessary to start processing immediately upon interrupt request generation.

In either of these two modes, all the contents of registers, flags and data memory just before the standby mode is set are held. The I/O port output latches and output buffer statuses are also held.

- Cautions**
- 1. The STOP mode can be used only when the CPU is operating on the main system clock. The subsystem clock oscillation cannot be stopped. The HALT mode can be used when the CPU is operating on either the main system clock or the subsystem clock.**
  - 2. When shifting to the STOP mode, be sure to stop the peripheral hardware operation operating with main system clock before executing STOP instruction.**
  - 3. The following sequence is recommended for operating current reduction of the 10-bit successive approximation type A/D converter when the standby function is used: First clear bit 7 (ADCS) and bit 0 (ADCE) of the A/D converter mode register (ADM) to 0 to stop the A/D conversion operation, and then execute the STOP instruction.**

19.1.2 Registers controlling standby function

The standby function is controlled by the following two registers.

- Oscillation stabilization time counter status register (OSTC)
- Oscillation stabilization time select register (OSTS)

**Remark** For the registers that start, stop, or select the clock, see **CHAPTER 5 CLOCK GENERATOR**.

(1) Oscillation stabilization time counter status register (OSTC)

This is the register that indicates the count status of the X1 clock oscillation stabilization time counter. When X1 clock oscillation starts with the internal high-speed oscillation clock or subsystem clock used as the CPU clock, the X1 clock oscillation stabilization time can be checked.

OSTC can be read by a 1-bit or 8-bit memory manipulation instruction.

When reset is released (reset by  $\overline{\text{RESET}}$  input, POC, LVI, and WDT), the STOP instruction and MSTOP (bit 7 of MOC register) = 1 clear OSTC to 00H.

Figure 19-1. Format of Oscillation Stabilization Time Counter Status Register (OSTC)

Address: FFA3H After reset: 00H R

Symbol	7	6	5	4	3	2	1	0
OSTC	0	0	0	MOST11	MOST13	MOST14	MOST15	MOST16

MOST11	MOST13	MOST14	MOST15	MOST16	Oscillation stabilization time status	
					$f_x = 10 \text{ MHz}$	
1	0	0	0	0	$2^{11}/f_x \text{ min.}$	204.8 $\mu\text{s}$ min.
1	1	0	0	0	$2^{13}/f_x \text{ min.}$	819.2 $\mu\text{s}$ min.
1	1	1	0	0	$2^{14}/f_x \text{ min.}$	1.64 ms min.
1	1	1	1	0	$2^{15}/f_x \text{ min.}$	3.27 ms min.
1	1	1	1	1	$2^{16}/f_x \text{ min.}$	6.55 ms min.


**Cautions** 1. After the above time has elapsed, the bits are set to 1 in order from MOST11 and remain 1.

2. The oscillation stabilization time counter counts up to the oscillation stabilization time set by OSTS. If the STOP mode is entered and then released while the internal high-speed oscillation clock is being used as the CPU clock, set the oscillation stabilization time as follows.

- Desired OSTC oscillation stabilization time  $\leq$  Oscillation stabilization time set by OSTS

**Note**, therefore, that only the status up to the oscillation stabilization time set by OSTS is set to OSTC after STOP mode is released.

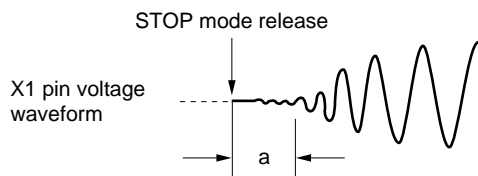3. The X1 clock oscillation stabilization wait time does not include the time until clock oscillation starts (“a” below).



**Remark**  $f_x$ : X1 clock oscillation frequency

**(2) Oscillation stabilization time select register (OSTS)**

This register is used to select the X1 clock oscillation stabilization wait time when the STOP mode is released. When the X1 clock is selected as the CPU clock, the operation waits for the time set using OSTS after the STOP mode is released.

When the internal high-speed oscillation clock is selected as the CPU clock, confirm with OSTC that the desired oscillation stabilization time has elapsed after the STOP mode is released. The oscillation stabilization time can be checked up to the time set using OSTC.

OSTS can be set by an 8-bit memory manipulation instruction.

Reset signal generation sets OSTS to 05H.

**Figure 19-2. Format of Oscillation Stabilization Time Select Register (OSTS)**

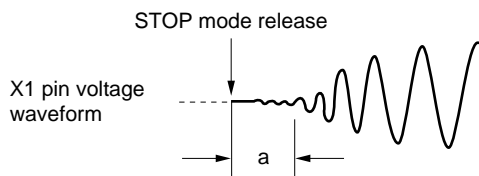
Address: FFA4H After reset: 05H R/W

Symbol	7	6	5	4	3	2	1	0
OSTS	0	0	0	0	0	OSTS2	OSTS1	OSTS0

OSTS2	OSTS1	OSTS0	Oscillation stabilization time selection	
				$f_x = 10 \text{ MHz}$
0	0	1	$2^{11}/f_x$	204.8 $\mu\text{s}$
0	1	0	$2^{13}/f_x$	819.2 $\mu\text{s}$
0	1	1	$2^{14}/f_x$	1.64 ms
1	0	0	$2^{15}/f_x$	3.27 ms
1	0	1	$2^{16}/f_x$	6.55 ms
Other than above			Setting prohibited	

- Cautions**
- To set the STOP mode when the X1 clock is used as the CPU clock, set OSTS before executing the STOP instruction.
  - Do not change the value of the OSTS register during the X1 clock oscillation stabilization time.
  - The oscillation stabilization time counter counts up to the oscillation stabilization time set by OSTS. If the STOP mode is entered and then released while the internal high-speed oscillation clock is being used as the CPU clock, set the oscillation stabilization time as follows.
    - Desired OSTC oscillation stabilization time  $\leq$  Oscillation stabilization time set by OSTS

Note, therefore, that only the status up to the oscillation stabilization time set by OSTS is set to OSTC after STOP mode is released.
  - The X1 clock oscillation stabilization wait time does not include the time until clock oscillation starts (“a” below).



**Remark**  $f_x$ : X1 clock oscillation frequency

## 19.2 Standby Function Operation

### 19.2.1 HALT mode

#### (1) HALT mode

The HALT mode is set by executing the HALT instruction. HALT mode can be set regardless of whether the CPU clock before the setting was the high-speed system clock, internal high-speed oscillation clock, or subsystem clock.

The operating statuses in the HALT mode are shown below.

**Table 19-1. Operating Statuses in HALT Mode (1/2)**

HALT Mode Setting Item		When HALT Instruction Is Executed While CPU Is Operating on Main System Clock		
		When CPU Is Operating on Internal High-Speed Oscillation Clock ( $f_{RH}$ )	When CPU Is Operating on X1 Clock ( $f_x$ )	When CPU Is Operating on External Main System Clock ( $f_{EXCLK}$ )
System clock		Clock supply to the CPU is stopped		
Main system clock	$f_{RH}$	Operation continues (cannot be stopped)	Status before HALT mode was set is retained	
	$f_x$	Status before HALT mode was set is retained	Operation continues (cannot be stopped)	Status before HALT mode was set is retained
	$f_{EXCLK}$	Operates or stops by external clock input		Operation continues (cannot be stopped)
Subsystem clock	$f_{XT}$	Status before HALT mode was set is retained		
$f_{RL}$		Status before HALT mode was set is retained		
CPU		Operation stopped		
Flash memory				
RAM		Status before HALT mode was set is retained		
Port (latch)				
16-bit timer/event counter 00		Operable		
8-bit timer/event counter	50			
	51			
	52			
8-bit timer	H0			
	H1			
	H2			
Real-time counter				
Watchdog timer		Operable. Clock supply to watchdog timer stops when "internal low-speed oscillator can be stopped by software" is set by option byte.		
Buzzer output		Operable		
10-bit successive approximation type A/D converter <sup>Note</sup>				
Serial interface	UART0			
	UART6			
LCD controller/driver				
Manchester code generator				
Remote controller receiver				
Power-on-clear function				
Low-voltage detection function				
External interrupt				

**Note**  $\mu$ PD78F041x only.

**Remark**  $f_{RH}$ : Internal high-speed oscillation clock  
 $f_x$ : X1 clock  
 $f_{EXCLK}$ : External main system clock  
 $f_{XT}$ : XT1 clock  
 $f_{RL}$ : Internal low-speed oscillation clock

Table 19-1. Operating Statuses in HALT Mode (2/2)

HALT Mode Setting		When HALT Instruction Is Executed While CPU Is Operating on Subsystem Clock
Item		When CPU Is Operating on XT1 Clock ( $f_{XT}$ )
System clock		Clock supply to the CPU is stopped
Main system clock	$f_{RH}$	Status before HALT mode was set is retained
	$f_X$	
	$f_{EXCLK}$	Operates or stops by external clock input
Subsystem clock	$f_{XT}$	Operation continues (cannot be stopped)
	$f_{RL}$	Status before HALT mode was set is retained
CPU		Operation stopped
Flash memory		
RAM		Status before HALT mode was set is retained
Port (latch)		
16-bit timer/event counter 00 <sup>Note 1</sup>		Operable
8-bit timer/event counter	50	
	51	
	52 <sup>Note 1</sup>	
8-bit timer	H0	
	H1	
	H2	
Real-time counter		
Watchdog timer		Operable. Clock supply to watchdog timer stops when "internal low-speed oscillator can be stopped by software" is set by option byte.
Buzzer output		Operable. However, operation disabled when peripheral hardware clock ( $f_{PRS}$ ) is stopped.
10-bit successive approximation type A/D converter <sup>Note 2</sup>		
Serial interface	UART0	Operable
	UART6	
LCD controller/driver		
Manchester code generator		
Power-on-clear function		
Low-voltage detection function		
External interrupt		

**Notes 1.** When the CPU is operating on the subsystem clock and the internal high-speed oscillation clock has been stopped, do not start operation of these functions on the external clock input from peripheral hardware pins.

**2.**  $\mu$ PD78F041x only.

**Remark**  $f_{RH}$ : Internal high-speed oscillation clock  
 $f_X$ : X1 clock  
 $f_{EXCLK}$ : External main system clock  
 $f_{XT}$ : XT1 clock  
 $f_{RL}$ : Internal low-speed oscillation clock


(2) **HALT mode release**

The HALT mode can be released by the following two sources.

(a) **Release by unmasked interrupt request**

When an unmasked interrupt request is generated, the HALT mode is released. If interrupt acknowledgment is enabled, vectored interrupt servicing is carried out. If interrupt acknowledgment is disabled, the next address instruction is executed.

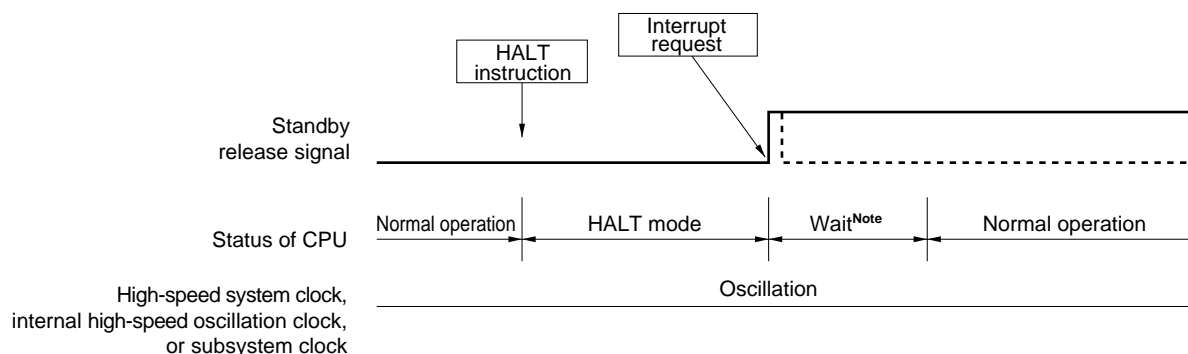**Figure 19-3. HALT Mode Release by Interrupt Request Generation**



**Note** The wait time is as follows:

- When vectored interrupt servicing is carried out: 8 or 9 clocks
- When vectored interrupt servicing is not carried out: 2 or 3 clocks

**Remark** The broken lines indicate the case when the interrupt request which has released the standby mode is acknowledged.




**(b) Release by reset signal generation**


When the reset signal is generated, HALT mode is released, and then, as in the case with a normal reset operation, the program is executed after branching to the reset vector address.

**Figure 19-4. HALT Mode Release by Reset**

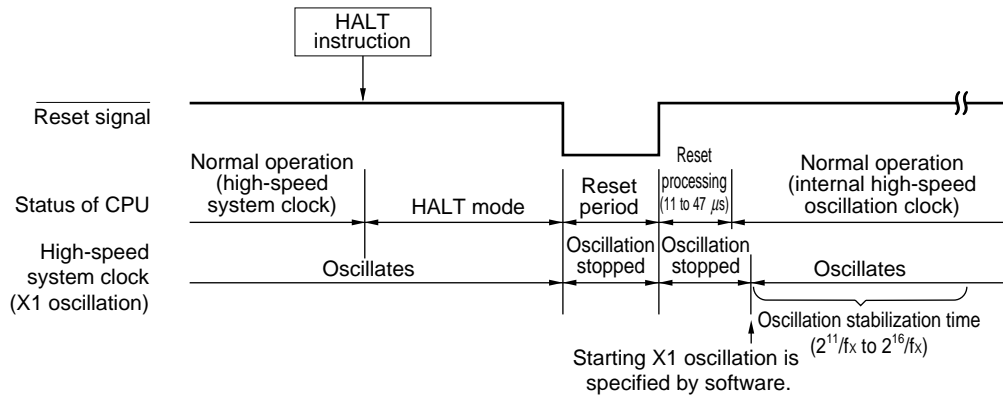
**(1) When high-speed system clock is used as CPU clock**



**(2) When internal high-speed oscillation clock is used as CPU clock**

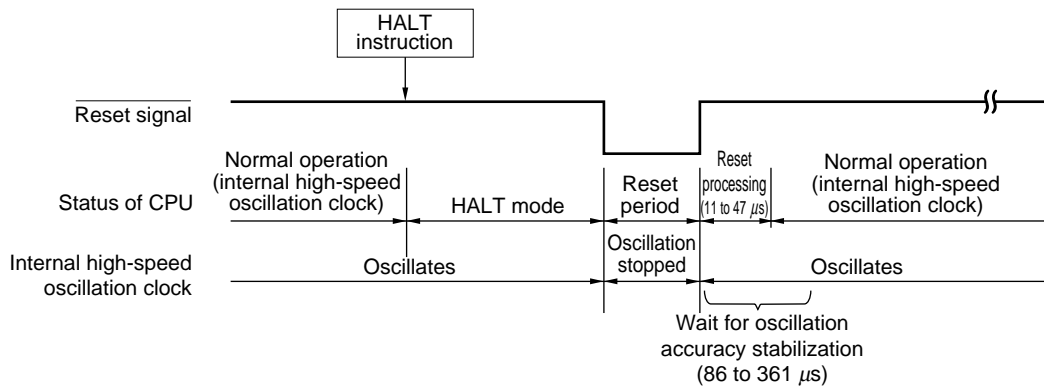

**(3) When subsystem clock is used as CPU clock**

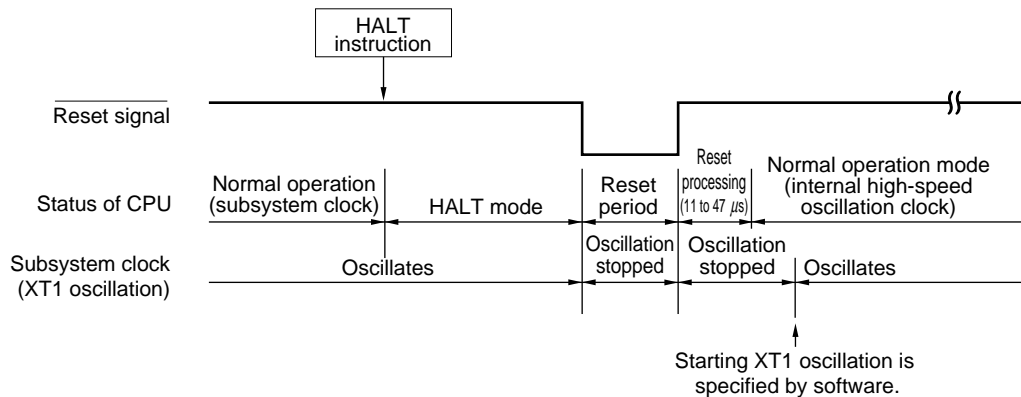

**Remark**  $f_x$ : X1 clock oscillation frequency

Table 19-2. Operation in Response to Interrupt Request in HALT Mode

Release Source	MK <sub>xx</sub>	PR <sub>xx</sub>	IE	ISP	Operation
Maskable interrupt request	0	0	0	×	Next address instruction execution
	0	0	1	×	Interrupt servicing execution
	0	1	0	1	Next address instruction execution
	0	1	×	0	
	0	1	1	1	Interrupt servicing execution
	1	×	×	×	HALT mode held
Reset	–	–	×	×	Reset processing

×: don't care

### 19.2.2 STOP mode

#### (1) STOP mode setting and operating statuses

The STOP mode is set by executing the STOP instruction, and it can be set only when the CPU clock before the setting was the main system clock.

**Caution** Because the interrupt request signal is used to clear the standby mode, if there is an interrupt source with the interrupt request flag set and the interrupt mask flag reset, the standby mode is immediately cleared if set. Thus, the STOP mode is reset to the HALT mode immediately after execution of the STOP instruction and the system returns to the operating mode as soon as the wait time set using the oscillation stabilization time select register (OSTS) has elapsed.

The operating statuses in the STOP mode are shown below.

Table 19-3. Operating Statuses in STOP Mode

STOP Mode Setting		When STOP Instruction Is Executed While CPU Is Operating on Main System Clock		
		When CPU Is Operating on Internal High-Speed Oscillation Clock ( $f_{RH}$ )	When CPU Is Operating on X1 Clock ( $f_x$ )	When CPU Is Operating on External Main System Clock ( $f_{EXCLK}$ )
System clock		Clock supply to the CPU is stopped		
Main system clock	$f_{RH}$	Stopped		
	$f_x$			
	$f_{EXCLK}$	Input invalid		
Subsystem clock	$f_{XT}$	Status before STOP mode was set is retained		
	$f_{RL}$	Status before STOP mode was set is retained		
CPU		Operation stopped		
Flash memory				
RAM		Status before STOP mode was set is retained		
Port (latch)				
16-bit timer/event counter 00 <sup>Note 1</sup>		Operable only when TM52 output or TI000 is selected as the count clock		
8-bit timer/event counter	50	Status before STOP mode was set is retained		
	51			
	52 <sup>Note 1</sup>	Operable only when TI52 is selected as the count clock		
8-bit timer	H0	Operable only when TM50 output is selected as the count clock during 8-bit timer/event counter 50 operation		
	H1	Operable only when $f_{RL}$ , $f_{RL}/2^7$ , $f_{RL}/2^9$ is selected as the count clock		
	H2	Operation stopped		
Real-time counter		Operable only when subsystem clock is selected as the count clock		
Watchdog timer		Operable. Clock supply to watchdog timer stops when "internal low-speed oscillator can be stopped by software" is set by option byte.		
Buzzer output		Operation stopped		
10-bit successive approximation type A/D converter <sup>Note 2</sup>				
Serial interface	UART0	Operable only when TM50 output is selected as the serial clock during 8-bit timer/event counter 50 operation		
	UART6			
LCD controller/driver		Operable only when subsystem clock is selected as the count clock		
Manchester code generator		Operation stopped		
Power-on-clear function		Operable		
Low-voltage detection function				
External interrupt				

**Notes 1.** Do not start operation of these functions on the external clock input from peripheral hardware pins in the stop mode.


**2.**  $\mu$ PD78F041x only.

**Remark**  $f_{RH}$ : Internal high-speed oscillation clock  
 $f_x$ : X1 clock  
 $f_{EXCLK}$ : External main system clock  
 $f_{XT}$ : XT1 clock  
 $f_{RL}$ : Internal low-speed oscillation clock

- Cautions**
1. To use the peripheral hardware that stops operation in the STOP mode, and the peripheral hardware for which the clock that stops oscillating in the STOP mode after the STOP mode is released, restart the peripheral hardware.
  2. Even if “internal low-speed oscillator can be stopped by software” is selected by the option byte, the internal low-speed oscillation clock continues in the STOP mode in the status before the STOP mode is set. To stop the internal low-speed oscillator’s oscillation in the STOP mode, stop it by software and then execute the STOP instruction.
  3. To shorten oscillation stabilization time after the STOP mode is released when the CPU operates with the high-speed system clock (X1 oscillation), temporarily switch the CPU clock to the internal high-speed oscillation clock before the next execution of the STOP instruction. Before changing the CPU clock from the internal high-speed oscillation clock to the high-speed system clock (X1 oscillation) after the STOP mode is released, check the oscillation stabilization time with the oscillation stabilization time counter status register (OSTC).

(2) STOP mode release

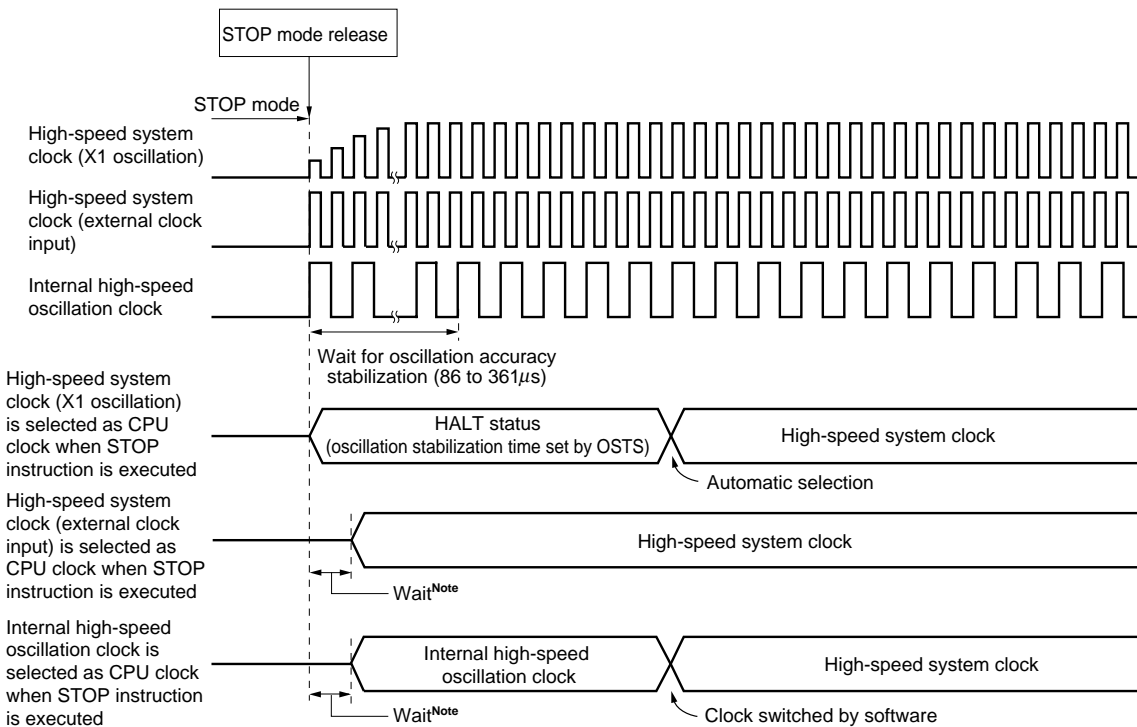**Figure 19-5. Operation Timing When STOP Mode Is Released (When Unmasked Interrupt Request Is Generated)**



**Note** The wait time is as follows:

- When vectored interrupt servicing is carried out: 8 or 9 clocks
- When vectored interrupt servicing is not carried out: 2 or 3 clocks


The STOP mode can be released by the following two sources.

**(a) Release by unmasked interrupt request**


When an unmasked interrupt request is generated, the STOP mode is released. After the oscillation stabilization time has elapsed, if interrupt acknowledgment is enabled, vectored interrupt servicing is carried out. If interrupt acknowledgment is disabled, the next address instruction is executed.

**Figure 19-6. STOP Mode Release by Interrupt Request Generation (1/2)**

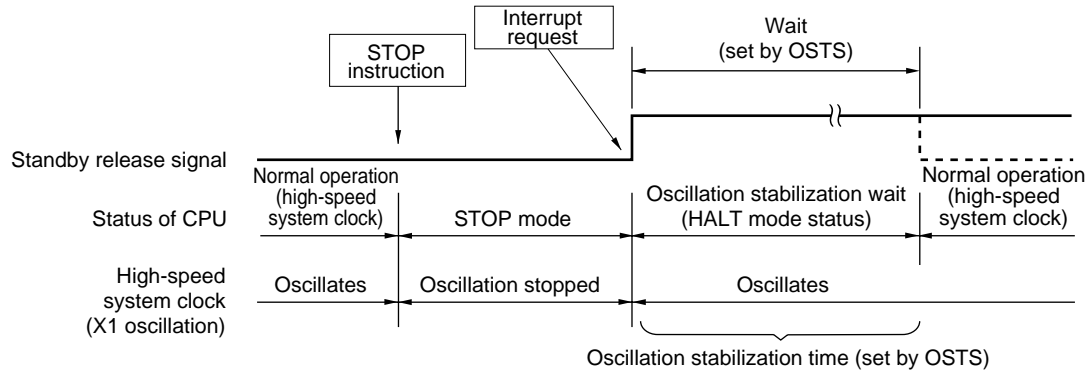**(1) When high-speed system clock (X1 oscillation) is used as CPU clock**



**(2) When high-speed system clock (external clock input) is used as CPU clock**

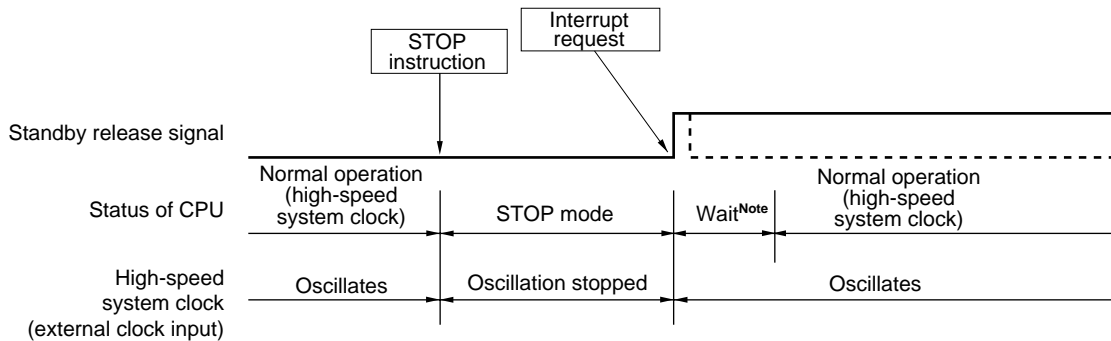


**Note** The wait time is as follows:

- When vectored interrupt servicing is carried out: 8 or 9 clocks
- When vectored interrupt servicing is not carried out: 2 or 3 clocks

**Remark** The broken lines indicate the case when the interrupt request that has released the standby mode is acknowledged.

Figure 19-6. STOP Mode Release by Interrupt Request Generation (2/2)

## (3) When internal high-speed oscillation clock is used as CPU clock

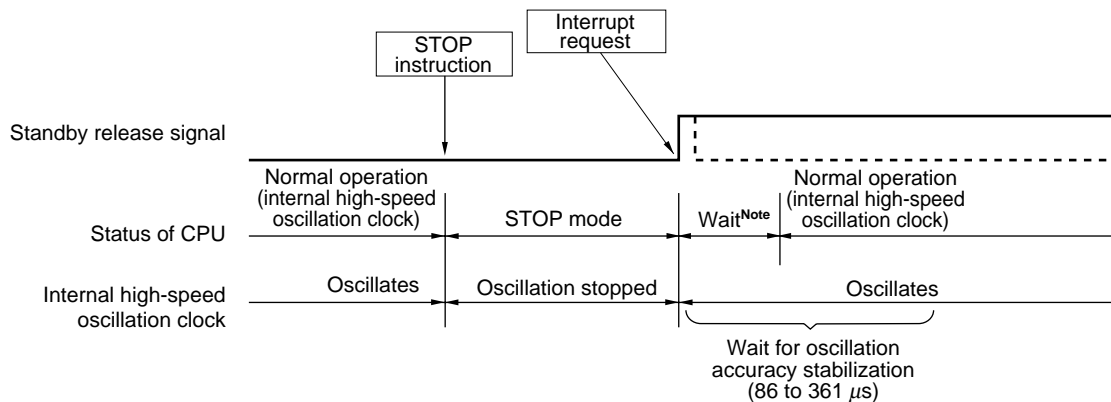

**Note** The wait time is as follows:

- When vectored interrupt servicing is carried out: 8 or 9 clocks
- When vectored interrupt servicing is not carried out: 2 or 3 clocks


**Remark** The broken lines indicate the case when the interrupt request that has released the standby mode is acknowledged.

**(b) Release by reset signal generation**


When the reset signal is generated, STOP mode is released, and then, as in the case with a normal reset operation, the program is executed after branching to the reset vector address.

**Figure 19-7. STOP Mode Release by Reset**

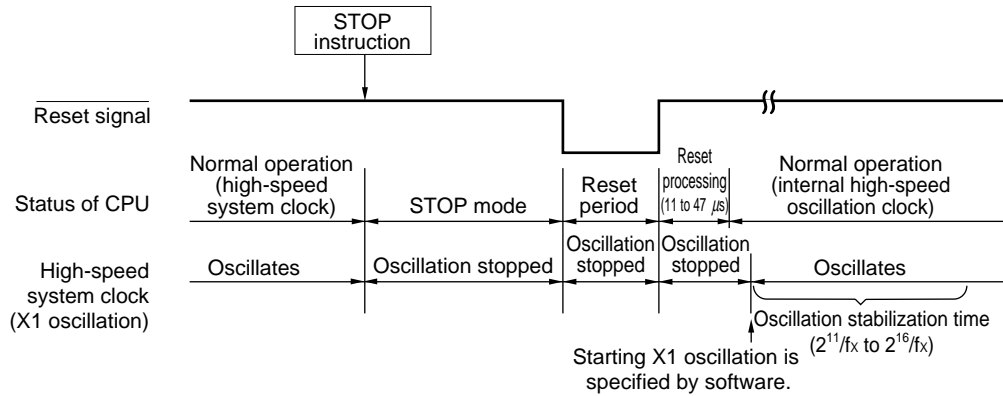**(1) When high-speed system clock is used as CPU clock**



**(2) When internal high-speed oscillation clock is used as CPU clock**

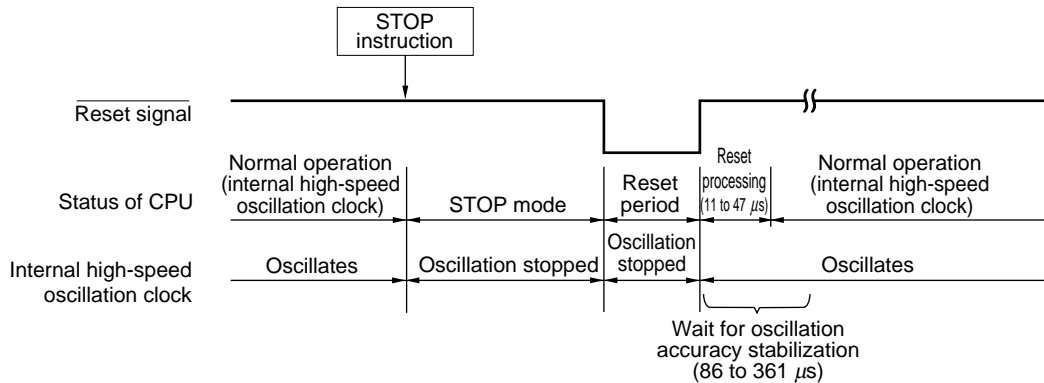

**Remark** fx: X1 clock oscillation frequency

**Table 19-4. Operation in Response to Interrupt Request in STOP Mode**

Release Source	MKxx	PRxx	IE	ISP	Operation
Maskable interrupt request	0	0	0	×	Next address instruction execution
	0	0	1	×	Interrupt servicing execution
	0	1	0	1	Next address instruction execution
	0	1	×	0	
	0	1	1	1	Interrupt servicing execution
	1	×	×	×	STOP mode held
Reset	–	–	×	×	Reset processing

×: don't care

## CHAPTER 20 RESET FUNCTION

The following four operations are available to generate a reset signal.

- (1) External reset input via  $\overline{\text{RESET}}$  pin
- (2) Internal reset by watchdog timer program loop detection
- (3) Internal reset by comparison of supply voltage and detection voltage of power-on-clear (POC) circuit
- (4) Internal reset by comparison of supply voltage and detection voltage of low-power-supply detector (LVI)

External and internal resets have no functional differences. In both cases, program execution starts at the address at 0000H and 0001H when the reset signal is generated.


A reset is applied when a low level is input to the  $\overline{\text{RESET}}$  pin, the watchdog timer overflows, or by POC and LVI circuit voltage detection, and each item of hardware is set to the status shown in Tables 20-1 and 20-2. Each pin is high impedance during reset signal generation or during the oscillation stabilization time just after a reset release.

When a low level is input to the  $\overline{\text{RESET}}$  pin, the device is reset. It is released from the reset status when a high level is input to the  $\overline{\text{RESET}}$  pin and program execution is started with the internal high-speed oscillation clock after reset processing. A reset by the watchdog timer is automatically released, and program execution starts using the internal high-speed oscillation clock (see **Figures 20-2 to 20-4**) after reset processing. Reset by POC and LVI circuit power supply detection is automatically released when  $V_{DD} \geq V_{POC}$  or  $V_{DD} \geq V_{LVI}$  after the reset, and program execution starts using the internal high-speed oscillation clock (see **CHAPTER 21 POWER-ON-CLEAR CIRCUIT** and **CHAPTER 22 LOW-VOLTAGE DETECTOR**) after reset processing.

- Cautions**
1. For an external reset, input a low level for 10  $\mu\text{s}$  or more to the  $\overline{\text{RESET}}$  pin.
  2. During reset input, the X1 clock, XT1 clock, internal high-speed oscillation clock, and internal low-speed oscillation clock stop oscillating. External main system clock input becomes invalid.
  3. When the STOP mode is released by a reset, the STOP mode contents are held during reset input. However, the port pins become high-impedance.



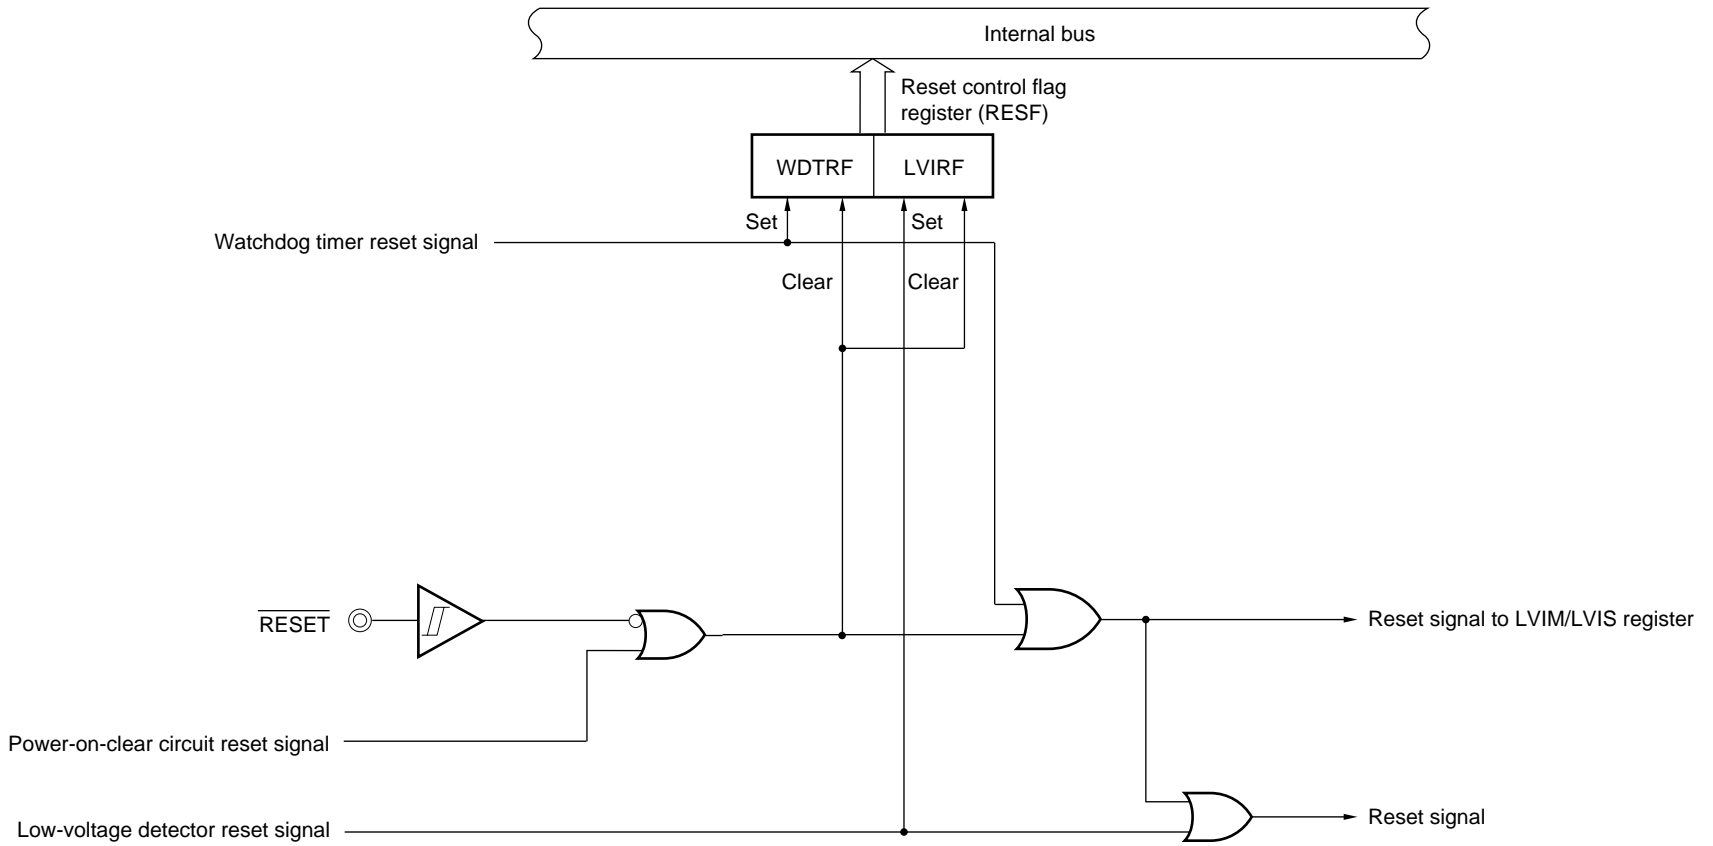Figure 20-1. Block Diagram of Reset Function



**Caution** An LVI circuit internal reset does not reset the LVI circuit.

- Remarks**
1. LVIM: Low-voltage detection register
  2. LVIS: Low-voltage detection level selection register

Figure 20-2. Timing of Reset by RESET Input



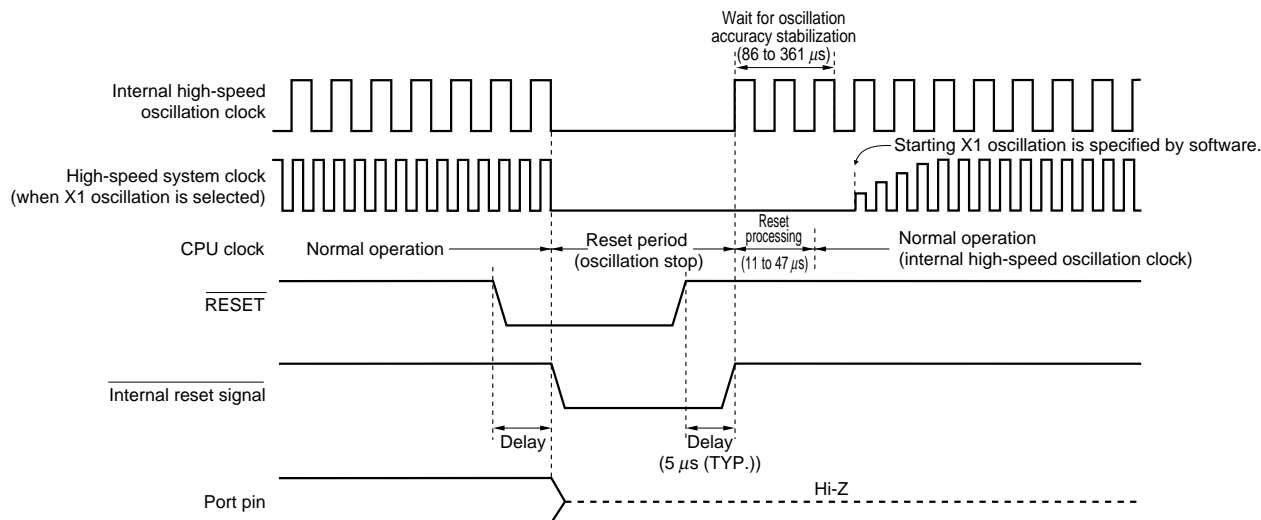


Figure 20-3. Timing of Reset Due to Watchdog Timer Overflow

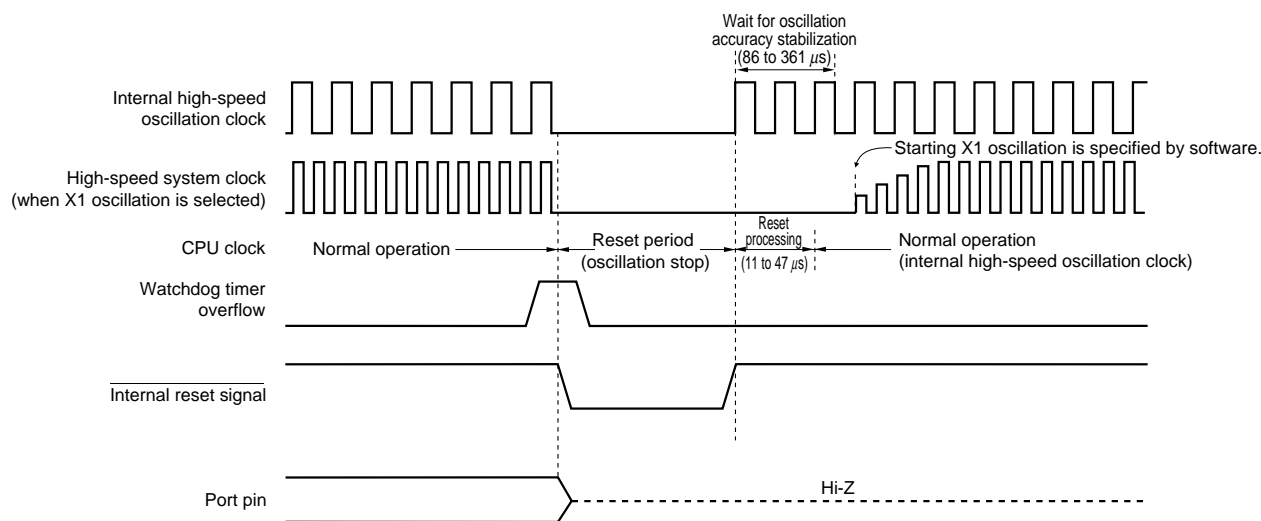

**Caution** A watchdog timer internal reset resets the watchdog timer.

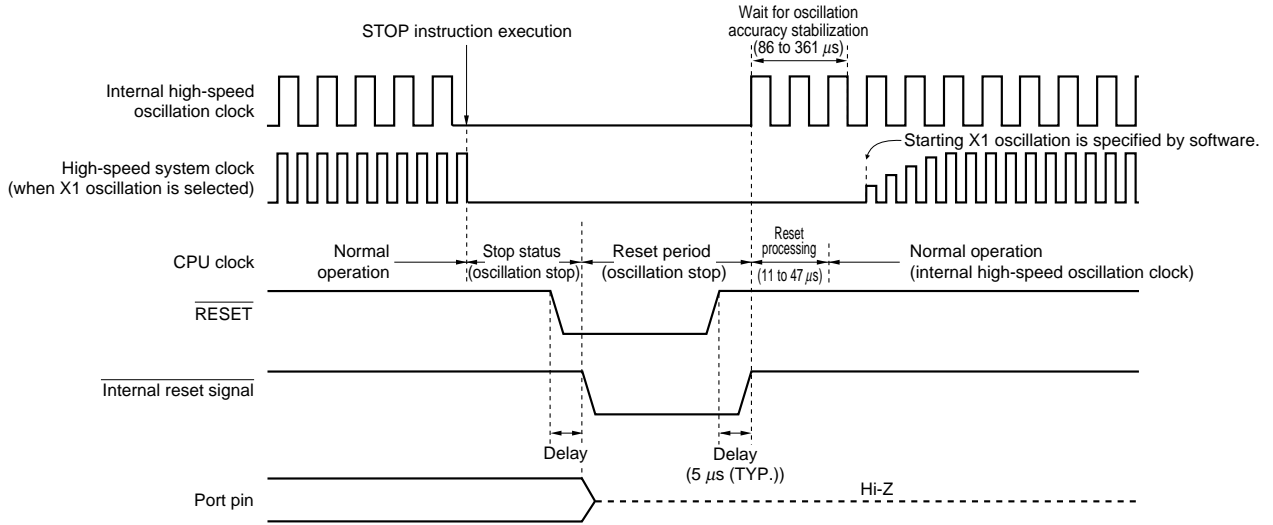Figure 20-4. Timing of Reset in STOP Mode by  $\overline{\text{RESET}}$  Input



**Remark** For the reset timing of the power-on-clear circuit and low-voltage detector, see **CHAPTER 21 POWER-ON-CLEAR CIRCUIT** and **CHAPTER 22 LOW-VOLTAGE DETECTOR**.

Table 20-1. Operation Statuses During Reset Period

Item		During Reset Period	
System clock		Clock supply to the CPU is stopped.	
Main system clock	f <sub>RH</sub>	Operation stopped	
	f <sub>X</sub>	Operation stopped (pin is I/O port mode)	
	f <sub>EXCLK</sub>	Clock input invalid (pin is I/O port mode)	
Subsystem clock	f <sub>XT</sub>	Operation stopped (pin is I/O port mode)	
f <sub>RL</sub>		Operation stopped	
CPU			
Flash memory			
RAM			
Port (latch)			
16-bit timer/event counter	00		
8-bit timer/event counter	50		
	51		
	52		
8-bit timer	H0		
	H1		
	H2		
Real-time counter			
Watchdog timer			
Buzzer output			
10-bit successive approximation type A/D converter <sup>Note</sup>			
Serial interface	UART0		
	UART6		
LCD controller/driver			
Manchester code generator			
Power-on-clear function			Operable
Low-voltage detection function			Operation stopped
External interrupt			

**Note**  $\mu$ PD78F041x only.

**Remark** f<sub>RH</sub>: Internal high-speed oscillation clock  
 f<sub>X</sub>: X1 oscillation clock  
 f<sub>EXCLK</sub>: External main system clock  
 f<sub>XT</sub>: XT1 oscillation clock  
 f<sub>RL</sub>: Internal low-speed oscillation clock

Table 20-2. Hardware Statuses After Reset Acknowledgment (1/3)

Hardware		After Reset Acknowledgment <sup>Note 1</sup>
Program counter (PC)		The contents of the reset vector table (0000H, 0001H) are set.
Stack pointer (SP)		Undefined
Program status word (PSW)		02H
RAM	Data memory	Undefined <sup>Note 2</sup>
	General-purpose registers	Undefined <sup>Note 2</sup>
Port registers (P1 to P4, P10 to P12, P14, P15) (output latches)		00H
Port mode registers (PM1 to PM4, PM10 to PM12, PM14, PM15)		FFH
Pull-up resistor option registers (PU1, PU3, PU4, PU10 to PU12, PU14, PU15)		00H
Port function register (PF1)		00H
Port function register (PF2)		00H
Port function register (PFALL)		00H
Internal memory size switching register (IMS)		CFH <sup>Note 3</sup>
Clock operation mode select register (OSCCTL)		00H
Processor clock control register (PCC)		01H
Internal oscillation mode register (RCM)		80H
Main OSC control register (MOC)		80H
Main clock mode register (MCM)		00H
Oscillation stabilization time counter status register (OSTC)		00H
Oscillation stabilization time select register (OSTS)		05H
Internal high-speed oscillation trimming register (HIOTRM)		10H
16-bit timer/event counters 00	Timer counters 00 (TM00)	0000H
	Capture/compare registers 000, 010 (CR000, CR010)	0000H
	Mode control registers 00 (TMC00)	00H
	Prescaler mode registers 00 (PRM00)	00H
	Capture/compare control registers 00 (CRC00)	00H
	Timer output control registers 00 (TOC00)	00H
8-bit timer/event counters 50, 51, 52	Timer counters 50, 51, 52 (TM50, TM51, TM52)	00H
	Compare registers 50, 51, 52 (CR50, CR51, CR52)	00H
	Timer clock selection registers 50, 51, 52 (TCL50, TCL51, TCL52)	00H
	Mode control registers 50, 51, 52 (TMC50, TMC51, TMC52)	00H

- Notes**
1. During reset signal generation or oscillation stabilization time wait, only the PC contents among the hardware statuses become undefined. All other hardware statuses remain unchanged after reset.
  2. When a reset is executed in the standby mode, the pre-reset status is held even after reset.
  3. The initial values of the internal memory size switching register (IMS) after a reset release are constant (IMS = CFH) in all the 78K0/LC3 products, regardless of the internal memory capacity. Therefore, after a reset is released, be sure to set the following values for each product.

Flash Memory Version (78K0/LC3)	IMS	ROM Capacity	Internal High-Speed RAM Capacity
μPD78F0400, 78F0410	42H	8 KB	512 bytes
μPD78F0401, 78F0411	04H	16 KB	768 bytes
μPD78F0402, 78F0412	C6H	24 KB	1 KB
μPD78F0403, 78F0413	C8H	32 KB	

Table 20-2. Hardware Statuses After Reset Acknowledgment (2/3)

Hardware		Status After Reset Acknowledgment <sup>Note 1</sup>
8-bit timers H0, H1, H2	Compare registers 00, 10, 01, 11, 02, 12 (CMP00, CMP10, CMP01, CMP11, CMP02, CMP12)	00H
	Mode registers (TMHMD0, TMHMD1, TMHMD2)	00H
	Carrier control register 1 (TMCYC1) <sup>Note 2</sup>	00H
Real-time counter	Clock selection register (RTCCL)	00H
	Sub-count register (RSUBC)	0000H
	Second count register (SEC)	00H
	Minute count register (MIN)	00H
	Hour count register (HOUR)	12H
	Week count register (WEEK)	00H
	Day count register (DAY)	01H
	Month count register (MONTH)	01H
	Year count register (YEAR)	00H
	Watch error correction register (SUBCUD)	00H
	Alarm minute register (ALARMWMM)	00H
	Alarm hour register (ALARMWH)	12H
	Alarm week register (ALARMWW)	00H
	Control register 0 (RTCC0)	00H
	Control register 1 (RTCC1)	00H
Control register 2 (RTCC2)	00H	
buzzer output controller	Clock output selection register (CKS)	00H
Watchdog timer	Enable register (WDTE)	1AH/9AH <sup>Note 3</sup>
10-bit successive approximation type A/D converter <sup>Note 4</sup>	10-bit A/D conversion result register (ADCR)	0000H
	8-bit A/D conversion result register (ADCRH)	00H
	A/D converter mode register (ADM)	00H
	Analog input channel specification register (ADS)	00H
	A/D port configuration register 0 (ADPC0)	08H
Serial interface UART0	Receive buffer register 0 (RXB0)	FFH
	Transmit shift register 0 (TXS0)	FFH
	Asynchronous serial interface operation mode register 0 (ASIM0)	01H
	Asynchronous serial interface reception error status register 0 (ASIS0)	00H
	Baud rate generator control register 0 (BRGC0)	1FH

**Notes** 1. During reset signal generation or oscillation stabilization time wait, only the PC contents among the hardware statuses become undefined. All other hardware statuses remain unchanged after reset.

2. 8-bit timer H1 only.
3. The reset value of WDTE is determined by the option byte setting.
4.  $\mu$ PD78F041x only.

**Table 20-2. Hardware Statuses After Reset Acknowledgment (3/3)**

Hardware		Status After Reset Acknowledgment <sup>Note 1</sup>
Serial interface UART6	Receive buffer register 6 (RXB6)	FFH
	Transmit buffer register 6 (TXB6)	FFH
	Asynchronous serial interface operation mode register 6 (ASIM6)	01H
	Asynchronous serial interface reception error status register 6 (ASIS6)	00H
	Asynchronous serial interface transmission status register 6 (ASIF6)	00H
	Clock selection register 6 (CKSR6)	00H
	Baud rate generator control register 6 (BRGC6)	FFH
	Asynchronous serial interface control register 6 (ASICL6)	16H
	Input switch control register (ISC)	00H
LCD controller/driver	LCD mode register (LCDMD)	00H
	LCD display mode register (LCDM)	00H
	LCD clock control register 0 (LCDC0)	00H
Manchester code generator	Transmit buffer register (MC0TX)	FFH
	Transmit bit count specification register (MC0BIT)	07H
	Control register 0 (MC0CTL0)	10H
	Control register 1 (MC0CTL1)	00H
	Control register 2 (MC0CTL2)	1FH
	Status register (MC0STR)	00H
Key interrupt	Key return mode register (KRM)	00H
Reset function	Reset control flag register (RESF)	00H <sup>Note 2</sup>
Low-voltage detector	Low-voltage detection register (LVIM)	00H <sup>Note 2</sup>
	Low-voltage detection level selection register (LVIS)	00H <sup>Note 2</sup>
Interrupt	Request flag registers 0L, 0H, 1L, 1H (IF0L, IF0H, IF1L, IF1H)	00H
	Mask flag registers 0L, 0H, 1L, 1H (MK0L, MK0H, MK1L, MK1H)	FFH
	Priority specification flag registers 0L, 0H, 1L, 1H (PR0L, PR0H, PR1L, PR1H)	FFH
	External interrupt rising edge enable register (EGP)	00H
	External interrupt falling edge enable register (EGN)	00H

**Notes 1.** During reset signal generation or oscillation stabilization time wait, only the PC contents among the hardware statuses become undefined. All other hardware statuses remain unchanged after reset.

**2.** These values vary depending on the reset source.

Reset Source		RESE $\bar{T}$ Input	Reset by POC	Reset by WDT	Reset by LVI
Register	RESF	Cleared (0)	Cleared (0)	Set (1)	Held
	LVIRF bit			Held	Set (1)
LVIM		Cleared (00H)	Cleared (00H)	Cleared (00H)	Held
LVIS					

## 20.1 Register for Confirming Reset Source

Many internal reset generation sources exist in the 78K0/LC3. The reset control flag register (RESF) is used to store which source has generated the reset request.

RESF can be read by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$  input, reset by power-on-clear (POC) circuit, and reading RESF set RESF to 00H.

**Figure 20-5. Format of Reset Control Flag Register (RESF)**

Address: FFACH After reset: 00H<sup>Note</sup> R

Symbol	7	6	5	4	3	2	1	0
RESF	0	0	0	WDTRF	0	0	0	LVIRF

WDTRF	Internal reset request by watchdog timer (WDT)
0	Internal reset request is not generated, or RESF is cleared.
1	Internal reset request is generated.

LVIRF	Internal reset request by low-voltage detector (LVI)
0	Internal reset request is not generated, or RESF is cleared.
1	Internal reset request is generated.

**Note** The value after reset varies depending on the reset source.

**Caution** Do not read data by a 1-bit memory manipulation instruction.

The status of RESF when a reset request is generated is shown in Table 20-3.

**Table 20-3. RESF Status When Reset Request Is Generated**

Reset Source	$\overline{\text{RESET}}$ Input	Reset by POC	Reset by WDT	Reset by LVI
Flag				
WDTRF	Cleared (0)	Cleared (0)	Set (1)	Held
LVIRF			Held	Set (1)



## CHAPTER 21 POWER-ON-CLEAR CIRCUIT

### 21.1 Functions of Power-on-Clear Circuit

The power-on-clear circuit (POC) has the following functions.

- Generates internal reset signal at power on.  
In the 1.59 V POC mode (option byte: POCMODE = 0), the reset signal is released when the supply voltage ( $V_{DD}$ ) exceeds  $1.59\text{ V} \pm 0.15\text{ V}$ .  
In the 2.7 V/1.59 V POC mode (option byte: POCMODE = 1), the reset signal is released when the supply voltage ( $V_{DD}$ ) exceeds  $2.7\text{ V} \pm 0.2\text{ V}$ .
- Compares supply voltage ( $V_{DD}$ ) and detection voltage ( $V_{POC} = 1.59\text{ V} \pm 0.15\text{ V}$ ), generates internal reset signal when  $V_{DD} < V_{POC}$ .


**Caution** If an internal reset signal is generated in the POC circuit, the reset control flag register (RESF) is cleared to 00H.

**Remark** 78K0/LC3 incorporates multiple hardware functions that generate an internal reset signal. A flag that indicates the reset source is located in the reset control flag register (RESF) for when an internal reset signal is generated by the watchdog timer (WDT) or low-voltage-detector (LVI). RESF is not cleared to 00H and the flag is set to 1 when an internal reset signal is generated by WDT or LVI. For details of RESF, see **CHAPTER 20 RESET FUNCTION**.

## 21.2 Configuration of Power-on-Clear Circuit

The block diagram of the power-on-clear circuit is shown in Figure 21-1.

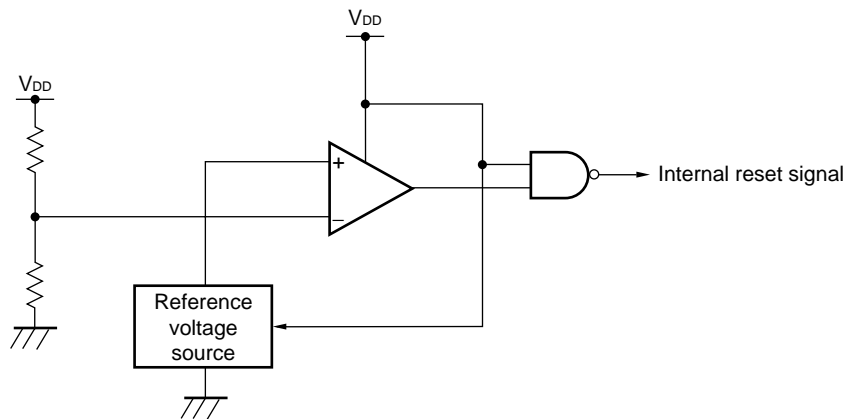**Figure 21-1. Block Diagram of Power-on-Clear Circuit**



## 21.3 Operation of Power-on-Clear Circuit

### (1) In 1.59 V POC mode (option byte: POCMODE = 0)

- An internal reset signal is generated on power application. When the supply voltage ( $V_{DD}$ ) exceeds the detection voltage ( $V_{POC} = 1.59\text{ V} \pm 0.15\text{ V}$ ), the reset status is released.
- The supply voltage ( $V_{DD}$ ) and detection voltage ( $V_{POC} = 1.59\text{ V} \pm 0.15\text{ V}$ ) are compared. When  $V_{DD} < V_{POC}$ , the internal reset signal is generated. It is released when  $V_{DD} \geq V_{POC}$ .


### (2) In 2.7 V/1.59 V POC mode (option byte: POCMODE = 1)

- An internal reset signal is generated on power application. When the supply voltage ( $V_{DD}$ ) exceeds the detection voltage ( $V_{DDPOC} = 2.7\text{ V} \pm 0.2\text{ V}$ ), the reset status is released.
- The supply voltage ( $V_{DD}$ ) and detection voltage ( $V_{POC} = 1.59\text{ V} \pm 0.15\text{ V}$ ) are compared. When  $V_{DD} < V_{POC}$ , the internal reset signal is generated. It is released when  $V_{DD} \geq V_{DDPOC}$ .

The timing of generation of the internal reset signal by the power-on-clear circuit and low-voltage detector is shown below.

Figure 21-2. Timing of Generation of Internal Reset Signal by Power-on-Clear Circuit and Low-Voltage Detector (1/2)

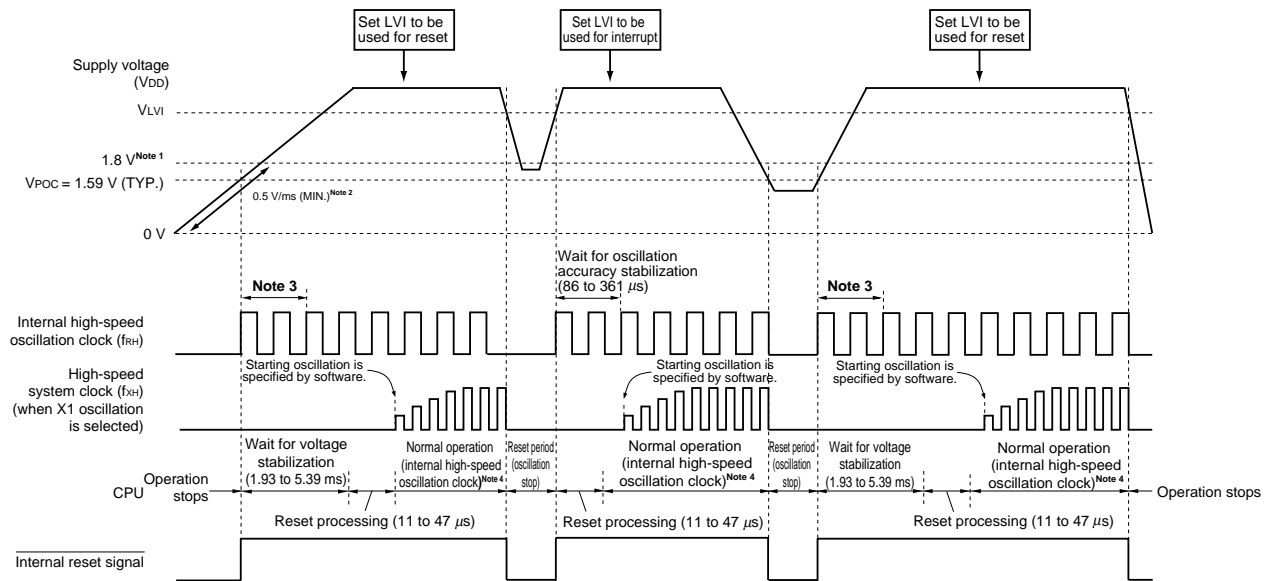(1) In 1.59 V POC mode (option byte: POCMODE = 0)




- Notes**
- The operation guaranteed range is  $1.8 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$ . To make the state at lower than 1.8 V reset state when the supply voltage falls, use the reset function of the low-voltage detector, or input the low level to the  $\overline{\text{RESET}}$  pin.
  - If the voltage rises to 1.8 V at a rate slower than 0.5 V/ms (MIN.) on power application, input a low level to the  $\overline{\text{RESET}}$  pin after power application and before the voltage reaches 1.8 V, or set the 2.7 V/1.59 V POC mode by using an option byte (POCMODE = 1).
  - The internal voltage stabilization time includes the oscillation accuracy stabilization time of the internal high-speed oscillation clock.
  - The internal high-speed oscillation clock and a high-speed system clock or subsystem clock can be selected as the CPU clock. To use the X1 clock, use the OSTC register to confirm the lapse of the oscillation stabilization time. To use the XT1 clock, use the timer function for confirmation of the lapse of the stabilization time.

**Caution** Set the low-voltage detector by software after the reset status is released (see CHAPTER 22 LOW-VOLTAGE DETECTOR).

**Remark** V<sub>LVI</sub>: LVI detection voltage  
V<sub>POC</sub>: POC detection voltage

Figure 21-2. Timing of Generation of Internal Reset Signal by Power-on-Clear Circuit and Low-Voltage Detector (2/2)

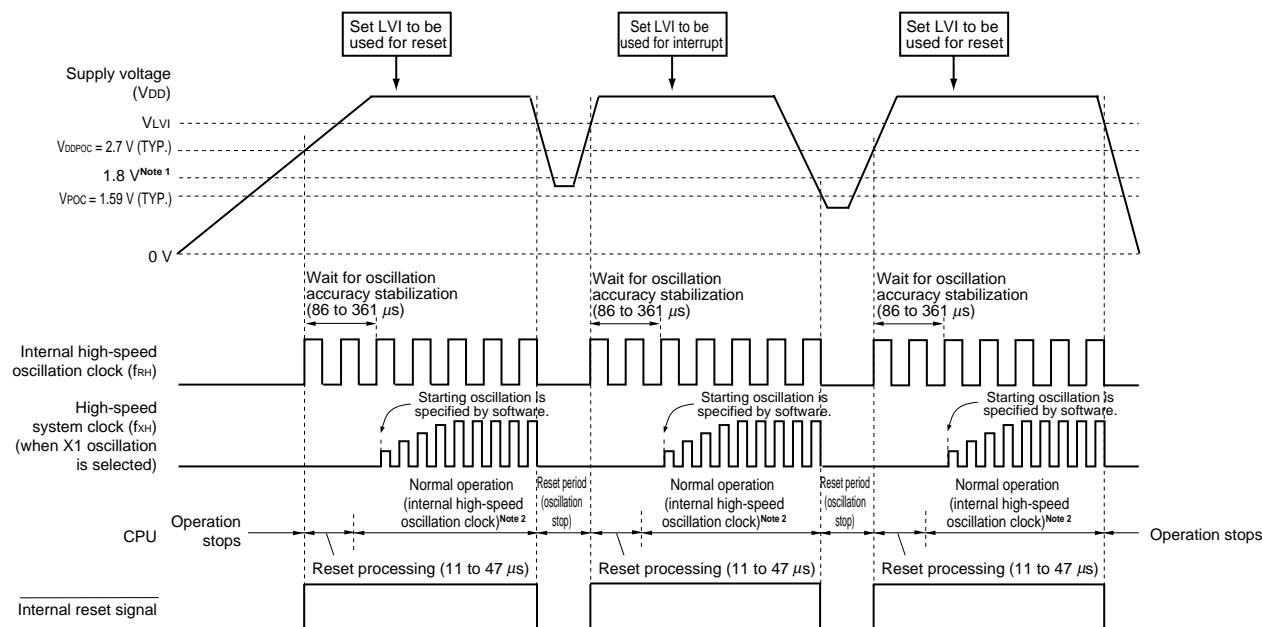(2) In 2.7 V/1.59 V POC mode (option byte: POCMODE = 1)



- Notes**
1. The operation guaranteed range is  $1.8\text{ V} \leq V_{DD} \leq 5.5\text{ V}$ . To make the state at lower than 1.8 V reset state when the supply voltage falls, use the reset function of the low-voltage detector, or input the low level to the  $\overline{\text{RESET}}$  pin.
  2. The internal high-speed oscillation clock and a high-speed system clock or subsystem clock can be selected as the CPU clock. To use the X1 clock, use the OSTC register to confirm the lapse of the oscillation stabilization time. To use the XT1 clock, use the timer function for confirmation of the lapse of the stabilization time.

- Cautions**
1. Set the low-voltage detector by software after the reset status is released (see CHAPTER 22 LOW-VOLTAGE DETECTOR).
  2. A voltage oscillation stabilization time of 1.93 to 5.39 ms is required after the supply voltage reaches 1.59 V (TYP.). If the supply voltage rises from 1.59 V (TYP.) to 2.7 V (TYP.) within 1.93 ms, the power supply oscillation stabilization time of 0 to 5.39 ms is automatically generated before reset processing.

**Remark** V<sub>LVI</sub>: LVI detection voltage  
V<sub>POC</sub>: POC detection voltage

### 21.4 Cautions for Power-on-Clear Circuit


In a system where the supply voltage ( $V_{DD}$ ) fluctuates for a certain period in the vicinity of the POC detection voltage ( $V_{POC}$ ), the system may be repeatedly reset and released from the reset status. In this case, the time from release of reset to the start of the operation of the microcontroller can be arbitrarily set by taking the following action.

<Action>

After releasing the reset signal, wait for the supply voltage fluctuation period of each system by means of a software counter that uses a timer, and then initialize the ports.

**Figure 21-3. Example of Software Processing After Reset Release (1/2)**

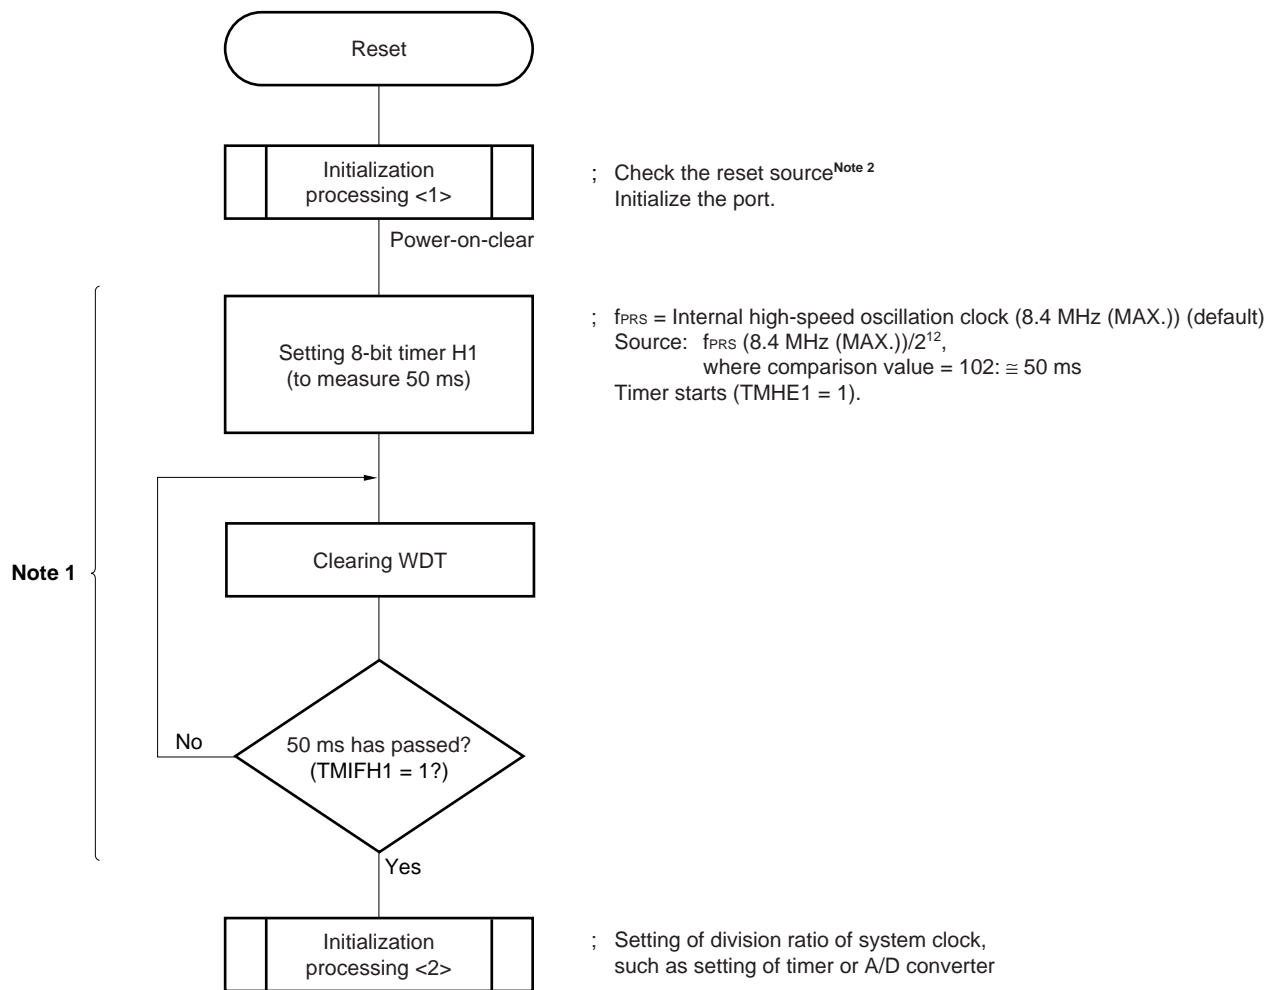
- If supply voltage fluctuation is 50 ms or less in vicinity of POC detection voltage



- Notes**
1. If reset is generated again during this period, initialization processing <2> is not started.
  2. A flowchart is shown on the next page.

Figure 21-3. Example of Software Processing After Reset Release (2/2)

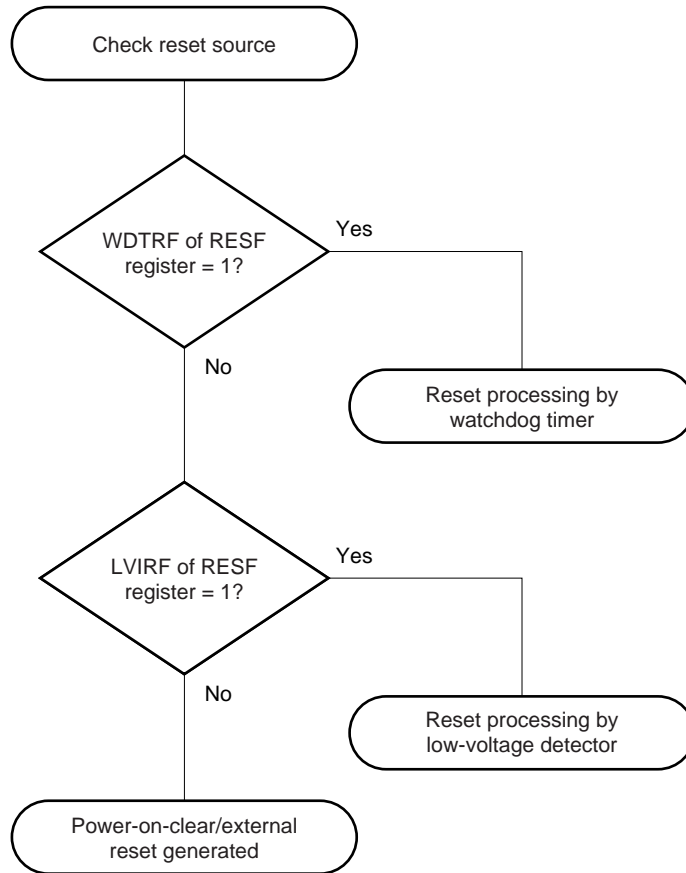- Checking reset source



## CHAPTER 22 LOW-VOLTAGE DETECTOR

### 22.1 Functions of Low-Voltage Detector

The low-voltage detector (LVI) has the following functions.

- The LVI circuit compares the supply voltage ( $V_{DD}$ ) with the detection voltage ( $V_{LVI}$ ) or the input voltage from an external input pin (EXLVI) with the detection voltage ( $V_{EXLVI} = 1.21 \text{ V (TYP.)}$ ; fixed), and generates an internal reset or internal interrupt signal.
- The supply voltage ( $V_{DD}$ ) or input voltage from an external input pin (EXLVI) can be selected by software.
- Reset or interrupt function can be selected by software.
- Detection levels (16 levels) of supply voltage can be changed by software.
- Operable in STOP mode.

The reset and interrupt signals are generated as follows depending on selection by software.

Selection of Level Detection of Supply Voltage ( $V_{DD}$ ) (LVISEL = 0)		Selection Level Detection of Input Voltage from External Input Pin (EXLVI) (LVISEL = 1)	
Selects reset (LVIMD = 1).	Selects interrupt (LVIMD = 0).	Selects reset (LVIMD = 1).	Selects interrupt (LVIMD = 0).
Generates an internal reset signal when $V_{DD} < V_{LVI}$ and releases the reset signal when $V_{DD} \geq V_{LVI}$ .	Generates an internal interrupt signal when $V_{DD}$ drops lower than $V_{LVI}$ ( $V_{DD} < V_{LVI}$ ) or when $V_{DD}$ becomes $V_{LVI}$ or higher ( $V_{DD} \geq V_{LVI}$ ).	Generates an internal reset signal when $EXLVI < V_{EXLVI}$ and releases the reset signal when $EXLVI \geq V_{EXLVI}$ .	Generates an internal interrupt signal when EXLVI drops lower than $V_{EXLVI}$ ( $EXLVI < V_{EXLVI}$ ) or when EXLVI becomes $V_{EXLVI}$ or higher ( $EXLVI \geq V_{EXLVI}$ ).

**Remark** LVISEL: Bit 2 of low-voltage detection register (LVIM)  
 LVIMD: Bit 1 of LVIM


While the low-voltage detector is operating, whether the supply voltage or the input voltage from an external input pin is more than or less than the detection level can be checked by reading the low-voltage detection flag (LVIF: bit 0 of LVIM).

When the low-voltage detector is used to reset, bit 0 (LVIRF) of the reset control flag register (RESF) is set to 1 if reset occurs. For details of RESF, see **CHAPTER 20 RESET FUNCTION**.

## 22.2 Configuration of Low-Voltage Detector

The block diagram of the low-voltage detector is shown in Figure 22-1.

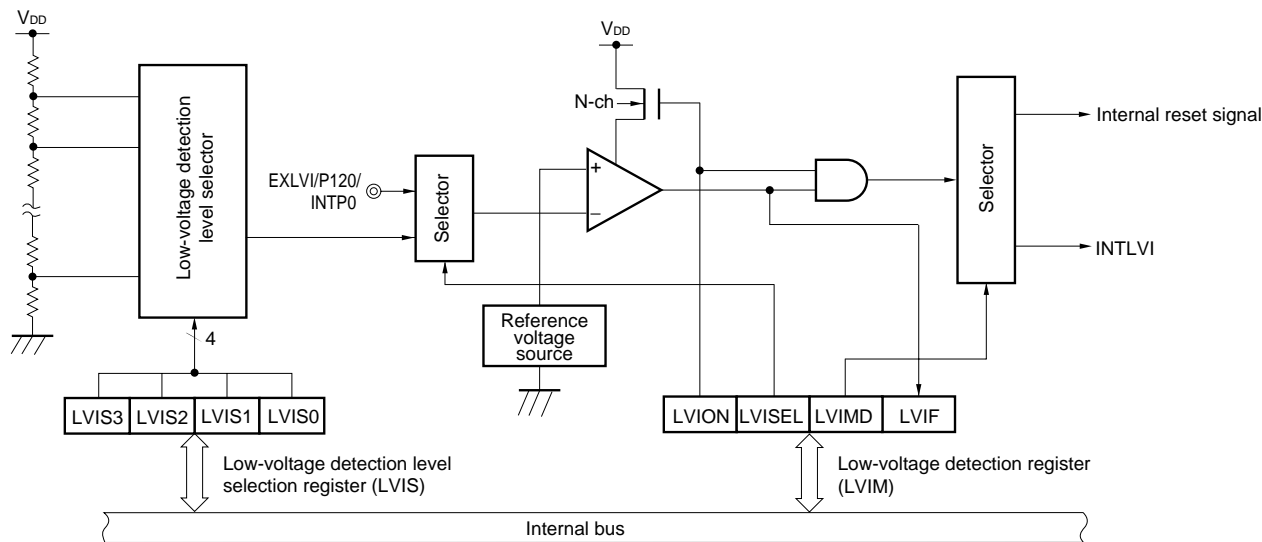Figure 22-1. Block Diagram of Low-Voltage Detector



## 22.3 Registers Controlling Low-Voltage Detector

The low-voltage detector is controlled by the following registers.

- Low-voltage detection register (LVIM)
- Low-voltage detection level selection register (LVIS)
- Port mode register 12 (PM12)

### (1) Low-voltage detection register (LVIM)

This register sets low-voltage detection and the operation mode.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

The generation of a reset signal other than an LVI reset clears this register to 00H.



Figure 22-2. Format of Low-Voltage Detection Register (LVIM)

Address: FFBEH After reset: 00H<sup>Note 1</sup> R/W<sup>Note 2</sup>

Symbol	<7>	6	5	4	3	<2>	<1>	<0>
LVIM	LVION	0	0	0	0	LVISEL	LVIMD	LVIF

LVION <sup>Notes 3,4</sup>	Enables low-voltage detection operation
0	Disables operation
1	Enables operation

LVISEL <sup>Note 3</sup>	Voltage detection selection
0	Detects level of supply voltage ( $V_{DD}$ )
1	Detects level of input voltage from external input pin (EXLVI)

LVIMD <sup>Note 3</sup>	Low-voltage detection operation mode (interrupt/reset) selection
0	<ul style="list-style-type: none"> <li>LVISEL = 0: Generates an internal interrupt signal when the supply voltage (<math>V_{DD}</math>) drops lower than the detection voltage (<math>V_{LVI}</math>) (<math>V_{DD} &lt; V_{LVI}</math>) or when <math>V_{DD}</math> becomes <math>V_{LVI}</math> or higher (<math>V_{DD} \geq V_{LVI}</math>).</li> <li>LVISEL = 1: Generates an interrupt signal when the input voltage from an external input pin (EXLVI) drops lower than the detection voltage (<math>V_{EXLVI}</math>) (<math>EXLVI &lt; V_{EXLVI}</math>) or when EXLVI becomes <math>V_{EXLVI}</math> or higher (<math>EXLVI \geq V_{EXLVI}</math>).</li> </ul>
1	<ul style="list-style-type: none"> <li>LVISEL = 0: Generates an internal reset signal when the supply voltage (<math>V_{DD}</math>) &lt; detection voltage (<math>V_{LVI}</math>) and releases the reset signal when <math>V_{DD} \geq V_{LVI}</math>.</li> <li>LVISEL = 1: Generates an internal reset signal when the input voltage from an external input pin (EXLVI) &lt; detection voltage (<math>V_{EXLVI}</math>) and releases the reset signal when <math>EXLVI \geq V_{EXLVI}</math>.</li> </ul>

LVIF	Low-voltage detection flag
0	<ul style="list-style-type: none"> <li>LVISEL = 0: Supply voltage (<math>V_{DD}</math>) <math>\geq</math> detection voltage (<math>V_{LVI}</math>), or when operation is disabled</li> <li>LVISEL = 1: Input voltage from external input pin (EXLVI) <math>\geq</math> detection voltage (<math>V_{EXLVI}</math>), or when operation is disabled</li> </ul>
1	<ul style="list-style-type: none"> <li>LVISEL = 0: Supply voltage (<math>V_{DD}</math>) &lt; detection voltage (<math>V_{LVI}</math>)</li> <li>LVISEL = 1: Input voltage from external input pin (EXLVI) &lt; detection voltage (<math>V_{EXLVI}</math>)</li> </ul>

- Notes**
- This bit is cleared to 00H upon a reset other than an LVI reset.
  - Bit 0 is read-only.
  - LVION, LVIMD, and LVISEL are cleared to 0 in the case of a reset other than an LVI reset. These are not cleared to 0 in the case of an LVI reset.
  - When LVION is set to 1, operation of the comparator in the LVI circuit is started. Use software to wait for an operation stabilization time (10  $\mu$ s (MAX.)) from when LVION is set to 1 until operation is stabilized. After operation has stabilized, 200  $\mu$ s (MIN.) are required from when a state below LVI detection voltage has been entered, until LVIF is set (1).

- Cautions**
- To stop LVI, follow either of the procedures below.
    - When using 8-bit memory manipulation instruction: Write 00H to LVIM.
    - When using 1-bit memory manipulation instruction: Clear LVION to 0.
  - Input voltage from external input pin (EXLVI) must be  $EXLVI < V_{DD}$ .
  - When using LVI as an interrupt, if LVION is cleared (0) in a state below the LVI detection voltage, an INTLVI signal is generated and LVIF becomes 1.

**(2) Low-voltage detection level selection register (LVIS)**

This register selects the low-voltage detection level.

This register can be set by a 1-bit or 8-bit memory manipulation instruction.

The generation of a reset signal other than an LVI reset clears this register to 00H.

**Figure 22-3. Format of Low-Voltage Detection Level Selection Register (LVIS)**

Address: FFBFH After reset: 00H<sup>Note</sup> R/W

Symbol	7	6	5	4	3	2	1	0
LVIS	0	0	0	0	LVIS3	LVIS2	LVIS1	LVIS0

LVIS3	LVIS2	LVIS1	LVIS0	Detection level
0	0	0	0	V <sub>LV10</sub> (4.24 V ±0.1 V)
0	0	0	1	V <sub>LV11</sub> (4.09 V ±0.1 V)
0	0	1	0	V <sub>LV12</sub> (3.93 V ±0.1 V)
0	0	1	1	V <sub>LV13</sub> (3.78 V ±0.1 V)
0	1	0	0	V <sub>LV14</sub> (3.62 V ±0.1 V)
0	1	0	1	V <sub>LV15</sub> (3.47 V ±0.1 V)
0	1	1	0	V <sub>LV16</sub> (3.32 V ±0.1 V)
0	1	1	1	V <sub>LV17</sub> (3.16 V ±0.1 V)
1	0	0	0	V <sub>LV18</sub> (3.01 V ±0.1 V)
1	0	0	1	V <sub>LV19</sub> (2.85 V ±0.1 V)
1	0	1	0	V <sub>LV110</sub> (2.70 V ±0.1 V)
1	0	1	1	V <sub>LV111</sub> (2.55 V ±0.1 V)
1	1	0	0	V <sub>LV112</sub> (2.39 V ±0.1 V)
1	1	0	1	V <sub>LV113</sub> (2.24 V ±0.1 V)
1	1	1	0	V <sub>LV114</sub> (2.08 V ±0.1 V)
1	1	1	1	V <sub>LV115</sub> (1.93 V ±0.1 V)

**Note** The value of LVIS is not reset but retained as is, upon a reset by LVI. It is cleared to 00H upon other resets.

- Cautions**
1. Be sure to clear bits 4 to 7 to “0”.
  2. Do not change the value of LVIS during LVI operation.
  3. When an input voltage from the external input pin (EXLVI) is detected, the detection voltage (V<sub>EXLVI</sub> = 1.21 V (TYP.)) is fixed. Therefore, setting of LVIS is not necessary.

**(3) Port mode register 12 (PM12)**

When using the P120/EXLVI/INTP0 pin for external low-voltage detection potential input, set PM120 to 1. At this time, the output latch of P120 may be 0 or 1.

PM12 can be set by a 1-bit or 8-bit memory manipulation instruction.

Reset signal generation sets PM12 to FFH.

**Figure 22-4. Format of Port Mode Register 12 (PM12)**

Address: FF2CH    After reset: FFH    R/W

Symbol	7	6	5	4	3	2	1	0
PM12	1	1	1	1	1	1	1	PM120

PM120	P120 pin I/O mode selection
0	Output mode (output buffer on)
1	Input mode (output buffer off)

## 22.4 Operation of Low-Voltage Detector

The low-voltage detector can be used in the following two modes.

**(1) Used as reset (LVIMD = 1)**

- If LVISEL = 0, compares the supply voltage ( $V_{DD}$ ) and detection voltage ( $V_{LVI}$ ), generates an internal reset signal when  $V_{DD} < V_{LVI}$ , and releases internal reset when  $V_{DD} \geq V_{LVI}$ .
- If LVISEL = 1, compares the input voltage from external input pin (EXLVI) and detection voltage ( $V_{EXLVI} = 1.21$  V (TYP.)), generates an internal reset signal when  $EXLVI < V_{EXLVI}$ , and releases internal reset when  $EXLVI \geq V_{EXLVI}$ .

**(2) Used as interrupt (LVIMD = 0)**

- If LVISEL = 0, compares the supply voltage ( $V_{DD}$ ) and detection voltage ( $V_{LVI}$ ). When  $V_{DD}$  drops lower than  $V_{LVI}$  ( $V_{DD} < V_{LVI}$ ) or when  $V_{DD}$  becomes  $V_{LVI}$  or higher ( $V_{DD} \geq V_{LVI}$ ), generates an interrupt signal (INTLVI).
- If LVISEL = 1, compares the input voltage from external input pin (EXLVI) and detection voltage ( $V_{EXLVI} = 1.21$  V (TYP.)). When EXLVI drops lower than  $V_{EXLVI}$  ( $EXLVI < V_{EXLVI}$ ) or when EXLVI becomes  $V_{EXLVI}$  or higher ( $EXLVI \geq V_{EXLVI}$ ), generates an interrupt signal (INTLVI).

While the low-voltage detector is operating, whether the supply voltage or the input voltage from an external input pin is more than or less than the detection level can be checked by reading the low-voltage detection flag (LVIF: bit 0 of LVIM).

**Remark** LVIMD: Bit 1 of low-voltage detection register (LVIM)  
 LVISEL: Bit 2 of LVIM

### 22.4.1 When used as reset

#### (1) When detecting level of supply voltage ( $V_{DD}$ )

- When starting operation
  - <1> Mask the LVI interrupt ( $LVIMK = 1$ ).
  - <2> Clear bit 2 (LVISEL) of the low-voltage detection register (LVIM) to 0 (detects level of supply voltage ( $V_{DD}$ )) (default value).
  - <3> Set the detection voltage using bits 3 to 0 (LVIS3 to LVIS0) of the low-voltage detection level selection register (LVIS).
  - <4> Set bit 7 (LVION) of LVIM to 1 (enables LVI operation).
  - <5> Use software to wait for an operation stabilization time (10  $\mu$ s (MAX.)).
  - <6> Wait until it is checked that (supply voltage ( $V_{DD}$ )  $\geq$  detection voltage ( $V_{LVI}$ )) by bit 0 (LVIF) of LVIM.
  - <7> Set bit 1 (LVIMD) of LVIM to 1 (generates reset when the level is detected).


Figure 22-5 shows the timing of the internal reset signal generated by the low-voltage detector. The numbers in this timing chart correspond to <1> to <7> above.

- Cautions**
1. <1> must always be executed. When  $LVIMK = 0$ , an interrupt may occur immediately after the processing in <4>.
  2. If supply voltage ( $V_{DD}$ )  $\geq$  detection voltage ( $V_{LVI}$ ) when LVIMD is set to 1, an internal reset signal is not generated.

- When stopping operation
  - Either of the following procedures must be executed.
  - When using 8-bit memory manipulation instruction:  
Write 00H to LVIM.
  - When using 1-bit memory manipulation instruction:  
Clear LVIMD to 0 and then LVION to 0.

**Figure 22-5. Timing of Low-Voltage Detector Internal Reset Signal Generation (Detects Level of Supply Voltage ( $V_{DD}$ )) (1/2)**

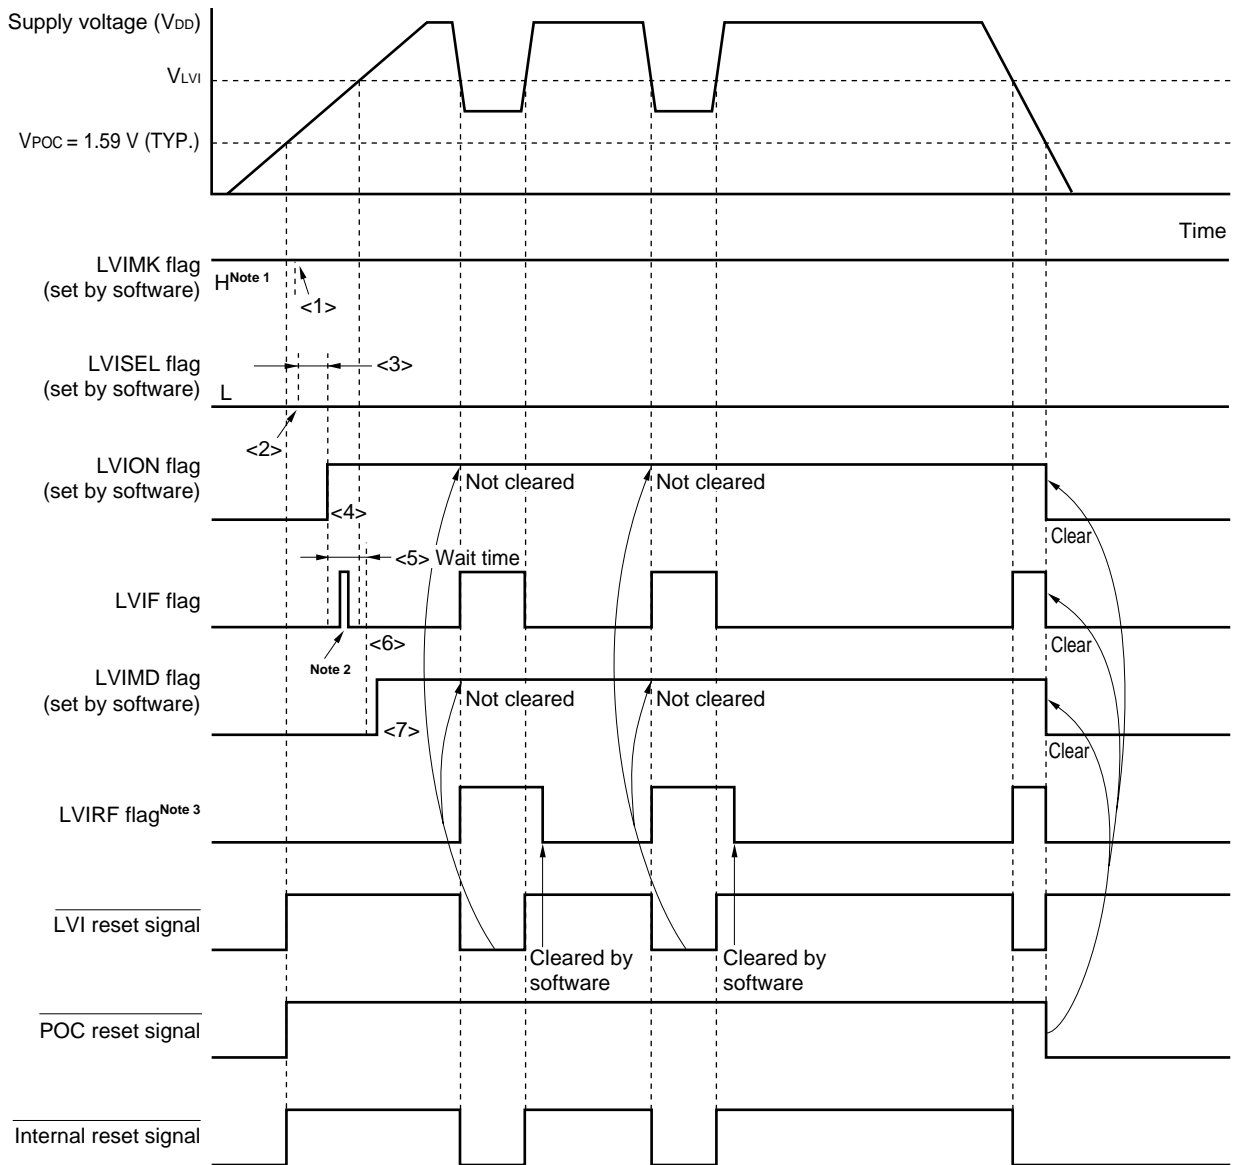(1) In 1.59 V POC mode (option byte: POCMODE = 0)




- Notes**
1. The LVIMK flag is set to "1" by reset signal generation.
  2. The LVIF flag may be set (1).
  3. LVIRF is bit 0 of the reset control flag register (RESF). For details of RESF, see **CHAPTER 20 RESET FUNCTION**.

**Remark** <1> to <7> in Figure 22-5 above correspond to <1> to <7> in the description of "When starting operation" in **22.4.1 (1) When detecting level of supply voltage ( $V_{DD}$ )**.

Figure 22-5. Timing of Low-Voltage Detector Internal Reset Signal Generation (Detects Level of Supply Voltage ( $V_{DD}$ )) (2/2)

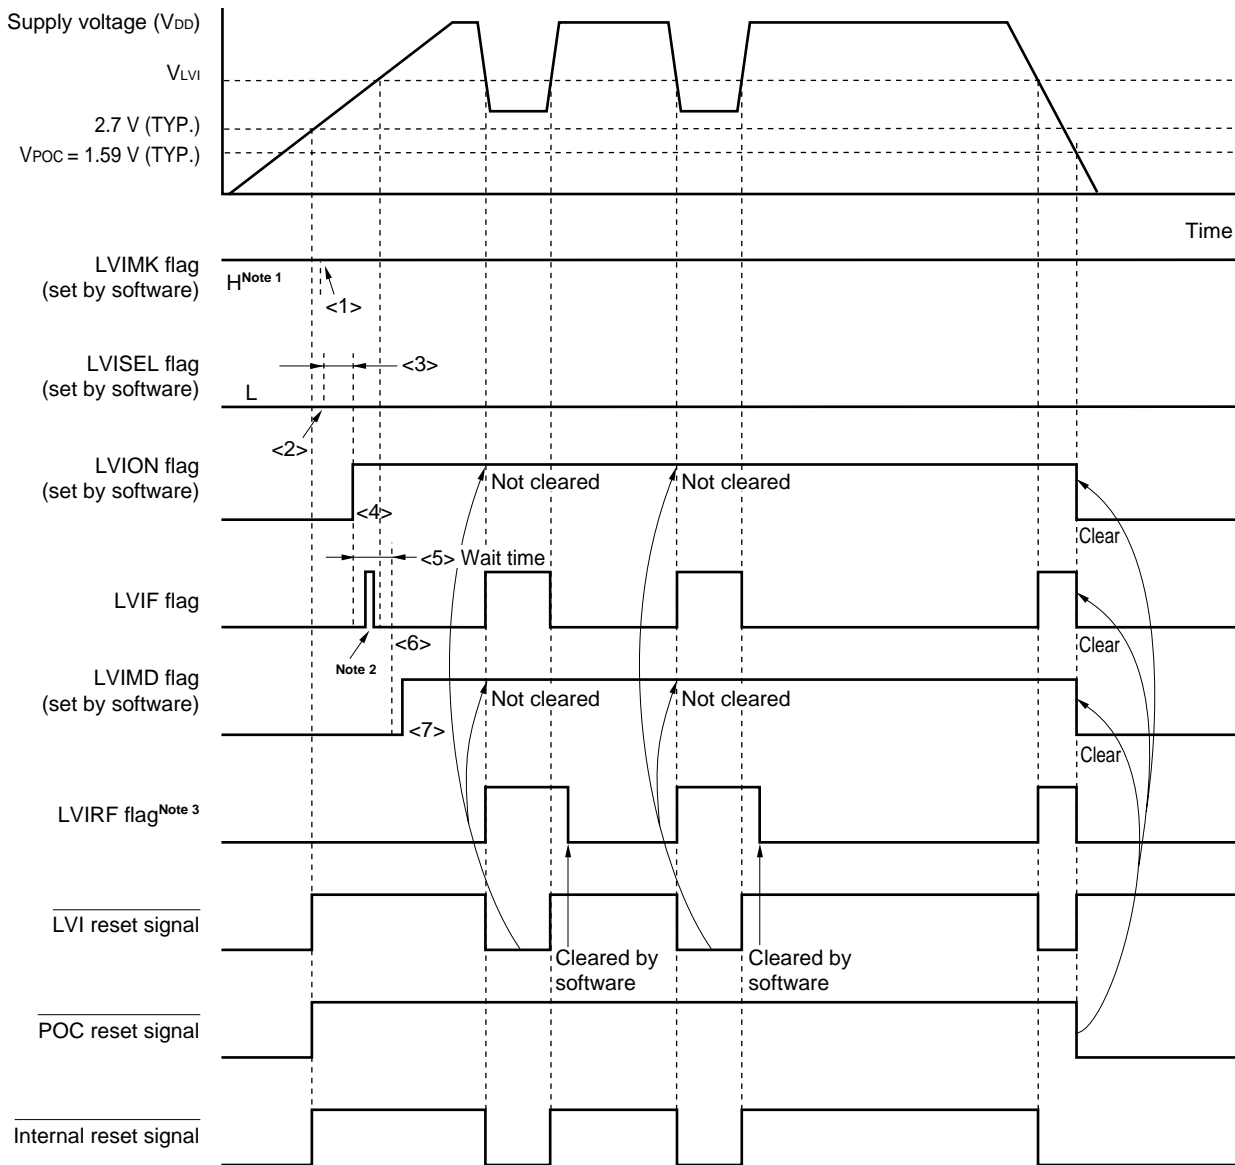(2) In 2.7 V/1.59 V POC mode (option byte: POCMODE = 1)



- Notes**
1. The LVIMK flag is set to "1" by reset signal generation.
  2. The LVIF flag may be set (1).
  3. LVIRF is bit 0 of the reset control flag register (RESF). For details of RESF, see **CHAPTER 20 RESET FUNCTION**.

**Remark** <1> to <7> in Figure 22-5 above correspond to <1> to <7> in the description of "When starting operation" in 22.4.1 (1) **When detecting level of supply voltage ( $V_{DD}$ )**.

**(2) When detecting level of input voltage from external input pin (EXLVI)**

- When starting operation
  - <1> Mask the LVI interrupt (LVIMK = 1).
  - <2> Set bit 2 (LVISEL) of the low-voltage detection register (LVIM) to 1 (detects level of input voltage from external input pin (EXLVI)).
  - <3> Set bit 7 (LVION) of LVIM to 1 (enables LVI operation).
  - <4> Use software to wait for an operation stabilization time (10  $\mu$ s (MAX.)).
  - <5> Wait until it is checked that (input voltage from external input pin (EXLVI)  $\geq$  detection voltage ( $V_{EXLVI} = 1.21$  V (TYP.))) by bit 0 (LVIF) of LVIM.
  - <6> Set bit 1 (LVIMD) of LVIM to 1 (generates reset signal when the level is detected).

Figure 22-6 shows the timing of the internal reset signal generated by the low-voltage detector. The numbers in this timing chart correspond to <1> to <6> above.

**Cautions 1. <1> must always be executed. When LVIMK = 0, an interrupt may occur immediately after the processing in <3>.**

**2. If input voltage from external input pin (EXLVI)  $\geq$  detection voltage ( $V_{EXLVI} = 1.21$  V (TYP.)) when LVIMD is set to 1, an internal reset signal is not generated.**


**3. Input voltage from external input pin (EXLVI) must be  $EXLVI < V_{DD}$ .**

- When stopping operation
 

Either of the following procedures must be executed.

  - When using 8-bit memory manipulation instruction:  
Write 00H to LVIM.
  - When using 1-bit memory manipulation instruction:  
Clear LVIMD to 0 and then LVION to 0.

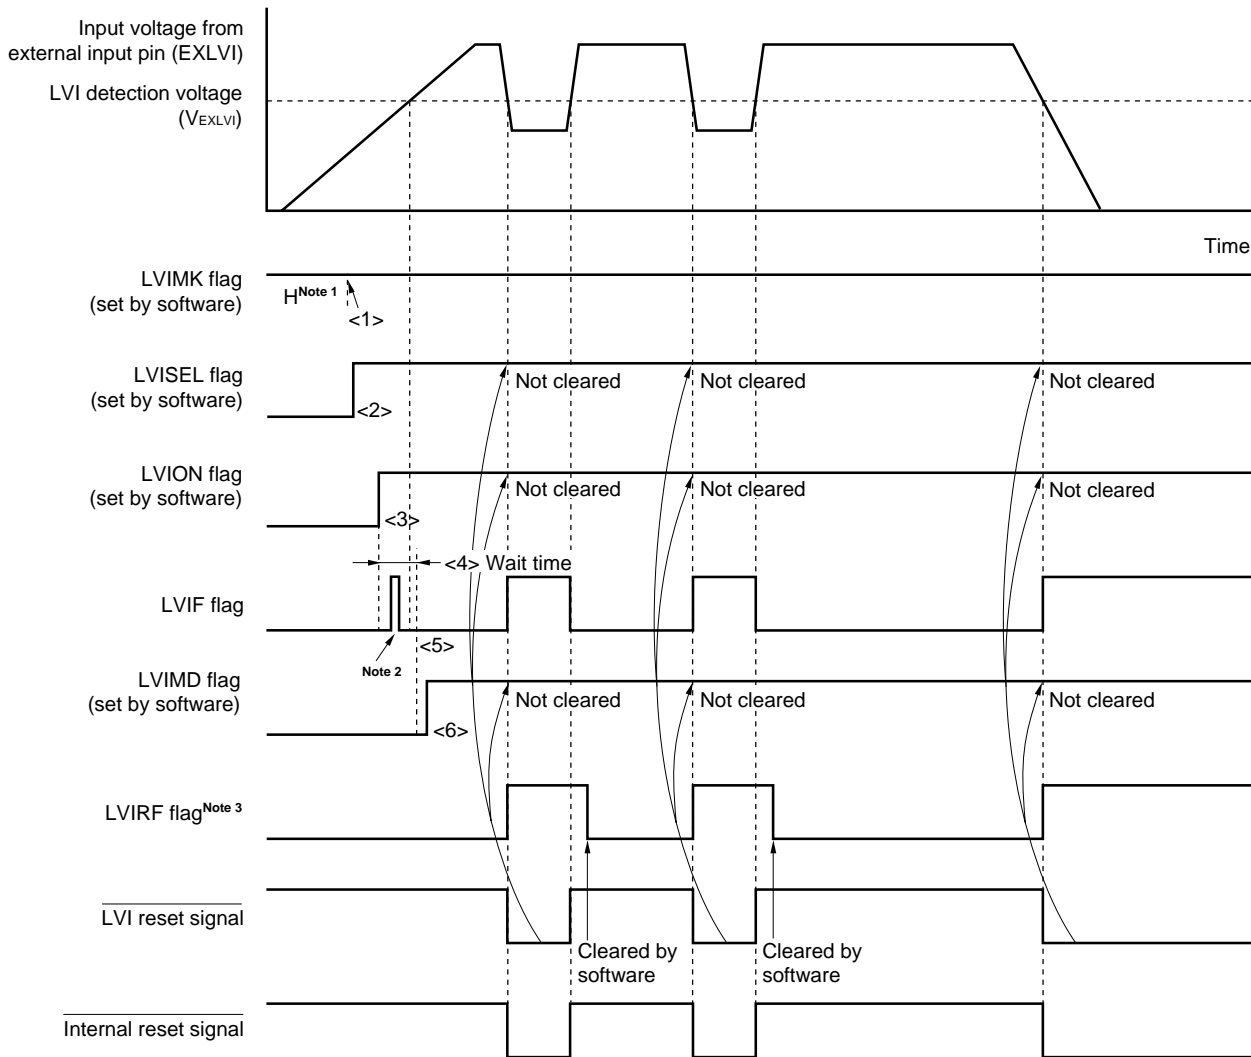**Figure 22-6. Timing of Low-Voltage Detector Internal Reset Signal Generation (Detects Level of Input Voltage from External Input Pin (EXLVI))**



- Notes**
1. The LVIMK flag is set to "1" by reset signal generation.
  2. The LVIF flag may be set (1).
  3. LVIRF is bit 0 of the reset control flag register (RESF). For details of RESF, see **CHAPTER 20 RESET FUNCTION**.

**Remark** <1> to <6> in Figure 22-6 above correspond to <1> to <6> in the description of "When starting operation" in **22.4.1 (2) When detecting level of input voltage from external input pin (EXLVI)**.



### 22.4.2 When used as interrupt

#### (1) When detecting level of supply voltage ( $V_{DD}$ )

- When starting operation
  - <1> Mask the LVI interrupt ( $LVIMK = 1$ ).
  - <2> Clear bit 2 ( $LVISEL$ ) of the low-voltage detection register ( $LVIM$ ) to 0 (detects level of supply voltage ( $V_{DD}$ )) (default value).
  - <3> Set the detection voltage using bits 3 to 0 ( $LVIS3$  to  $LVIS0$ ) of the low-voltage detection level selection register ( $LVIS$ ).
  - <4> Set bit 7 ( $LVION$ ) of  $LVIM$  to 1 (enables LVI operation).
  - <5> Use software to wait for an operation stabilization time ( $10 \mu s$  (MAX.)).
  - <6> Confirm that “supply voltage ( $V_{DD}$ )  $\geq$  detection voltage ( $V_{LVI}$ )” when detecting the falling edge of  $V_{DD}$ , or “supply voltage ( $V_{DD}$ )  $<$  detection voltage ( $V_{LVI}$ )” when detecting the rising edge of  $V_{DD}$ , at bit 0 ( $LVIF$ ) of  $LVIM$ .
  - <7> Clear the interrupt request flag of LVI ( $LVIF$ ) to 0.
  - <8> Release the interrupt mask flag of LVI ( $LVIMK$ ).
  - <9> Clear bit 1 ( $LVIMD$ ) of  $LVIM$  to 0 (generates interrupt signal when the level is detected) (default value).
  - <10> Execute the EI instruction (when vector interrupts are used).

Figure 22-7 shows the timing of the interrupt signal generated by the low-voltage detector. The numbers in this timing chart correspond to <1> to <9> above.


- When stopping operation
 

Either of the following procedures must be executed.

  - When using 8-bit memory manipulation instruction:  
Write 00H to  $LVIM$ .
  - When using 1-bit memory manipulation instruction:  
Clear  $LVION$  to 0.

**Figure 22-7. Timing of Low-Voltage Detector Interrupt Signal Generation (Detects Level of Supply Voltage ( $V_{DD}$ )) (1/2)**

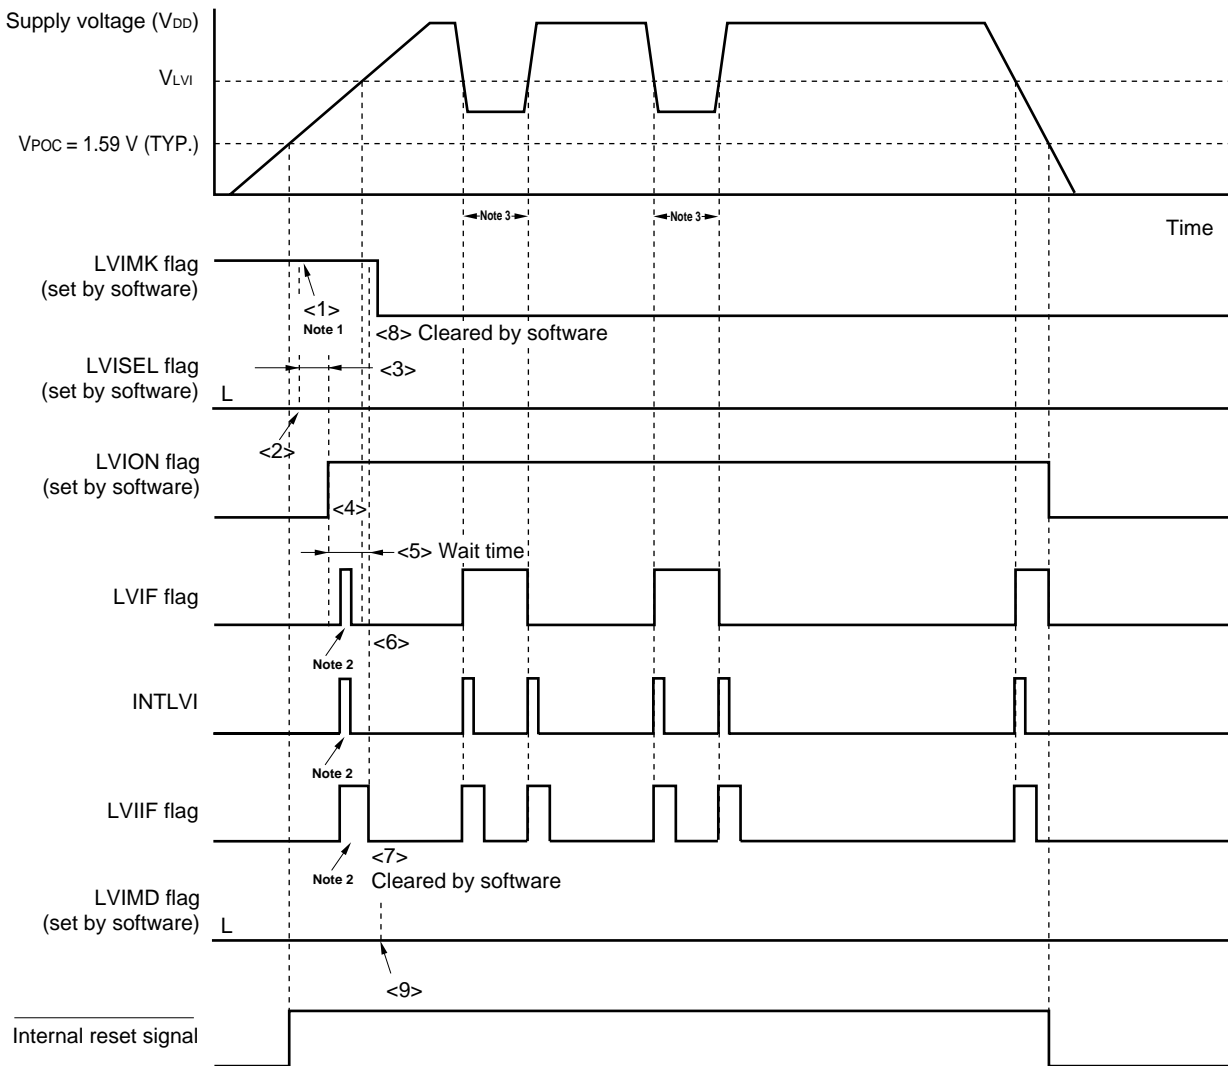(1) In 1.59 V POC mode (option byte: POCMODE = 0)




- Notes**
1. The LVIMK flag is set to “1” by reset signal generation.
  2. The interrupt request signal (INTLVI) is generated and the LVIF and LVIIF flags may be set (1).
  3. If LVION is cleared (0) in a state below the LVI detection voltage, an INTLVI signal is generated and LVIIF becomes 1.

**Remark** <1> to <9> in Figure 22-7 above correspond to <1> to <9> in the description of “When starting operation” in 22.4.2 (1) When detecting level of supply voltage ( $V_{DD}$ ).

Figure 22-7. Timing of Low-Voltage Detector Interrupt Signal Generation (Detects Level of Supply Voltage ( $V_{DD}$ )) (2/2)

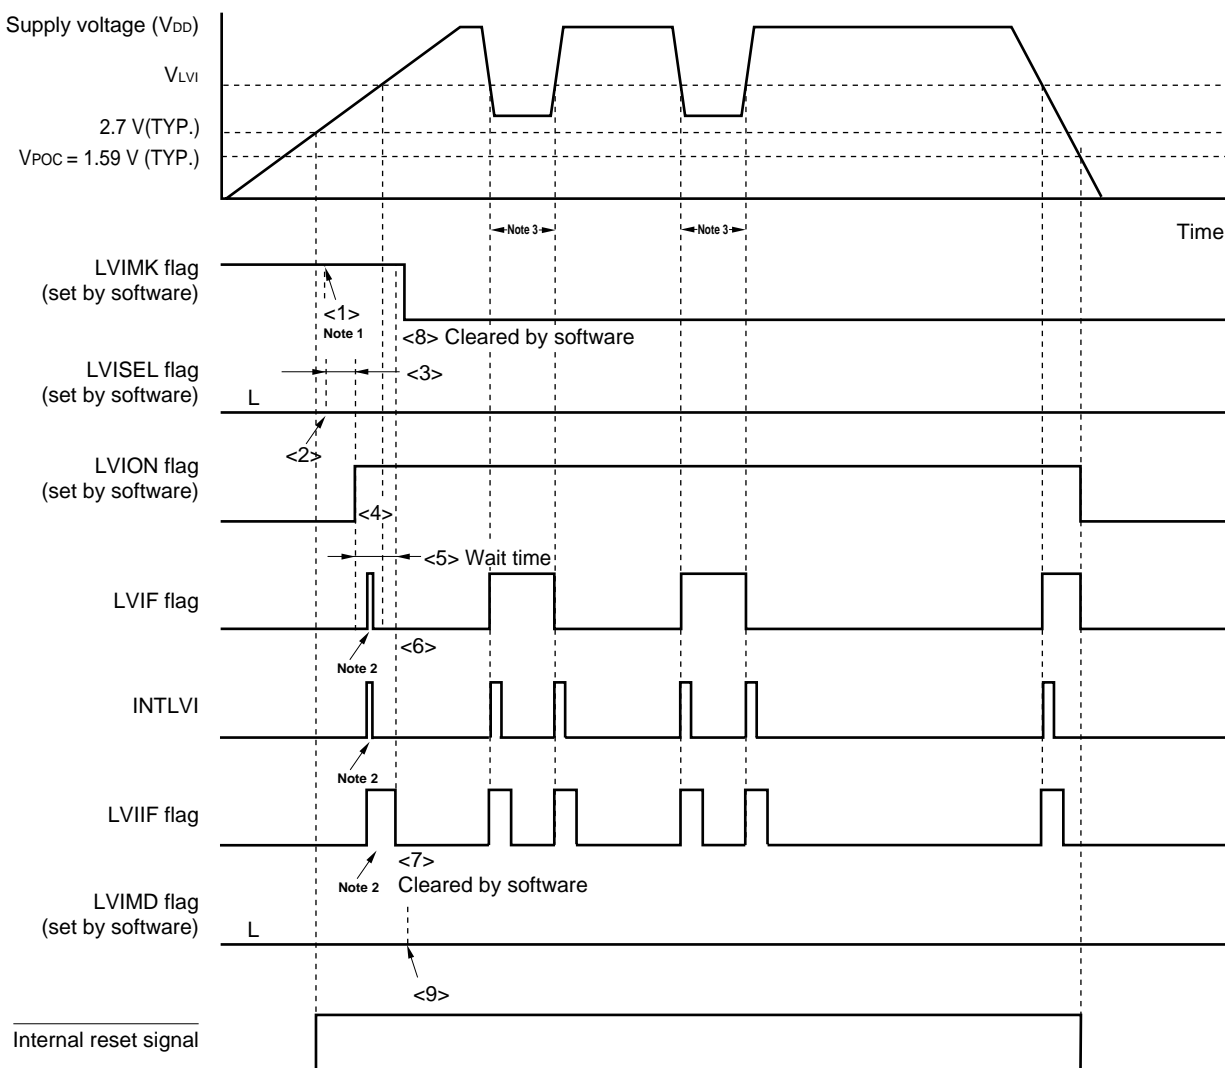(2) In 2.7 V/1.59 V POC mode (option byte: POCMODE = 1)



- Notes**
1. The LVIMK flag is set to “1” by reset signal generation.
  2. The interrupt request signal (INTLVI) is generated and the LVIF and LVIIF flags may be set (1).
  3. If LVION is cleared (0) in a state below the LVI detection voltage, an INTLVI signal is generated and LVIIF becomes 1.

**Remark** <1> to <9> in Figure 22-7 above correspond to <1> to <9> in the description of “When starting operation” in 22.4.2 (1) When detecting level of supply voltage ( $V_{DD}$ ).

**(2) When detecting level of input voltage from external input pin (EXLVI)**


- When starting operation
  - <1> Mask the LVI interrupt (LVIMK = 1).
  - <2> Set bit 2 (LVISEL) of the low-voltage detection register (LVIM) to 1 (detects level of input voltage from external input pin (EXLVI)).
  - <3> Set bit 7 (LVION) of LVIM to 1 (enables LVI operation).
  - <4> Use software to wait for an operation stabilization time (10  $\mu$ s (MAX.)).
  - <5> Confirm that “input voltage from external input pin (EXLVI)  $\geq$  detection voltage ( $V_{EXLVI} = 1.21$  V (TYP.))” when detecting the falling edge of EXLVI, or “input voltage from external input pin (EXLVI) < detection voltage ( $V_{EXLVI} = 1.21$  V (TYP.))” when detecting the rising edge of EXLVI, at bit 0 (LVIF) of LVIM.
  - <6> Clear the interrupt request flag of LVI (LVIF) to 0.
  - <7> Release the interrupt mask flag of LVI (LVIMK).
  - <8> Clear bit 1 (LVIMD) of LVIM to 0 (generates interrupt signal when the level is detected) (default value).
  - <9> Execute the EI instruction (when vector interrupts are used).

Figure 22-8 shows the timing of the interrupt signal generated by the low-voltage detector. The numbers in this timing chart correspond to <1> to <8> above.

**Caution** Input voltage from external input pin (EXLVI) must be  $EXLVI < V_{DD}$ .

- When stopping operation
  - Either of the following procedures must be executed.
    - When using 8-bit memory manipulation instruction:  
Write 00H to LVIM.
    - When using 1-bit memory manipulation instruction:  
Clear LVION to 0.

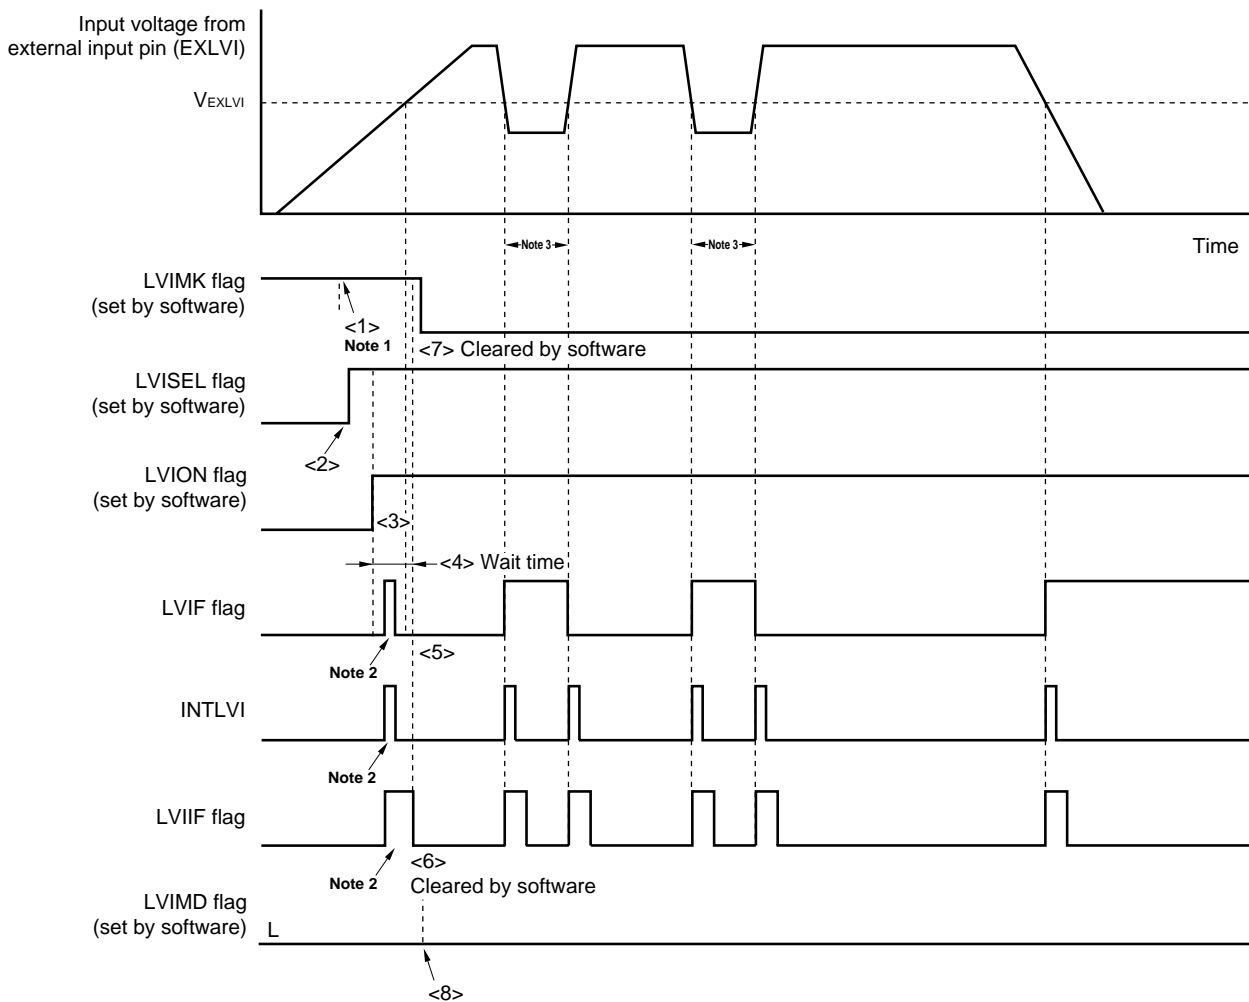**Figure 22-8. Timing of Low-Voltage Detector Interrupt Signal Generation (Detects Level of Input Voltage from External Input Pin (EXLVI))**



- Notes**
1. The LVIMK flag is set to "1" by reset signal generation.
  2. The interrupt request signal (INTLVI) is generated and the LVIF and LVIIF flags may be set (1).
  3. If LVION is cleared (0) in a state below the LVI detection voltage, an INTLVI signal is generated and LVIIF becomes 1.

**Remark** <1> to <8> in Figure 22-8 above correspond to <1> to <8> in the description of "When starting operation" in 22.4.2 (2) **When detecting level of input voltage from external input pin (EXLVI).**

## 22.5 Cautions for Low-Voltage Detector

In a system where the supply voltage ( $V_{DD}$ ) fluctuates for a certain period in the vicinity of the LVI detection voltage ( $V_{LVI}$ ), the operation is as follows depending on how the low-voltage detector is used.

### (1) When used as reset

The system may be repeatedly reset and released from the reset status.

In this case, the time from release of reset to the start of the operation of the microcontroller can be arbitrarily set by taking action (1) below.

### (2) When used as interrupt

Interrupt requests may be frequently generated. Take (b) of action (2) below.

<Action>

### (1) When used as reset

After releasing the reset signal, wait for the supply voltage fluctuation period of each system by means of a software counter that uses a timer, and then initialize the ports (see **Figure 22-9**).

### (2) When used as interrupt


- (a) Confirm that “supply voltage ( $V_{DD}$ )  $\geq$  detection voltage ( $V_{LVI}$ )” when detecting the falling edge of  $V_{DD}$ , or “supply voltage ( $V_{DD}$ )  $<$  detection voltage ( $V_{LVI}$ )” when detecting the rising edge of  $V_{DD}$ , in the servicing routine of the LVI interrupt by using bit 0 (LVIF) of the low-voltage detection register (LVIM). Clear bit 0 (LVIIF) of interrupt request flag register 0L (IF0L) to 0.
- (b) In a system where the supply voltage fluctuation period is long in the vicinity of the LVI detection voltage, wait for the supply voltage fluctuation period, confirm that “supply voltage ( $V_{DD}$ )  $\geq$  detection voltage ( $V_{LVI}$ )” when detecting the falling edge of  $V_{DD}$ , or “supply voltage ( $V_{DD}$ )  $<$  detection voltage ( $V_{LVI}$ )” when detecting the rising edge of  $V_{DD}$ , using the LVIF flag, and clear the LVIIF flag to 0.

**Remark** If bit 2 (LVISEL) of the low voltage detection register (LVIM) is set to “1”, the meanings of the above words change as follows.

- Supply voltage ( $V_{DD}$ ) → Input voltage from external input pin (EXLVI)
- Detection voltage ( $V_{LVI}$ ) → Detection voltage ( $V_{EXLVI} = 1.21$  V)

Figure 22-9. Example of Software Processing After Reset Release (1/2)

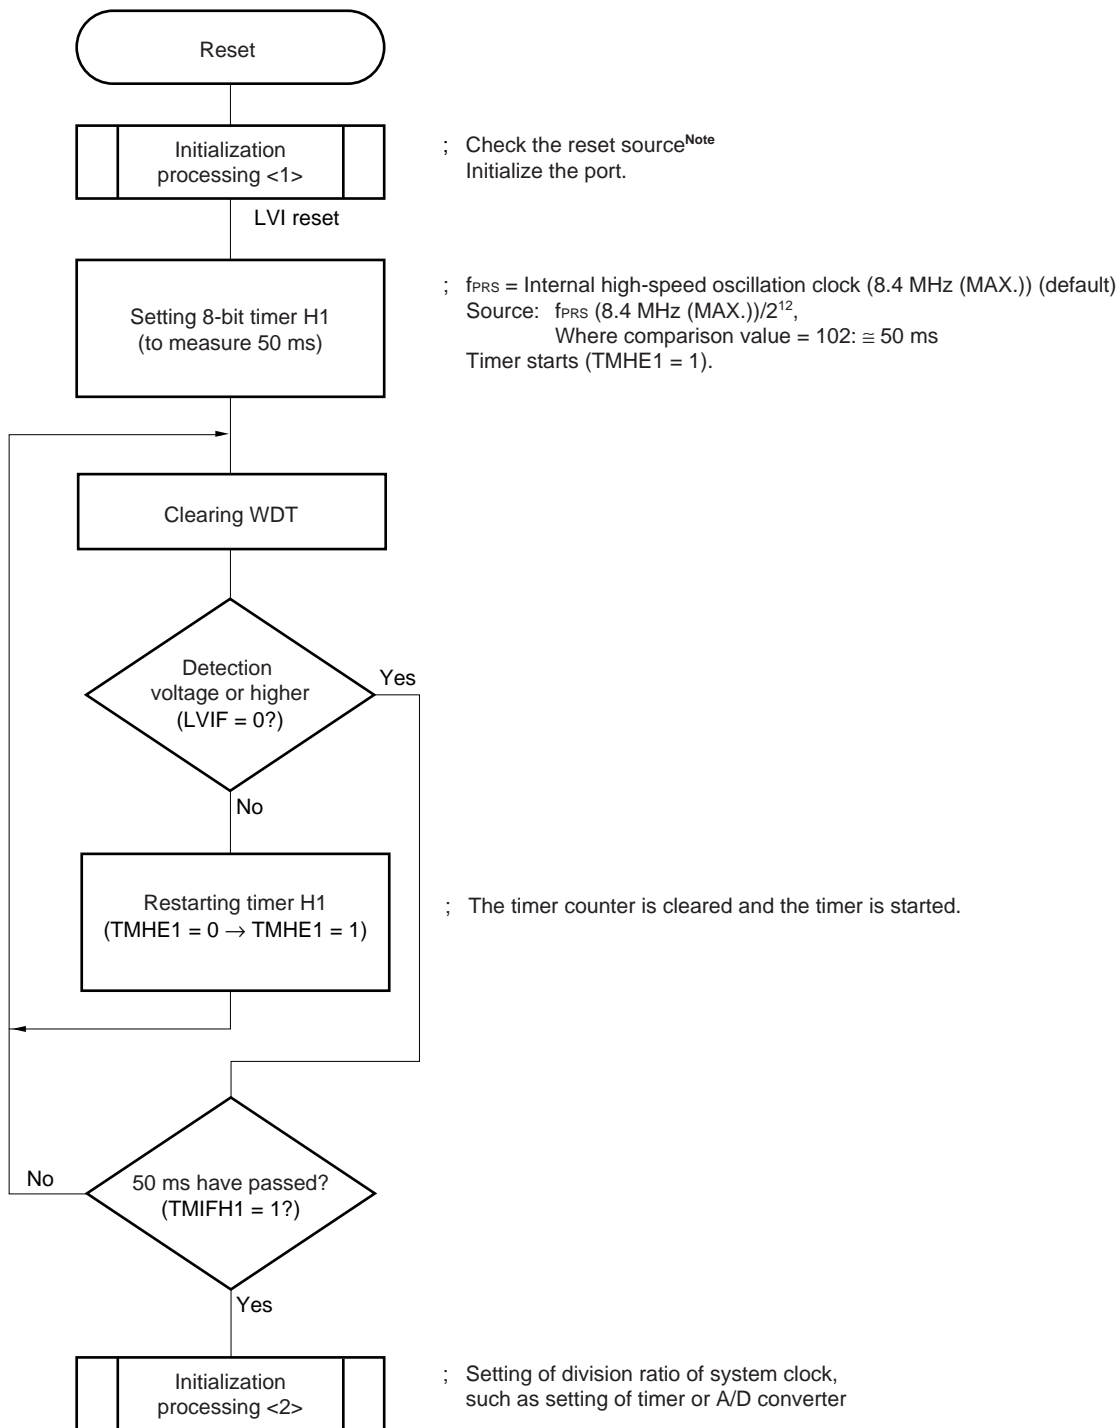
- If supply voltage fluctuation is 50 ms or less in vicinity of LVI detection voltage



**Note** A flowchart is shown on the next page.

Figure 22-9. Example of Software Processing After Reset Release (2/2)

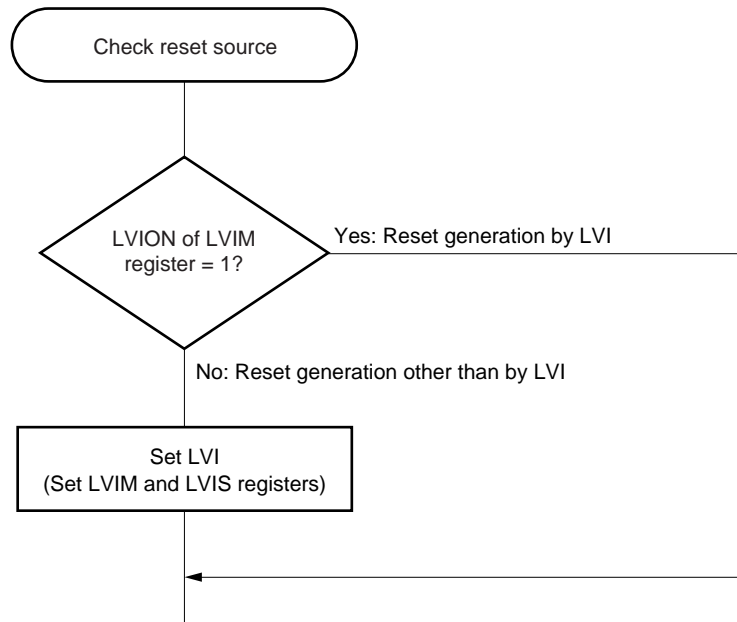- Checking reset source





## CHAPTER 23 OPTION BYTE

### 23.1 Functions of Option Bytes

The flash memory at 0080H to 0084H of the 78K0/LC3 is an option byte area. When power is turned on or when the device is restarted from the reset status, the device automatically references the option bytes and sets specified functions. When using the product, be sure to set the following functions by using the option bytes.

When the boot swap operation is used during self-programming, 0080H to 0084H are switched to 1080H to 1084H. Therefore, set values that are the same as those of 0080H to 0084H to 1080H to 1084H in advance.

**Caution** Be sure to set 00H to 0082H and 0083H (0082H/1082H and 0083H/1083H when the boot swap function is used).

#### (1) 0080H/1080H

- Internal low-speed oscillator operation
  - Can be stopped by software
  - Cannot be stopped
- Watchdog timer interval time setting
- Watchdog timer counter operation
  - Enabled counter operation
  - Disabled counter operation
- Watchdog timer window open period setting

**Caution** Set a value that is the same as that of 0080H to 1080H because 0080H and 1080H are switched during the boot swap operation.

#### (2) 0081H/1081H

- Selecting POC mode
  - During 2.7 V/1.59 V POC mode operation (POCMODE = 1)

The device is in the reset state upon power application and until the supply voltage reaches 2.7 V (TYP.). It is released from the reset state when the voltage exceeds 2.7 V (TYP.). After that, POC is not detected at 2.7 V but is detected at 1.59 V (TYP.).

If the supply voltage rises to 1.8 V after power application at a pace slower than 0.5 V/ms (MIN.), use of the 2.7 V/1.59 V POC mode is recommended.
  - During 1.59 V POC mode operation (POCMODE = 0)

The device is in the reset state upon power application and until the supply voltage reaches 1.59 V (TYP.). It is released from the reset state when the voltage exceeds 1.59 V (TYP.). After that, POC is detected at 1.59 V (TYP.), in the same manner as on power application.

**Caution** POCMODE can only be written by using a dedicated flash memory programmer. It cannot be set during self-programming or boot swap operation during self-programming (at this time, 1.59 V POC mode (default) is set). However, because the value of 1081H is copied to 0081H during the boot swap operation, it is recommended to set a value that is the same as that of 0081H to 1081H when the boot swap function is used.

**(3) 0084H/1084H**

- On-chip debug operation control
  - Disabling on-chip debug operation
  - Enabling on-chip debug operation and erasing data of the flash memory in case authentication of the on-chip debug security ID fails
  - Enabling on-chip debug operation and not erasing data of the flash memory even in case authentication of the on-chip debug security ID fails

**Caution** To use the on-chip debug function, set 02H or 03H to 0084H. Set a value that is the same as that of 0084H to 1084H because 0084H and 1084H are switched during the boot operation.

## 23.2 Format of Option Byte

The format of the option byte is shown below.

Figure 23-1. Format of Option Byte (1/2)

Address: 0080H/1080H<sup>Note</sup>

7	6	5	4	3	2	1	0
0	WINDOW1	WINDOW0	WDTON	WDCS2	WDCS1	WDCS0	LSROSC
WINDOW1	WINDOW0	Watchdog timer window open period					
0	0	25%					
0	1	50%					
1	0	75%					
1	1	100%					
WDTON	Operation control of watchdog timer counter/illegal access detection						
0	Counter operation disabled (counting stopped after reset), illegal access detection operation disabled						
1	Counter operation enabled (counting started after reset), illegal access detection operation enabled						
WDCS2	WDCS1	WDCS0	Watchdog timer overflow time				
0	0	0	$2^{10}/f_{RL}$ (3.88 ms)				
0	0	1	$2^{11}/f_{RL}$ (7.76 ms)				
0	1	0	$2^{12}/f_{RL}$ (15.52 ms)				
0	1	1	$2^{13}/f_{RL}$ (31.03 ms)				
1	0	0	$2^{14}/f_{RL}$ (62.06 ms)				
1	0	1	$2^{15}/f_{RL}$ (124.12 ms)				
1	1	0	$2^{16}/f_{RL}$ (248.24 ms)				
1	1	1	$2^{17}/f_{RL}$ (496.48 ms)				
LSROSC	Internal low-speed oscillator operation						
0	Can be stopped by software (stopped when 1 is written to bit 1 (LSRSTOP) of RCM register)						
1	Cannot be stopped (not stopped even if 1 is written to LSRSTOP bit)						

**Note** Set a value that is the same as that of 0080H to 1080H because 0080H and 1080H are switched during the boot swap operation.

- Cautions**
1. The combination of **WDCS2 = WDCS1 = WDCS0 = 0** and **WINDOW1 = WINDOW0 = 0** is prohibited.
  2. The **watchdog timer** continues its operation during self-programming and EEPROM emulation of the flash memory. **During processing, the interrupt acknowledge time is delayed. Set the overflow time and window size taking this delay into consideration.**
  3. If **LSROSC = 0** (oscillation can be stopped by software), the count clock is not supplied to the watchdog timer in the **HALT** and **STOP** modes, regardless of the setting of bit 1 (LSRSTOP) of the internal oscillation mode register (RCM).  
When 8-bit timer H1 operates with the internal low-speed oscillation clock, the count clock is supplied to 8-bit timer H1 even in the **HALT/STOP** mode.
  4. Be sure to clear bit 7 to 0.

- Remarks**
1.  $f_{RL}$ : Internal low-speed oscillation clock frequency
  2. ( ):  $f_{RL} = 264$  kHz (MAX.)

Figure 23-1. Format of Option Byte (2/2)

Address: 0081H/1081H<sup>Notes 1, 2</sup>

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	POCMODE

POCMODE	POC mode selection
0	1.59 V POC mode (default)
1	2.7 V/1.59 V POC mode

- Notes**
1. POCMODE can only be written by using a dedicated flash memory programmer. It cannot be set during self-programming or boot swap operation during self-programming (at this time, 1.59 V POC mode (default) is set). However, because the value of 1081H is copied to 0081H during the boot swap operation, it is recommended to set a value that is the same as that of 0081H to 1081H when the boot swap function is used.
  2. To change the setting for the POC mode, set the value to 0081H again after batch erasure (chip erasure) of the flash memory. The setting cannot be changed after the memory of the specified block is erased.

**Caution** Be sure to clear bits 7 to 1 to “0”.

Address: 0082H/1082H, 0083H/1083H<sup>Note</sup>

7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0

**Note** Be sure to set 00H to 0082H and 0083H, as these addresses are reserved areas. Also set 00H to 1082H and 1083H because 0082H and 0083H are switched with 1082H and 1083H when the boot swap operation is used.

Address: 0084H/1084H<sup>Note</sup>

7	6	5	4	3	2	1	0
0	0	0	0	0	0	OCDEN1	OCDEN0

OCDEN1	OCDEN0	On-chip debug operation control
0	0	Operation disabled
0	1	Setting prohibited
1	0	Operation enabled. Does not erase data of the flash memory in case authentication of the on-chip debug security ID fails.
1	1	Operation enabled. Erases data of the flash memory in case authentication of the on-chip debug security ID fails.

**Note** To use the on-chip debug function, set 02H or 03H to 0084H. Set a value that is the same as that of 0084H to 1084H because 0084H and 1084H are switched during the boot swap operation.

**Remark** For the on-chip debug security ID, see **CHAPTER 25 ON-CHIP DEBUG FUNCTION**.

Here is an example of description of the software for setting the option bytes.

OPT	CSEG	AT 0080H	
OPTION:	DB	30H	; Enables watchdog timer operation (illegal access detection operation), ; Window open period of watchdog timer: 50%, ; Overflow time of watchdog timer: $2^{10}/f_{RL}$ , ; Internal low-speed oscillator can be stopped by software.
	DB	00H	; 1.59 V POC mode
	DB	00H	; Reserved area
	DB	00H	; Reserved area
	DB	00H	; On-chip debug operation disabled

**Remark** Referencing of the option byte is performed during reset processing. For the reset processing timing, see **CHAPTER 20 RESET FUNCTION**.

## CHAPTER 24 FLASH MEMORY

The 78K0/LC3 incorporates the flash memory to which a program can be written, erased, and overwritten while mounted on the board.

### 24.1 Internal Memory Size Switching Register

The internal memory capacity can be selected using the internal memory size switching register (IMS). IMS is set by an 8-bit memory manipulation instruction. Reset signal generation sets IMS to CFH.

**Caution** Be sure to set each product to the values shown in Table 24-1 after a reset release.

**Figure 24-1. Format of Internal Memory Size Switching Register (IMS)**

Address: FFF0H    After reset: CFH    R/W

Symbol	7	6	5	4	3	2	1	0
IMS	RAM2	RAM1	RAM0	0	ROM3	ROM2	ROM1	ROM0

RAM2	RAM1	RAM0	Internal high-speed RAM capacity selection
0	0	0	768 bytes
0	1	0	512 bytes
1	1	0	1024 bytes
Other than above			Setting prohibited

ROM3	ROM2	ROM1	ROM0	Internal ROM capacity selection
0	0	1	0	8 KB
0	1	0	0	16 KB
0	1	1	0	24 KB
1	0	0	0	32 KB
Other than above				Setting prohibited

**Table 24-1. Internal Memory Size Switching Register Settings**

Flash Memory Version (78K0/LC3)	IMS Setting	ROM Capacity	Internal High-Speed RAM Capacity
μPD78F0400, 78F0410	42H	8 KB	512 bytes
μPD78F0401, 78F0411	04H	16 KB	768 bytes
μPD78F0402, 78F0412	C6H	24 KB	1 K bytes
μPD78F0403, 78F0413	C8H	32 KB	

## 24.2 Writing with Flash memory programmer

Data can be written to the flash memory on-board or off-board, by using a dedicated flash memory programmer.

### (1) On-board programming

The contents of the flash memory can be rewritten after the 78K0/LC3 has been mounted on the target system. The connectors that connect the dedicated flash memory programmer must be mounted on the target system.

### (2) Off-board programming

Data can be written to the flash memory with a dedicated program adapter (FA series) before the 78K0/LC3 is mounted on the target system.

**Remark** The FA series is a product of Naito Densai Machida Mfg. Co., Ltd.

**Table 24-2. Wiring Between 78K0/LC3 and Dedicated Flash memory programmer**

Pin Configuration of Dedicated Flash memory programmer			With UART6	
Signal Name	I/O	Pin Function	Pin Name	Pin No.
SI/RxD	Input	Receive signal	TxD6/SEG6/P112	24
SO/TxD	Output	Transmit signal	RxD6/SEG7/P113	23
SCK	Output	Transfer clock	–	–
CLK	Output	Clock to 78K0/LC3	<b>Note 1</b>	<b>Note 1</b>
/RESET	Output	Reset signal	$\overline{\text{RESET}}$	6
FLMD0	Output	Mode signal	FLMD0	9
V <sub>DD</sub>	I/O	V <sub>DD</sub> voltage generation/ power monitoring	V <sub>DD</sub>	14
			V <sub>DD</sub> <sup>Note 2</sup>	35
			AV <sub>REF</sub> <sup>Note 3</sup>	
GND	–	Ground	V <sub>SS</sub>	13
			V <sub>SS</sub> <sup>Note 2</sup>	36
			AV <sub>SS</sub> <sup>Note 3</sup>	

**Notes 1.** Only the X1 clock ( $f_x$ ) or external main system clock ( $f_{\text{EXCLK}}$ ) can be used when UART6 is used. When using the clock output of the dedicated flash memory programmer, pin connection varies depending on the type of the dedicated flash memory programmer used.


- PG-FP4, FL-PR4: Connect CLK of the programmer to EXCLK/X2/P122 (pin 10).
- PG-FPL3, FP-LITE3: Connect CLK of the programmer to X1/P121 (pin 11), and connect its inverted signal to X2/EXCLK/P122 (pin 10).

2.  $\mu$ PD78F040x only.

3.  $\mu$ PD78F041x only.

Examples of the recommended connection when using the adapter for flash memory writing are shown below.

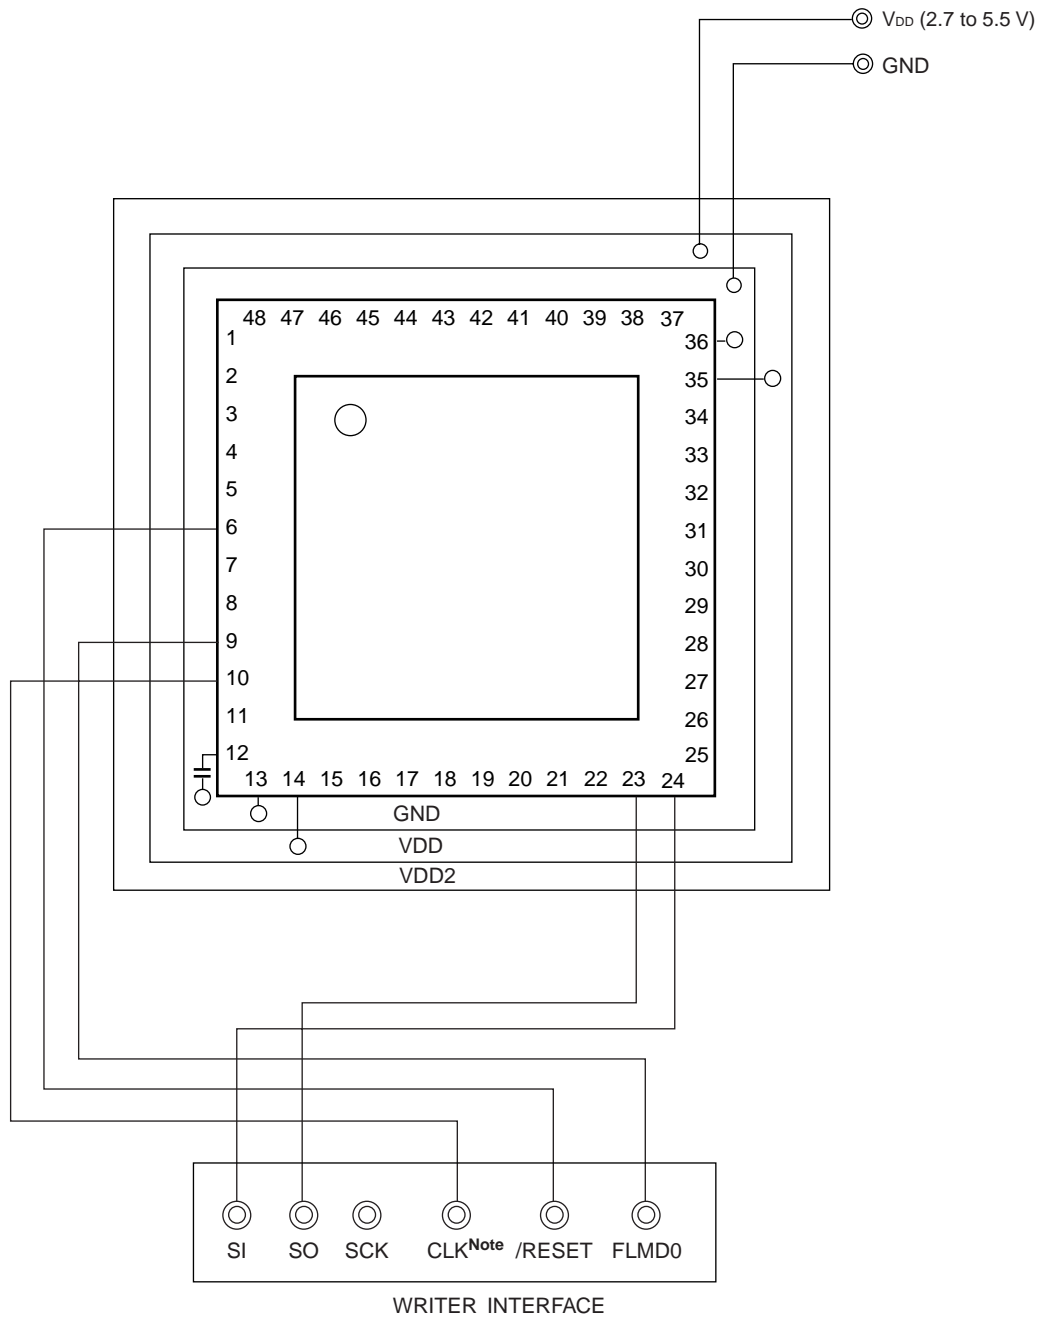**Figure 24-2. Example of Wiring Adapter for Flash Memory Writing in UART (UART6) Mode**




**Note** The above figure illustrates an example of wiring when using the clock output from the PG-FP4 or FL-PR4. When using the clock output from the PG-FPL3 or FP-LITE3, connect CLK to X1/P121 (pin 11), and connect its inverted signal to X2/EXCLK/P122 (pin 10).



### 24.3 Programming Environment

The environment required for writing a program to the flash memory of the 78K0/LC3 is illustrated below.

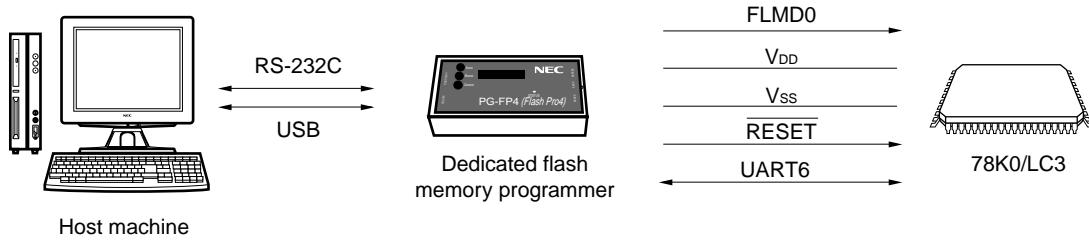**Figure 24-3. Environment for Writing Program to Flash Memory**



A host machine that controls the dedicated flash memory programmer is necessary.

To interface between the dedicated flash memory programmer and the 78K0/LC3, UART6 is used for manipulation such as writing and erasing. To write the flash memory off-board, a dedicated program adapter (FA series) is necessary.


### 24.4 Communication Mode

Communication between the dedicated flash memory programmer and the 78K0/LC3 is established by serial communication via UART6 of the 78K0/LC3.


- **UART6**

Transfer rate: 115200 bps

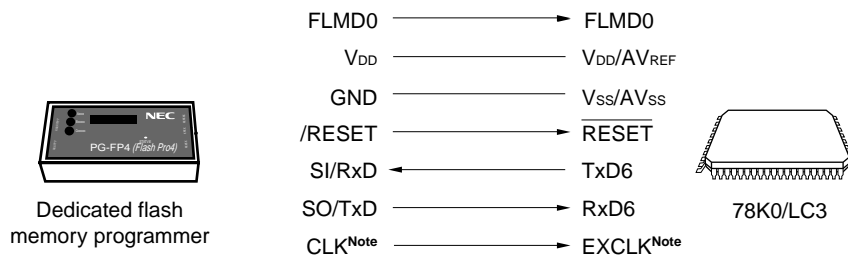**Figure 24-4. Communication with Dedicated Flash memory programmer (UART6)**



**Note** The above figure illustrates an example of wiring when using the clock output from the PG-FP4 or FL-PR4. When using the clock output from the PG-FPL3 or FP-LITE3, connect CLK to X1/P121, and connect its inverted signal to X2/EXCLK/P122.



**Caution** Only the bottom side pins (pin numbers 23 and 24) correspond to the UART6 pins (RxD6 and TxD6) when writing by a flash memory programmer. Writing cannot be performed by the top side pins (pin numbers 48 and 47).

The dedicated flash memory programmer generates the following signals for the 78K0/LC3. For details, refer to the user's manual for the PG-FP4, FL-PR4, PG-FPL3, or FP-LITE3.

**Table 24-3. Pin Connection**

Dedicated Flash memory programmer			78K0/LC3	Connection
Signal Name	I/O	Pin Function	Pin Name	UART6
FLMD0	Output	Mode signal	FLMD0	○
V <sub>DD</sub>	I/O	V <sub>DD</sub> voltage generation/power monitoring	V <sub>DD</sub> , AV <sub>REF</sub> <sup>Note 2</sup>	○
GND	–	Ground	V <sub>SS</sub> , AV <sub>SS</sub> <sup>Note 2</sup>	○
CLK	Output	Clock output to 78K0/LC3	<b>Note 1</b>	○ <sup>Note 1</sup>
/RESET	Output	Reset signal	RESET	○
SI/RxD	Input	Receive signal	TxD6	○
SO/TxD	Output	Transmit signal	RxD6	○
SCK	Output	Transfer clock	-	×

**Notes 1.** Only the X1 clock (fx) or external main system clock (f<sub>EXCLK</sub>) can be used when UART6 is used. When using the clock output of the dedicated flash memory programmer, pin connection varies depending on the type of the dedicated flash memory programmer used.

- PG-FP4, FL-PR4: Connect CLK of the programmer to EXCLK/X2/P122.
- PG-FPL3, FP-LITE3: Connect CLK of the programmer to X1/P121, and connect its inverted signal to X2/EXCLK/P122.

2.  $\mu$ PD78F041x only.

**Remark** ○: Be sure to connect the pin.

○: The pin does not have to be connected if the signal is generated on the target board.

×: The pin does not have to be connected.

## 24.5 Connection of Pins on Board


To write the flash memory on-board, connectors that connect the dedicated flash memory programmer must be provided on the target system. First provide a function that selects the normal operation mode or flash memory programming mode on the board.

When the flash memory programming mode is set, all the pins not used for programming the flash memory are in the same status as immediately after reset. Therefore, if the external device does not recognize the state immediately after reset, the pins must be handled as described below.

### 24.5.1 FLMD0 pin

In the normal operation mode, 0 V is input to the FLMD0 pin. In the flash memory programming mode, the  $V_{DD}$  write voltage is supplied to the FLMD0 pin. An FLMD0 pin connection example is shown below.

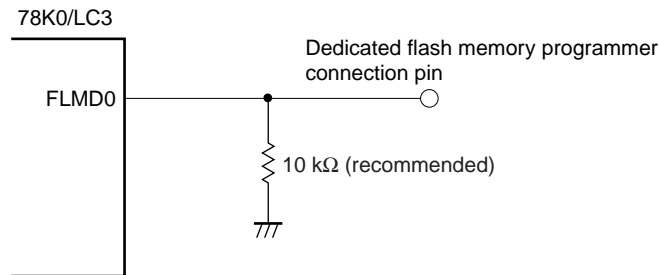**Figure 24-5. FLMD0 Pin Connection Example**



### 24.5.2 Serial interface pins

The pins used by each serial interface are listed below.

**Table 24-4. Pins Used by Each Serial Interface**


Serial Interface	Pins Used
UART6	TxD6, RxD6

To connect the dedicated flash memory programmer to the pins of a serial interface that is connected to another device on the board, care must be exercised so that signals do not collide or that the other device does not malfunction.

**(1) Signal collision**

If the dedicated flash memory programmer (output) is connected to a pin (input) of a serial interface connected to another device (output), signal collision takes place. To avoid this collision, either isolate the connection with the other device, or make the other device go into an output high-impedance state.

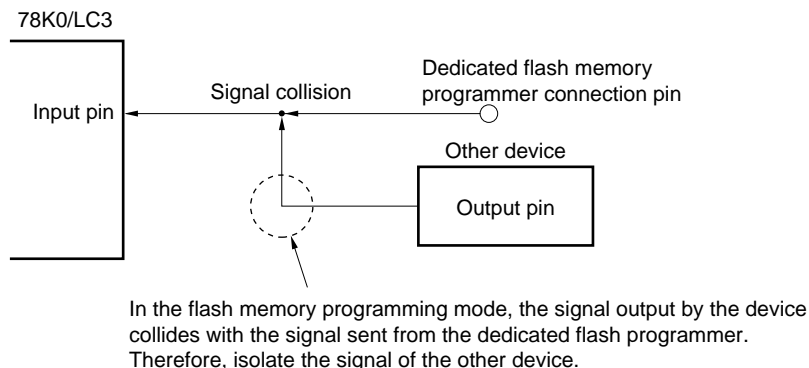
**Figure 24-6. Signal Collision (Input Pin of Serial Interface)**



**(2) Malfunction of other device**

If the dedicated flash memory programmer (output or input) is connected to a pin (input or output) of a serial interface connected to another device (input), a signal may be output to the other device, causing the device to malfunction. To avoid this malfunction, isolate the connection with the other device.

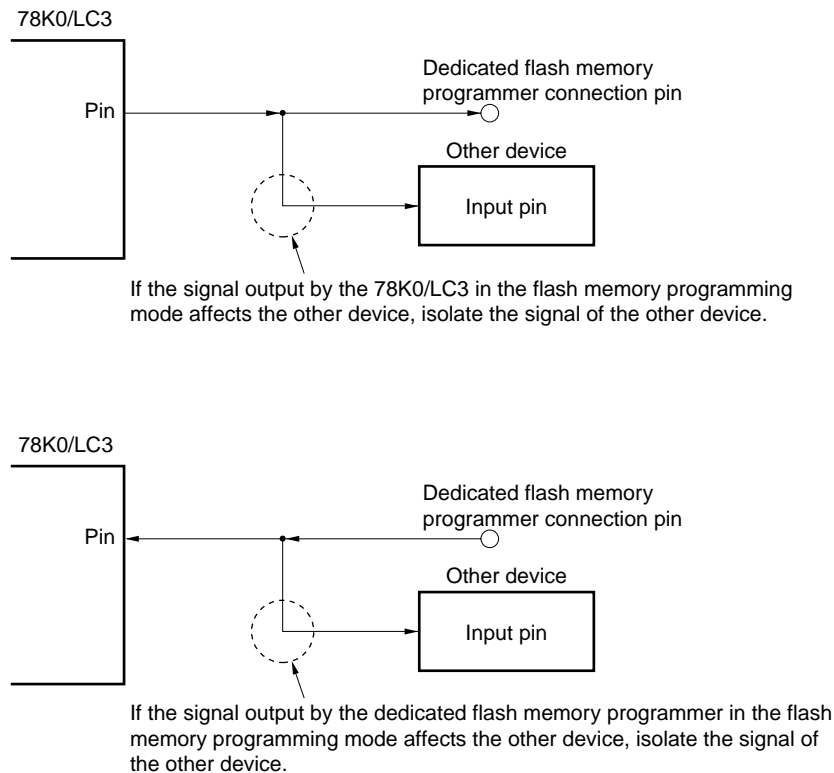**Figure 24-7. Malfunction of Other Device**




### 24.5.3 $\overline{\text{RESET}}$ pin

If the reset signal of the dedicated flash memory programmer is connected to the  $\overline{\text{RESET}}$  pin that is connected to the reset signal generator on the board, signal collision takes place. To prevent this collision, isolate the connection with the reset signal generator.

If the reset signal is input from the user system while the flash memory programming mode is set, the flash memory will not be correctly programmed. Do not input any signal other than the reset signal of the dedicated flash memory programmer.

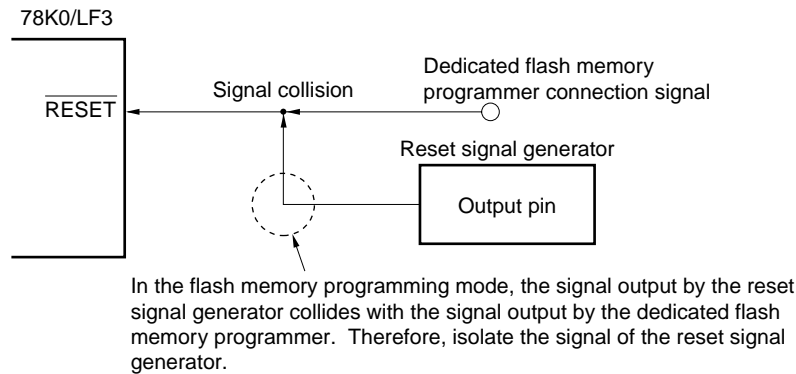**Figure 24-8. Signal Collision ( $\overline{\text{RESET}}$  Pin)**



### 24.5.4 Port pins

When the flash memory programming mode is set, all the pins not used for flash memory programming enter the same status as that immediately after reset. If external devices connected to the ports do not recognize the port status immediately after reset, the port pin must be connected to  $V_{DD}$  or  $V_{SS}$  via a resistor.

### 24.5.5 REGC pin

Connect the REGC pin to GND via a capacitor (0.47 to 1  $\mu\text{F}$ : recommended) in the same manner as during normal operation.

### 24.5.6 Other signal pins

Connect X1 and X2 in the same status as in the normal operation mode when using the on-board clock.

To input the operating clock from the dedicated flash memory programmer, however, connect as follows.

- PG-FP4, FL-PR4: Connect CLK of the programmer to EXCLK/X2/P122.
- PG-FPL3, FP-LITE3: Connect CLK of the programmer and X1/P121, and connect its inverted signal to X2/EXCLK/P122.

**Cautions** Only the X1 clock (fx) or external main system clock (fEXCLK) can be used when UART6 is used.

### 24.5.7 Power supply

To use the supply voltage output of the flash memory programmer, connect the V<sub>DD</sub> pin to V<sub>DD</sub> of the flash p memory programmer, and the V<sub>SS</sub> pin to GND of the flash memory programmer.

To use the on-board supply voltage, connect in compliance with the normal operation mode.

However, be sure to connect the V<sub>DD</sub> and V<sub>SS</sub> pins to V<sub>DD</sub> and GND of the flash memory programmer to use the power monitor function with the flash memory programmer, even when using the on-board supply voltage.


Supply the same other power supplies (AV<sub>REF</sub> and AV<sub>SS</sub>) as those in the normal operation mode.

## 24.6 Programming Method

### 24.6.1 Controlling flash memory

The following figure illustrates the procedure to manipulate the flash memory.

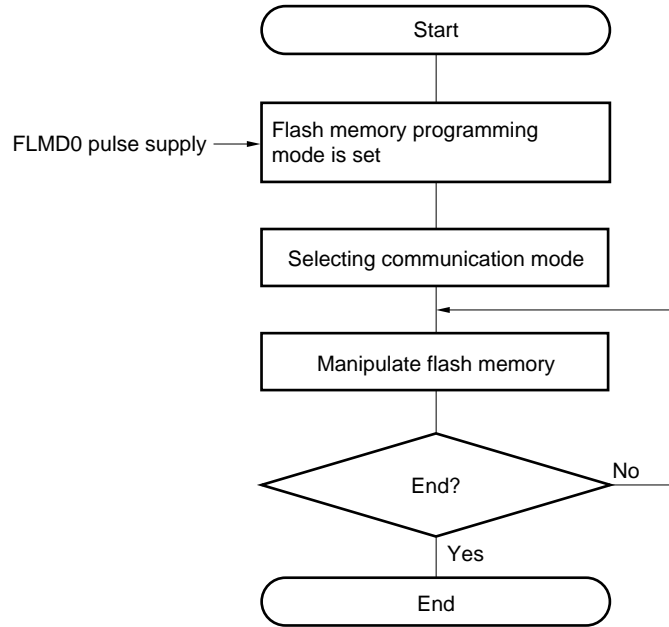**Figure 24-9. Flash Memory Manipulation Procedure**




### 24.6.2 Flash memory programming mode

To rewrite the contents of the flash memory by using the dedicated flash memory programmer, set the 78K0/LC3 in the flash memory programming mode. To set the mode, set the FLMD0 pin to  $V_{DD}$  and clear the reset signal.

Change the mode by using a jumper when writing the flash memory on-board.

**Figure 24-10. Flash Memory Programming Mode**

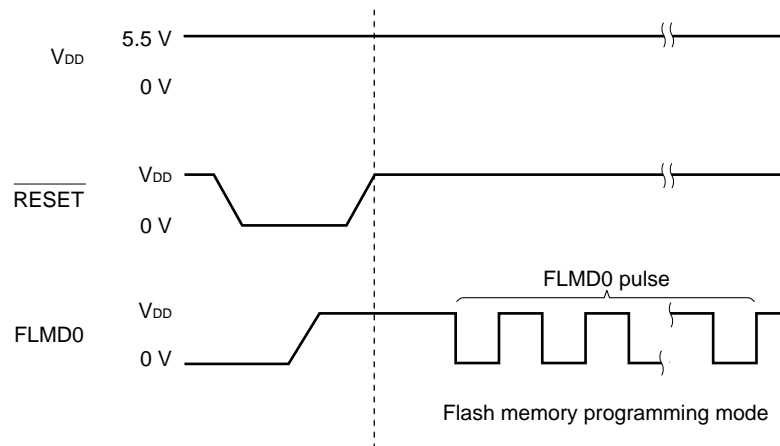

**Table 24-5. Relationship Between FLMD0 Pin and Operation Mode After Reset Release**

FLMD0	Operation Mode
0	Normal operation mode
$V_{DD}$	Flash memory programming mode

### 24.6.3 Selecting communication mode

In the 78K0/LC3, a communication mode is selected by inputting pulses to the FLMD0 pin after the dedicated flash memory programming mode is entered. These FLMD0 pulses are generated by the flash memory programmer.

The following table shows the relationship between the number of pulses and communication modes.

**Table 24-6. Communication Modes**

Communication Mode	Standard Setting <sup>Note 1</sup>				Pins Used	Peripheral Clock	Number of FLMD0 Pulses
	Port	Speed	Frequency	Multiply Rate			
UART (UART6)	UART-Ext-Osc	115,200 bps <sup>Note 3</sup>	2 to 10 MHz <sup>Note 2</sup>	1.0	TxD6, RxD6	f <sub>x</sub>	0
	UART-Ext-FP4CK					f <sub>EXCLK</sub>	3

- Notes**
1. Selection items for Standard settings on GUI of the flash memory programmer.
  2. The possible setting range differs depending on the voltage. For details, see **CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)**.
  3. Because factors other than the baud rate error, such as the signal waveform slew, also affect UART communication, thoroughly evaluate the slew as well as the baud rate error.

**Caution** When UART6 is selected, the receive clock is calculated based on the reset command sent from the dedicated flash memory programmer after the FLMD0 pulse has been received.


**Remark** f<sub>x</sub>: X1 clock  
f<sub>EXCLK</sub>: External main system clock



**24.6.4 Communication commands**

The 78K0/LC3 communicates with the dedicated flash memory programmer by using commands. The signals sent from the flash memory programmer to the 78K0/LC3 are called commands, and the signals sent from the 78K0/LC3 to the dedicated flash memory programmer are called response.

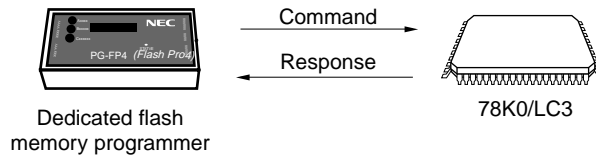**Figure 24-11. Communication Commands**



The flash memory control commands of the 78K0/LC3 are listed in the table below. All these commands are issued from the programmer and the 78K0/LC3 perform processing corresponding to the respective commands.

**Table 24-7. Flash Memory Control Commands**

Classification	Command Name	Function
Verify	Verify	Compares the contents of a specified area of the flash memory with data transmitted from the programmer.
Erase	Chip Erase	Erases the entire flash memory.
	Block Erase	Erases a specified area in the flash memory.
Blank check	Block Blank Check	Checks if a specified block in the flash memory has been correctly erased.
Write	Programming	Writes data to a specified area in the flash memory.
Getting information	Status	Gets the current operating status (status data).
	Silicon Signature	Gets 78K0/Lx3 information (such as the part number and flash memory configuration).
	Version Get	Gets the 78K0/Lx3 version and firmware version.
	Checksum	Gets the checksum data for a specified area.
Security	Security Set	Sets security information.
Others	Reset	Used to detect synchronization status of communication.
	Oscillating Frequency Set	Specifies an oscillation frequency.

The 78K0/LC3 return a response for the command issued by the dedicated flash memory programmer. The response names sent from the 78K0/LC3 are listed below.

**Table 24-8. Response Names**

Response Name	Function
ACK	Acknowledges command/data.
NAK	Acknowledges illegal command/data.

## 24.7 Security Settings

The 78K0/LC3 supports a security function that prohibits rewriting the user program written to the internal flash memory, so that the program cannot be changed by an unauthorized person.

The operations shown below can be performed using the Security Set command. The security setting is valid when the programming mode is set next.

- Disabling batch erase (chip erase)

Execution of the block erase and batch erase (chip erase) commands for entire blocks in the flash memory is prohibited by this setting during on-board/off-board programming. Once execution of the batch erase (chip erase) command is prohibited, all of the prohibition settings (including prohibition of batch erase (chip erase)) can no longer be cancelled.

**Caution** After the security setting for the batch erase is set, erasure cannot be performed for the device. In addition, even if a write command is executed, data different from that which has already been written to the flash memory cannot be written, because the erase command is disabled.

- Disabling block erase

Execution of the block erase command for a specific block in the flash memory is prohibited during on-board/off-board programming. However, blocks can be erased by means of self programming.

- Disabling write

Execution of the write and block erase commands for entire blocks in the flash memory is prohibited during on-board/off-board programming. However, blocks can be written by means of self programming.

- Disabling rewriting boot cluster 0

Execution of the batch erase (chip erase) command, block erase command, and write command on boot cluster 0 (0000H to 0FFFH) in the flash memory is prohibited by this setting.

**Caution** If a security setting that rewrites boot cluster 0 has been applied, boot cluster 0 of that device will not be rewritten.

The batch erase (chip erase), block erase, write commands, and rewriting boot cluster 0 are enabled by the default setting when the flash memory is shipped. Security can be set by on-board/off-board programming and self programming. Each security setting can be used in combination.

Prohibition of erasing blocks and writing is cleared by executing the batch erase (chip erase) command.

Table 24-9 shows the relationship between the erase and write commands when the 78K0/LC3 security function is enabled.

**Table 24-9. Relationship Between Enabling Security Function and Command**

**(1) During on-board/off-board programming**

Valid Security	Executed Command		
	Batch Erase (Chip Erase)	Block Erase	Write
Prohibition of batch erase (chip erase)	Cannot be erased in batch	Blocks cannot be erased.	Can be performed <sup>Note</sup> .
Prohibition of block erase	Can be erased in batch.		Can be performed.
Prohibition of writing			Cannot be performed.
Prohibition of rewriting boot cluster 0	Cannot be erased in batch	Boot cluster 0 cannot be erased.	Boot cluster 0 cannot be written.

**Note** Confirm that no data has been written to the write area. Because data cannot be erased after batch erase (chip erase) is prohibited, do not write data if the data has not been erased.

**(2) During self programming**

Valid Security	Executed Command	
	Block Erase	Write
Prohibition of batch erase (chip erase)	Blocks can be erased.	Can be performed.
Prohibition of block erase		
Prohibition of writing		
Prohibition of rewriting boot cluster 0	Boot cluster 0 cannot be erased.	Boot cluster 0 cannot be written.

Table 24-10 shows how to perform security settings in each programming mode.

**Table 24-10. Setting Security in Each Programming Mode**

**(1) On-board/off-board programming**

Security	Security Setting	How to Disable Security Setting
Prohibition of batch erase (chip erase)	Set via GUI of dedicated flash memory programmer, etc.	Cannot be disabled after set.
Prohibition of block erase		Execute batch erase (chip erase) command
Prohibition of writing		
Prohibition of rewriting boot cluster 0		Cannot be disabled after set.

**(2) Self programming**

Security	Security Setting	How to Disable Security Setting
Prohibition of batch erase (chip erase)	Set by using information library.	Cannot be disabled after set.
Prohibition of block erase		Execute batch erase (chip erase) command during on-board/off-board programming (cannot be disabled during self programming)
Prohibition of writing		
Prohibition of rewriting boot cluster 0		Cannot be disabled after set.

## 24.8 Flash Memory Programming by Self-Programming (Under Development)


The 78K0/LC3 supports a self-programming function that can be used to rewrite the flash memory via a user program. Because this function allows a user application to rewrite the flash memory by using the 78K0/LC3 self-programming sample library, it can be used to upgrade the program in the field.

If an interrupt occurs during self-programming, self-programming can be temporarily stopped and interrupt servicing can be executed. To execute interrupt servicing, restore the normal operation mode after self-programming has been stopped, and execute the EI instruction. After the self-programming mode is later restored, self-programming can be resumed.

- Cautions**
- 1. The self-programming function cannot be used when the CPU operates with the subsystem clock.**
  - 2. Input a high level to the FLMD0 pin during self-programming.**
  - 3. Be sure to execute the DI instruction before starting self-programming.**  
The self-programming function checks the interrupt request flags (IF0L, IF0H, IF1L, and IF1H). If an interrupt request is generated, self-programming is stopped.
  - 4. Self-programming is also stopped by an interrupt request that is not masked even in the DI status. To prevent this, mask the interrupt by using the interrupt mask flag registers (MK0L, MK0H, MK1L, and MK1H).**

The following figure illustrates a flow of rewriting the flash memory by using a self programming sample library.

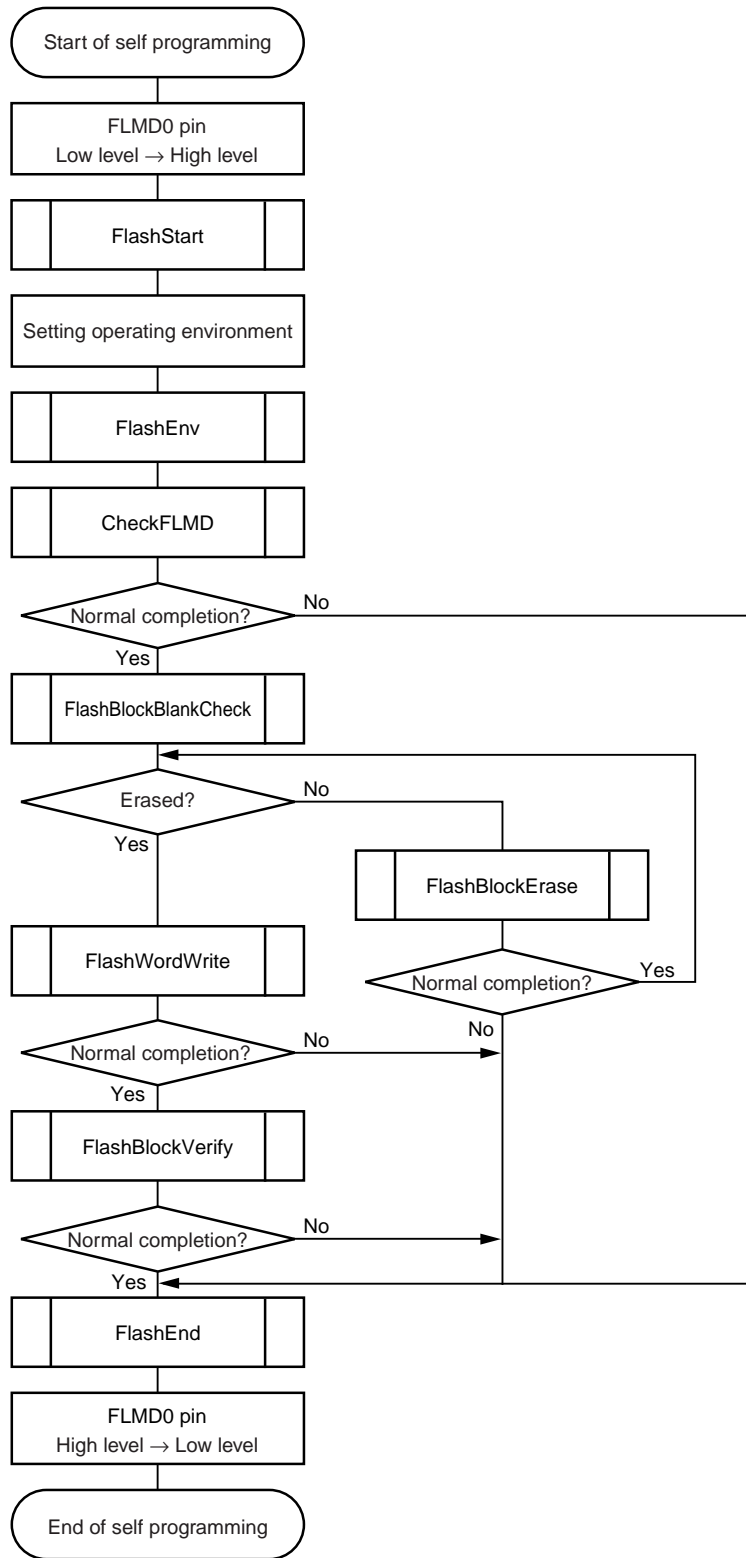**Figure 24-12. Flow of Self Programming (Rewriting Flash Memory)**



### 24.8.1 Boot swap function

If rewriting the boot area has failed during self-programming due to a power failure or some other cause, the data in the boot area may be lost and the program may not be restarted by resetting.

The boot swap function is used to avoid this problem.

Before erasing boot cluster 0<sup>Note</sup>, which is a boot program area, by self-programming, write a new boot program to boot cluster 1 in advance. When the program has been correctly written to boot cluster 1, swap this boot cluster 1 and boot cluster 0 by using the set information function of the firmware of the 78K0/LC3, so that boot cluster 1 is used as a boot area. After that, erase or write the original boot program area, boot cluster 0.

As a result, even if a power failure occurs while the boot programming area is being rewritten, the program is executed correctly because it is booted from boot cluster 1 to be swapped when the program is reset and started next.


If the program has been correctly written to boot cluster 0, restore the original boot area by using the set information function of the firmware of the 78K0/LC3.

**Note** A boot cluster is a 4 KB area and boot clusters 0 and 1 are swapped by the boot swap function.

Boot cluster 0 (0000H to 0FFFH): Original boot program area


Boot cluster 1 (1000H to 1FFFH): Area subject to boot swap function

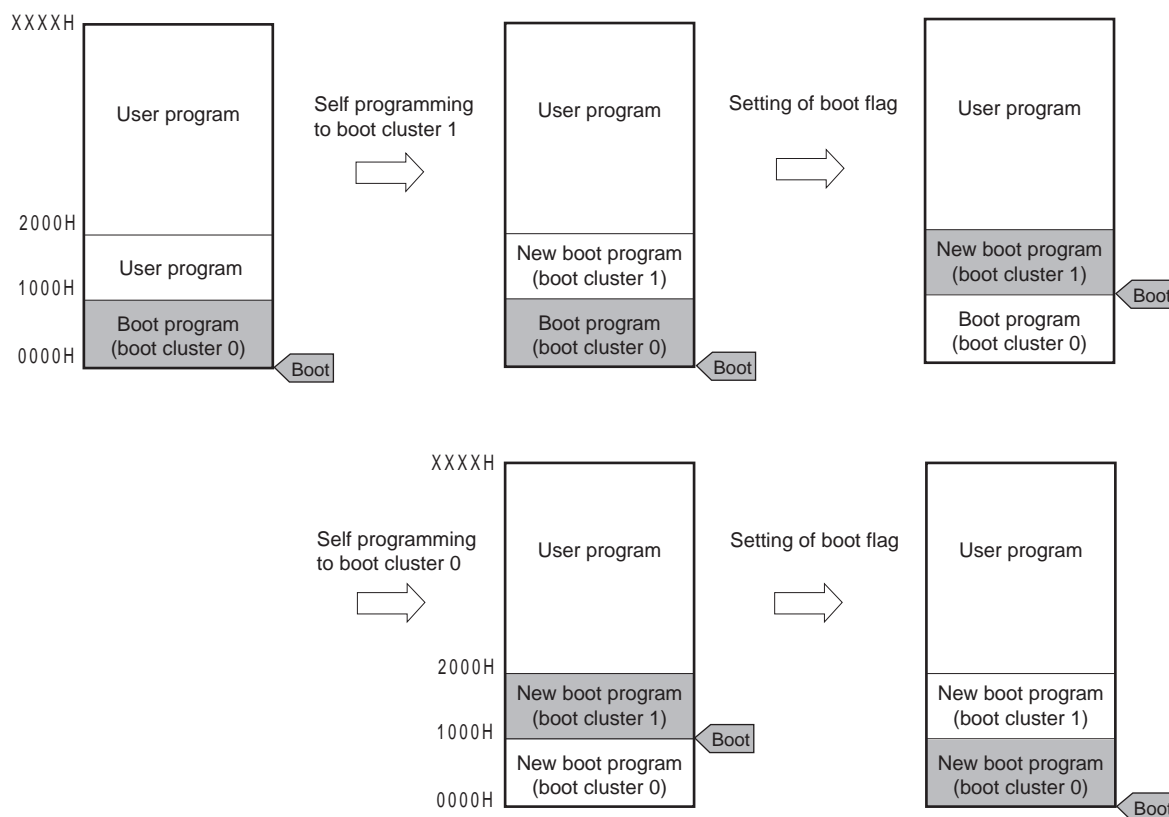**Figure 24-13. Boot Swap Function**



**Remark** Boot cluster 1 becomes 0000H to 0FFFH when a reset is generated after the boot flag has been set.

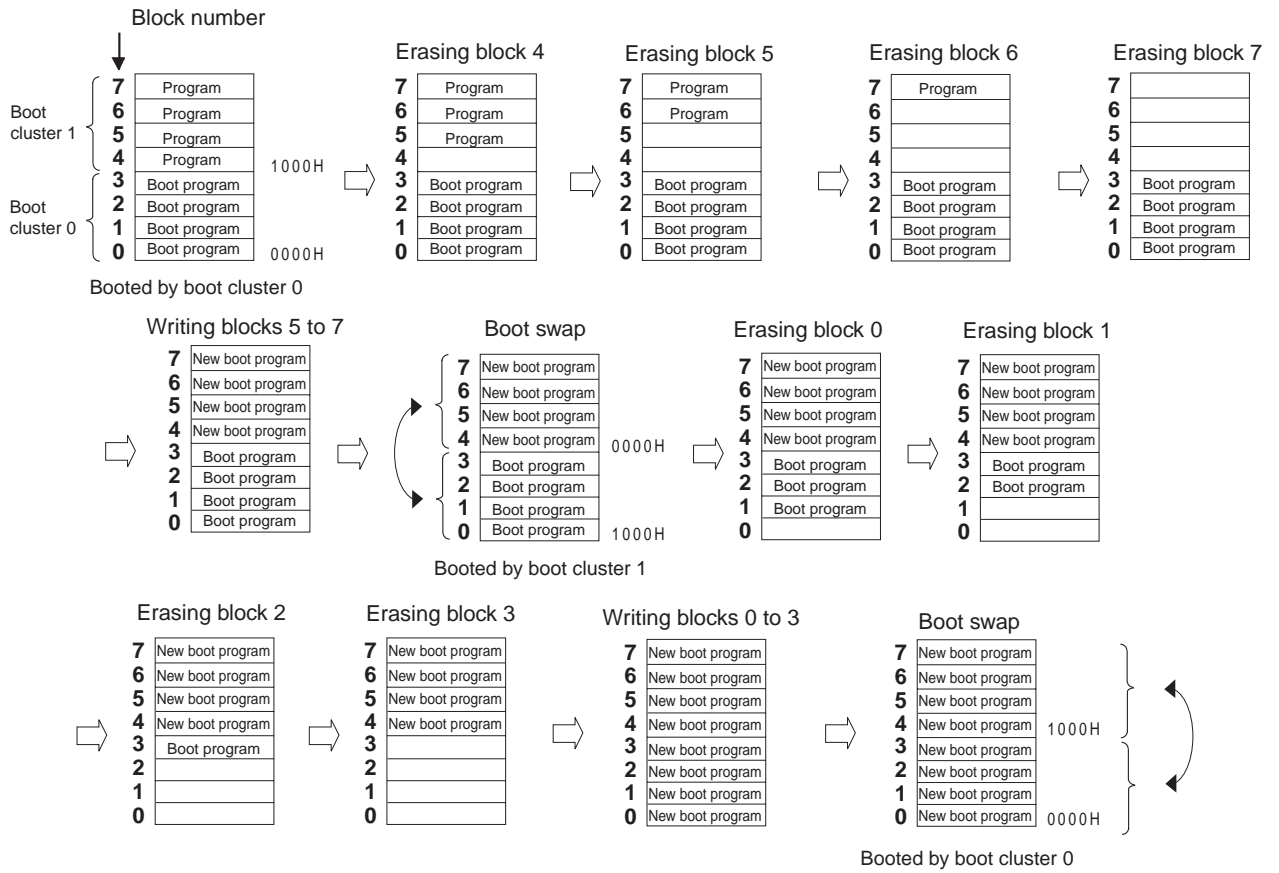Figure 24-14. Example of Executing Boot Swapping




## CHAPTER 25 ON-CHIP DEBUG FUNCTION

### 25.1 Connecting QB-78K0MINI to 78K0/LC3

The 78K0/LC3 uses the  $V_{DD}$ , FLMD0,  $\overline{\text{RESET}}$ , OCD0A/X1, OCD0B/X2, and  $V_{SS}$  pins to communicate with the host machine via an on-chip debug emulator (QB-78K0MINI).

**Caution** The 78K0/LC3 has an on-chip debug function. Do not use this product for mass production because its reliability cannot be guaranteed after the on-chip debug function has been used, given the issue of the number of times the flash memory can be rewritten. NEC Electronics does not accept complaints concerning this product after the on-chip debug function has been used.

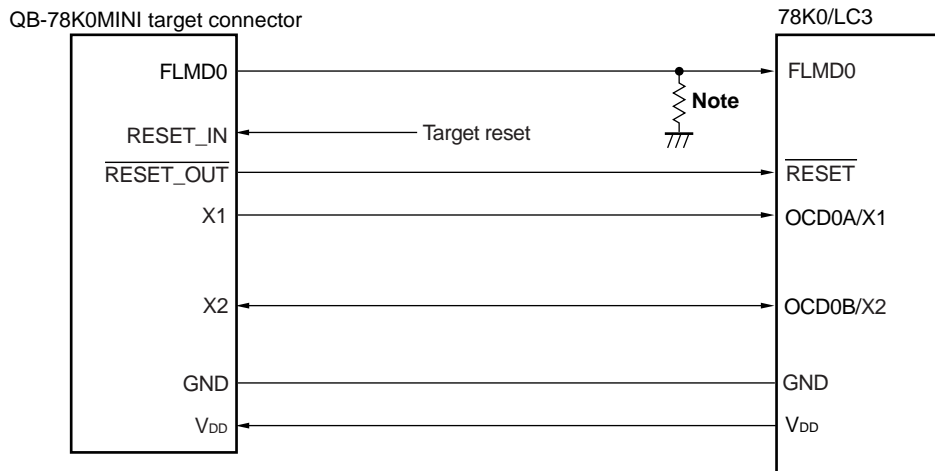**Figure 25-1. Connection Example of QB-78K0MINI and 78K0/LC3  
(When OCD0A/X1 and OCD0B/X2 Are Used)**




**Note** Make pull-down resistor 470  $\Omega$  or more (10 k $\Omega$ : recommended).

**Caution** Input the clock from the OCD0A/X1 pin during on-chip debugging.



Connect the FLMD0 pin as follows when performing self programming by means of on-chip debugging.

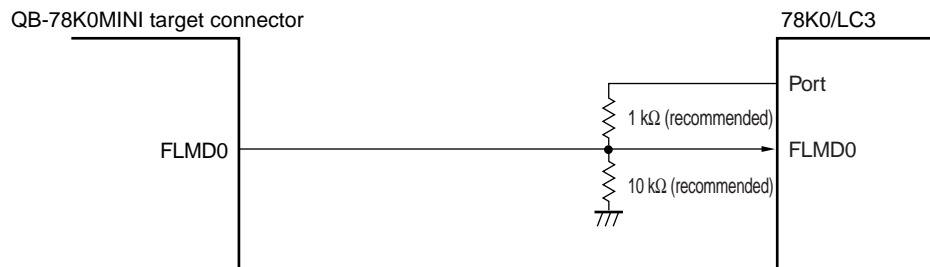**Figure 25-2. Connection of FLMD0 Pin for Self Programming by Means of On-Chip Debugging**



## 25.2 On-Chip Debug Security ID

The 78K0/LC3 has an on-chip debug operation control flag in the flash memory at 0084H (see **CHAPTER 23 OPTION BYTE**) and an on-chip debug security ID setting area at 0085H to 008EH.

When the boot swap function is used, also set a value that is the same as that of 1084H and 1085H to 108EH in advance, because 0084H, 0085H to 008EH and 1084H, and 1085H to 108EH are switched.

For details on the on-chip debug security ID, refer to the **QB-78K0MINI User's Manual (U17029E)**.

**Table 25-1. On-Chip Debug Security ID**

Address	On-Chip Debug Security ID
0085H to 008EH	Any ID code of 10 bytes
1085H to 108EH	

## CHAPTER 26 INSTRUCTION SET

This chapter lists each instruction set of the 78K0/LC3 in table form. For details of each operation and operation code, refer to the separate document **78K/0 Series Instructions User's Manual (U12326E)**.

### 26.1 Conventions Used in Operation List

#### 26.1.1 Operand identifiers and specification methods

Operands are written in the "Operand" column of each instruction in accordance with the specification method of the instruction operand identifier (refer to the assembler specifications for details). When there are two or more methods, select one of them. Uppercase letters and the symbols #, !, \$ and [ ] are keywords and must be written as they are. Each symbol has the following meaning.

- #: Immediate data specification
- !: Absolute address specification
- \$: Relative address specification
- [ ]: Indirect address specification

In the case of immediate data, describe an appropriate numeric value or a label. When using a label, be sure to write the #, !, \$, and [ ] symbols.

For operand register identifiers r and rp, either function names (X, A, C, etc.) or absolute names (names in parentheses in the table below, R0, R1, R2, etc.) can be used for specification.

**Table 26-1. Operand Identifiers and Specification Methods**

Identifier	Specification Method
r	X (R0), A (R1), C (R2), B (R3), E (R4), D (R5), L (R6), H (R7)
rp	AX (RP0), BC (RP1), DE (RP2), HL (RP3)
sfr	Special function register symbol <sup>Note</sup>
sfrp	Special function register symbol (16-bit manipulatable register even addresses only) <sup>Note</sup>
saddr	FE20H to FF1FH Immediate data or labels
saddrp	FE20H to FF1FH Immediate data or labels (even address only)
addr16	0000H to FFFFH Immediate data or labels (Only even addresses for 16-bit data transfer instructions)
addr11	0800H to 0FFFH Immediate data or labels
addr5	0040H to 007FH Immediate data or labels (even address only)
word	16-bit immediate data or label
byte	8-bit immediate data or label
bit	3-bit immediate data or label
RBn	RB0 to RB3

**Note** Addresses from FFD0H to FFDFH cannot be accessed with these operands.

**Remark** For special function register symbols, see **Table 3-6 Special Function Register List**.

**26.1.2 Description of operation column**

A:	A register; 8-bit accumulator
X:	X register
B:	B register
C:	C register
D:	D register
E:	E register
H:	H register
L:	L register
AX:	AX register pair; 16-bit accumulator
BC:	BC register pair
DE:	DE register pair
HL:	HL register pair
PC:	Program counter
SP:	Stack pointer
PSW:	Program status word
CY:	Carry flag
AC:	Auxiliary carry flag
Z:	Zero flag
RBS:	Register bank select flag
IE:	Interrupt request enable flag
( ):	Memory contents indicated by address or register contents in parentheses
X <sub>H</sub> , X <sub>L</sub> :	Higher 8 bits and lower 8 bits of 16-bit register
∧:	Logical product (AND)
∨:	Logical sum (OR)
⊕:	Exclusive logical sum (exclusive OR)
⎯:	Inverted data
addr16:	16-bit immediate data or label
jdsp8:	Signed 8-bit data (displacement value)

**26.1.3 Description of flag operation column**

(Blank):	Not affected
0:	Cleared to 0
1:	Set to 1
×	Set/cleared according to the result
R:	Previously saved value is restored

## 26.2 Operation List

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag				
				Note 1	Note 2		Z	AC	CY		
8-bit data transfer	<b>MOV</b>	r, #byte	2	4	–	$r \leftarrow \text{byte}$					
		saddr, #byte	3	6	7	$(\text{saddr}) \leftarrow \text{byte}$					
		sfr, #byte	3	–	7	$\text{sfr} \leftarrow \text{byte}$					
		A, r	Note 3	1	2	–	$A \leftarrow r$				
		r, A	Note 3	1	2	–	$r \leftarrow A$				
		A, saddr		2	4	5	$A \leftarrow (\text{saddr})$				
		saddr, A		2	4	5	$(\text{saddr}) \leftarrow A$				
		A, sfr		2	–	5	$A \leftarrow \text{sfr}$				
		sfr, A		2	–	5	$\text{sfr} \leftarrow A$				
		A, !addr16		3	8	9	$A \leftarrow (\text{addr16})$				
		!addr16, A		3	8	9	$(\text{addr16}) \leftarrow A$				
		PSW, #byte		3	–	7	$\text{PSW} \leftarrow \text{byte}$		x	x	x
		A, PSW		2	–	5	$A \leftarrow \text{PSW}$				
		PSW, A		2	–	5	$\text{PSW} \leftarrow A$		x	x	x
		A, [DE]		1	4	5	$A \leftarrow (\text{DE})$				
		[DE], A		1	4	5	$(\text{DE}) \leftarrow A$				
		A, [HL]		1	4	5	$A \leftarrow (\text{HL})$				
		[HL], A		1	4	5	$(\text{HL}) \leftarrow A$				
		A, [HL + byte]		2	8	9	$A \leftarrow (\text{HL} + \text{byte})$				
		[HL + byte], A		2	8	9	$(\text{HL} + \text{byte}) \leftarrow A$				
	A, [HL + B]		1	6	7	$A \leftarrow (\text{HL} + \text{B})$					
	[HL + B], A		1	6	7	$(\text{HL} + \text{B}) \leftarrow A$					
	A, [HL + C]		1	6	7	$A \leftarrow (\text{HL} + \text{C})$					
	[HL + C], A		1	6	7	$(\text{HL} + \text{C}) \leftarrow A$					
	<b>XCH</b>	A, r	Note 3	1	2	–	$A \leftrightarrow r$				
		A, saddr		2	4	6	$A \leftrightarrow (\text{saddr})$				
		A, sfr		2	–	6	$A \leftrightarrow (\text{sfr})$				
		A, !addr16		3	8	10	$A \leftrightarrow (\text{addr16})$				
		A, [DE]		1	4	6	$A \leftrightarrow (\text{DE})$				
		A, [HL]		1	4	6	$A \leftrightarrow (\text{HL})$				
		A, [HL + byte]		2	8	10	$A \leftrightarrow (\text{HL} + \text{byte})$				
		A, [HL + B]		2	8	10	$A \leftrightarrow (\text{HL} + \text{B})$				
A, [HL + C]		2	8	10	$A \leftrightarrow (\text{HL} + \text{C})$						

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed
  3. Except "r = A"

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock ( $f_{\text{CPU}}$ ) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
16-bit data transfer	<b>MOVW</b>	rp, #word	3	6	–	rp ← word			
		saddrp, #word	4	8	10	(saddrp) ← word			
		sfrp, #word	4	–	10	sfrp ← word			
		AX, saddrp	2	6	8	AX ← (saddrp)			
		saddrp, AX	2	6	8	(saddrp) ← AX			
		AX, sfrp	2	–	8	AX ← sfrp			
		sfrp, AX	2	–	8	sfrp ← AX			
		AX, rp <small>Note 3</small>	1	4	–	AX ← rp			
		rp, AX <small>Note 3</small>	1	4	–	rp ← AX			
		AX, laddr16	3	10	12	AX ← (addr16)			
	laddr16, AX	3	10	12	(addr16) ← AX				
	<b>XCHW</b>	AX, rp <small>Note 3</small>	1	4	–	AX ↔ rp			
8-bit operation	<b>ADD</b>	A, #byte	2	4	–	A, CY ← A + byte	x	x	x
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) + byte	x	x	x
		A, r <small>Note 4</small>	2	4	–	A, CY ← A + r	x	x	x
		r, A	2	4	–	r, CY ← r + A	x	x	x
		A, saddr	2	4	5	A, CY ← A + (saddr)	x	x	x
		A, laddr16	3	8	9	A, CY ← A + (addr16)	x	x	x
		A, [HL]	1	4	5	A, CY ← A + (HL)	x	x	x
		A, [HL + byte]	2	8	9	A, CY ← A + (HL + byte)	x	x	x
		A, [HL + B]	2	8	9	A, CY ← A + (HL + B)	x	x	x
		A, [HL + C]	2	8	9	A, CY ← A + (HL + C)	x	x	x
	<b>ADDC</b>	A, #byte	2	4	–	A, CY ← A + byte + CY	x	x	x
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) + byte + CY	x	x	x
		A, r <small>Note 4</small>	2	4	–	A, CY ← A + r + CY	x	x	x
		r, A	2	4	–	r, CY ← r + A + CY	x	x	x
		A, saddr	2	4	5	A, CY ← A + (saddr) + CY	x	x	x
		A, laddr16	3	8	9	A, CY ← A + (addr16) + C	x	x	x
		A, [HL]	1	4	5	A, CY ← A + (HL) + CY	x	x	x
		A, [HL + byte]	2	8	9	A, CY ← A + (HL + byte) + CY	x	x	x
		A, [HL + B]	2	8	9	A, CY ← A + (HL + B) + CY	x	x	x
A, [HL + C]	2	8	9	A, CY ← A + (HL + C) + CY	x	x	x		

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed
  3. Only when rp = BC, DE or HL
  4. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f<sub>CPU</sub>) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
8-bit operation	<b>SUB</b>	A, #byte	2	4	–	A, CY ← A – byte	x	x	x
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) – byte	x	x	x
		A, r <span style="float:right">Note 3</span>	2	4	–	A, CY ← A – r	x	x	x
		r, A	2	4	–	r, CY ← r – A	x	x	x
		A, saddr	2	4	5	A, CY ← A – (saddr)	x	x	x
		A, !addr16	3	8	9	A, CY ← A – (addr16)	x	x	x
		A, [HL]	1	4	5	A, CY ← A – (HL)	x	x	x
		A, [HL + byte]	2	8	9	A, CY ← A – (HL + byte)	x	x	x
		A, [HL + B]	2	8	9	A, CY ← A – (HL + B)	x	x	x
	A, [HL + C]	2	8	9	A, CY ← A – (HL + C)	x	x	x	
	<b>SUBC</b>	A, #byte	2	4	–	A, CY ← A – byte – CY	x	x	x
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) – byte – CY	x	x	x
		A, r <span style="float:right">Note 3</span>	2	4	–	A, CY ← A – r – CY	x	x	x
		r, A	2	4	–	r, CY ← r – A – CY	x	x	x
		A, saddr	2	4	5	A, CY ← A – (saddr) – CY	x	x	x
		A, !addr16	3	8	9	A, CY ← A – (addr16) – CY	x	x	x
		A, [HL]	1	4	5	A, CY ← A – (HL) – CY	x	x	x
		A, [HL + byte]	2	8	9	A, CY ← A – (HL + byte) – CY	x	x	x
		A, [HL + B]	2	8	9	A, CY ← A – (HL + B) – CY	x	x	x
	A, [HL + C]	2	8	9	A, CY ← A – (HL + C) – CY	x	x	x	
	<b>AND</b>	A, #byte	2	4	–	A ← A ∧ byte	x		
		saddr, #byte	3	6	8	(saddr) ← (saddr) ∧ byte	x		
		A, r <span style="float:right">Note 3</span>	2	4	–	A ← A ∧ r	x		
		r, A	2	4	–	r ← r ∧ A	x		
		A, saddr	2	4	5	A ← A ∧ (saddr)	x		
		A, !addr16	3	8	9	A ← A ∧ (addr16)	x		
		A, [HL]	1	4	5	A ← A ∧ (HL)	x		
		A, [HL + byte]	2	8	9	A ← A ∧ (HL + byte)	x		
		A, [HL + B]	2	8	9	A ← A ∧ (HL + B)	x		
	A, [HL + C]	2	8	9	A ← A ∧ (HL + C)	x			

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed
  3. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f<sub>CPU</sub>) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
8-bit operation	<b>OR</b>	A, #byte	2	4	–	$A \leftarrow A \vee \text{byte}$	x		
		saddr, #byte	3	6	8	$(\text{saddr}) \leftarrow (\text{saddr}) \vee \text{byte}$	x		
		A, r <span style="float:right">Note 3</span>	2	4	–	$A \leftarrow A \vee r$	x		
		r, A	2	4	–	$r \leftarrow r \vee A$	x		
		A, saddr	2	4	5	$A \leftarrow A \vee (\text{saddr})$	x		
		A, laddr16	3	8	9	$A \leftarrow A \vee (\text{addr16})$	x		
		A, [HL]	1	4	5	$A \leftarrow A \vee (\text{HL})$	x		
		A, [HL + byte]	2	8	9	$A \leftarrow A \vee (\text{HL} + \text{byte})$	x		
		A, [HL + B]	2	8	9	$A \leftarrow A \vee (\text{HL} + B)$	x		
	A, [HL + C]	2	8	9	$A \leftarrow A \vee (\text{HL} + C)$	x			
	<b>XOR</b>	A, #byte	2	4	–	$A \leftarrow A \nabla \text{byte}$	x		
		saddr, #byte	3	6	8	$(\text{saddr}) \leftarrow (\text{saddr}) \nabla \text{byte}$	x		
		A, r <span style="float:right">Note 3</span>	2	4	–	$A \leftarrow A \nabla r$	x		
		r, A	2	4	–	$r \leftarrow r \nabla A$	x		
		A, saddr	2	4	5	$A \leftarrow A \nabla (\text{saddr})$	x		
		A, laddr16	3	8	9	$A \leftarrow A \nabla (\text{addr16})$	x		
		A, [HL]	1	4	5	$A \leftarrow A \nabla (\text{HL})$	x		
		A, [HL + byte]	2	8	9	$A \leftarrow A \nabla (\text{HL} + \text{byte})$	x		
		A, [HL + B]	2	8	9	$A \leftarrow A \nabla (\text{HL} + B)$	x		
	A, [HL + C]	2	8	9	$A \leftarrow A \nabla (\text{HL} + C)$	x			
	<b>CMP</b>	A, #byte	2	4	–	$A - \text{byte}$	x	x	x
		saddr, #byte	3	6	8	$(\text{saddr}) - \text{byte}$	x	x	x
		A, r <span style="float:right">Note 3</span>	2	4	–	$A - r$	x	x	x
		r, A	2	4	–	$r - A$	x	x	x
		A, saddr	2	4	5	$A - (\text{saddr})$	x	x	x
		A, laddr16	3	8	9	$A - (\text{addr16})$	x	x	x
		A, [HL]	1	4	5	$A - (\text{HL})$	x	x	x
		A, [HL + byte]	2	8	9	$A - (\text{HL} + \text{byte})$	x	x	x
		A, [HL + B]	2	8	9	$A - (\text{HL} + B)$	x	x	x
	A, [HL + C]	2	8	9	$A - (\text{HL} + C)$	x	x	x	

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed
  3. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f<sub>CPU</sub>) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
16-bit operation	<b>ADDW</b>	AX, #word	3	6	–	AX, CY ← AX + word	×	×	×
	<b>SUBW</b>	AX, #word	3	6	–	AX, CY ← AX – word	×	×	×
	<b>CMPW</b>	AX, #word	3	6	–	AX – word	×	×	×
Multiply/divide	<b>MULU</b>	X	2	16	–	AX ← A × X			
	<b>DIVUW</b>	C	2	25	–	AX (Quotient), C (Remainder) ← AX ÷ C			
Increment/decrement	<b>INC</b>	r	1	2	–	r ← r + 1	×	×	
		saddr	2	4	6	(saddr) ← (saddr) + 1	×	×	
	<b>DEC</b>	r	1	2	–	r ← r – 1	×	×	
		saddr	2	4	6	(saddr) ← (saddr) – 1	×	×	
	<b>INCW</b>	rp	1	4	–	rp ← rp + 1			
	<b>DECW</b>	rp	1	4	–	rp ← rp – 1			
Rotate	<b>ROR</b>	A, 1	1	2	–	(CY, A7 ← A0, A <sub>m-1</sub> ← A <sub>m</sub> ) × 1 time			×
	<b>ROL</b>	A, 1	1	2	–	(CY, A0 ← A7, A <sub>m+1</sub> ← A <sub>m</sub> ) × 1 time			×
	<b>RORC</b>	A, 1	1	2	–	(CY ← A0, A7 ← CY, A <sub>m-1</sub> ← A <sub>m</sub> ) × 1 time			×
	<b>ROLC</b>	A, 1	1	2	–	(CY ← A7, A0 ← CY, A <sub>m+1</sub> ← A <sub>m</sub> ) × 1 time			×
	<b>ROR4</b>	[HL]	2	10	12	A <sub>3-0</sub> ← (HL) <sub>3-0</sub> , (HL) <sub>7-4</sub> ← A <sub>3-0</sub> , (HL) <sub>3-0</sub> ← (HL) <sub>7-4</sub>			
	<b>ROL4</b>	[HL]	2	10	12	A <sub>3-0</sub> ← (HL) <sub>7-4</sub> , (HL) <sub>3-0</sub> ← A <sub>3-0</sub> , (HL) <sub>7-4</sub> ← (HL) <sub>3-0</sub>			
BCD adjustment	<b>ADJBA</b>		2	4	–	Decimal Adjust Accumulator after Addition	×	×	×
	<b>ADJBS</b>		2	4	–	Decimal Adjust Accumulator after Subtract	×	×	×
Bit manipulate	<b>MOV1</b>	CY, saddr.bit	3	6	7	CY ← (saddr.bit)			×
		CY, sfr.bit	3	–	7	CY ← sfr.bit			×
		CY, A.bit	2	4	–	CY ← A.bit			×
		CY, PSW.bit	3	–	7	CY ← PSW.bit			×
		CY, [HL].bit	2	6	7	CY ← (HL).bit			×
		saddr.bit, CY	3	6	8	(saddr.bit) ← CY			
		sfr.bit, CY	3	–	8	sfr.bit ← CY			
		A.bit, CY	2	4	–	A.bit ← CY			
		PSW.bit, CY	3	–	8	PSW.bit ← CY			×
[HL].bit, CY	2	6	8	(HL).bit ← CY					

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f<sub>CPU</sub>) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.



Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
Bit manipulate	<b>AND1</b>	CY, saddr.bit	3	6	7	$CY \leftarrow CY \wedge (\text{saddr.bit})$			x
		CY, sfr.bit	3	–	7	$CY \leftarrow CY \wedge \text{sfr.bit}$			x
		CY, A.bit	2	4	–	$CY \leftarrow CY \wedge A.\text{bit}$			x
		CY, PSW.bit	3	–	7	$CY \leftarrow CY \wedge \text{PSW.bit}$			x
		CY, [HL].bit	2	6	7	$CY \leftarrow CY \wedge (\text{HL}).\text{bit}$			x
	<b>OR1</b>	CY, saddr.bit	3	6	7	$CY \leftarrow CY \vee (\text{saddr.bit})$			x
		CY, sfr.bit	3	–	7	$CY \leftarrow CY \vee \text{sfr.bit}$			x
		CY, A.bit	2	4	–	$CY \leftarrow CY \vee A.\text{bit}$			x
		CY, PSW.bit	3	–	7	$CY \leftarrow CY \vee \text{PSW.bit}$			x
		CY, [HL].bit	2	6	7	$CY \leftarrow CY \vee (\text{HL}).\text{bit}$			x
	<b>XOR1</b>	CY, saddr.bit	3	6	7	$CY \leftarrow CY \oplus (\text{saddr.bit})$			x
		CY, sfr.bit	3	–	7	$CY \leftarrow CY \oplus \text{sfr.bit}$			x
		CY, A.bit	2	4	–	$CY \leftarrow CY \oplus A.\text{bit}$			x
		CY, PSW. bit	3	–	7	$CY \leftarrow CY \oplus \text{PSW.bit}$			x
		CY, [HL].bit	2	6	7	$CY \leftarrow CY \oplus (\text{HL}).\text{bit}$			x
	<b>SET1</b>	saddr.bit	2	4	6	$(\text{saddr.bit}) \leftarrow 1$			
		sfr.bit	3	–	8	$\text{sfr.bit} \leftarrow 1$			
		A.bit	2	4	–	$A.\text{bit} \leftarrow 1$			
		PSW.bit	2	–	6	$\text{PSW.bit} \leftarrow 1$	x	x	x
		[HL].bit	2	6	8	$(\text{HL}).\text{bit} \leftarrow 1$			
	<b>CLR1</b>	saddr.bit	2	4	6	$(\text{saddr.bit}) \leftarrow 0$			
		sfr.bit	3	–	8	$\text{sfr.bit} \leftarrow 0$			
		A.bit	2	4	–	$A.\text{bit} \leftarrow 0$			
		PSW.bit	2	–	6	$\text{PSW.bit} \leftarrow 0$	x	x	x
		[HL].bit	2	6	8	$(\text{HL}).\text{bit} \leftarrow 0$			
	<b>SET1</b>	CY	1	2	–	$CY \leftarrow 1$			1
	<b>CLR1</b>	CY	1	2	–	$CY \leftarrow 0$			0
	<b>NOT1</b>	CY	1	2	–	$CY \leftarrow \overline{CY}$			x

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock ( $f_{CPU}$ ) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
Call/return	<b>CALL</b>	!addr16	3	7	–	$(SP - 1) \leftarrow (PC + 3)_H, (SP - 2) \leftarrow (PC + 3)_L,$ $PC \leftarrow \text{addr16}, SP \leftarrow SP - 2$			
	<b>CALLF</b>	!addr11	2	5	–	$(SP - 1) \leftarrow (PC + 2)_H, (SP - 2) \leftarrow (PC + 2)_L,$ $PC_{15-11} \leftarrow 00001, PC_{10-0} \leftarrow \text{addr11},$ $SP \leftarrow SP - 2$			
	<b>CALLT</b>	[addr5]	1	6	–	$(SP - 1) \leftarrow (PC + 1)_H, (SP - 2) \leftarrow (PC + 1)_L,$ $PC_H \leftarrow (00000000, \text{addr5} + 1),$ $PC_L \leftarrow (00000000, \text{addr5}),$ $SP \leftarrow SP - 2$			
	<b>BRK</b>		1	6	–	$(SP - 1) \leftarrow \text{PSW}, (SP - 2) \leftarrow (PC + 1)_H,$ $(SP - 3) \leftarrow (PC + 1)_L, PC_H \leftarrow (003FH),$ $PC_L \leftarrow (003EH), SP \leftarrow SP - 3, IE \leftarrow 0$			
	<b>RET</b>		1	6	–	$PC_H \leftarrow (SP + 1), PC_L \leftarrow (SP),$ $SP \leftarrow SP + 2$			
	<b>RETI</b>		1	6	–	$PC_H \leftarrow (SP + 1), PC_L \leftarrow (SP),$ $\text{PSW} \leftarrow (SP + 2), SP \leftarrow SP + 3$	R	R	R
	<b>RETB</b>		1	6	–	$PC_H \leftarrow (SP + 1), PC_L \leftarrow (SP),$ $\text{PSW} \leftarrow (SP + 2), SP \leftarrow SP + 3$	R	R	R
Stack manipulate	<b>PUSH</b>	PSW	1	2	–	$(SP - 1) \leftarrow \text{PSW}, SP \leftarrow SP - 1$			
		rp	1	4	–	$(SP - 1) \leftarrow \text{rp}_H, (SP - 2) \leftarrow \text{rp}_L,$ $SP \leftarrow SP - 2$			
	<b>POP</b>	PSW	1	2	–	$\text{PSW} \leftarrow (SP), SP \leftarrow SP + 1$	R	R	R
		rp	1	4	–	$\text{rp}_H \leftarrow (SP + 1), \text{rp}_L \leftarrow (SP),$ $SP \leftarrow SP + 2$			
	<b>MOVW</b>	SP, #word	4	–	10	$SP \leftarrow \text{word}$			
		SP, AX	2	–	8	$SP \leftarrow \text{AX}$			
AX, SP		2	–	8	$\text{AX} \leftarrow \text{SP}$				
Unconditional branch	<b>BR</b>	!addr16	3	6	–	$PC \leftarrow \text{addr16}$			
		\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$			
		AX	2	8	–	$\text{PCH} \leftarrow \text{A}, \text{PCL} \leftarrow \text{X}$			
Conditional branch	<b>BC</b>	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if $\text{CY} = 1$			
	<b>BNC</b>	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if $\text{CY} = 0$			
	<b>BZ</b>	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if $\text{Z} = 1$			
	<b>BNZ</b>	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if $\text{Z} = 0$			

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock ( $f_{\text{CPU}}$ ) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

Instruction Group	Mnemonic	Operands	Bytes	Clocks		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
Conditional branch	<b>BT</b>	saddr.bit, \$addr16	3	8	9	PC ← PC + 3 + jdisp8 if (saddr.bit) = 1			
		sfr.bit, \$addr16	4	–	11	PC ← PC + 4 + jdisp8 if sfr.bit = 1			
		A.bit, \$addr16	3	8	–	PC ← PC + 3 + jdisp8 if A.bit = 1			
		PSW.bit, \$addr16	3	–	9	PC ← PC + 3 + jdisp8 if PSW.bit = 1			
		[HL].bit, \$addr16	3	10	11	PC ← PC + 3 + jdisp8 if (HL).bit = 1			
	<b>BF</b>	saddr.bit, \$addr16	4	10	11	PC ← PC + 4 + jdisp8 if (saddr.bit) = 0			
		sfr.bit, \$addr16	4	–	11	PC ← PC + 4 + jdisp8 if sfr.bit = 0			
		A.bit, \$addr16	3	8	–	PC ← PC + 3 + jdisp8 if A.bit = 0			
		PSW.bit, \$addr16	4	–	11	PC ← PC + 4 + jdisp8 if PSW.bit = 0			
		[HL].bit, \$addr16	3	10	11	PC ← PC + 3 + jdisp8 if (HL).bit = 0			
	<b>BTCLR</b>	saddr.bit, \$addr16	4	10	12	PC ← PC + 4 + jdisp8 if (saddr.bit) = 1 then reset (saddr.bit)			
		sfr.bit, \$addr16	4	–	12	PC ← PC + 4 + jdisp8 if sfr.bit = 1 then reset sfr.bit			
		A.bit, \$addr16	3	8	–	PC ← PC + 3 + jdisp8 if A.bit = 1 then reset A.bit			
		PSW.bit, \$addr16	4	–	12	PC ← PC + 4 + jdisp8 if PSW.bit = 1 then reset PSW.bit	×	×	×
		[HL].bit, \$addr16	3	10	12	PC ← PC + 3 + jdisp8 if (HL).bit = 1 then reset (HL).bit			
	<b>DBNZ</b>	B, \$addr16	2	6	–	B ← B – 1, then PC ← PC + 2 + jdisp8 if B ≠ 0			
		C, \$addr16	2	6	–	C ← C – 1, then PC ← PC + 2 + jdisp8 if C ≠ 0			
		saddr, \$addr16	3	8	10	(saddr) ← (saddr) – 1, then PC ← PC + 3 + jdisp8 if (saddr) ≠ 0			
CPU control	<b>SEL</b>	RBn	2	4	–	RBS1, 0 ← n			
	<b>NOP</b>		1	2	–	No Operation			
	<b>EI</b>		2	–	6	IE ← 1 (Enable Interrupt)			
	<b>DI</b>		2	–	6	IE ← 0 (Disable Interrupt)			
	<b>HALT</b>		2	6	–	Set HALT Mode			
	<b>STOP</b>		2	6	–	Set STOP Mode			

- Notes**
1. When the internal high-speed RAM area is accessed or for an instruction with no data access
  2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock ( $f_{CPU}$ ) selected by the processor clock control register (PCC).
  2. This clock cycle applies to the internal ROM program.

26.3 Instructions Listed by Addressing Type

(1) 8-bit instructions

MOV, XCH, ADD, ADDC, SUB, SUBC, AND, OR, XOR, CMP, MULU, DIVUW, INC, DEC, ROR, ROL, RORC, ROLC, ROR4, ROL4, PUSH, POP, DBNZ

Second Operand First Operand	#byte	A	r <sup>Note</sup>	sfr	saddr	laddr16	PSW	[DE]	[HL]	[HL + byte] [HL + B] [HL + C]	\$addr16	1	None
A	ADD ADDC SUB SUBC AND OR XOR CMP		MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV	MOV XCH	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP		ROR ROL RORC ROLC	
r	MOV	MOV ADD ADDC SUB SUBC AND OR XOR CMP											INC DEC
B, C											DBNZ		
sfr	MOV	MOV											
saddr	MOV ADD ADDC SUB SUBC AND OR XOR CMP	MOV									DBNZ		INC DEC
laddr16		MOV											
PSW	MOV	MOV											PUSH POP
[DE]		MOV											
[HL]		MOV											ROR4 ROL4
[HL + byte] [HL + B] [HL + C]		MOV											
X													MULU
C													DIVUW

Note Except "r = A"

**(2) 16-bit instructions**

MOVW, XCHW, ADDW, SUBW, CMPW, PUSH, POP, INCW, DECW

Second Operand First Operand	#word	AX	rp <sup>Note</sup>	sfrp	saddrp	laddr16	SP	None
AX	ADDW SUBW CMPW		MOVW XCHW	MOVW	MOVW	MOVW	MOVW	
rp	MOVW	MOVW <sup>Note</sup>						INCW DECW PUSH POP
sfrp	MOVW	MOVW						
saddrp	MOVW	MOVW						
laddr16		MOVW						
SP	MOVW	MOVW						

**Note** Only when rp = BC, DE, HL

**(3) Bit manipulation instructions**

MOV1, AND1, OR1, XOR1, SET1, CLR1, NOT1, BT, BF, BTCLR

Second Operand First Operand	A.bit	sfr.bit	saddr.bit	PSW.bit	[HL].bit	CY	\$addr16	None
A.bit						MOV1	BT BF BTCLR	SET1 CLR1
sfr.bit						MOV1	BT BF BTCLR	SET1 CLR1
saddr.bit						MOV1	BT BF BTCLR	SET1 CLR1
PSW.bit						MOV1	BT BF BTCLR	SET1 CLR1
[HL].bit						MOV1	BT BF BTCLR	SET1 CLR1
CY	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1			SET1 CLR1 NOT1

**(4) Call instructions/branch instructions**

CALL, CALLF, CALLT, BR, BC, BNC, BZ, BNZ, BT, BF, BTCLR, DBNZ

Second Operand First Operand	AX	!addr16	!addr11	[addr5]	\$addr16
Basic instruction	BR	CALL BR	CALLF	CALLT	BR BC BNC BZ BNZ
Compound instruction					BT BF BTCLR DBNZ

**(5) Other instructions**

ADJBA, ADJBS, BRK, RET, RETI, RETB, SEL, NOP, EI, DI, HALT, STOP

## CHAPTER 27 ELECTRICAL SPECIFICATIONS (STANDARD PRODUCTS)

**Caution** The 78K0/LC3 is provided with an on-chip debug function. After using the on-chip debug function, do not use the product for mass production because its reliability cannot be guaranteed from the viewpoint of the limit of the number of times the flash memory can be rewritten. After the on-chip debug function is used, complaints will not be accepted.

### Absolute Maximum Ratings (T<sub>A</sub> = 25°C) (1/2)

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V <sub>DD</sub>		-0.5 to +6.5	V
	V <sub>SS</sub>		-0.5 to +0.3	V
	AV <sub>REF</sub> <sup>Note 2</sup>		-0.5 to V <sub>DD</sub> + 0.3 <sup>Note 1</sup>	V
	AV <sub>SS</sub> <sup>Note 2</sup>		-0.5 to +0.3	V
REGC pin input voltage	V <sub>IREGC</sub>		-0.5 to +3.6 and -0.5 to V <sub>DD</sub>	V
Input voltage	V <sub>i</sub>	P12, P13, P20 to P25, P31 to P34, P40, P100, P101, P112, P113, P120 to P124, P140 to P143, P150 to P153, X1, X2, XT1, XT2, FLMD0, RESET	-0.3 to V <sub>DD</sub> + 0.3 <sup>Note 1</sup>	V
Output voltage	V <sub>o</sub>		-0.3 to V <sub>DD</sub> + 0.3 <sup>Note 1</sup>	V
Analog input voltage	V <sub>AN</sub>	ANI0 to ANI5 <sup>Note 2</sup>	-0.3 to AV <sub>REF</sub> + 0.3 <sup>Note 1</sup> and -0.3 to V <sub>DD</sub> + 0.3 <sup>Note 1</sup>	V

**Notes 1.** Must be 6.5 V or lower.

**2.**  $\mu$ PD78F041x only.

**Caution** Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of port pins.

Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ ) (2/2)

Parameter	Symbol	Conditions		Ratings	Unit
Output current, high	$I_{OH1}$	Per pin	P12, P13, P31 to P34, P40, P100, P101, P112, P113, P120, P140 to P143, P150 to P153	-10	mA
		Total of all pins -35 mA	P12, P13, P31 to P34, P40, P120	-25	mA
			P100, P101, P112, P113, P140 to P143, P150 to P153	-10	mA
	$I_{OH2}$	Per pin	P20 to P25	-0.5	mA
		Total of all pins		-2	mA
	Output current, low	$I_{OL}$	Per pin	P12, P13, P31 to P34, P40, P100, P101, P112, P113, P120, P140 to P143, P150 to P153	30
Total of all pins 80 mA			P12, P13, P31 to P34, P40, P120	40	mA
			P100, P101, P112, P113, P140 to P143, P150 to P153	40	mA
Per pin			P20 to P25	1	mA
Total of all pins			5	mA	
Operating ambient temperature		$T_A$	In normal operation mode		-40 to +85
	In flash memory programming mode				
Storage temperature	$T_{stg}$			-65 to +150	$^\circ\text{C}$

**Caution** Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of port pins.



**X1 Oscillator Characteristics**(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Resonator	Recommended Circuit	Parameter	Conditions	MIN.	TYP.	MAX.	Unit
Ceramic resonator		X1 clock oscillation frequency (f <sub>x</sub> ) <sup>Note</sup>	2.7 V ≤ V <sub>DD</sub> ≤ 5.5 V	2.0		10.0	MHz
			1.8 V ≤ V <sub>DD</sub> < 2.7 V	2.0		5.0	
Crystal resonator		X1 clock oscillation frequency (f <sub>x</sub> ) <sup>Note</sup>	2.7 V ≤ V <sub>DD</sub> ≤ 5.5 V	2.0		10.0	MHz
			1.8 V ≤ V <sub>DD</sub> < 2.7 V	2.0		5.0	

**Note** Indicates only oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.

**Cautions 1.** When using the X1 oscillator, wire as follows in the area enclosed by the broken lines in the above figures to avoid an adverse effect from wiring capacitance.

- Keep the wiring length as short as possible.
  - Do not cross the wiring with the other signal lines.
  - Do not route the wiring near a signal line through which a high fluctuating current flows.
  - Always make the ground point of the oscillator capacitor the same potential as V<sub>SS</sub>.
  - Do not ground the capacitor to a ground pattern through which a high current flows.
  - Do not fetch signals from the oscillator.
2. Since the CPU is started by the internal high-speed oscillation clock after a reset release, check the X1 clock oscillation stabilization time using the oscillation stabilization time counter status register (OSTC) by the user. Determine the oscillation stabilization time of the OSTC register and oscillation stabilization time select register (OSTS) after sufficiently evaluating the oscillation stabilization time with the resonator to be used.

**Remark** For the resonator selection and oscillator constant, customers are requested to either evaluate the oscillation themselves or apply to the resonator manufacturer for evaluation.


**Internal Oscillator Characteristics**(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Resonator	Parameter	Conditions		MIN.	TYP.	MAX.	Unit
8 MHz internal oscillator	Internal high-speed oscillation clock frequency (f <sub>RH</sub> ) <sup>Notes 1, 2</sup>	RSTS = 1	2.5 V ≤ V <sub>DD</sub> ≤ 5.5 V	7.6	8.0	8.4	MHz
			1.8 V ≤ V <sub>DD</sub> < 2.5 V	6.75	8.0	8.4	MHz
		RSTS = 0		2.48	5.6	9.86	MHz
240 kHz internal oscillator	Internal low-speed oscillation clock frequency (f <sub>RL</sub> )	2.6 V ≤ V <sub>DD</sub> ≤ 5.5 V		216	240	264	kHz
		1.8 V ≤ V <sub>DD</sub> < 2.6 V		192	240	264	kHz

**Notes** 1. Indicates only oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.

2. When setting HIOTRM = 10H (±0%: default)

**Remark** RSTS: Bit 7 of the internal oscillation mode register (RCM)**XT1 Oscillator Characteristics**(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Resonator	Recommended Circuit	Parameter	Conditions	MIN.	TYP.	MAX.	Unit
Crystal resonator		XT1 clock oscillation frequency (f <sub>XT</sub> ) <sup>Note</sup>		32	32.768	35	kHz

**Note** Indicates only oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.**Cautions** 1. When using the XT1 oscillator, wire as follows in the area enclosed by the broken lines in the above figure to avoid an adverse effect from wiring capacitance.

- Keep the wiring length as short as possible.
- Do not cross the wiring with the other signal lines.
- Do not route the wiring near a signal line through which a high fluctuating current flows.
- Always make the ground point of the oscillator capacitor the same potential as V<sub>SS</sub>.
- Do not ground the capacitor to a ground pattern through which a high current flows.
- Do not fetch signals from the oscillator.

2. The XT1 oscillator is designed as a low-amplitude circuit for reducing power consumption, and is more prone to malfunction due to noise than the X1 oscillator. Particular care is therefore required with the wiring method when the XT1 clock is used.

**Remark** For the resonator selection and oscillator constant, customers are requested to either evaluate the oscillation themselves or apply to the resonator manufacturer for evaluation.

## DC Characteristics (1/5)

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, AV<sub>REF</sub> ≤ V<sub>DD</sub>, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output current, high <sup>Note1</sup>	I <sub>OH1</sub>	Per pin for P12, P13, P31 to P34, P40, P120	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		-3.0	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		-2.5	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		-1.0	mA
		Per pin for P100, P101, P112, P113, P140 to P143, P150 to P153	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		-0.1	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		-0.1	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		-0.1	mA
		Total <sup>Note3</sup> of P12, P13, P31 to P34, P40, P120	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		-20.0	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		-10.0	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		-5.0	mA
		Total <sup>Note3</sup> of P100, P101, P112, P113, P140 to P143, P150 to P153	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		-2.8	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		-2.8	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		-2.8	mA
		Total <sup>Note3</sup> of all pins	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		-22.8	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		-12.8	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		-7.8	mA
	I <sub>OH2</sub>	Per pin for P20 to P25	AV <sub>REF</sub> = V <sub>DD</sub>		-0.1	mA
Output current, low <sup>Note2</sup>	I <sub>OL1</sub>	Per pin for P12, P13, P31 to P34, P40, P120	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		8.5	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		5.0	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		2.0	mA
		Per pin for P100, P101, P112, P113, P140 to P143, P150 to P153	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		0.4	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		0.4	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		0.4	mA
		Total <sup>Note3</sup> of P12, P13, P31 to P34, P40, P120	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		20.0	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		15.0	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		9.0	mA
		Total <sup>Note3</sup> of P100, P101, P112, P113, P140 to P143, P150 to P153	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		11.2	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		11.2	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		11.2	mA
		Total <sup>Note3</sup> of all pins	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V		31.2	mA
			2.7 V ≤ V <sub>DD</sub> < 4.0 V		26.2	mA
			1.8 V ≤ V <sub>DD</sub> < 2.7 V		20.2	mA
	I <sub>OL2</sub>	Per pin for P20 to P25	AV <sub>REF</sub> = V <sub>DD</sub>		0.4	mA

- Notes**
- Value of current at which the device operation is guaranteed even if the current flows from V<sub>DD</sub> to an output pin.
  - Value of current at which the device operation is guaranteed even if the current flows from an output pin to GND.
  - Specification under conditions where the duty factor is 70% (time for which current is output is 0.7 × t and time for which current is not output is 0.3 × t, where t is a specific time). The total output current of the pins at a duty factor of other than 70% can be calculated by the following expression.
    - Where the duty factor of I<sub>OH</sub> is n%: Total output current of pins = (I<sub>OH</sub> × 0.7)/(n × 0.01)
    - <Example> Where the duty factor is 50%, I<sub>OH</sub> = 20.0 mA
    - Total output current of pins = (20.0 × 0.7)/(50 × 0.01) = 28.0 mA
- However, the current that is allowed to flow into one pin does not vary depending on the duty factor. A current higher than the absolute maximum rating must not flow into one pin.

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of port pins.

## DC Characteristics (2/5)

(T<sub>A</sub> = –40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, AV<sub>REF</sub> ≤ V<sub>DD</sub>, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage, high	V <sub>IH1</sub>	P32, P100, P101, P112, P121 to P124, P140 to P143, P150 to P153	0.7V <sub>DD</sub>		V <sub>DD</sub>	V
	V <sub>IH2</sub>	P12, P13, P31, P33, P34, P40, P113, P120, RESET, EXCLK	0.8V <sub>DD</sub>		V <sub>DD</sub>	V
	V <sub>IH3</sub>	P20 to P25 AV <sub>REF</sub> = V <sub>DD</sub>	0.7AV <sub>REF</sub>		AV <sub>REF</sub>	V
Input voltage, low	V <sub>IL1</sub>	P32, P100, P101, P112, P121 to P124, P140 to P143, P150 to P153	0		0.3V <sub>DD</sub>	V
	V <sub>IL2</sub>	P12, P13, P31, P33, P34, P40, P113, P120, RESET, EXCLK	0		0.2V <sub>DD</sub>	V
	V <sub>IL3</sub>	P20 to P25 AV <sub>REF</sub> = V <sub>DD</sub>	0		0.3AV <sub>REF</sub>	V
Output voltage, high	V <sub>OH1</sub>	P12, P13, P31 to P34, P40, P120	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V, I <sub>OH1</sub> = –3.0 mA		V <sub>DD</sub> – 0.7	V
			2.7 V ≤ V <sub>DD</sub> < 4.0 V, I <sub>OH1</sub> = –2.5 mA		V <sub>DD</sub> – 0.5	V
			1.8 V ≤ V <sub>DD</sub> < 2.7 V, I <sub>OH1</sub> = –1.0 mA		V <sub>DD</sub> – 0.5	V
		P100, P101, P112, P113, P140 to P143, P150 to P153	I <sub>OH1</sub> = –0.1 mA		V <sub>DD</sub> – 0.5	V
	V <sub>OH2</sub>	P20 to P25 AV <sub>REF</sub> = V <sub>DD</sub> , I <sub>OH2</sub> = –0.1 mA		V <sub>DD</sub> – 0.5		V
Output voltage, low	V <sub>OL1</sub>	P12, P13, P31 to P34, P40, P120	4.0 V ≤ V <sub>DD</sub> ≤ 5.5 V, I <sub>OL1</sub> = 8.5 mA		0.7	V
			2.7 V ≤ V <sub>DD</sub> < 4.0 V, I <sub>OL1</sub> = 5.0 mA		0.7	V
			1.8 V ≤ V <sub>DD</sub> < 2.7 V, I <sub>OL1</sub> = 2.0 mA		0.5	V
			1.8 V ≤ V <sub>DD</sub> < 2.7 V, I <sub>OL1</sub> = 1.0 mA		0.5	V
			1.8 V ≤ V <sub>DD</sub> < 2.7 V, I <sub>OL1</sub> = 0.5 mA		0.4	V
		P100, P101, P112, P113, P140 to P143, P150 to P153	I <sub>OL1</sub> = 0.4 mA		0.4	V
	V <sub>OL2</sub>	P20 to P25 AV <sub>REF</sub> = V <sub>DD</sub> , I <sub>OL2</sub> = 0.4 mA			0.4	V

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of port pins.

**Caution** The high-level and low-level input voltages of P122/EXCLK vary between the input port mode and external clock mode.

## DC Characteristics (3/5)

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, AV<sub>REF</sub> ≤ V<sub>DD</sub>, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input leakage current, high	I <sub>LIH1</sub>	P12, P13, P31 to P34, P40, P100, P101, P112, P113, P120, P140 to P143, P150 to P153, FLMD0, RESET	V <sub>I</sub> = V <sub>DD</sub>		1	μA
	I <sub>LIH2</sub>	P20 to P25	V <sub>I</sub> = AV <sub>REF</sub> = V <sub>DD</sub>		1	μA
	I <sub>LIH3</sub>	P121 to 124 (X1, X2, XT1, XT2)	V <sub>I</sub> = V <sub>DD</sub>	I/O port mode	1	μA
			OSC mode	20	μA	
Input leakage current, low	I <sub>LIL1</sub>	P12, P13, P31 to P34, P40, P100, P101, P112, P113, P120, P140 to P143, P150 to P153, FLMD0, RESET	V <sub>I</sub> = V <sub>SS</sub>		-1	μA
	I <sub>LIL2</sub>	P20 to P25	V <sub>I</sub> = V <sub>SS</sub> , AV <sub>REF</sub> = V <sub>DD</sub>		-1	μA
	I <sub>LIL3</sub>	P121 to 124 (X1, X2, XT1, XT2)	V <sub>I</sub> = V <sub>SS</sub>	I/O port mode	-1	μA
			OSC mode	-20	μA	
Pull-up resistor	R <sub>U</sub>	V <sub>I</sub> = V <sub>SS</sub>	10	20	100	kΩ
FLMD0 supply voltage	V <sub>IL</sub>	In normal operation mode	0		0.2V <sub>DD</sub>	V
	V <sub>IH</sub>	In self-programming mode	0.8V <sub>DD</sub>		V <sub>DD</sub>	V

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of port pins.

## DC Characteristics (4/5)

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, AV<sub>REF</sub> ≤ V<sub>DD</sub>, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions		MIN.	TYP.	MAX.	Unit				
Supply current Note 1	I <sub>DD1</sub>	Operating mode	f <sub>XH</sub> = 10 MHz <sup>Note 2</sup> , V <sub>DD</sub> = 5.0 V	Square wave input		1.6	3.0	mA			
				Resonator connection		2.3	3.4				
					f <sub>XH</sub> = 10 MHz <sup>Note 2</sup> , V <sub>DD</sub> = 3.0 V	Square wave input		1.5	2.9	mA	
						Resonator connection		2.2	3.3		
					f <sub>XH</sub> = 5 MHz <sup>Note 2</sup> , V <sub>DD</sub> = 3.0 V	Square wave input		0.9	1.7	mA	
						Resonator connection		1.3	2.0		
					f <sub>XH</sub> = 5 MHz <sup>Note 2</sup> , V <sub>DD</sub> = 2.0 V	Square wave input		0.7	1.4	mA	
	Resonator connection						1.0	1.6			
				f <sub>RH</sub> = 8 MHz, V <sub>DD</sub> = 5.0 V <sup>Note 3</sup>			1.4	2.3	mA		
				f <sub>SUB</sub> = 32.768 kHz <sup>Note 4</sup> , V <sub>DD</sub> = 5.0 V	Resonator connection		6.7	26	μA		
	I <sub>DD2</sub>	HALT mode		f <sub>XH</sub> = 10 MHz <sup>Note 2</sup> , V <sub>DD</sub> = 5.0 V	Square wave input		0.4	1.4	mA		
					Resonator connection		1.0	1.7			
						f <sub>XH</sub> = 5 MHz <sup>Note 2</sup> , V <sub>DD</sub> = 3.0 V	Square wave input		0.2	0.7	mA
							Resonator connection		0.5	1.0	
					f <sub>RH</sub> = 8 MHz, V <sub>DD</sub> = 5.0 V <sup>Note 3</sup>			0.4	1.2	mA	
			f <sub>SUB</sub> = 32.768 kHz <sup>Note 4</sup> , V <sub>DD</sub> = 5.0 V	Resonator connection		2.4	22	μA			
I <sub>DD3</sub> <sup>Note 5</sup>	STOP mode	V <sub>DD</sub> = 5.0 V				1	20	μA			
		V <sub>DD</sub> = 5.0 V, T <sub>A</sub> = -40 to +70°C				1	10	μA			

- Notes**
- Total current flowing into the internal power supply (V<sub>DD</sub>), including the peripheral operation current and the input leakage current flowing when the level of the input pin is fixed to V<sub>DD</sub> or V<sub>SS</sub>. However, the current flowing into the pull-up resistors and the output current of the port are not included.
  - Not including the operating current of the 8 MHz internal oscillator, 240 kHz internal oscillator and XT1 oscillation, and the current flowing into the A/D converter, watchdog timer, LVI circuit and LCD controller/driver.
  - Not including the operating current of the X1 oscillation, XT1 oscillation and 240 kHz internal oscillator, and the current flowing into the A/D converter, watchdog timer, LVI circuit and LCD controller/driver.
  - Not including the operating current of the X1 oscillation, 8 MHz internal oscillator and 240 kHz internal oscillator, and the current flowing into the A/D converter, watchdog timer, LVI circuit and LCD controller/driver.
  - Not including the operating current of the 240 kHz internal oscillator and XT1 oscillation, and the current flowing into the A/D converter, watchdog timer, LVI circuit and LCD controller/driver.

- Remarks**
- f<sub>XH</sub>: High-speed system clock frequency (X1 clock oscillation frequency or external main system clock frequency)
  - f<sub>RH</sub>: Internal high-speed oscillation clock frequency
  - f<sub>SUB</sub>: Subsystem clock frequency (XT1 clock oscillation frequency)

## DC Characteristics (5/5)

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, AV<sub>REF</sub> ≤ V<sub>DD</sub>, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Watchdog timer operating current	I <sub>WDT</sub> <sup>Note 1</sup>	During 240 kHz internal low-speed oscillation clock operation		5	10	μA	
LVI operating current	I <sub>LVI</sub> <sup>Note 2</sup>			9	18	μA	
Successive approximation type A/D converter operating current	I <sub>ADC1</sub> <sup>Note 3</sup>	2.3 V ≤ AV <sub>REF</sub> ≤ V <sub>DD</sub>		0.86	1.9	mA	
LCD operating current	I <sub>LCD1</sub> <sup>Note 4</sup>	LCD display off (LCDON = 0, SCOC = 1)	V <sub>DD</sub> = 5.0 V		3.0	8.0	μA
			V <sub>DD</sub> = 3.0 V		2.0	5.0	μA
	I <sub>LCD2</sub> <sup>Note 4</sup>	LCD display on (LCDON = 1, SCOC = 1)	V <sub>DD</sub> = 5.0 V		3.0	8.0	μA
			V <sub>DD</sub> = 3.0 V		2.0	5.0	μA

- Notes**
1. This includes only the current that flows through the watchdog timer (including the operating current of the 240 kHz internal oscillator). When the watchdog timer is operating in HALT mode or STOP mode, the current value of the 78K0/LC3 is obtained by adding I<sub>WDT</sub> to I<sub>DD2</sub> or I<sub>DD3</sub>.
  2. This includes only the current that flows through the LVI circuit. When the LVI circuit is operating in HALT mode or STOP mode, the current value of the 78K0/LC3 is obtained by adding I<sub>LVI</sub> to I<sub>DD2</sub> or I<sub>DD3</sub>.
  3. This includes only the current that flows through the A/D converter. When the A/D converter is operating in HALT mode or STOP mode, the current value of the 78K0/LC3 is obtained by adding I<sub>ADC1</sub>, I<sub>ADC2</sub>, or I<sub>ADC3</sub> to I<sub>DD1</sub> or I<sub>DD2</sub>.
  4. This includes only the current that flows through the LCD controller/driver. Not including the current that flows through the LCD divider resistor. The current value of the 78K0/LC3 is obtained by adding the LCD operating current (I<sub>LCD1</sub> or I<sub>LCD2</sub>) to the supply current (I<sub>DD1</sub>, I<sub>DD2</sub>, or I<sub>DD3</sub>).

## AC Characteristics

## (1) Basic operation

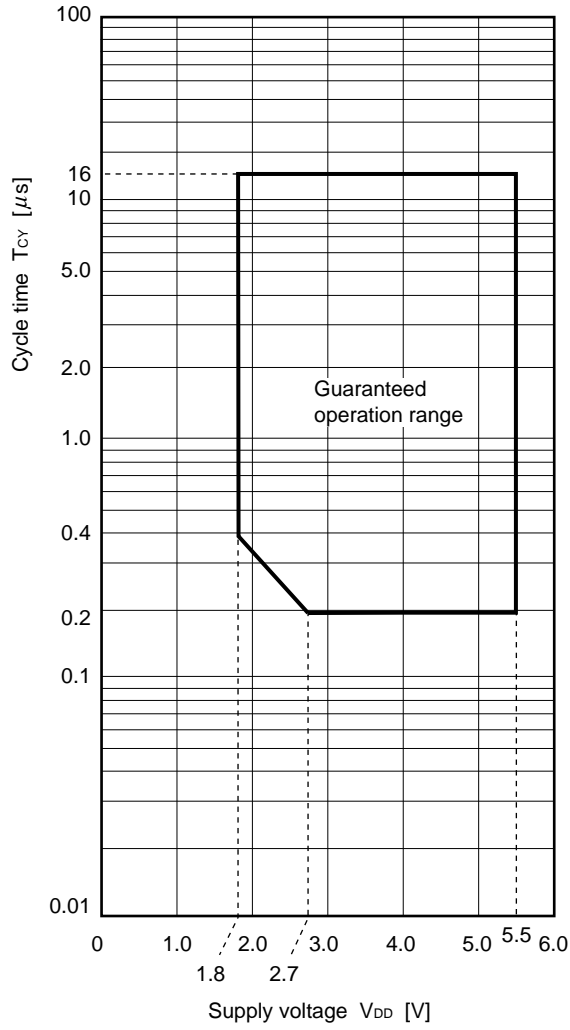
 $(T_A = -40 \text{ to } +85^\circ\text{C}, 1.8 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}, V_{SS} = AV_{SS} = 0 \text{ V})$ 

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Instruction cycle (minimum instruction execution time)	$T_{CY}$	Main system clock ( $f_{XP}$ ) operation	$2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	0.2		16	$\mu\text{s}$
			$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	0.4		16	$\mu\text{s}$
		Subsystem clock ( $f_{SUB}$ ) operation			114	122	125
Peripheral hardware clock frequency	$f_{PRS}$	XSEL = 1	$2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$			10	MHz
			$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$			5	MHz
		XSEL = 0	$2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	7.6		8.4	MHz
			$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$ <sup>Note 1</sup>	6.75		8.4	MHz
External main system clock frequency	$f_{EXCLK}$	$2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	2.0		10.0	MHz	
		$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	2.0		5.0	MHz	
External main system clock input high-level width, low-level width	$t_{EXCLKH}$	$2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	48		500	ns	
	$t_{EXCLKL}$	$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	96		500	ns	
TI000 input high-level width, low-level width	$t_{TIH0}$ , $t_{TIL0}$	$2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	$2/f_{sam} + 0.2$ <sup>Note 2</sup>			$\mu\text{s}$	
		$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	$2/f_{sam} + 0.5$ <sup>Note 2</sup>			$\mu\text{s}$	
TI52 input frequency	$f_{TI5}$	$4.0 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$			16	MHz	
		$2.7 \text{ V} \leq V_{DD} < 4.0 \text{ V}$			10	MHz	
		$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$			5	MHz	
TI52 input high-level width, low-level width	$t_{TIH5}$ , $t_{TIL5}$	$4.0 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	31.25			ns	
		$2.7 \text{ V} \leq V_{DD} < 4.0 \text{ V}$	50			ns	
		$1.8 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	100			ns	
Interrupt input high-level width, low-level width	$t_{INTH}$ , $t_{INTL}$		1			$\mu\text{s}$	
Key return input low-level width	$t_{KR}$		250			ns	
RESET low-level width	$t_{RSL}$		10			$\mu\text{s}$	


- Notes**
1. A characteristic of the main system clock frequency. Set the clock divider to be set using a peripheral function to  $f_{RH}/2$  or less.
  2. Selection of  $f_{sam} = f_{PRS}, f_{PRS}/4, f_{PRS}/256$  is possible using bits 0 and 1 (PRM000, PRM001) of prescaler mode registers 00 (PRM00). Note that when selecting the TI000 valid edge as the count clock,  $f_{sam} = f_{PRS}$ .




**T<sub>CY</sub> vs. V<sub>DD</sub> (Main System Clock Operation)**





**AC Timing Test Points (Excluding External Main System Clock)**




**External Main System Clock Timing**

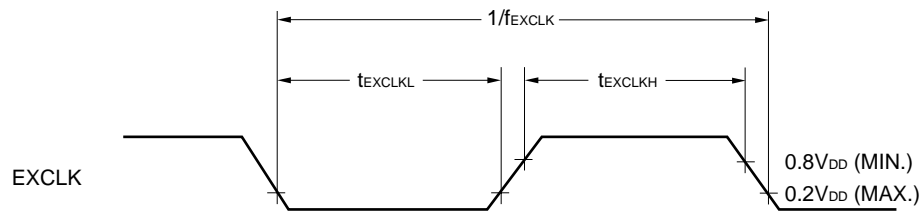


**TI Timing**

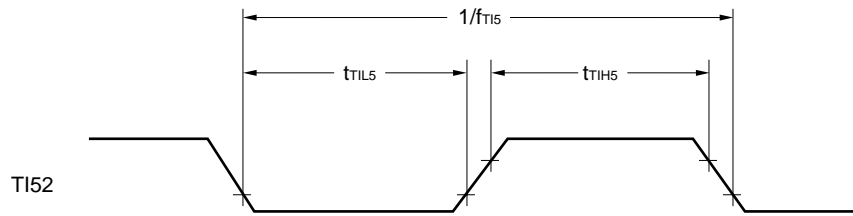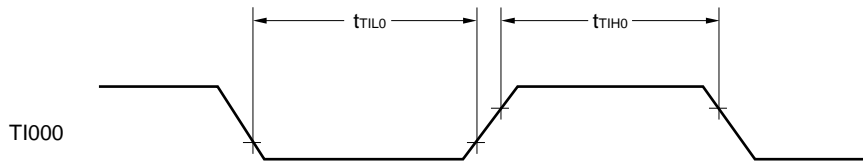


**Interrupt Request Input Timing**

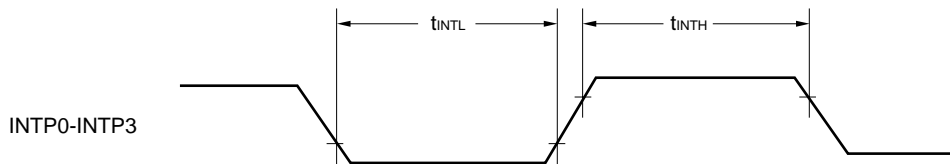

**Key Interrupt Input Timing**

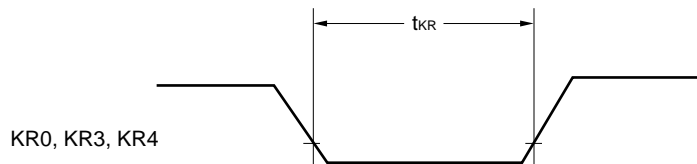

**RESET Input Timing**

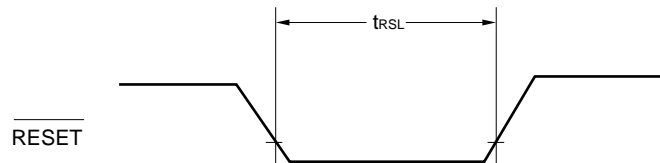

**(2) Manchester code generator****(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Transfer rate					250	kbps

**(3) Serial interface****(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)****(a) UART6 (Dedicated baud rate generator output)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Transfer rate					625	kbps

**(b) UART0 (Dedicated baud rate generator output)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Transfer rate					625	kbps

10-bit successive approximation type A/D Converter Characteristics ( $\mu$ PD78F041x only)(T<sub>A</sub> = -40 to +85°C, 2.3 V ≤ AV<sub>REF</sub> ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Resolution	R <sub>ES</sub>				10	bit
Overall error <sup>Notes 1, 2</sup>	A <sub>INL</sub>	4.0 V ≤ AV <sub>REF</sub> ≤ 5.5 V			±0.4	%FSR
		2.7 V ≤ AV <sub>REF</sub> < 4.0 V			±0.6	%FSR
		2.3 V ≤ AV <sub>REF</sub> < 2.7 V			±1.2	%FSR
Conversion time	t <sub>CONV</sub>	4.0 V ≤ AV <sub>REF</sub> ≤ 5.5 V	6.1		36.7	μs
		2.7 V ≤ AV <sub>REF</sub> < 4.0 V	12.2		36.7	μs
		2.3 V ≤ AV <sub>REF</sub> < 2.7 V	27		66.6	μs
Zero-scale error <sup>Notes 1, 2</sup>	E <sub>ZS</sub>	4.0 V ≤ AV <sub>REF</sub> ≤ 5.5 V			±0.4	%FSR
		2.7 V ≤ AV <sub>REF</sub> < 4.0 V			±0.6	%FSR
		2.3 V ≤ AV <sub>REF</sub> < 2.7 V			±0.6	%FSR
Full-scale error <sup>Notes 1, 2</sup>	E <sub>FS</sub>	4.0 V ≤ AV <sub>REF</sub> ≤ 5.5 V			±0.4	%FSR
		2.7 V ≤ AV <sub>REF</sub> < 4.0 V			±0.6	%FSR
		2.3 V ≤ AV <sub>REF</sub> < 2.7 V			±0.6	%FSR
Integral non-linearity error <sup>Note 1</sup>	I <sub>LE1</sub>	4.0 V ≤ AV <sub>REF</sub> ≤ 5.5 V			±2.5	LSB
		2.7 V ≤ AV <sub>REF</sub> < 4.0 V			±4.5	LSB
		2.3 V ≤ AV <sub>REF</sub> < 2.7 V			±6.5	LSB
Differential non-linearity error <sup>Note 1</sup>	D <sub>LE1</sub>	4.0 V ≤ AV <sub>REF</sub> ≤ 5.5 V			±1.5	LSB
		2.7 V ≤ AV <sub>REF</sub> < 4.0 V			±2.0	LSB
		2.3 V ≤ AV <sub>REF</sub> < 2.7 V			±2.0	LSB
Analog input voltage	V <sub>AIN1</sub>		AV <sub>SS</sub>		AV <sub>REF</sub>	V

**Notes** 1. Excludes quantization error (±1/2 LSB).

2. This value is indicated as a ratio (%FSR) to the full-scale value.

## LCD Characteristics

## (1) Resistance division method

(a) Static display mode ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ ,  $V_{\text{SS}} = 0\text{ V}$ )<sup>Note 3</sup>

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
LCD drive voltage	$V_{\text{LCD}}$	<b>Note 3</b>			$V_{\text{DD}}$	V
LCD divider resistor <sup>Note 1</sup>	$R_{\text{LCD}}$		60	100	150	k $\Omega$
LCD output resistor <sup>Note 2</sup> (Common)	$R_{\text{ODC}}$				40	k $\Omega$
LCD output resistor <sup>Note 2</sup> (Segment)	$R_{\text{ODS}}$				200	k $\Omega$

(b) 1/3 bias method ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ ,  $V_{\text{SS}} = 0\text{ V}$ )<sup>Note 3</sup>

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
LCD drive voltage	$V_{\text{LCD}}$	<b>Note 3</b>			$V_{\text{DD}}$	V
LCD divider resistor <sup>Note 1</sup>	$R_{\text{LCD}}$		60	100	150	k $\Omega$
LCD output resistor <sup>Note 2</sup> (Common)	$R_{\text{ODC}}$				40	k $\Omega$
LCD output resistor <sup>Note 2</sup> (Segment)	$R_{\text{ODS}}$				200	k $\Omega$

(c) 1/2 bias method ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ ,  $V_{\text{SS}} = 0\text{ V}$ )<sup>Note 3</sup>1/4 bias method ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $4.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ ,  $V_{\text{SS}} = 0\text{ V}$ )<sup>Note 3</sup>

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
LCD drive voltage	$V_{\text{LCD}}$	<b>Note 3</b>			$V_{\text{DD}}$	V
LCD divider resistor <sup>Note 1</sup>	$R_{\text{LCD}}$		60	100	150	k $\Omega$
LCD output resistor <sup>Note 2</sup> (Common)	$R_{\text{ODC}}$				40	k $\Omega$
LCD output resistor <sup>Note 2</sup> (Segment)	$R_{\text{ODS}}$				200	k $\Omega$

**Notes** 1. Internal resistance division method only.

2. The output resistor is a resistor connected between one of the  $V_{\text{LC0}}$ ,  $V_{\text{LC1}}$ ,  $V_{\text{LC2}}$  and  $V_{\text{SS}}$  pins, and either of the SEG and COM pins.

3. Set VAON based on the following conditions.

<When set to the static display mode>

- When  $2.0\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0

- When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1

<When set to the 1/3 bias method>

- When  $2.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0

- When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1

<When set to the 1/2 bias method>

- When  $2.7\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0

- When  $1.8\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 3.6\text{ V}$ : VAON = 1

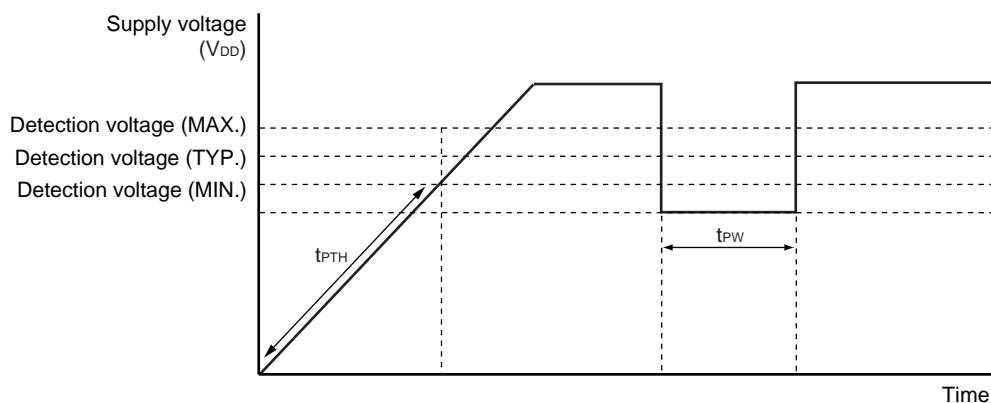
<When set to the 1/4 bias method>

- When  $4.5\text{ V} \leq V_{\text{LCD}} \leq V_{\text{DD}} \leq 5.5\text{ V}$ : VAON = 0

1.59 V POC Circuit Characteristics ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $V_{SS} = 0$  V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Detection voltage	$V_{POC}$		1.44	1.59	1.74	V
Power supply voltage rise inclination	$t_{PTH}$	$V_{DD}: 0$ V $\rightarrow$ change inclination of $V_{POC}$	0.5			V/ms
Minimum pulse width	$t_{PW}$		200			$\mu\text{s}$


## POC Circuit Timing

Supply Voltage Rise Time ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $V_{SS} = 0$  V)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Maximum time to rise to 1.8 V ( $V_{DD}$ (MIN.)) ( $V_{DD}: 0$ V $\rightarrow$ 1.8 V)	$t_{PUP1}$	POCMODE (option byte) = 0, when $\overline{\text{RESET}}$ input is not used			3.6	ms
Maximum time to rise to 1.8 V ( $V_{DD}$ (MIN.)) (releasing $\overline{\text{RESET}}$ input $\rightarrow$ $V_{DD}: 1.8$ V)	$t_{PUP2}$	POCMODE (option byte) = 0, when $\overline{\text{RESET}}$ input is used			1.9	ms

## Supply Voltage Rise Time Timing

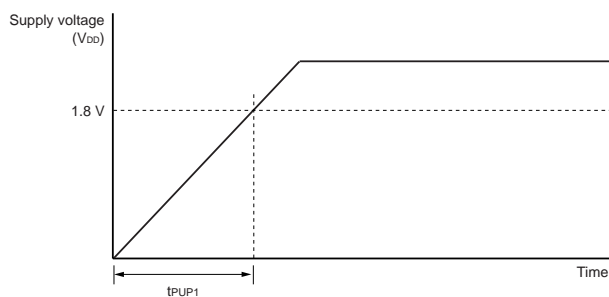- When  $\overline{\text{RESET}}$  pin input is not used



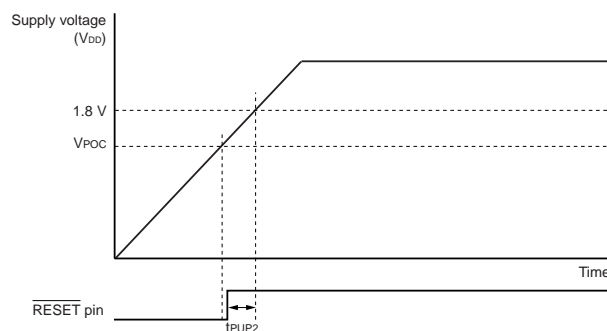- When  $\overline{\text{RESET}}$  pin input is used

2.7 V POC Circuit Characteristics ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $V_{SS} = 0$  V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Detection voltage on application of supply voltage	$V_{DDPOC}$	POCMODE (option byte) = 1	2.50	2.70	2.90	V

LVI Circuit Characteristics ( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $V_{POC} \leq V_{DD} \leq 5.5$  V,  $V_{SS} = 0$  V)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Detection voltage	Supply voltage level	$V_{LV10}$		4.14	4.24	4.34	V
		$V_{LV11}$		3.99	4.09	4.19	V
		$V_{LV12}$		3.83	3.93	4.03	V
		$V_{LV13}$		3.68	3.78	3.88	V
		$V_{LV14}$		3.52	3.62	3.72	V
		$V_{LV15}$		3.37	3.47	3.57	V
		$V_{LV16}$		3.22	3.32	3.42	V
		$V_{LV17}$		3.06	3.16	3.26	V
		$V_{LV18}$		2.91	3.01	3.11	V
		$V_{LV19}$		2.75	2.85	2.95	V
		$V_{LV110}$		2.60	2.70	2.80	V
		$V_{LV111}$		2.45	2.55	2.65	V
		$V_{LV112}$		2.29	2.39	2.49	V
		$V_{LV113}$		2.14	2.24	2.34	V
		$V_{LV114}$		1.98	2.08	2.18	V
$V_{LV115}$		1.83	1.93	2.03	V		
External input pin <sup>Note 1</sup>	EXLVI	$EXLVI < V_{DD}$ , $1.8$ V $\leq V_{DD} \leq 5.5$ V	1.11	1.21	1.31	V	
Minimum pulse width	$t_{LW}$		200			$\mu\text{s}$	
Operation stabilization wait time <sup>Note 2</sup>	$t_{LWAIT}$				10	$\mu\text{s}$	

**Notes 1.** The EXLVI/P120/INTP0 pin is used.

- Time required from setting bit 7 (LVION) of the low-voltage detection register (LVIM) to 1 to operation stabilization.

**Remark**  $V_{LV(n-1)} > V_{LVn}$ :  $n = 1$  to  $15$


## LVI Circuit Timing

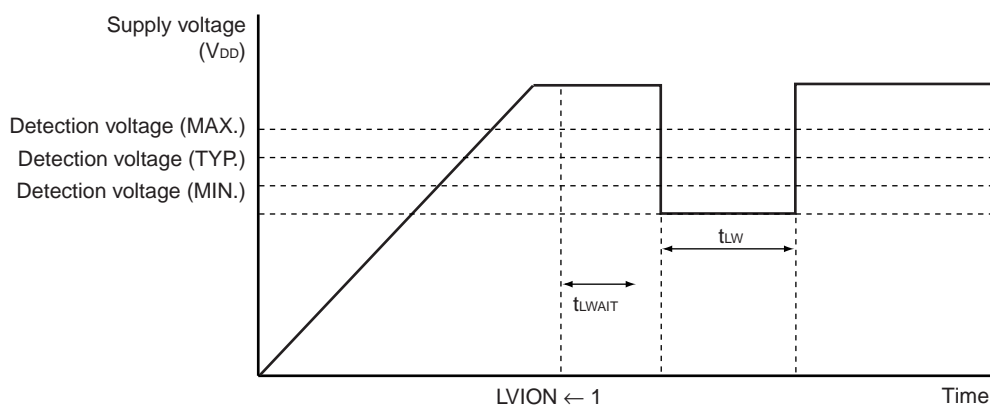

Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics ( $T_A = -40$  to  $+85^\circ\text{C}$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Data retention supply voltage	$V_{DDDR}$		1.44 <sup>Note</sup>		5.5	V

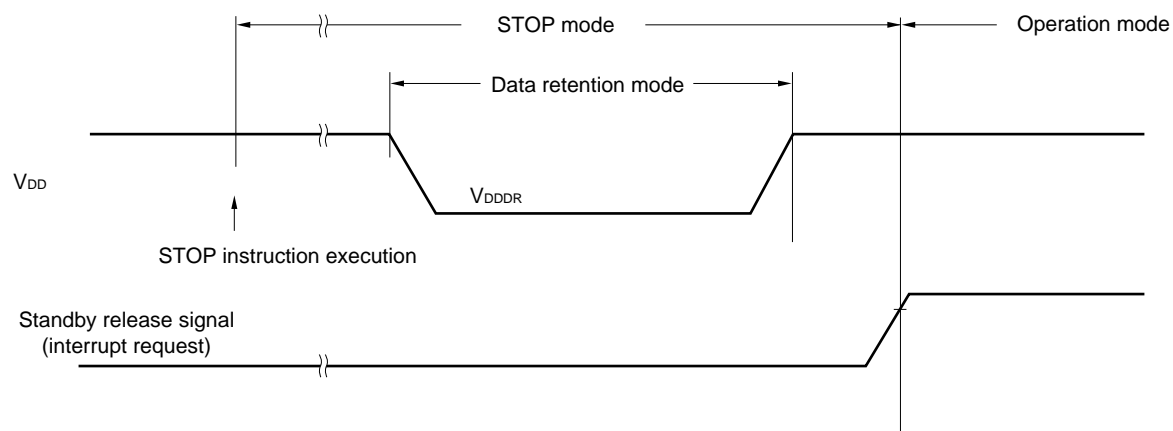**Note** The value depends on the POC detection voltage. When the voltage drops, the data is retained until a POC reset is effected, but data is not retained when a POC reset is effected.



## Flash Memory Programming Characteristics

( $T_A = -40$  to  $+85^\circ\text{C}$ ,  $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

## • Basic characteristics

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
$V_{DD}$ supply current	$I_{DD}$			4.5	11.0	mA
Erase time <sup>Note 1</sup>	All block	$T_{eraca}$		20	200	ms
	Block unit	$T_{erasa}$		20	200	ms
Write time (in 8-bit units)	$T_{wrwa}$			10	100	$\mu\text{s}$
Number of rewrites per chip	$C_{erwr}$	Retention: 15 years 1 erase + 1 write after erase = 1 rewrite <sup>Note 2</sup>	1000			Times

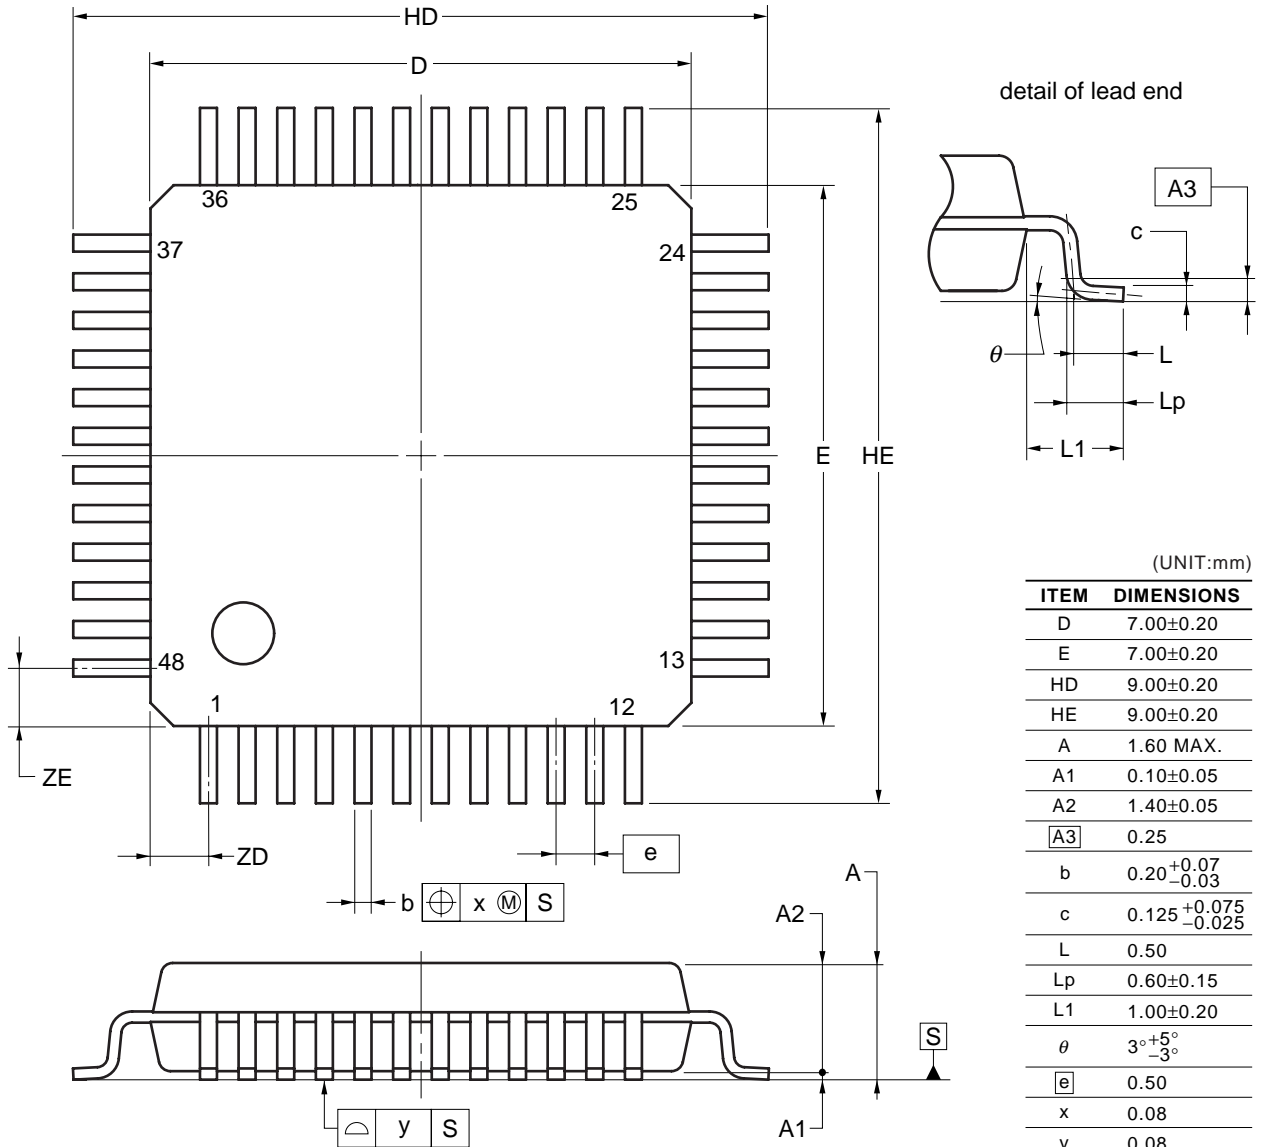
- Notes**
- The prewrite time before erasure and the erase verify time (writeback time) are not included.
  - When a product is first written after shipment, "erase → write" and "write only" are both taken as one rewrite.

**Remark**  $f_{XP}$ : Main system clock oscillation frequency



CHAPTER 28 PACKAGE DRAWINGS

48-PIN PLASTIC LQFP (FINE PITCH) (7x7)



**NOTE**  
Each lead centerline is located within 0.08 mm of its true position at maximum material condition.

P48GA-50-GAM

© NEC Electronics Corporation 2005

## CHAPTER 29 CAUTIONS FOR WAIT

### 29.1 Cautions for Wait

This product has two internal system buses.

One is a CPU bus and the other is a peripheral bus that interfaces with the low-speed peripheral hardware.

Because the clock of the CPU bus and the clock of the peripheral bus are asynchronous, unexpected illegal data may be passed if an access to the CPU conflicts with an access to the peripheral hardware.

When accessing the peripheral hardware that may cause a conflict, therefore, the CPU repeatedly executes processing, until the correct data is passed.

As a result, the CPU does not start the next instruction processing but waits. If this happens, the number of execution clocks of an instruction increases by the number of wait clocks (for the number of wait clocks, see **Table 29-1**). This must be noted when real-time processing is performed.

## 29.2 Peripheral Hardware That Generates Wait

Table 29-1 lists the registers that issue a wait request when accessed by the CPU, and the number of CPU wait clocks.

**Table 29-1. Registers That Generate Wait and Number of CPU Wait Clocks**

Peripheral Hardware	Register	Access	Number of Wait Clocks
Serial interface UART0	ASIS0	Read	1 clock (fixed)
Serial interface UART6	ASIS6	Read	1 clock (fixed)
10-bit successive approximation type A/D converter	ADM	Write	1 to 5 clocks (when $f_{AD} = f_{PRS}/2$ is selected)
	ADS	Write	1 to 7 clocks (when $f_{AD} = f_{PRS}/3$ is selected)
	ADPC	Write	1 to 9 clocks (when $f_{AD} = f_{PRS}/4$ is selected)
	ADCR	Read	2 to 13 clocks (when $f_{AD} = f_{PRS}/6$ is selected) 2 to 17 clocks (when $f_{AD} = f_{PRS}/8$ is selected) 2 to 25 clocks (when $f_{AD} = f_{PRS}/12$ is selected)
<p>The above number of clocks is when the same source clock is selected for <math>f_{CPU}</math> and <math>f_{PRS}</math>. The number of wait clocks can be calculated by the following expression and under the following conditions.</p> <p>&lt;Calculating number of wait clocks&gt;</p> <ul style="list-style-type: none"> <li>Number of wait clocks = <math>\frac{2 f_{CPU}}{f_{AD}} + 1</math></li> </ul> <p>* Fraction is truncated if the number of wait clocks <math>\leq 0.5</math> and rounded up if the number of wait clocks <math>&gt; 0.5</math>.</p> <p><math>f_{AD}</math>: A/D conversion clock frequency (<math>f_{PRS}/2</math> to <math>f_{PRS}/12</math>)  <math>f_{CPU}</math>: CPU clock frequency  <math>f_{PRS}</math>: Peripheral hardware clock frequency  <math>f_{XP}</math>: Main system clock frequency</p> <p>&lt;Conditions for maximum/minimum number of wait clocks&gt;</p> <ul style="list-style-type: none"> <li>Maximum number of times: Maximum speed of CPU (<math>f_{XP}</math>), lowest speed of A/D conversion clock (<math>f_{PRS}/12</math>)</li> <li>Minimum number of times: Minimum speed of CPU (<math>f_{SUB}/2</math>), highest speed of A/D conversion clock (<math>f_{PRS}/2</math>)</li> </ul>			

**Caution** When the CPU is operating on the subsystem clock and the peripheral hardware clock is stopped, do not access the registers listed above using an access method in which a wait request is issued.

**Remark** The clock is the CPU clock ( $f_{CPU}$ ).

*For further information,  
please contact:*

**NEC Electronics Corporation**

1753, Shimonumabe, Nakahara-ku,  
Kawasaki, Kanagawa 211-8668,  
Japan  
Tel: 044-435-5111  
<http://www.necel.com/>

**[America]**

**NEC Electronics America, Inc.**

2880 Scott Blvd.  
Santa Clara, CA 95050-2554, U.S.A.  
Tel: 408-588-6000  
800-366-9782  
<http://www.am.necel.com/>

**[Europe]**

**NEC Electronics (Europe) GmbH**

Arcadiastrasse 10  
40472 Düsseldorf, Germany  
Tel: 0211-65030  
<http://www.eu.necel.com/>

**Hanover Office**

Podbielskistrasse 166 B  
30177 Hannover  
Tel: 0 511 33 40 2-0

**Munich Office**

Werner-Eckert-Strasse 9  
81829 München  
Tel: 0 89 92 10 03-0

**Stuttgart Office**

Industriestrasse 3  
70565 Stuttgart  
Tel: 0 711 99 01 0-0

**United Kingdom Branch**

Cygnus House, Sunrise Parkway  
Linford Wood, Milton Keynes  
MK14 6NP, U.K.  
Tel: 01908-691-133

**Succursale Française**

9, rue Paul Dautier, B.P. 52  
78142 Velizy-Villacoublay Cédex  
France  
Tel: 01-3067-5800

**Sucursal en España**

Juan Esplandiu, 15  
28007 Madrid, Spain  
Tel: 091-504-2787

**Tyskland Filial**

Täby Centrum  
Entrance S (7th floor)  
18322 Täby, Sweden  
Tel: 08 638 72 00

**Filiale Italiana**

Via Fabio Filzi, 25/A  
20124 Milano, Italy  
Tel: 02-667541

**Branch The Netherlands**

Steijgerweg 6  
5616 HS Eindhoven  
The Netherlands  
Tel: 040 265 40 10

**[Asia & Oceania]**

**NEC Electronics (China) Co., Ltd**

7th Floor, Quantum Plaza, No. 27 ZhiChunLu Haidian  
District, Beijing 100083, P.R.China  
Tel: 010-8235-1155  
<http://www.cn.necel.com/>

**NEC Electronics Shanghai Ltd.**

Room 2511-2512, Bank of China Tower,  
200 Yincheng Road Central,  
Pudong New Area, Shanghai P.R. China P.C:200120  
Tel: 021-5888-5400  
<http://www.cn.necel.com/>

**NEC Electronics Hong Kong Ltd.**

Unit 1601-1613, 16/F., Tower 2, Grand Century Place,  
193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: 2886-9318  
<http://www.hk.necel.com/>

**NEC Electronics Taiwan Ltd.**

7F, No. 363 Fu Shing North Road  
Taipei, Taiwan, R. O. C.  
Tel: 02-8175-9600  
<http://www.tw.necel.com/>

**NEC Electronics Singapore Pte. Ltd.**

238A Thomson Road,  
#12-08 Novena Square,  
Singapore 307684  
Tel: 6253-8311  
<http://www.sg.necel.com/>

**NEC Electronics Korea Ltd.**

11F., Samik Lavied'or Bldg., 720-2,  
Yeoksam-Dong, Kangnam-Ku,  
Seoul, 135-080, Korea  
Tel: 02-558-3737  
<http://www.kr.necel.com/>