


FEATURES

- Miniature open frame package
- Epoxy coated
- Moisture resistant
- Spectral response similar to the human eye
- Applications include dusk-dawn lighting control

LIGHT DEPENDENT RESISTOR

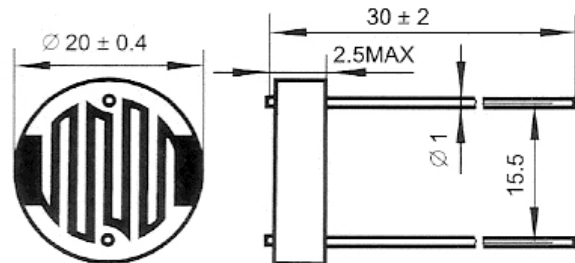

Dimensions in millimetres

SPECIFICATION AND PERFORMANCE

| Model | Vmax (VDC) | Pmax (mW) | Ambient temp(°C) | Spectral peak (nm) | Light Resistance at 10Lux (KΩ) | Dark Resistance (MΩ) | Gamma a value at 100-10Lux | Response Time (ms) | |
|---------|------------|-----------|------------------|--------------------|--------------------------------|----------------------|----------------------------|--------------------|------------|
| | | | | | | | | Rise Time | Decay time |
| GL20516 | 500 | 500 | -30~+70 | 560 | 5-10 | 1 | 0.6 | 20 | 30 |

Measuring Conditions

- 1. Light resistance:**
Measured at 10 Lux with standard light A (2854K color temperature) and 2hr illumination at 400-600 lux prior to testing.
- 2. Dark Resistance:**
Measured 10 seconds after closed 10 lux.
- 3. Gamma Characteristic:**
Between 10 lux and 100 lux and given by $\gamma = \lg(R_{10}/R_{100})$
R₁₀、R₁₀₀ Cell resistance at 10 lux and 100 lux.
The error of γ is ± 0.1 .
- 4. Pmax:**
Max. power dissipation at ambient temperature of 25 °C.
- 5. Vmax:**
Max. voltage in darkness that may be applied to the cell continuously.

光谱响应特性
Spectral Response

