





# Automotive Chip Choke®

## EMI Suppression for CAN-Bus Networks

### 2-Line Common Mode Chokes



-  Meets AEC-Q200 Requirements
-  Suppression of common mode noise without attenuating the signal
-  Magnetically shielded versions for lower Rdc and higher current
-  Supports CAN-Bus, A2B and other IVN high speed differential signal lines (LVDS)



Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Common Mode Impedance (10MHz)		Inductance (uH)	Standard Tolerance	RDC (Ω Max)	IDC (A MAX)	Isolation Resistance (MΩ) Min	Rated Voltage (V) Max
	Min	Typ						
<b>PE-1210ACCXXXSTS</b>								
PE-1210ACC110STS	300	550	11	+50/-30%	0.4	0.3	10	80
PE-1210ACC220STS	500	1100	22	+50/-30%	0.5	0.25	10	80
PE-1210ACC510STS	1000	2600	51	+50/-30%	0.7	0.2	10	80
PE-1210ACC101STS	2200	5100	100	+50/-30%	1.5	0.15	10	80
<b>PE-1812ACCXXXSTS</b>								
PE-1812ACC110STS	300	600	11	+50/-30%	0.5	0.36	10	50
PE-1812ACC220STS	600	1200	22	+50/-30%	0.6	0.31	10	50
PE-1812ACC510STS	1500	3500	51	+50/-30%	1	0.23	10	50
PE-1812ACC101STS	3000	7500	100	+50/-30%	2	0.2	10	50

### Mechanical

### Schematic

#### PE-1210ACCXXXSTS

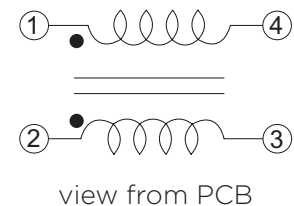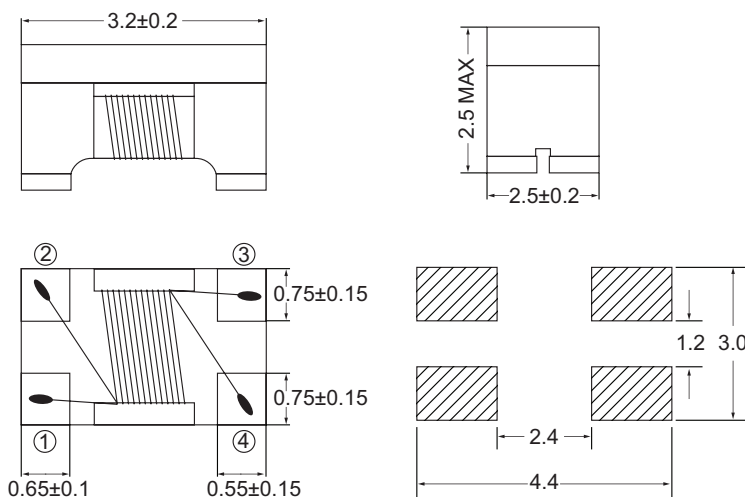

# Automotive Chip Choke<sup>®</sup>



## EMI Suppression for CAN-Bus Networks

### 2-Line Common Mode Chokes

#### Mechanical



#### Schematic

PE-1812ACCXXXSTS

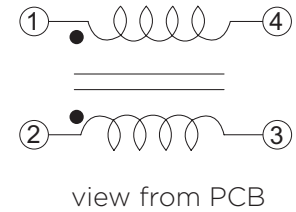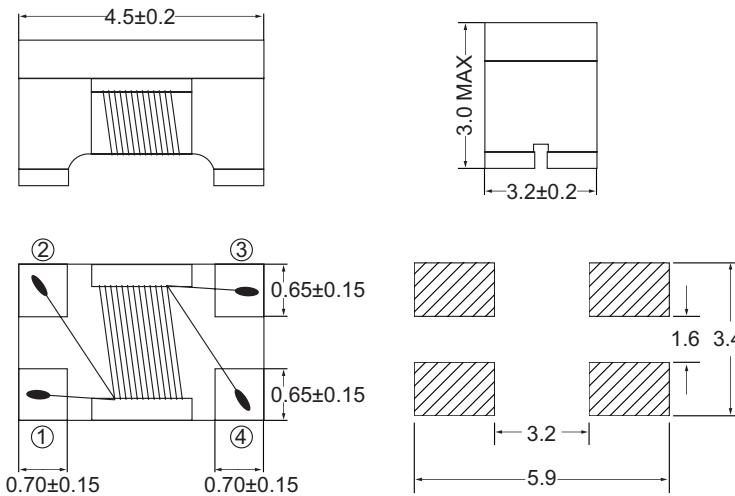

#### Impedance Curve


PE-1210ACCXXXSTS

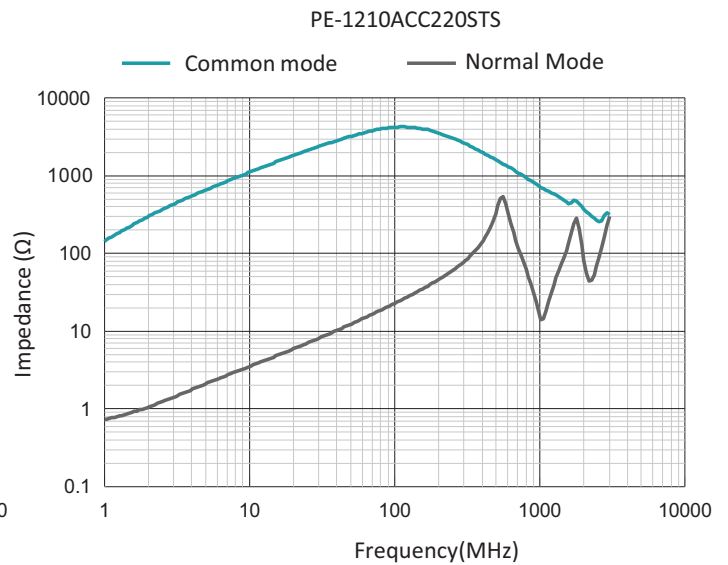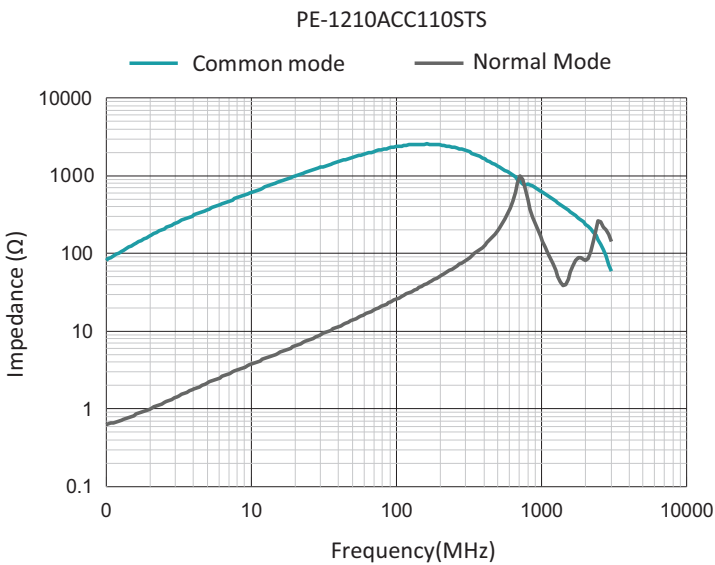

# Automotive Chip Choke<sup>®</sup>



## EMI Suppression for CAN-Bus Networks

### 2-Line Common Mode Chokes

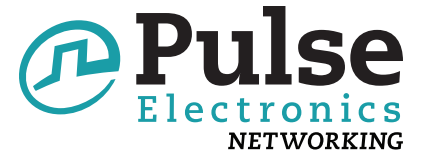


### Impedance Curve

PE-1210ACCXXSTS

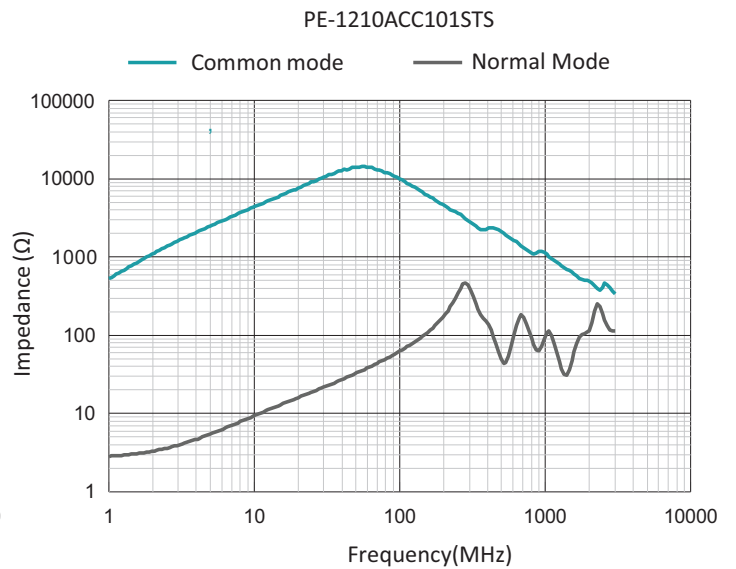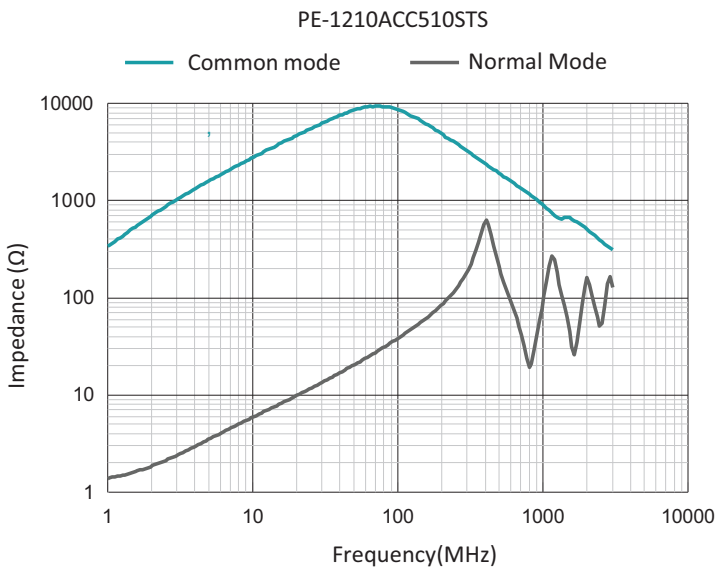


### Impedance vs Frequency

PE-1210ACC101STS

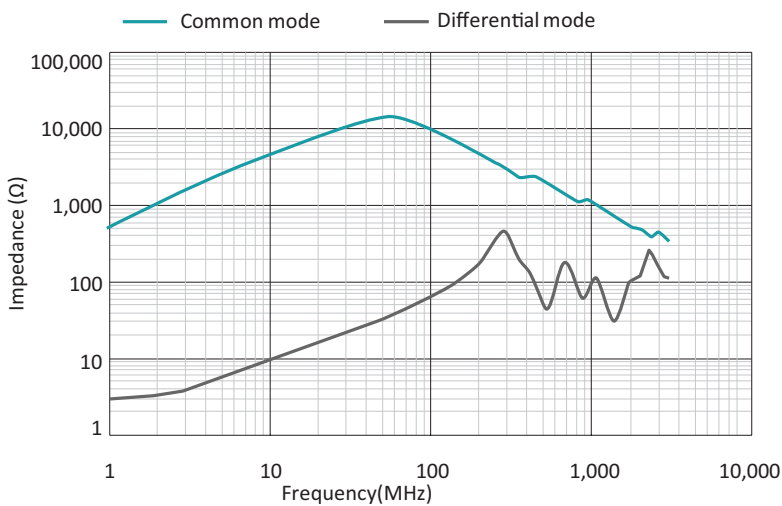


### Temp vs DC Current

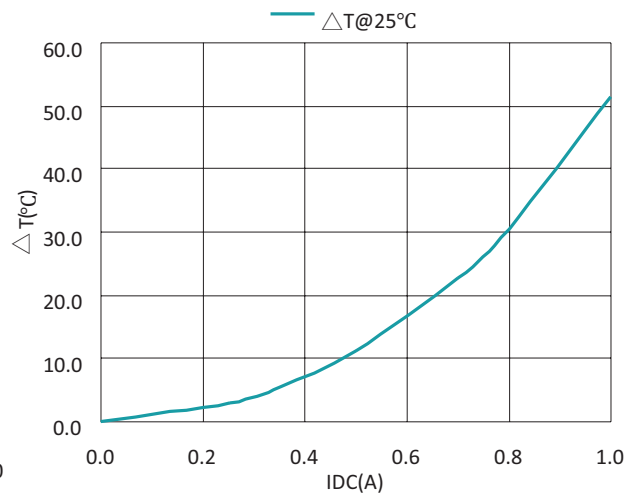

# Automotive Chip Choke<sup>®</sup>

## EMI Suppression for CAN-Bus Networks



### 2-Line Common Mode Chokes

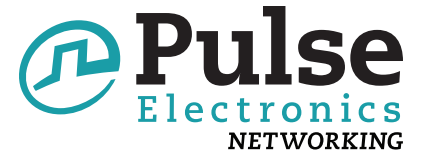



Impedance vs Frequency

Temp vs DC Current

PE-1812ACC110STS

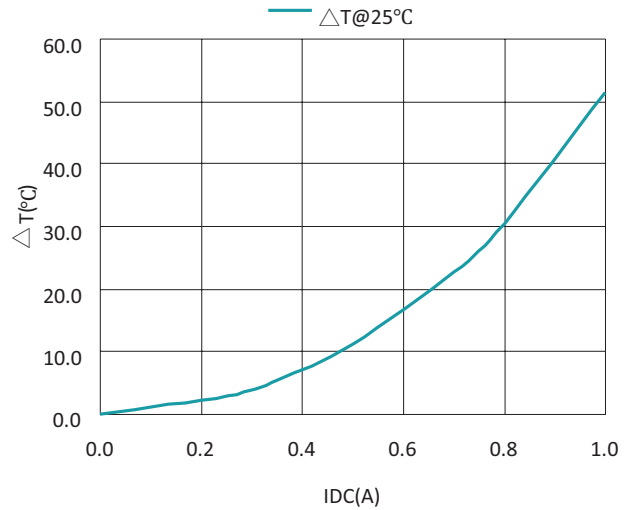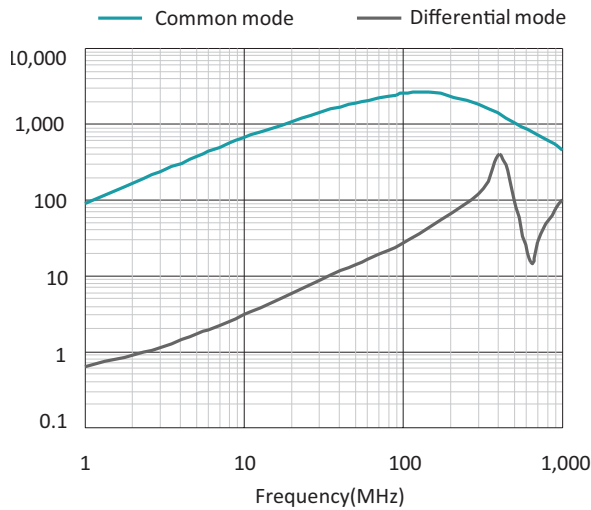

PE-1812ACC220STS

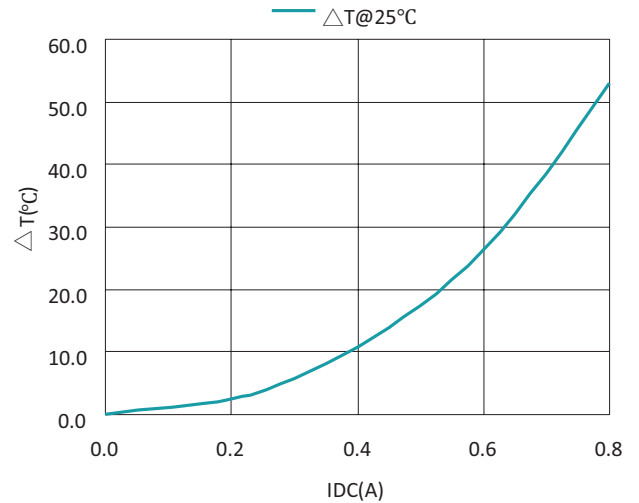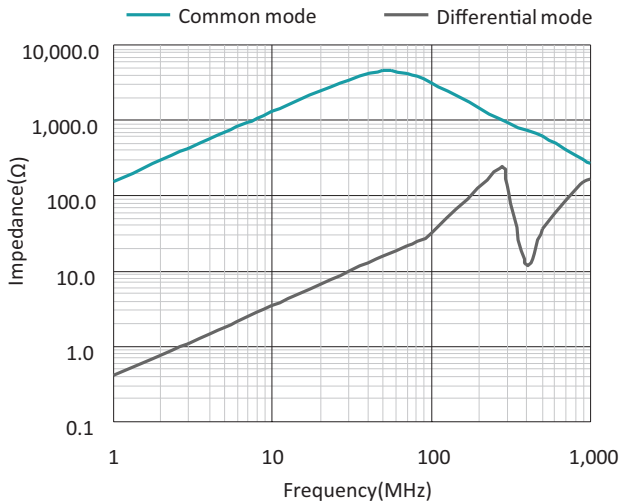

# Automotive Chip Choke<sup>®</sup>



## EMI Suppression for CAN-Bus Networks

### 2-Line Common Mode Chokes



### Impedance vs Frequency

### Temp vs DC Current

PE-1812ACC510STS

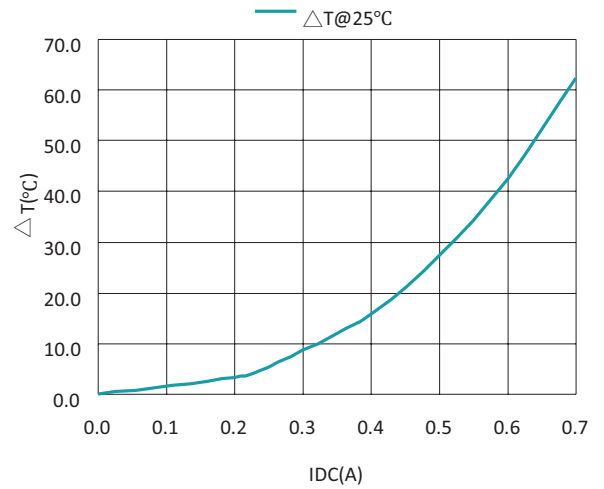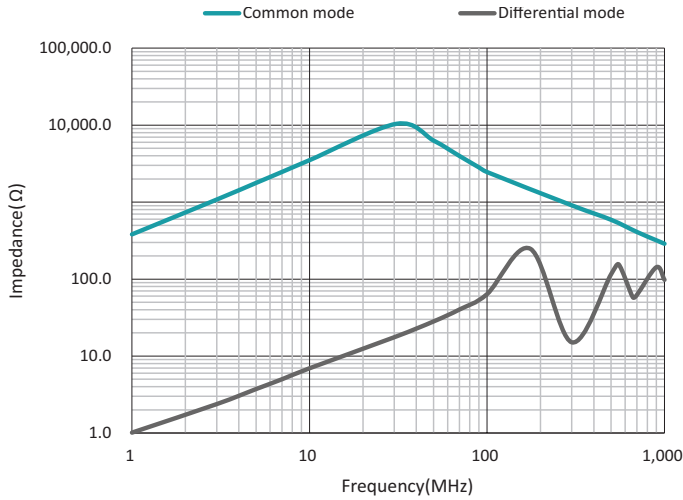

PE-1812ACC101STS

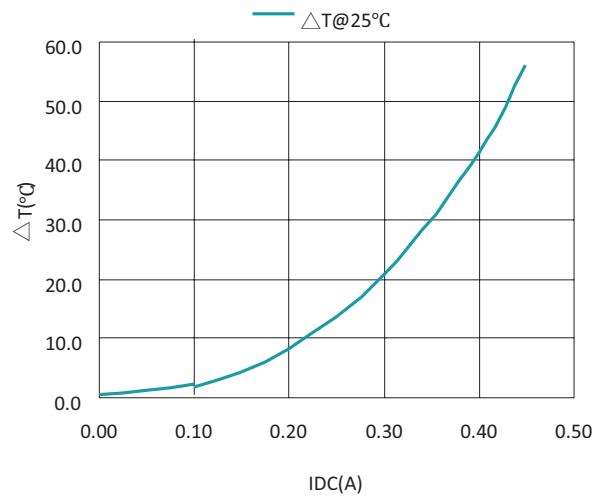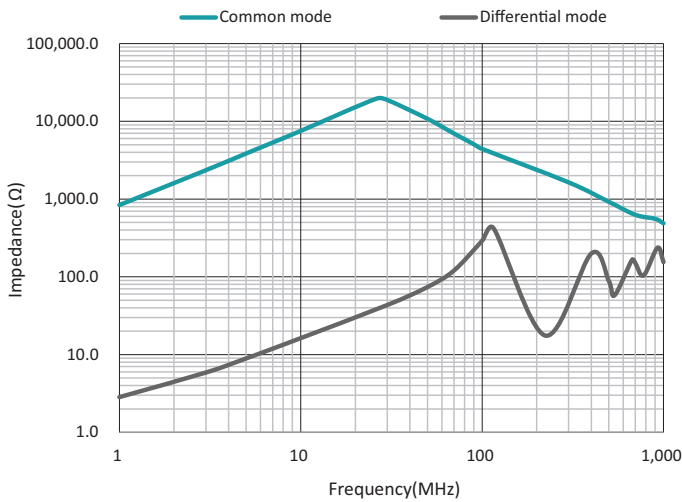

# Automotive Chip Choke®

## EMI Suppression for CAN-Bus Networks

### 2-Line Common Mode Chokes



#### Reliability Test


Item	Reference documents	Test Condition	Test Specification
1. High Temperature Exposure	MIL-STD-202 Method 108	1. Temperature: 125°C 2. Time: 1000 hours	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
2. Temperature Cycling	JESD22 Method JA-104	1. Temperature: 40°C~125°C 2. Number of cycles: 1000 cycle 3. Dwell time: 30 minutes	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
3. Biased Humidity Test	MIL-STD-202 Method 103	1. Temperature: 85 $\pm 5$ °C 2. Time: 1000 hours 3. Humidity: 85 $\pm 5\%$ RH	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
4. Operational Life	MIL-PRF-27	1. Temperature: 125°C 2. Time: 1000 hours 3. Apply rated current	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
5. External Visual	MIL-STD-883 Method 2009	Inspect product construction, marking and workmanship	Per product specification standard
6. Physical Dimensions	JESD22 Method JB-100	Verify physical dimensions to the applicable product detail specification	Per product specification standard
7. Resistance to solvents	MIL-STD-202 Method 215	Immerse into solvent for 3 $\pm 0.5$ minutes & brush 10 times for their cycles.	1. No body change in appearance 2. No marking blurred. 3. Inductance shall not change more than $\pm 30\%$
8. Vibration Test	MIL-STD-202 Method 204	1. Frequency and Amplified: 10~2000-10 Hz, 1.5mm 2. Direction: X, Y, Z 3. Test duration: 2 hours for each direction, 6 hours in total	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
9. Resistance to Soldering Heat Test	MIL-STD-202 Method 210	1. Temperature: 250 $\pm 5$ °C 2. Time: (temp. $\geq 217$ °C) 60~150 Second 3. IR reflow times: 3 times	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
10. Rated Current	MIL-STD-202 Method 330	Apply rated current for 5 seconds.	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
11. Temperature Rise	MIL-PRF-27	Apply rated current for 10 minutes.	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
12. Over load	MIL-PRF-27	Apply twice as rated current for 5 minutes.	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
13. Solderability Test	J-STD-002	1. Baking in pre-testing: 155 $\pm 5$ °C / 16Hours $\pm 30$ min. 2. Peak temperature: 240 $\pm 5$ °C 3. Time: (temp. $\geq 217$ °C) 60~150 Second 4. IR reflow times: 1 time	The terminal shall be at least 95% covered with fresh solder.
14. Electrical Characterization	User Spec.	1. Operating temperature: -40°C~125°C 2. Room Temperature: 25°C	1. No mechanical and electrical damage 2. Inductance shall not change more than $\pm 30\%$
15. Withstanding Voltage Test	MIL-STD-202 Method 201	1. DV: 500V 2. Time: 1 minute	1. During the test no breakdown. 2. The characteristic is normal after test.
16. Drop	JESD22-B111	Package & Drop down from 1m. In 1 angle 1 ridge & 2 surfaces orientation	1. No case deformation or change in appearance. 2. Inductance shall not change more than $\pm 30\%$
17. Terminal Strength Test	JIS-C-6429	1. Apply push force to samples mounted on PCB. 2. Force of 1.8 kg for 60 $\pm 1$ seconds.	After test, inductors shall be on mechanical damage.

# Automotive Chip Choke®

## EMI Suppression for CAN-Bus Networks

### 2-Line Common Mode Chokes

#### Tape and Reel Specifications

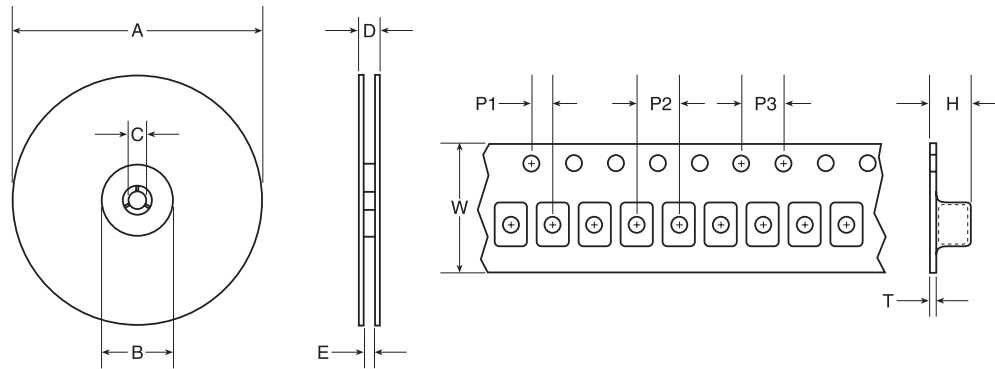

Series	Parts per Reel	Reel Dimensions (mm)					Tape Dimensions (mm)					
		A	B	C	D	E	W	P1	P2	P3	H	T
1210 ACC	2000	178	60	13.5	12	9	8	2	4	4	2.5	0.26
1812 ACC	500	178	60	13	17	14	12	2	8	4	4	0.35


#### III. Description:

- Ferrite drum core construction
- Magnetically shielded
- Enameled copper wire: H class
- Product weight: 0.15g (ref.)
- Moisture sensitivity Level 1
- Products comply with RoHS' requirements
- Halogen Free available

#### IV. General specification:

- Storage temp: -40°C to +125°C
- Operating temp: -40°C to +125°C  
(Temp. rise included)
- Resistance to solder heat: 250°C 10 secs.

#### Recommended Solder Heat Resistance Profile

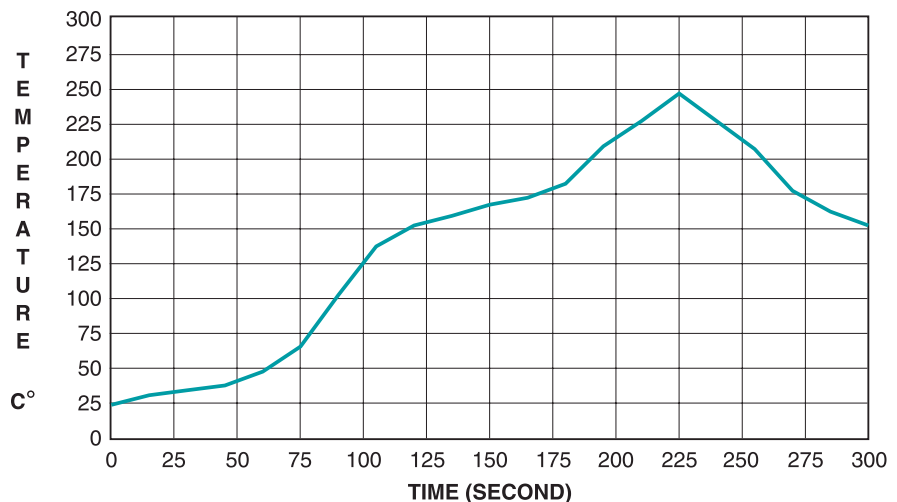

#### For More Information

##### Pulse Worldwide Headquarters

12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

##### Pulse Europe

Humboldtstrasse 32  
Leinfelden-Echterdingen  
D-70771  
Germany

Tel: 49 7032 78060  
Fax: 49 7032 7806 135

##### Pulse China - Shenzhen

B708, Shenzhen Academy  
of Aerospace  
Technology Bldg.  
The 10th Keji South Road  
Nanshan District  
Shenzhen, PR China  
518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

##### Pulse South China

1F, No.111, Xiyuan Road  
Zhongli District  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 886 3 4356768  
Fax: 886 3 4356820

##### Pulse Asia

3 Fraser Street  
0428 DUO Tower  
Singapore 189352

Tel: 65 6287 8998  
Fax: 65 6280 0080

##### Pulse India

No.14, 5th Main Rd.  
Ground Floor, Opp to  
Cha Cha Park,  
Jauamahal Extension,  
Bangalore-560 046,  
India

Tel: 91 95990 31171

##### Pulse Japan

Yebisu Garden  
Place Tower 23F  
4-20-3 Ebisu,  
Shibuya-Ku  
Tokyo 150-6023  
Japan

Tel: 81 3 5792 9760

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pulse:](#)

[PE-1812ACC220STS](#) [PE-1812ACC510STS](#) [PE-1812ACC110STS](#) [PE-1812ACC101STS](#) [PE-1210ACC510STS](#) [PE-1210ACC110STS](#) [PE-1210ACC220STS](#) [PE-1210ACC101STS](#)