



NPU 75 μ 软磁粉芯 (10kHz~30kHz)

低频率范围 Sendust 60 μ 的优选方案

A Superior solution to Sendust 60 μ for low frequency applications




良好的直流偏置特性 Good DC Bias Performance

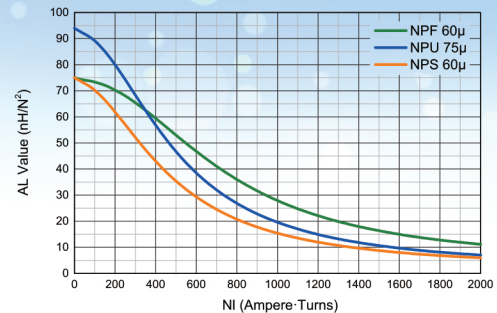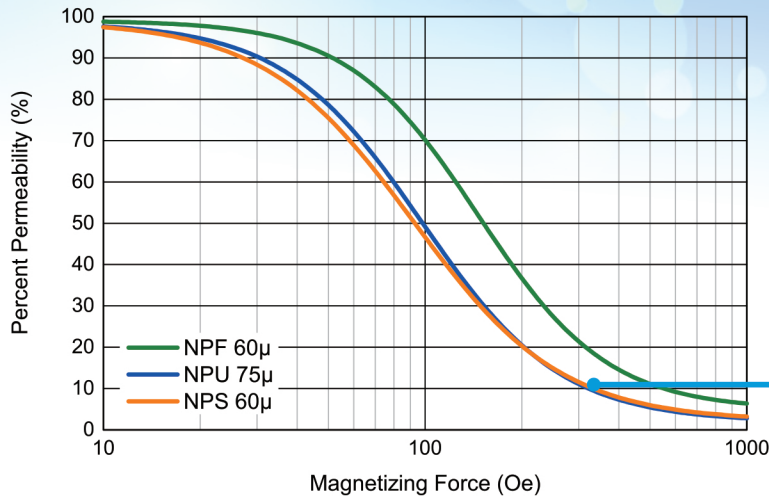

与 sendust 60 μ 一致的直流偏置性能
An equivalent DCB to Sendust 60 μ

相当的磁芯损耗 Comparable Core Loss

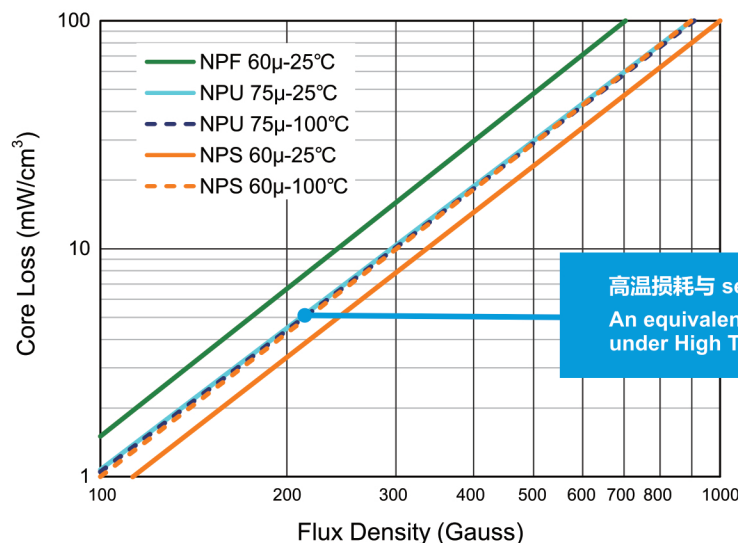


高温损耗与 sendust 60 μ 一致
An equivalent Core Loss to Sendust 60 μ
under High Temperature Conditions

基本信息 Basic information

磁导率 Permeability (μ)
75

尺寸 Size (inch)
1.57 ~ 5.00

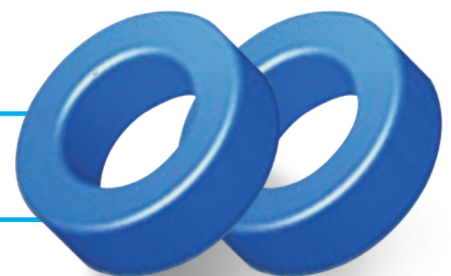

* 备注：所有性能参数均由铂科测试平台提供。Notes: All data are provided by POCO testing platforms.