
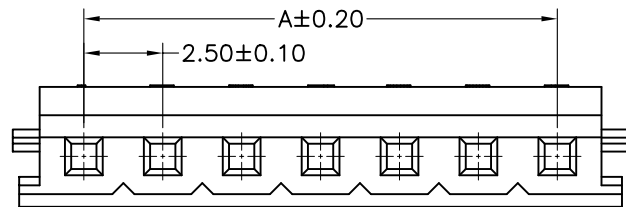



1 2 3 4 5

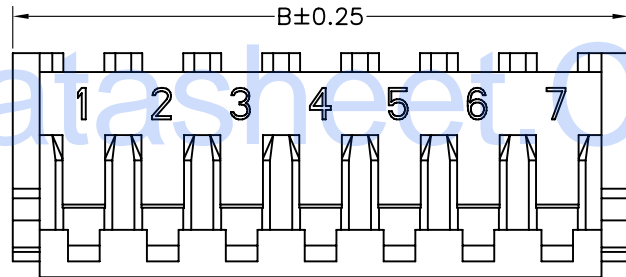

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: NYLON 66
 FLAMABILITY RATING: UL94-V0
 COLOR: WHITE
 PITCH: 2.50MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 UP TO 85°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 3A
 WORKING VOLTAGE: 250V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 800V AC/MN

PACKAGING
 BAG

DIMENSION
 A = 2.50 x (NB PIN - 1)
 B = 2.50 x (NB PIN) + 2.00

TO BE USED WITH TERMINAL 688 001 113 722

A

B

C

D

RoHS Compliant

G			
F			
E			
D			
C			
B			
A	10-AUG-09	PDF	JP
REV	DATE	FILE	BY

PROJECTION:

GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15



APPROVAL: RJ

UNIT: MM
 SCALE:
 SHEET: 1/1
 DRAW: MIKE

DESCRIPTION: 2.50MM "J" FEMALE TERMINAL HOUSING
 WERI PART NO: 688 0xx 1133 22

SIZE
A4