


Surface Mount Transient Voltage Suppressors (TVS) SMAJ Series

Features

1. For surface mounted applications in order to optimize board space
2. Low leakage
3. Uni and Bidirectional unit
4. Low inductance
5. Excellent clamping capability
6. 400W Peak power capability at $10 \times 1000\mu\text{s}$ waveform Repetition rate

(duty cycle):0.01%

7. Fast response time: typically less than 1.0ps from 0 Volts to V_{BR} min
8. Typical I_R less than $5\mu\text{A}$ above 12V
9. High Temperature soldering: $260^\circ\text{C}/40$ seconds at terminals
10. Typical maximum temperature coefficient $\Delta V_{BR} = 0.1\% \times V_{BR}@25^\circ\text{C} \times \Delta T$
11. Plastic package has Underwriters Laboratory Flammability 94V-0
12. Matte tin lead-free Plated
13. Halogen free and RoHS compliant
14. Typical failure mode is short from over-specified voltage or current
15. Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
16. IEC-61000-4-2 ESD 15kV(Air), 8kV (Contact)
17. ESD protection of data lines in accordance with IEC 61000-4-2 (IEC801-2)
18. EFT protection of data lines in accordance with IEC 61000-4-4 (IEC801-4)

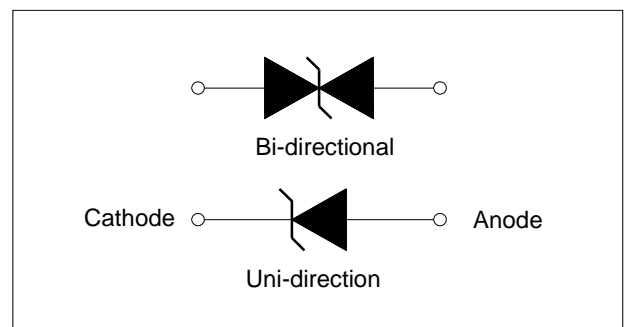

Applications

TVS devices are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Maximum Ratings($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000 μs waveform (Fig.1)(Note 1), (Note 2)	P_{PPM}	200	Watts
Peak Pulse Current with a 10/1000 μs waveform.(Note1, Fig.3)	I_{PP}	See Next Table	Amps
Power Dissipation on Infinite Heat Sink at $T_L=75^\circ\text{C}$	$P_{M(AV)}$	1.0	Watt
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	40	Amps
Maximum Instantaneous Forward Voltage at 25A for Unidirectional Only (Note 4)	V_F	3.5/5.0	Voltage
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Notes:

- 1.Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
- 2.Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal.
- 3.8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.
4. $V_F < 3.5\text{V}$ for $V_{BR} < 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} > 201\text{V}$.

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Marking		Reverse Stand off Voltage V_R (Volts)	Breakdown Voltage V_{BR} (Volts) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{pp} (V)	Maximum Peak Pulse Current I_{pp} (A)
		UNI	BI		MIN	MAX			
SMAJ5.0A	SMAJ5.0CA	AE	WE	5.0	6.40	7.00	10	9.2	21.7
SMAJ6.0A	SMAJ6.0CA	AG	WG	6.0	6.67	7.37	10	10.3	19.4
SMAJ6.5A	SMAJ6.5CA	AK	WK	6.5	7.22	7.98	10	11.2	17.8
SMAJ7.0A	SMAJ7.0CA	AM	WM	7.0	7.78	8.60	10	12.0	16.6
SMAJ7.5A	SMAJ7.5CA	AP	WP	7.5	8.33	9.21	1	12.9	15.5
SMAJ8.0A	SMAJ8.0CA	AR	WR	8.0	8.89	9.83	1	13.6	14.7
SMAJ8.5A	SMAJ8.5CA	AT	WT	8.5	9.44	10.40	1	14.4	13.9
SMAJ9.0A	SMAJ9.0CA	AV	WV	9.0	10.00	11.10	1	15.4	13.0
SMAJ10A	SMAJ10CA	AX	WX	10.0	11.10	12.30	1	17.0	11.7
SMAJ11A	SMAJ11CA	AZ	WZ	11.0	12.20	13.50	1	18.2	11.0
SMAJ12A	SMAJ12CA	BE	XE	12.0	13.30	14.70	1	19.9	10.1
SMAJ13A	SMAJ13CA	BG	XG	13.0	14.40	15.90	1	21.5	9.3
SMAJ14A	SMAJ14CA	BK	XK	14.0	15.60	17.20	1	23.2	8.6
SMAJ15A	SMAJ15CA	BM	XM	15.0	16.70	18.50	1	24.4	8.2
SMAJ16A	SMAJ16CA	BP	XP	16.0	17.80	19.70	1	26.0	7.7
SMAJ17A	SMAJ17CA	BR	XR	17.0	18.90	20.90	1	27.6	7.3
SMAJ18A	SMAJ18CA	BT	XT	18.0	20.00	22.10	1	29.2	6.8
SMAJ20A	SMAJ20CA	BV	XV	20.0	22.20	24.50	1	32.4	6.2
SMAJ22A	SMAJ22CA	BX	XX	22.0	24.40	26.90	1	35.5	5.6
SMAJ24A	SMAJ24CA	BZ	XZ	24.0	26.70	29.50	1	38.9	5.2
SMAJ26A	SMAJ26CA	CE	YE	26.0	28.90	31.90	1	42.1	4.7
SMAJ28A	SMAJ28CA	CG	YG	28.0	31.10	34.40	1	45.4	4.4
SMAJ30A	SMAJ30CA	CK	YK	30.0	33.30	36.80	1	48.4	4.1
SMAJ33A	SMAJ33CA	CM	YM	33.0	36.70	40.60	1	53.3	3.7
MK36A	MK36CA	CP	YP	36.0	40.00	44.20	1	58.1	3.45
SMAJ40A	SMAJ40CA	CR	YR	40.0	44.40	49.10	1	64.5	3.10
SMAJ43A	SMAJ43CA	CT	YT	43.0	47.80	52.80	1	69.4	2.9
SMAJ45A	SMAJ45CA	CV	YV	45.0	50.00	55.30	1	72.7	2.75
SMAJ48A	SMAJ48CA	CX	YX	48.0	53.30	58.90	1	77.4	2.6
SMAJ51A	SMAJ51CA	CZ	YZ	51.0	56.70	62.70	1	82.4	2.45
SMAJ54A	SMAJ54CA	RE	ZE	54.0	60.00	66.30	1	87.1	2.3
SMAJ58A	SMAJ58CA	RG	ZG	58.0	64.40	71.20	1	93.6	2.15
SMAJ60A	SMAJ60CA	RK	ZK	60.0	66.70	73.70	1	96.8	2.05
SMAJ64A	SMAJ64CA	RM	ZM	64.0	71.10	78.60	1	103.0	1.95
SMAJ70A	SMAJ70CA	RP	ZP	70.0	77.80	86.00	1	113.0	1.75
SMAJ75A	SMAJ75CA	RR	ZR	75.0	83.30	92.10	1	121.0	1.65
SMAJ78A	SMAJ78CA	RT	ZT	78.0	86.70	95.80	1	126.0	1.60
SMAJ85A	SMAJ85CA	RV	ZV	85.0	94.40	104.00	1	137.0	1.45
SMAJ90A	SMAJ90CA	RX	ZX	90.0	100.00	111.00	1	146.0	1.35
SMAJ100A	SMAJ100CA	RZ	ZZ	100.0	111.00	123.00	1	162.0	1.25
SMAJ110A	SMAJ110CA	SE	VE	110.0	122.00	135.00	1	177.0	1.15
SMAJ120A	SMAJ120CA	SG	VG	120.0	133.00	147.00	1	193.0	1.05
SMAJ130A	SMAJ130CA	SK	VK	130.0	144.00	159.00	1	209.0	0.95
SMAJ150A	SMAJ150CA	SM	VM	150.0	167.00	185.00	1	243.0	0.80
SMAJ160A	SMAJ160CA	SP	VP	160.0	178.00	197.00	1	259.0	0.75
SMAJ170A	SMAJ170CA	SR	VR	170.0	189.00	209.00	1	275.0	0.75
SMAJ180A	SMAJ180CA	ST	VT	180.0	201.00	222.00	1	292.0	0.70
SMAJ200A	SMAJ200CA	SV	VV	200.0	224.00	247.00	1	324.0	0.60
SMAJ220A	SMAJ220CA	SX	VX	220.0	246.00	272.00	1	356.0	0.55
SMAJ250A	SMAJ250CA	SZ	VZ	250.0	279.00	309.00	1	405.0	0.50
SMAJ300A	SMAJ300CA	TE	UE	300.0	335.00	371.00	1	486.0	0.40
SMAJ350A	SMAJ350CA	TG	UG	350.0	391.00	432.00	1	567.0	0.35
SMAJ400A	SMAJ400CA	TK	UK	400.0	447.00	494.00	1	648.0	0.3
SMAJ440A	SMAJ440CA	TM	UM	440.0	492.00	543.00	1	713.0	0.3

For bidirectional type having V_R of 10 volts and less, the I_R limit is double. For parts without A, the V_{BR} is $\pm 10\%$ and V_C is 5% higher than with A parts

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)

Figure 1 - Peak Pulse Power Derating Curve

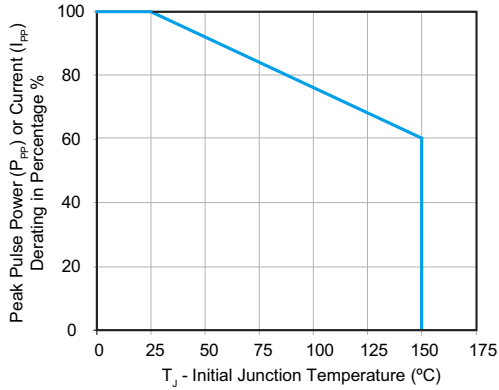


Figure 2 - Pulse Waveform

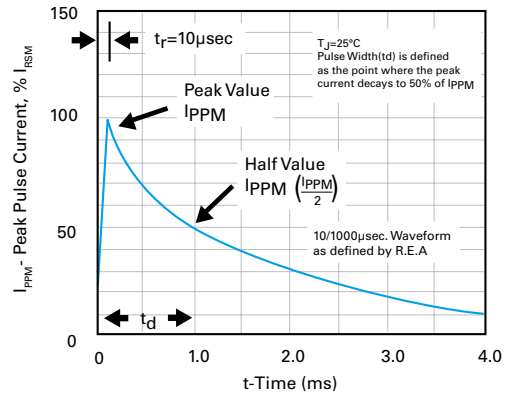


Figure 3 - Typical Junction Capacitance

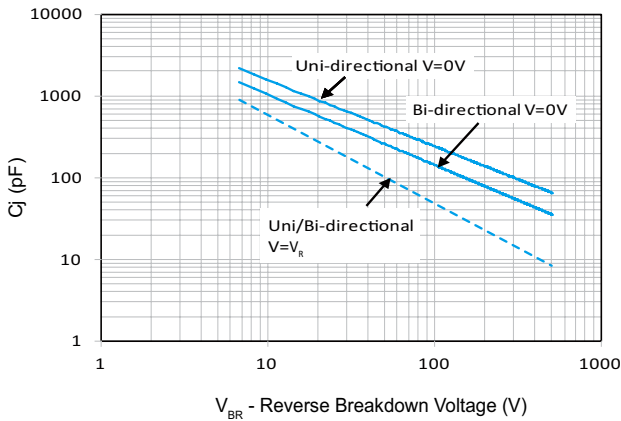


Figure 4 - Typical Transient Thermal Impedance

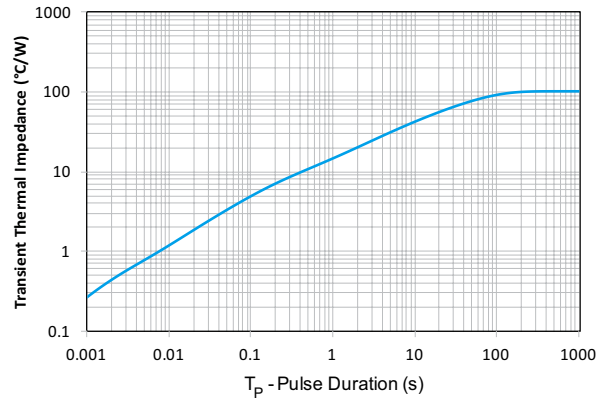


Figure 5 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Only



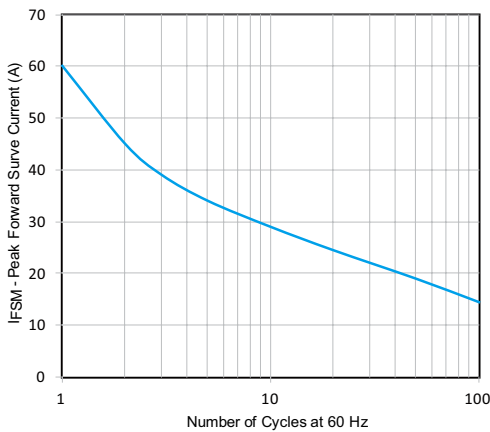


Figure 6 - Peak Forward Voltage Drop vs Peak Forward Current (Typical Values)

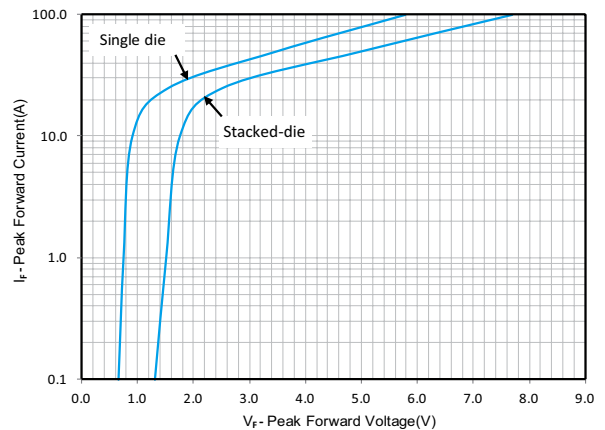

Soldering Parameters

	Reflow Condition	Lead-free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60-180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (t_s)	60-150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20-40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

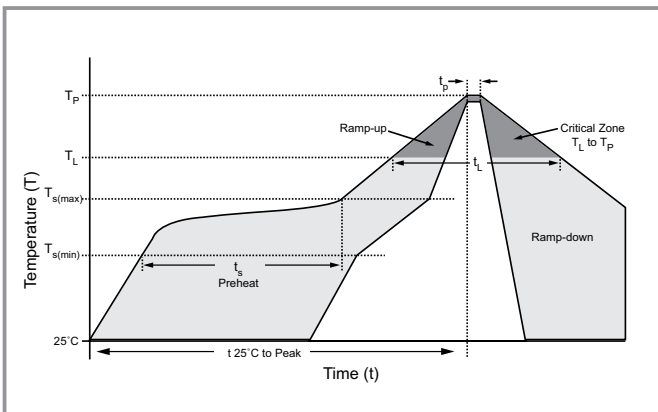


Physical Specifications

Weight	0.002 ounce, 0.061grams
Case	JEDEC DO-214AC. Molded plastic body over glass passivated junction
Polarity	Color band denotes cathode except Bidirectional.
Terminals	Matte Tin-plated leads, Solderable per JESD22-B102

Environmental Specifications


High Temp. Storage	JESD22-A103
HTRB	JESD 22-A108
Temperature Cycling	JESD22-A104
MSL	JEDEC-J-STD-020,Level 1
H3TRB	JESD22-A101
RSH	JESD22-A111

Dimensions

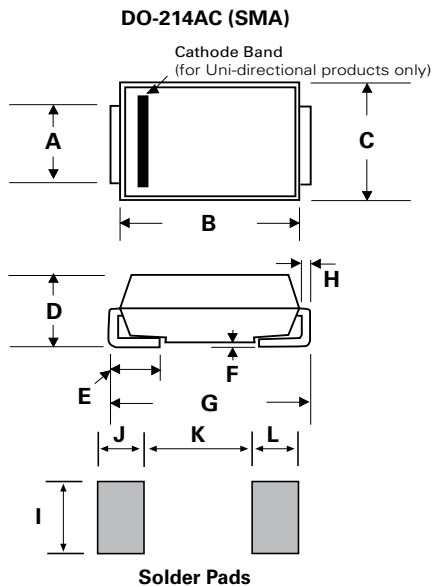

Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.049	0.065	1.250	1.650
B	0.157	0.181	3.990	4.600
C	0.095	0.110	2.400	2.790
D	0.075	0.090	1.900	2.290
E	0.030	0.060	0.780	1.520
F	-	0.008	-	0.203
G	0.189	0.208	4.800	5.280
H	0.006	0.012	0.152	0.305
I	0.070	-	1.800	-
J	0.082	-	2.100	-
K	-	0.090	-	2.300
L	0.082	-	2.100	-

Part Numbering System

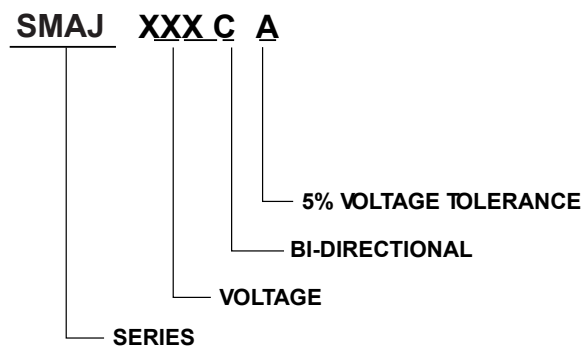

Packaging

Part Number	Component Package	Quantity	Packaging Option	Packaging Specification
SMAJxxxXX	DO-214AC	1800	Tape & Reel-16mm/13"tape	EIA STD RS-481