




<b>梯型铝外壳电阻器</b>  <b>RXLG Trapezoidal Aluminum</b>  <b>Housed Fixed Power Resistor</b>	文件编号 Document No.	YF-SE-02-23/A00
	文件日期 Released Date	2018-12-20
	页次 Page:	1/4

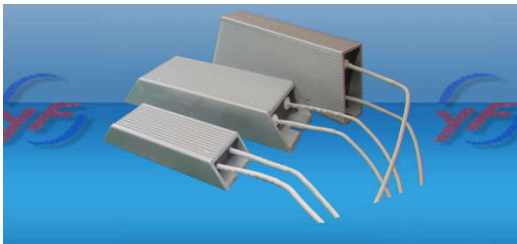

■ 产品特性 Feature:

- 高负荷、散热特性、不燃性;  
High load, heat-sink performance, non-flame ;
- 高频特性好、抗脉冲性;  
Stable performance of high voltage, pulsing load;
- 符合环保要求 RoHS compliant, halogen free, lead free;
- 防护等级 INGRESS PROTECTION: IP53;

■ 产品引用范围 Application:

- – 家电/音响系统 Entertainment system;
- – 电源系统/充电设备 Power supply;
- – 工业/自动化行业 Industrial/automation system;
- – 变频控制/风电控制 VFD control/Wind-power system;

■ 产品订货方式 Parts Number Explanation:

RXLG	-	200W	-	100R	-	J	-		
类型		功率		特性(可选)		阻值		误差	
Product Type		Rated Power		Feature (Optional)		Resistance		Tolerance	
								包装方式	
								Packing	
		40W		N/A:Normal		0R47=0.47Ω		F:±1%	Requirements
		60W		S:Small volume		2R7=2.7Ω		G:±2%	
		80W		L:Large volume		15R=15Ω		J:±5%	
		100W		N:Non-inductive		510R=510Ω		K:±10%	
		...		...		1K2=1.2KΩ			
		500W				75K=75KΩ			

■ 环保申明 RoHS declaration:

本产品符合 RoHS 2.0(2011/65/EU)环保要求。  
The products meet the standards of RoHS 2.0(2011/65/EU).

■ 参考标准 Reliability standard

可焊性 Weldability Standard:	IEC60068-2-20
环境标准 Environment Standard:	SJ/T 11363-2006, ROHS 2011/65/EU
检验标准 QC standard:	MIL-STD-105E, GB/T 2828.1-2003
产品性能 Performance:	IEC60115-2008, GB/T5729-2003




<b>梯型铝外壳电阻器</b>  <b>RXLG Trapezoidal Aluminum</b>  <b>Housed Fixed Power Resistor</b>	文件编号 Document No.	<b>YF-SE-02-23/A00</b>
	文件日期 Released Date	<b>2018-12-20</b>
	页次 Page:	<b>2/4</b>

■ 标准产品规格 Standard electrical specifications:

功率 Rated Power At 70°C	阻值 Resistance (Ω)	最高使用电压 Max. Rating Voltage(U <sub>R</sub> )	最高超载电压 Max. Overload Voltage(U <sub>L</sub> )	绝缘电压 Insulation Voltage(U <sub>N</sub> )	温度系数 T.C.R. PPM/°C	工作温度 Operating Temperature
P<100W	0.1~500K	250V	350V	1500V	±100 ±250 ±350 ±500	-55°C ~ +275°C
100W	0.1~100K	350V	550V	2000V		
120W	0.1~100K	350V	550V	2000V		
150W	0.1~10K	500V	1000V	2000V		
200W	0.1~10K	500V	1000V	3000V		
300W	0.1~10K	750V	1200V	3000V		
400W	0.1~10K	750V	1200V	3000V		
500W	0.1~10K	750V	1200V	3000V		

■ 产品尺寸 Type dimension:

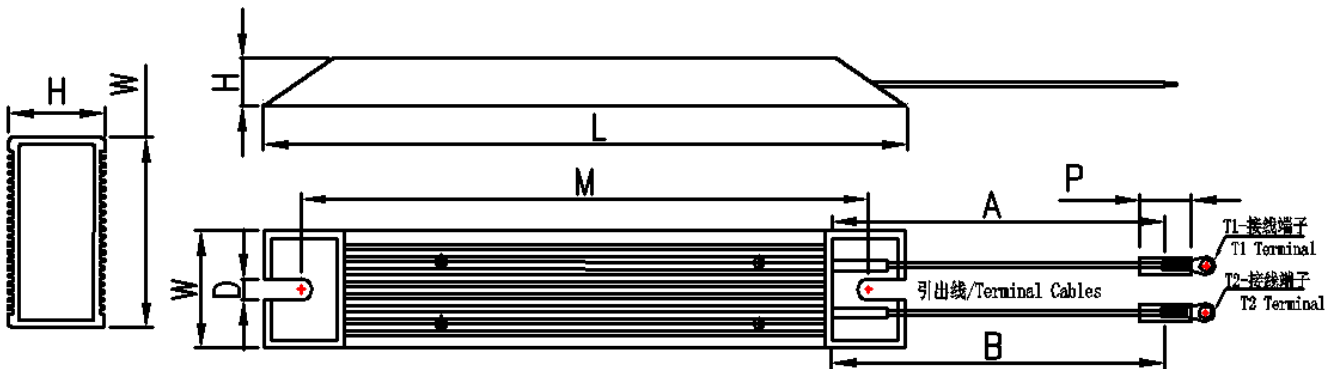

规格 Type	尺寸 Dimension(mm)						端子 Terminal	
	L±1.0	W±0.5	H±0.5	M±1.0	D±0.5	A/B±5	T1	T2
40W	90	40	15	75	5.5	200	φ4	φ4
60W	90	40	20	75	5.5	200	φ4	φ4
80W	115	40	20	100	5.5	200	φ4	φ4
100W	140	40	20	125	5.5	200	φ4	φ5
120W	165	40	20	150	5.5	300	φ5	φ5
150W	190	40	20	175	5.5	300	φ5	φ5
200W	165	60	30	150	5.5	300	φ5	φ5
300W	215	60	30	200	5.5	300	φ5	φ5
400W	265	60	30	250	5.5	300	φ5	φ5
500W	335	60	30	320	5.5	300	φ5	φ5




<b>梯型铝外壳电阻器</b>  <b>RXLG Trapezoidal Aluminum</b>  <b>Housed Fixed Power Resistor</b>	文件编号 Document No.	<b>YF-SE-02-23/A00</b>
	文件日期 Released Date	<b>2018-12-20</b>
	页次 Page:	<b>3/4</b>

■ 产品特性 Product parameter:

● 额定功耗 Power Derating Curve:

额定功率是周围温度 70℃ 以下(推荐工作区域), 可连续使用的负载功率的最大数值, 且应使机械性能与电气性能满足. 如周围温度超过 70℃ 时, 依照下图功率衰减曲线而定。

Rated power is the highest using power under 70℃ and continuous duty. At the same time, the overload power is fit for mechanical properties and electrical properties. When the temperature is over 70℃, the power must be derated in accordance with the curve as below:

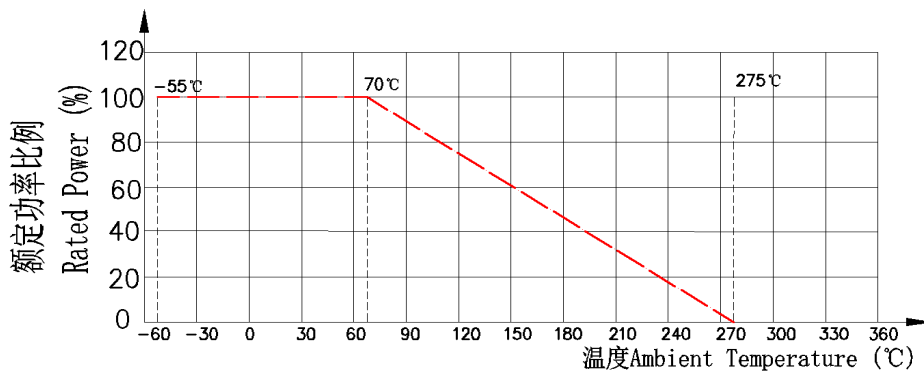

● 额定电压 Rating Voltage:

额定功率对应的额定电压, 直流(DC)或交流电流(AC), 可以采用如下公式计算。当计算的额定电压超过最高使用电压时, 则使用最高使用电压为额定电压。

The following equation may be used to determine the DC(Direct Current) or AC(Alternating Current)(RMS, root mean square value) of normal rated power. However, if the result value exceeds the max. using voltage, the max. using voltage is to be used:

$U_P = \sqrt{P \times R}$	U <sub>P</sub> : 额定电压 Rating voltage (V) P: 额定功率 Rating Power (W) R: 电阻值 Resistance(Ω)
---------------------------	--



<b>梯型铝外壳电阻器</b>  <b>RXLG Trapezoidal Aluminum</b>  <b>Housed Fixed Power Resistor</b>	文件编号 Document No.	<b>YF-SE-02-23/A00</b>
	文件日期 Released Date	<b>2018-12-20</b>
	页次 Page:	<b>4/4</b>

■ 产品特性 Product performance:

测试项目 Test Item	测试方法 Test Method	测试方法 Procedure	测试标准 Requirements										
端子强度 Terminal robustness	IEC60115-1 4.16	端子加载 20N 拉力, 时间 10 秒; Pressurizing force:17.7N, 10 seconds	无损伤 No broken										
本体强度 Body robustness	IEC60115-1 4.15	电阻体中间, 加载 5N 的压力, 时间 10 秒 Central part pressurizing force:5N, 10seconds	无损伤 No broken										
耐振性 Vibration	IEC60115-1 4.22	10~55HZ/0.75mm/2H*3	无损伤 No broken										
耐焊锡热 Soldering Heat	IEC60115-1 4.18	350±5℃, 3S±0.5S	△R/R≤±0.5%										
可焊锡性 Solderability	IEC60115-1 4.17	245±5℃, 5±0.5S	≥95%										
温度系数 Temperature coefficient	IEC60115-1 4.8	$T.C.R. = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0} \times 10^6 \quad (\text{PPM}/^\circ\text{C})$ R <sub>0</sub> :常温下(T <sub>0</sub> )的阻值 Resistance at room temperature(T <sub>0</sub> ); R: 测试温度(T=T <sub>0</sub> +100)的阻值 Resistance at T=T <sub>0</sub> +100;	根据产品额定参数 Refer to Ratings										
短时间过负载 Short Time Overload	IEC60115-1 4.13	Min( $\sqrt{10 \times W \times R}$ , U <sub>R</sub> ), 5s	△R/R≤±2.0%										
绝缘耐压 Voltage proof	IEC60115-1 4.7	U <sub>N</sub> , 60S, I≤1mA.	△R/R≤±1%										
绝缘阻值 Insulation resistance	IEC60115-1 4.6	DC500V, R>100MΩ	△R/R≤±0.5%										
耐久性 Endurance	IEC60115-1 4.25	Min(U <sub>P</sub> , U <sub>R</sub> ), 1.5H- ON, 0.5H-OFF, 1000H	△R/R≤±5%										
高温存储 High Temp. Exposure	IEC60115-1 4.23	125℃, 80%, 500H	无损伤 No broken										
温度循环 Temperature Cycle	IEC60115-1 4.19	如下循环 Cycle Below: <table border="1" style="margin-left: 20px;"> <tr> <td>温度 Temperature</td> <td>25℃</td> <td>125℃</td> <td>25℃</td> <td>-25℃</td> </tr> <tr> <td>时间 Duration</td> <td>15min</td> <td>15min</td> <td>15min</td> <td>15min</td> </tr> </table> 持续时间 Cycle Time:1000Hrs.	温度 Temperature	25℃	125℃	25℃	-25℃	时间 Duration	15min	15min	15min	15min	无损坏 No broken △R/R≤±0.5%
温度 Temperature	25℃	125℃	25℃	-25℃									
时间 Duration	15min	15min	15min	15min									
不燃特性 Noninflammabilit		16*U <sub>P</sub> ,5min	无燃烧现象 No flame										