

# FR101W THRU FR107W-HAF


## Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

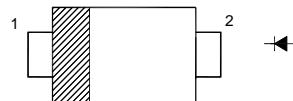

Top View  
Marking Code: FR101W~FR104W: F2  
FR105W: FR5  
FR106W~FR107W: FR7  
Simplified outline SOD-123FL and symbol

### Features

- Halogen and Antimony Free(HAF), RoHS compliant

## Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.


Parameter	Symbols	FR101W	FR102W	FR103W	FR104W	FR105W	FR106W	FR107W	Units			
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V			
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V			
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V			
Maximum Average Forward Rectified Current at $T_a = 65^\circ\text{C}$	$I_{F(AV)}$	1							A			
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	30							A			
Maximum Instantaneous Forward Voltage at 1 A	$V_F$	1.3							V			
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 125^\circ\text{C}$	$I_R$	5 50							$\mu\text{A}$			
Maximum Reverse Recovery Time <sup>1)</sup>	$t_{rr}$	150			200	500			ns			
Typical Junction Capacitance <sup>2)</sup>	$C_J$	15							pF			
Operating and Storage Temperature Range	$T_j, T_{stg}$	- 55 to + 150							°C			

<sup>1)</sup> Measured with  $I_F = 0.5 \text{ A}$ ,  $I_R = 1 \text{ A}$ ,  $I_{rr} = 0.25 \text{ A}$


<sup>2)</sup> Measured at 1MHz and applied reverse voltage of 4V D.C

# FR101W THRU FR107W-HAF


**Fig.1 Forward Current Derating Curve**

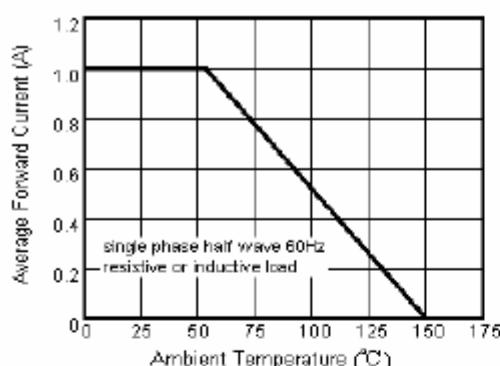


**Fig.2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

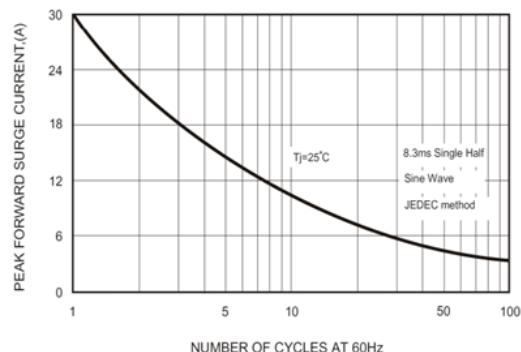


**Fig.3 Typical Instantaneous Forward Characteristics**

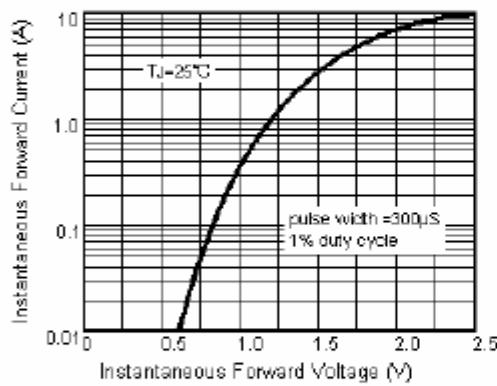

**Fig.4 Typical Reverse Characteristics**

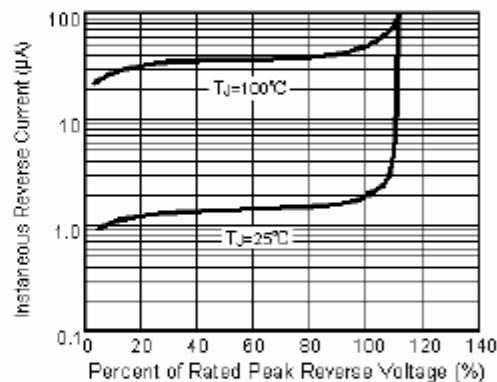

**Fig.5 Typical Junction Capacitance**

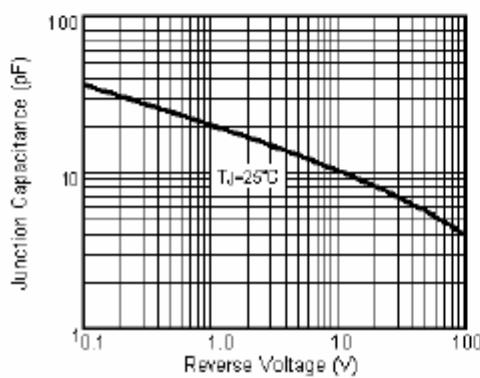


**TOP DYNAMIC**

# FR101W THRU FR107W-HAF

## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

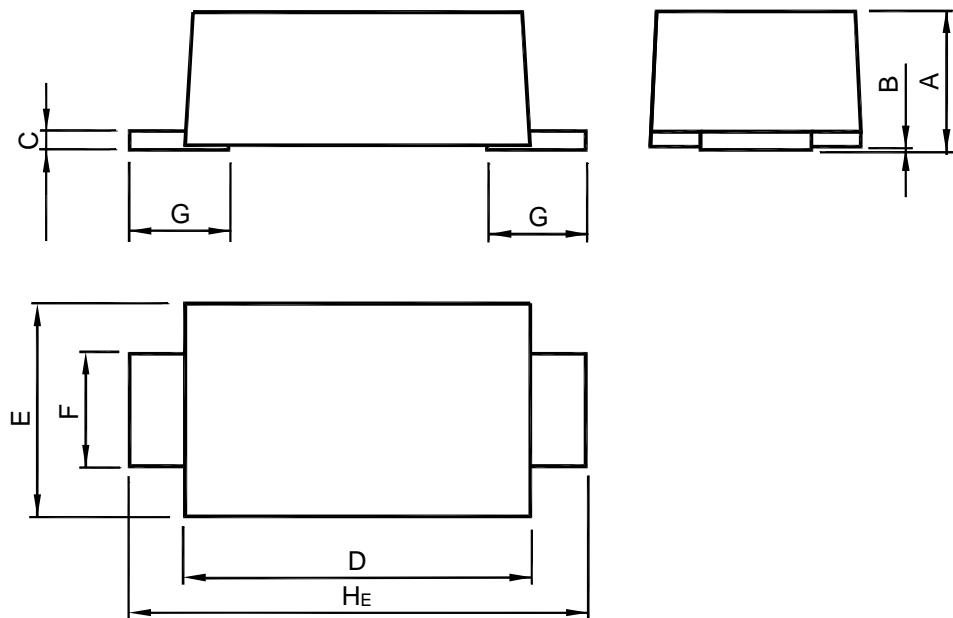

UNIT	A	B	C	D	E	F	G	H <sub>E</sub>
mm	1.08 0.88	0.1 0	0.2 0.1	2.9 2.6	1.9 1.7	1.1 0.8	0.9 0.7	3.9 3.5

## Recommended Soldering Footprint

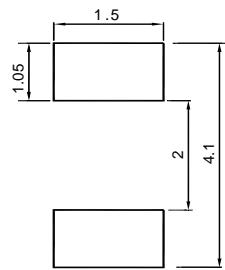

## Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

**TOP DYNAMIC**