

# SR202 THRU SR20A-HAF

## SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 20 to 100 V


Forward Current - 2 A

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, High efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- Halogen and Antimony Free(HAF), RoHS compliant

### Mechanical Data

- **Case:** Molded plastic body, DO-41.
- **Terminals:** Axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end.
- **Mounting Position:** Any

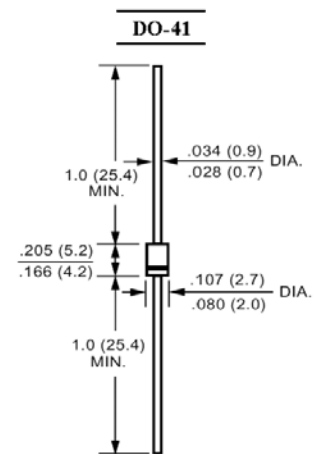

Dimensions in inches and (millimeters)

### Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%

Parameter	Symbols	SR202	SR203	SR204	SR205	SR206	SR208	SR20A	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead Length	$I_{F(AV)}$	2							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	50							A
Maximum Instantaneous Forward Voltage at 2 A <sup>1)</sup>	$V_F$	0.55		0.7		0.85		V	
Maximum Reverse Current $T_A = 25\text{ °C}$ at Rated Reverse Voltage $T_A = 100\text{ °C}$	$I_R$	0.5			0.1		-		mA
Thermal Resistance, Junction to Case	$R_{\theta JC}$	14							°C/W
Thermal Resistance Junction to Lead	$R_{\theta JL}$	21.7							°C/W
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	75							°C/W
Operating Junction Temperature Range	$T_j$	- 55 to +125			- 55 to +150				°C
Storage Temperature Range	$T_{stg}$	- 55 to +150							°C

<sup>1)</sup> Pulse test: tp=300µS, 1% duty cycle

**TOP DYNAMIC**



ISO14001 : 2004 Certificate No. 121505007  
 ISO 9001 : 2008 Certificate No. 50114012  
 OHSAS 18001 : 2007 Certificate No. 0519150006  
 IECQ QC 080000 Certificate No. EC410001 H02

Dated : 07/07/2016 GD Rev: 03

# SR202 THRU SR20A-HAF

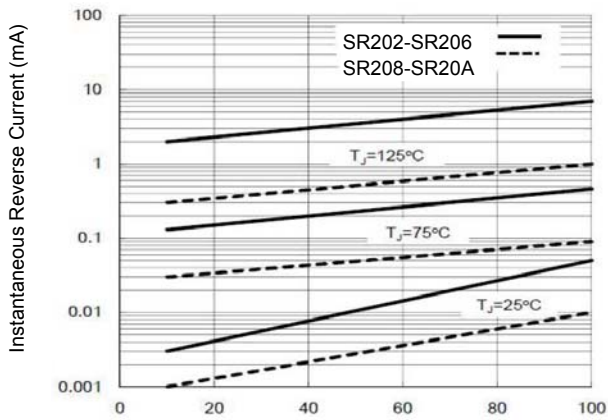


Figure 1. Typical Reverse Characteristics

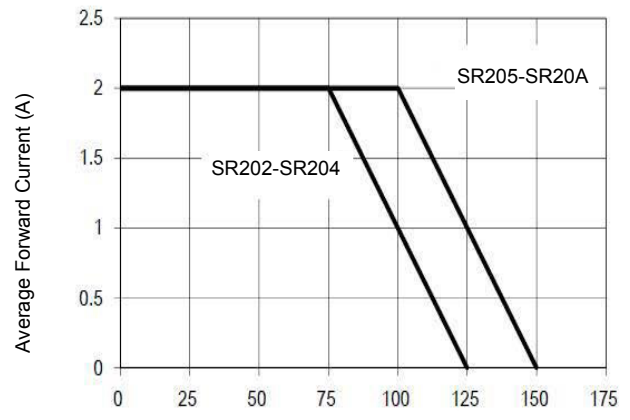


Figure 2. Forward Current Derating Curve

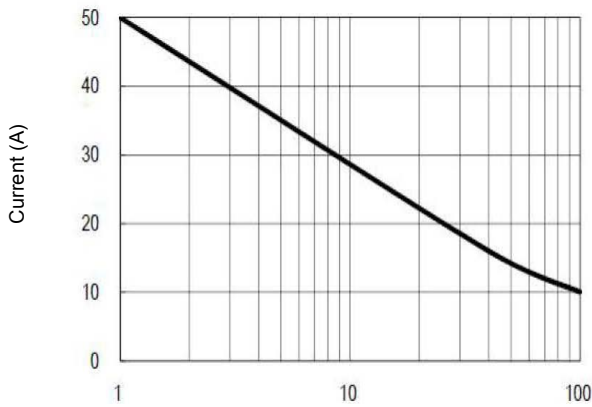


Figure 3. Maximum Non-Repetitive Forward Surge Current

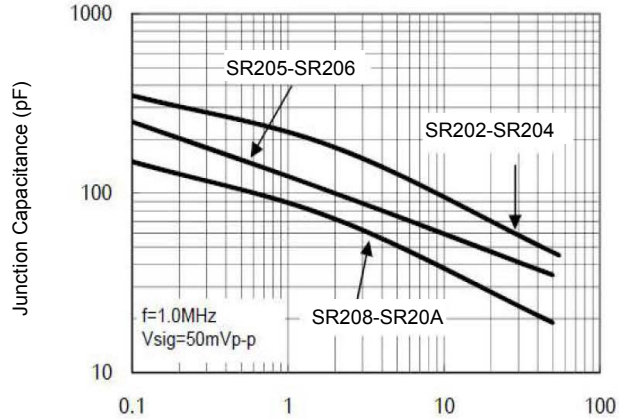


Figure 4. Typical Junction Capacitance

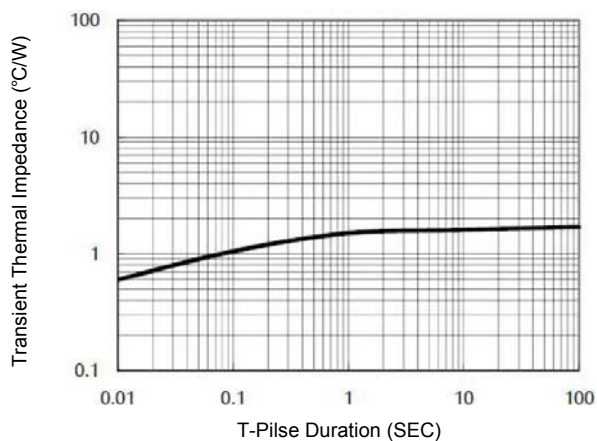


Figure 5. Typical Transient Thermal Characteristics

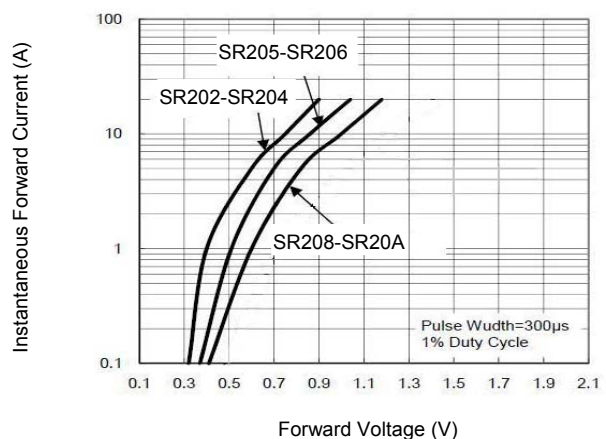


Figure 6. Typical Forward Characteristics

**TOP DYNAMIC**

