




# TK Type 14.3 x 8.7 mm Voltage Controlled Temperature Compensated Crystal Oscillator



**RoHS Compliant**


### FEATURE

- Typical 14.3 x 8.7 x 4.9 mm.
- Metal cover, FR-4 PCB based.
- Output: TTL/CMOS or Clipped Sine Wave.
- Low current option (2mA for Clipped Sine Wave o/p).
- VCTCXO available.


### TYPICAL APPLICATION

- Large-Scale equipment
- WLAN/WiMAX
- Mobile Phone

### DIMENSION (mm)

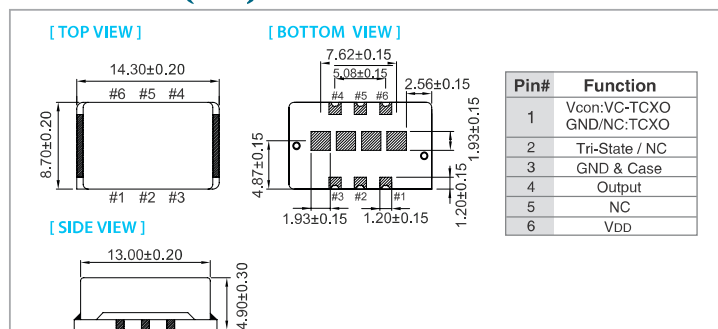

### SOLDER PAD LAYOUT (mm)

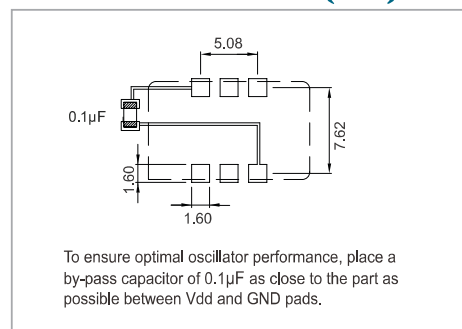

### ELECTRICAL SPECIFICATION

Parameter	5.0 V		3.3 / 3.0 V		Unit
	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)	VDD-5%	VDD+5%	VDD-5%	VDD+5%	V
Frequency Range	5	40	5	40	MHz
Standard Frequency (for CMOS)	5, 6.4, 8, 8.192, 10, 12.5, 12.8, 16, 16.384, 19.44, 20, 25				
Standard Frequency (for Clipped Sine Wave)	8.192, 10, 12.5, 12.8, 16, 16.384, 19.44, 20, 25				
Frequency Tolerance*	-	±2.0	-	±2.0	ppm
Frequency Stability					ppm
Vs Supply Voltage (±5%) change	-	±0.2	-	±0.2	
Vs Load (±10%) change	-	±0.2	-	±0.2	
Vs Aging (@ 1st year)	-	±1.0	-	±1.0	
Supply Current (CMOS output)	-	6	-	6	mA
Supply Current (Clipped Sine Wave)	-	3.5	-	3.5	
Output Level (CMOS)					V
Output High (Logic "1")	90%VDD	-	90%VDD	-	
Output Low (Logic "0")	-	10%VDD	-	10%VDD	
Duty	45	55	45	55	%
Output Level (Clipped Sine Wave)	0.8	-	0.8	-	Vp-p
Lead (CMOS)	15pF		15pF		
Lead (Clipped Sine Wave)	10 KΩ // 10pF		10 KΩ // 10pF		
Control Voltage Range (VCTCXO)	0.5	2.5	0.5	2.5	V
Pulling Range (VCTCXO)	±5.0	-	±5.0	-	ppm
Vc Input Impedance (VCTCXO)	100	-	100	-	kΩ
Phase Noise @ 12.8 MHz					dBc/Hz
100 Hz	-	-120	-	-120	
1 kHz	-	-140	-	-140	
10 kHz	-	-148	-	-148	
Start time	-	2	-	2	mSec
Tri-State (option)					V
Disable	-	1.5	-	0.99	
Enable	3.5	-	2.31	-	
Storage Temp. Range	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

\* Frequency at 25°C, 1 hour after reflow.

### FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±0.05	±0.1	±0.14	±0.2	±0.28	±0.37	±0.5
-10 ~ +70	○	○	○	○	○	○	○	○
-20 ~ +70	×	○	○	○	○	○	○	○
-40 ~ +85	×	×	×	○	○	○	○	○

\* ○: Available △: Conditional X: Not available

**Note: not all combination of options are available. Other specifications may be available upon request.**

Rev(17)02/2017

www.tai-tien.com

sales@tai-tien.com.tw