


Helping Customers Innovate, Improve & Grow



OX-200

Features

- Reflow Process Compatible
- AT-Cut and SC-Cut Crystal Options
- Low Profile Compact Package

Applications

- Base Stations
- Test Equipment
- Synthesizers
- Military Communication Equipment
- Digital Switching

Performance Specifications


Frequency Stabilities ¹ (AT-Cut Crystal-Standard)					
Parameter	Min	Typical	Max	Unit	Condition
vs. operating temperature range (referenced to +25°C)	-50		+50	ppb	0 to +70°C
	-100		+100	ppb	-20 to +70°C
	-150		+150	ppb	-40 to +70°C
	-200		+200	ppb	-40 to +85°C
Initial tolerance	-0.3		+0.3	ppm	at time of shipment, nominal EFC V _s ±5% static Load ±5% static after 30 days of operation after 30 days of operation after 30 days of operation
vs. supply voltage change	-10		+10	ppb	
vs. load change	-10		+10	ppb	
vs. aging/day	-2		+2	ppb	
vs. aging/1st year	-500		+500	ppb	
vs. aging/year (following years)	-250		+250	ppb	
Warm-up time			5	minutes	to ±100ppb of final frequency (1 hour reading) @ +25°C
Frequency Stabilities ¹ (SC-Cut Crystal-Option)					
vs. operating temperature range (referenced to +25°C)	-10		+10	ppb	0 to +70°C
	-20		+20	ppb	-20 to +70°C
	-25		+25	ppb	-40 to +70°C
	-30		+30	ppb	-40 to +85°C
Initial tolerance	-100		+100	ppb	at time of shipment, nominal EFC V _s ±5% static Load ±5% static after 30 days of operation after 30 days of operation after 30 days of operation
vs. supply voltage change	-5		+5	ppb	
vs. load change	-5		+5	ppb	
vs. aging/day	-1		+1	ppb	
vs. aging/1st year	-100		+100	ppb	
vs. aging/year (following years)	-50		+50	ppb	
Warm-up time			5	minutes	to ±10ppb of final frequency (1 hour reading) @ +25°C

Performance Specifications

Supply Voltage (Vs)						
Parameter	Min	Typical	Max	Unit	Condition	
Supply Voltage	3.135	3.3	3.465	VDC		
Supply Voltage	4.75	5.0	5.25	VDC		
Supply Voltage	11.4	12.0	12.6	VDC		
Power Consumption			3.0 1.0	Watts Watts	during warm-up steady state @ +25°C	
RF Output						
Signal [Standard]	HCMOS					
Load		15		pF		
Signal Level (Vol)			0.4 0.5	VDC VDC	with Vs=3.3V and 15 pF Load with Vs=5V & 12V and 15 pF Load	
Signal Level (Voh)	2.4 3.5			VDC VDC	with Vs=3.3V and 15 pF Load with Vs=5V & 12V and 15 pF Load	
Duty Cycle	45		55	%	@ (Voh-Vol)/2	
Signal	Sinewave					
Load		50		Ohms		
Output Power	+2.0 +5.0	+5.0 +8.0	+8.0 +11.0	dBm dBm	with Vs=3.3V and 50 Ohm load with Vs=5V & 12V and 50 Ohm load	
Harmonics			-30	dBc	50 Ohm load	
Frequency Tuning (EFC)						
Tuning Slope	Fixed OCXO; No adjust					
Tuning Range	±3.0 ±0.75		±8.0 ±2.0	ppm ppm	with AT cut crystal with SC cut crystal	
Linearity			10	%		
Tuning Slope	Positive					
Control Voltage Range	0.0 0.0	1.4 2.0	2.8 4.0	VDC VDC	with Vs=3.3V with Vs=5V & 12V	
Reference Voltage Output (VRef)						
Reference Voltage	2.75 3.92 4.9	2.8 4.0 5.0	2.85 4.08 5.1	VDC VDC VDC	with Vs=3.3V with Vs=5V with Vs=12V	
Additional Parameters						
Phase Noise ³			-90 -120 -140 -145 -150	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	1 Hz 10 Hz 100 Hz 1 kHz 10 kHz	@ 10MHz with SC cut
Phase Noise ³			-75 -100 -130 -140 -150	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	1 Hz 10 Hz 100 Hz 1 kHz 10 kHz	@ 10MHz with AT cut
Weight			14	g		


Absolute Maximum Ratings						
Parameter	Min	Typical	Max	Unit	Condition	
Supply Voltage (Vs)			6.5 15	V V	with Vs=3.3V & 5V with Vs=12V	
Output Load			50	pF		
Operable Temperature Range	-55		+85	°C		
Storage Temperature Range	-55		+125	°C		

Outline Drawing / Enclosure

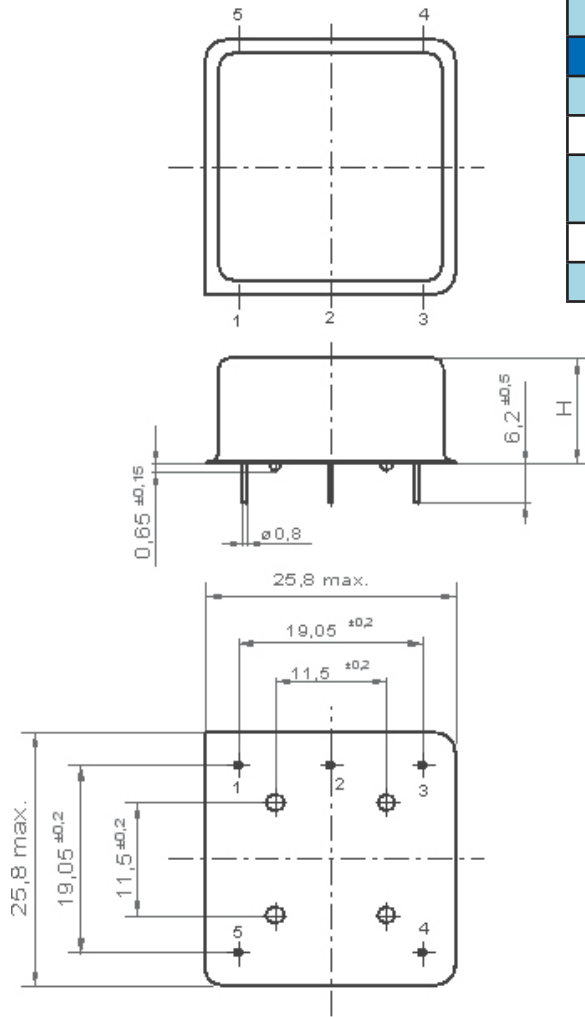

OX-200		
Code	Height "H"	Pin Length "L" Min
0	10.4	6.2
1	12.7	6.2
2	13.4	6.2
Pin Connections		
1	RF Output	
2	Ground (Case)	
3	Electronic Frequency Control Input (EFC)	
4	Reference Voltage Option	
5	Supply Voltage Input (VS)	


Standard Shipping Method

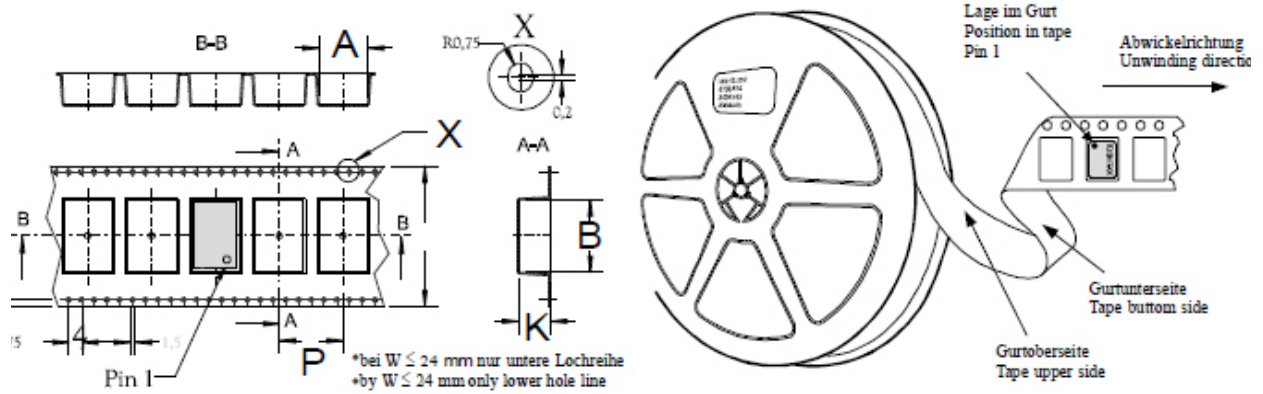

Enclosure Type	Tape width W [mm]	Quantity per meter	Quantity per reel	Dimension P
Type B	44	33.3	250	34
Type C	44	33.3	250	34

Recommended Reflow Profile


Solderprofile:

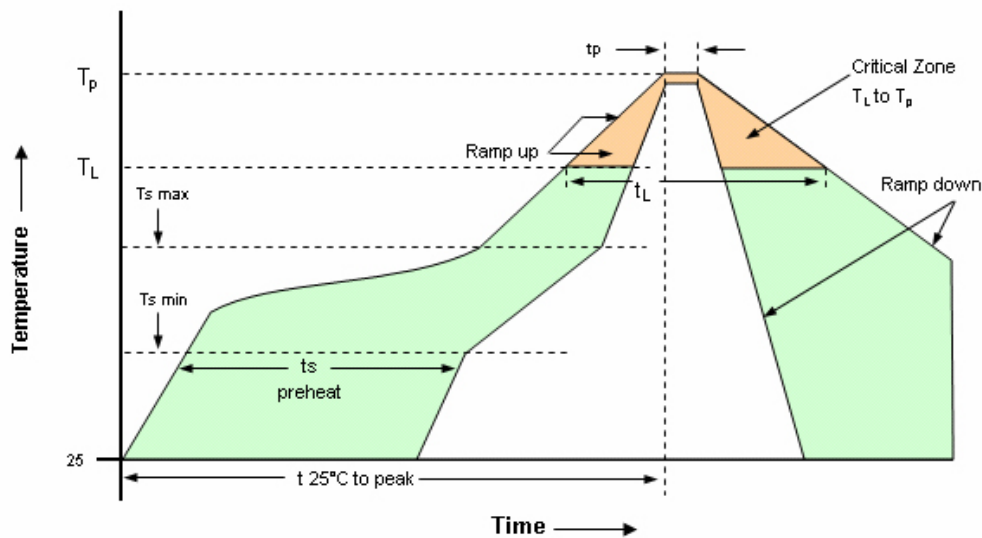

Profile Feature	Pb-Free Assembly /Sn-Pb Assembly	Profile Feature	Pb-Free Assembly /Sn-Pb Assembly
Average ramp-up rate (T _L to T _p)	3°C/second max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat -Temperature Min T _{smin} -Temperature Min T _{smax} -Time (min to max) (t _s)	150°C 200°C 60-180 seconds	Time maintained above - Temperature (T _L) - Time (t _L)	217°C 60-150 seconds
T _{smax} to T _L - Ramp-up Rate	3°C/second max.		
Time maintained above - Temperature (T _L) - Time (t _L)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Peak Temperature (T _p)	max 260°C	Ramp-down Rate	6°C/second max.

Note: All temperatures refer to topside of the package, measured on the package body surface.

Ordering Information

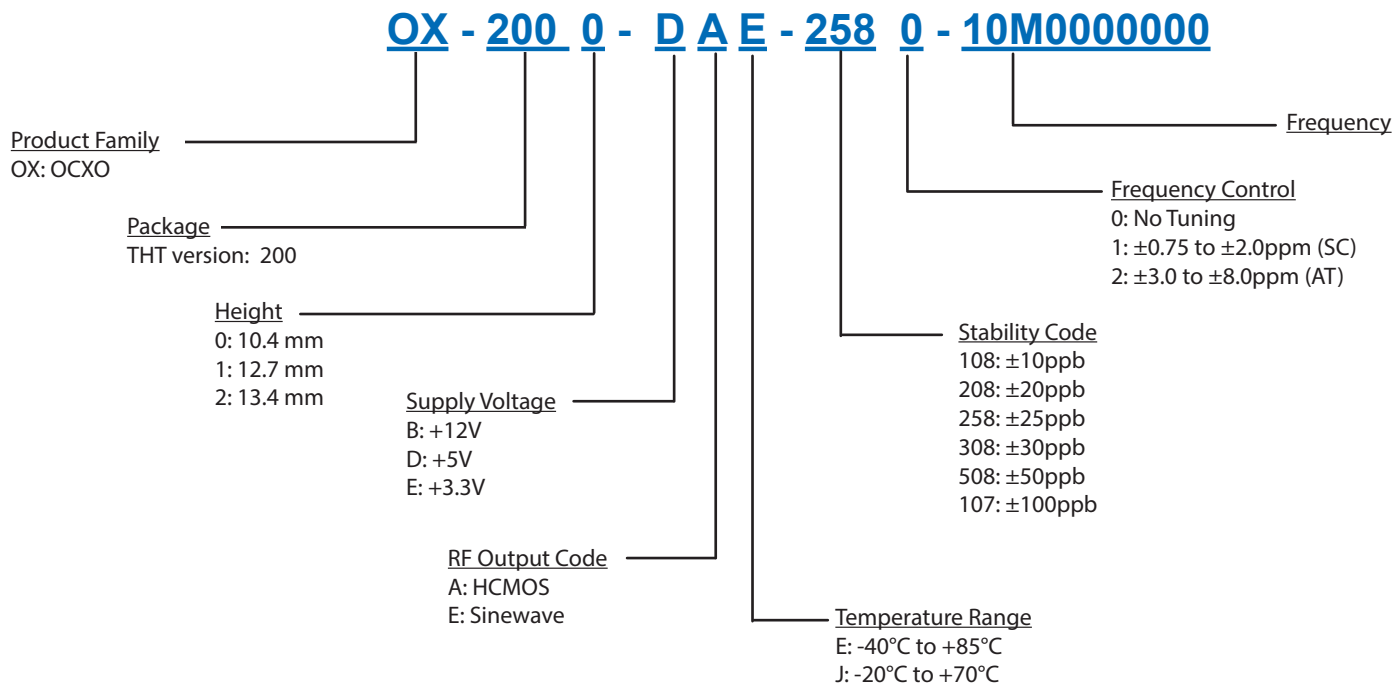

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road, Suite 102
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
68 Yin Cheng Road(C), 22nd Floor
One LuJiaZui
Pudong, Shanghai 200120, China
Tel: +86 21 6194 6886
Fax: +86 21 6194 6699

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.