

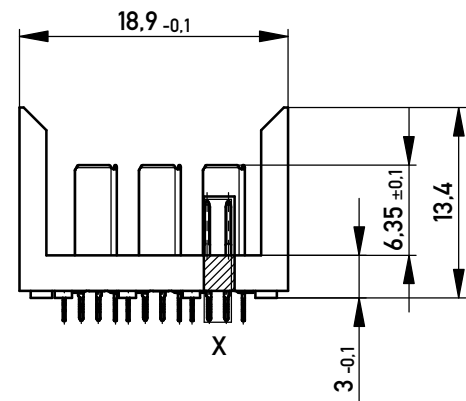
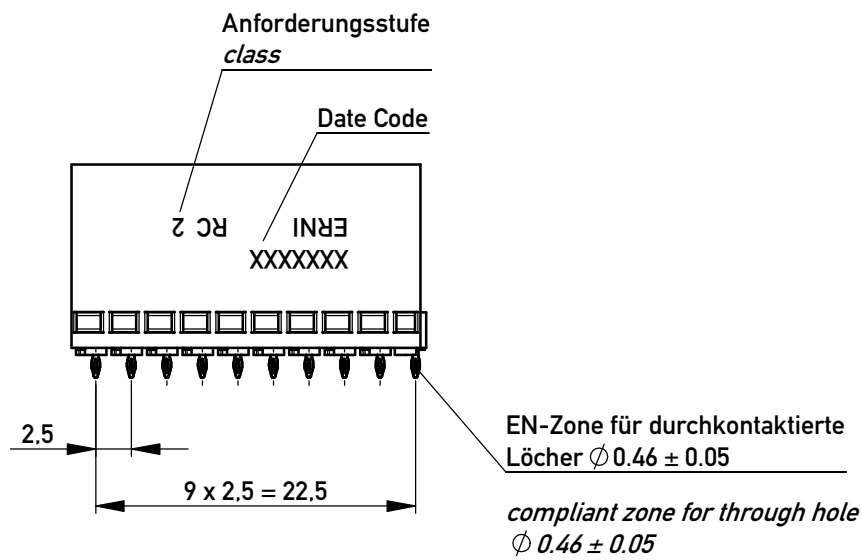


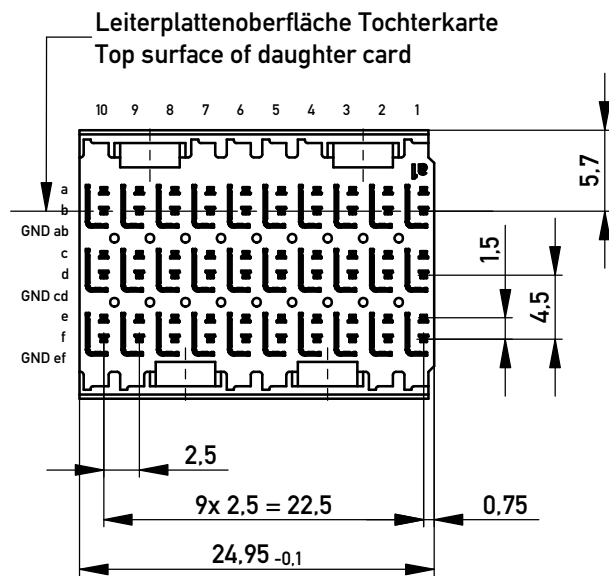


Einzelheit X
M 5:1

Messerkontakte sind im Paar symmetrisch angeordnet
Male contacts within pairs are arranged symmetrically

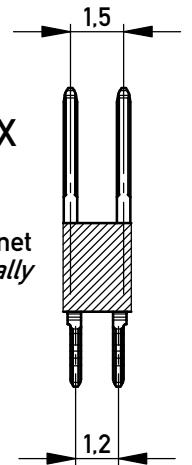


Kontaktversionen, Messerkontakte
Contact Selection Options, Male Contacts

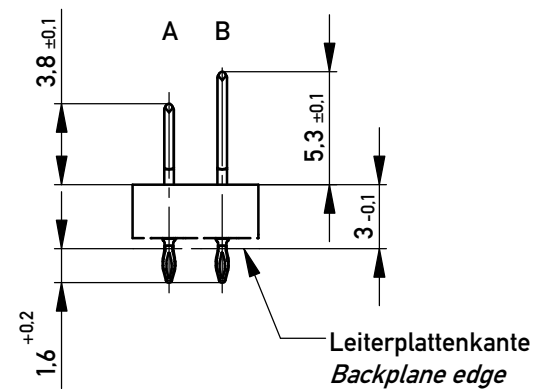


Lochbild für Leiterplatte
(Sicht auf Bestückungsseite)

PCB drill hole pattern
(Component mounting side)

Bestückungsplan - contact layout

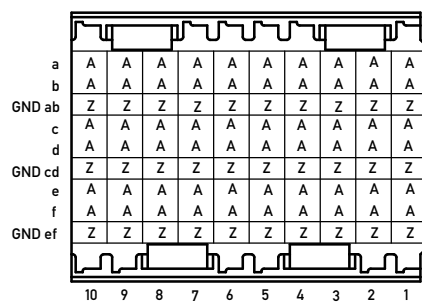

MAßSTAB 3 : 1

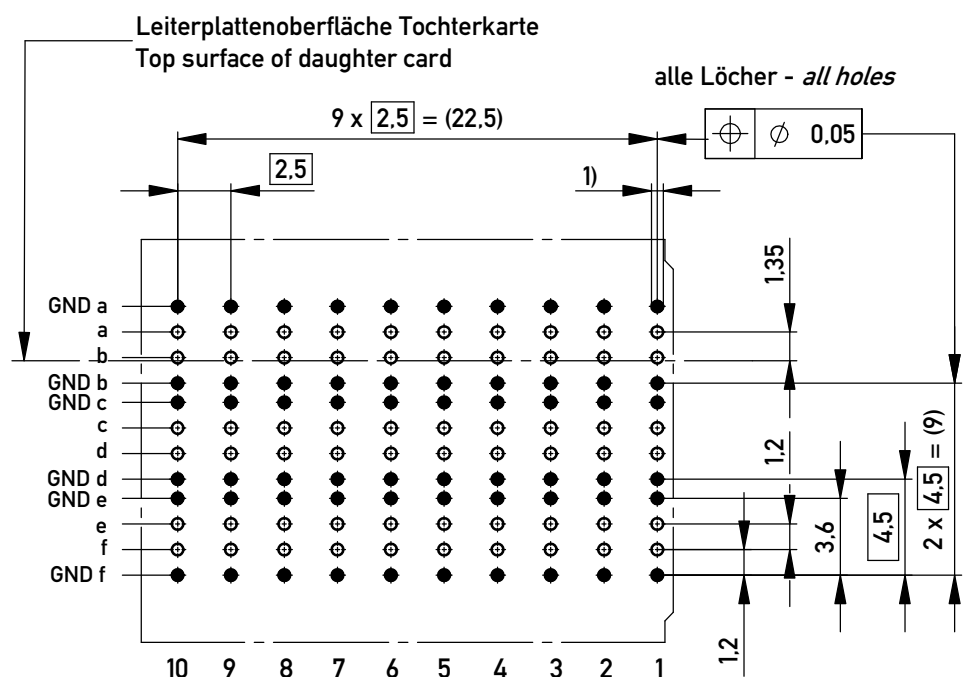


1) $\phi 0.46 \pm 0.05$ Durchmesser des metallisierten Loches
 $\phi 0.46 \pm 0.05$ Diameter of finished plated-through hole

$\phi 0.55 \pm 0.02$ Bohrdurchmesser des Loches
 $\phi 0.55 \pm 0.02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 384191

Metal plating of plated-through hole
see drawing 384191

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information: A+Z siehe Bestückungsplan <i>see contact layout</i>				Tolerances		 All Dimensions in mm		Scale 2:1					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation					
								ERmet ZDplus Messerleiste 3-10 <i>ERmet ZDplus Male Con. 3-10</i>					
												www.ERNI.com	
b				04.10.2012				100202390001				K	
Index				Date				Class ERMZD+				A3	