


LEXIC™

Fuse carriers

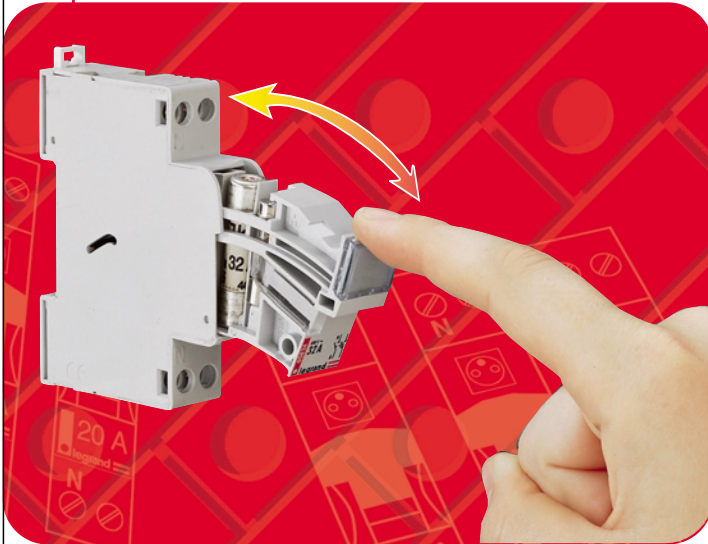

1 COMPLETE SAFETY

- Cartridge totally visible
- Class II insulation along the entire length of the carrier

1 PRACTICAL

Each fuse carrier is designed to take :

- a blow-out indicator
- a padlock

domestic cartridge fuses



| Pack | Cat.Nos | Miniature type 5 × 20 | | |
|------|---------|---|----------------------|----------------------------|
| | | New model type fast acting - Ceramic body Conform to IEC 60127 - NF EN 60-127 - VDE 0820-1 High rupture capacity (A) For use with dimmers, Viking terminals and emergency lighting units | | |
| | | Rating (Amps) | Voltage ~ (Volts) | Rupture capacity (Amps) |
| 10 | 102 02 | 0.2 | 250 | 1500 |
| 10 | 102 05 | 0.5 | | |
| 10 | 102 06 | 0.63 | | |
| 10 | 102 10 | 1 | | |
| 10 | 102 12 | 1.25 | | |
| 10 | 102 16 | 1.6 | | |
| 10 | 102 20 | 2 | | |
| 10 | 102 25 | 2.5 | | |
| 10 | 102 30 | 3.15 | | |
| 10 | 102 50 | 5 | | |
| 10 | 102 63 | 6.3 | 250 | 500 |
| 10 | 102 96 | 10 ⁽¹⁾ | | |

Cylindrical

| | Without indicator | With indicator | Rating (Amps) | Voltage ~ (Volts) | Rupture capacity (Amps) | Protected section (mm ²) copper | Colour identification |
|--------|-----------------------|-----------------------|----------------------|----------------------|-------------------------------|--|--------------------------|
| | | | 6.3 × 23 | | | | |
| 10 | 103 02 | | 2 | 250 | 6000 | 1.5 | |
| 10 | 103 04 | | 4 | | | | |
| 10 | 103 06 | | 6 | | | | |
| | | | 8.5 × 23 | | | | |
| 10 | 113 02 | 114 02 | 2 | 250 | 6000 | 1.5 | Yellow |
| 10 | 113 04 | 114 04 | 4 | | | | |
| 10 | 113 06 | 114 06 | 6 | | | | |
| 10/100 | 113 10 ⁽²⁾ | 114 10 ⁽²⁾ | 10 | | | | |
| 10 | 113 18 | | 18 | | | | |
| | | | 10.3 × 25.8 | | | | |
| 10 | 116 06 | 117 06 | 6 | 250 | 6000 | 2.5 | Red |
| 10 | 116 10 | 117 10 | 10 | | | | |
| 10 | 116 16 | 117 16 | 16 | | | | |
| | | | 8.5 × 31.5 | | | | |
| 10 | 123 01 | | 0.5 | 400 | 20000 | 2.5 | Green |
| 10 | 123 02 | 124 02 | 1 | | | | |
| 10 | 123 04 | 124 04 | 2 | | | | |
| 10 | 123 06 | 124 06 | 4 | | | | |
| 10 | 123 08 | 124 08 | 6 | | | | |
| 10 | 123 10 | | 8 | | | | |
| 10/100 | 123 10 | | 10 | | | | |
| 10 | | 124 10 | 10 | | | | |
| 10 | 123 12 | 124 12 | 12 | | | | |
| 10/100 | 123 16 | 124 16 | 16 | | | | |
| 10/100 | 123 20 ⁽²⁾ | 124 20 ⁽²⁾ | 20 | | | | |
| | | | 10.3 × 31.5 | | | | |
| 10 | 126 16 | 127 16 | 16 | 400 | 20000 | 4 | Blue |
| 10 | 126 20 | 127 20 | 20 | | | | |
| 10 | 126 25 ⁽²⁾ | 127 25 ⁽²⁾ | 25 | | | | |
| | | | 10.3 × 38 | | | | |
| 10/100 | 133 32 ⁽²⁾ | | 32 | 400 | 20000 | 6 | Brown |
| 10 | | 134 32 ⁽²⁾ | 32 | | | | |
| | | | Neutral links | | | | |
| 10 | | 123 00 | 8.5 × 31.5 | | | | |
| 10 | | 133 00 | 10 × 38 | | | | |

(1) Rating not described by standards
(2) Conform to NF C 61-203