



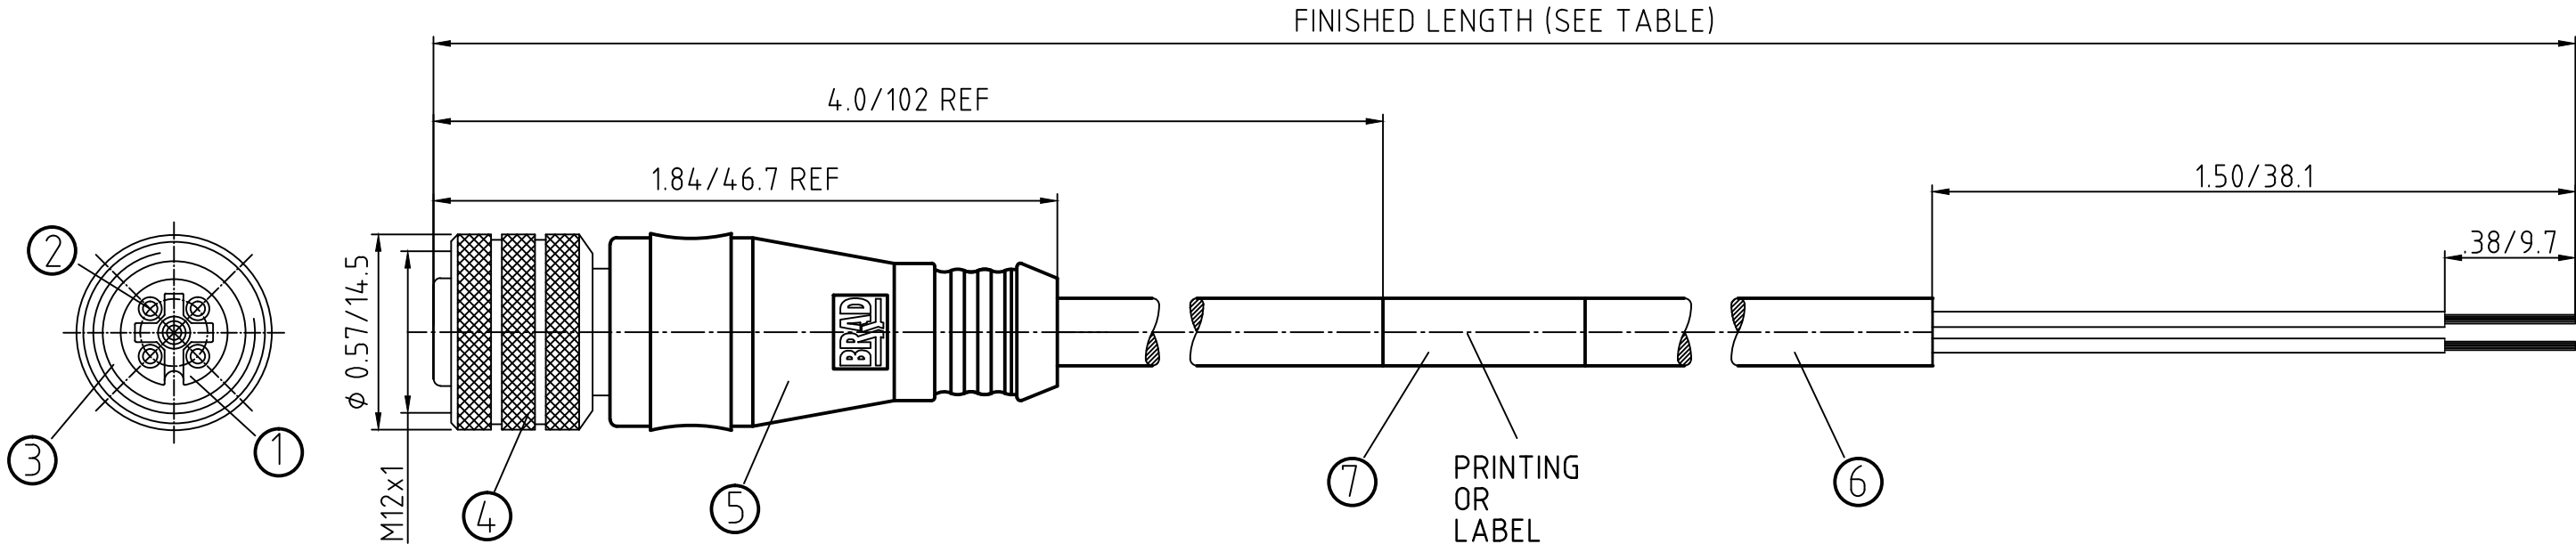

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	COUPLING NUT	BRASS	NICKEL PLATED
5	OVERMOLD	TPE	YELLOW
6	CABLE - 22 AWG, (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW
7	LABEL	MYLAR	BLACK/YELLOW

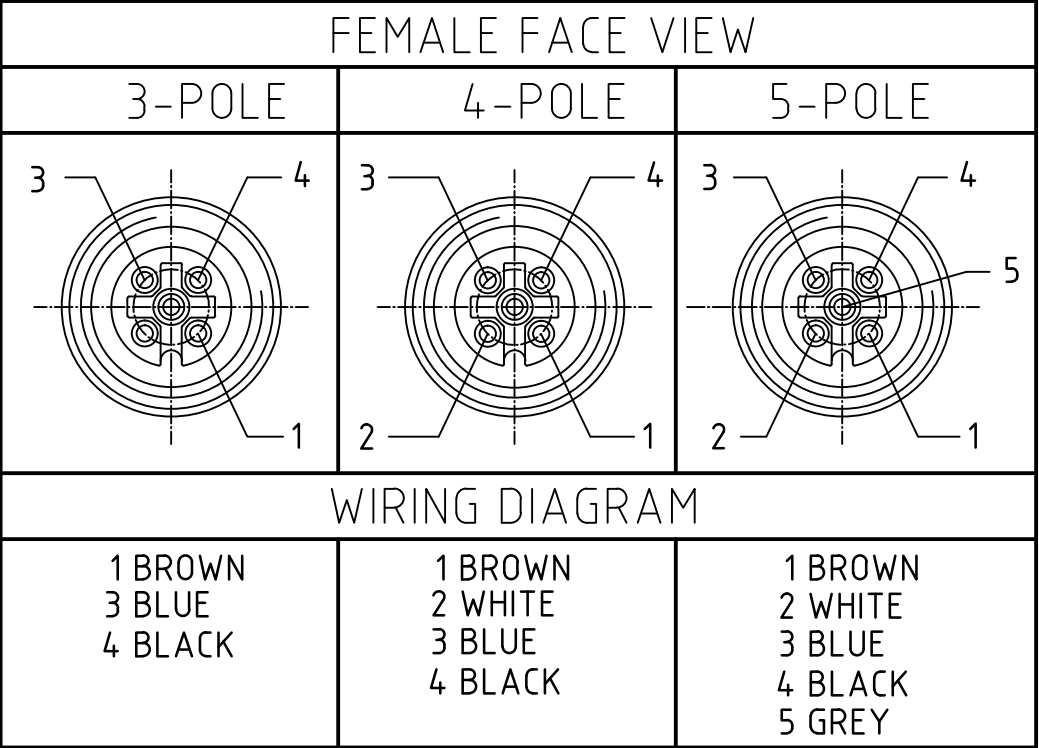

ADD "REF" TO HEAD DIMENSIONS EC NO: WNA2011-0563 DRWN: TWOLDEGE CH'KD: VOU APPR: JFMURPHY 2010/01/25	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					DRAWN BY _____ DATE _____		MICRO-CHANGE CORDSET 3/4/5-POL FEMALE STR SE 22/3-5 TPE YELLOW CABLE				
					CHECKED BY _____ DATE _____						
					RE _____ DATE 2010/01/21						
					APPROVED BY _____ DATE _____		molex MOLEX INCORPORATED				
					NSTAUDIG _____ DATE 2010/01/25						
					MATERIAL NO. _____		DOCUMENT NO. _____		SHEET NO. _____		
					SEE TABLE SHEET 2		SD-120065-034		1 OF 2		
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
2	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

F

E

D

C

B

A

F

E

D

C

B

A

10	9	8	7	6	5	4	3	2	1
----	---	---	---	---	---	---	---	---	---

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651108	803000K05M020	6.56' +3.50" -0 [2.0M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651120	804000K05M010	3.28' +2.19" -0 [1.0M +55.6 -0]
4	1200651121	804000K05M020	6.56' +3.50" -0 [2.0M +88.9 -0]
4	1200651122	804000K05M030	9.84' +3.50" -0 [3.0M +88.9 -0]
4	1200651123	804000K05M040	13.12' +6.50" -0 [4.0M +165.1 -0]
4	1200651124	804000K05M050	16.40' +6.50" -0 [5.0M +165.1 -0]
4	1200651125	804000K05M060	19.69' +6.50" -0 [6.0M +165.1 -0]
4	1200651126	804000K05M100	32.81' +12.50" -0 [10.0M +317.5 -0]
4	1200651127	804000K05M200	65.62' +24.50" -0 [20.0M +622.3 -0]

ADD "REF" TO HEAD DIMENSIONS EC NO.: WNA2011-0563 DRWN: TWOLDEGE CH'KD: VOU APPR: JFMURPHY 2010/01/25	QUALITY SYMBOLS ▽ = 0 ▽C = 0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY ____		DATE ----		MICRO-CHANGE CORDSET 3/4/5-POL FEMALE STR SE 22/3-5 TPE YELLOW CABLE			
			4 PLACES	±---	±---	CHECKED BY RE		DATE 2010/01/21					
			3 PLACES	±---	±---	APPROVED BY NSTAUDIG		DATE 2010/01/25		MOLEX INCORPORATED			
			2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120065-034				SHEET NO. 2 OF 2	
			1 PLACE	±0.3	±---	SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
			ANGULAR ± --- °										
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
			2										

10	9	8	7	6	5	4	3	2	1
----	---	---	---	---	---	---	---	---	---