


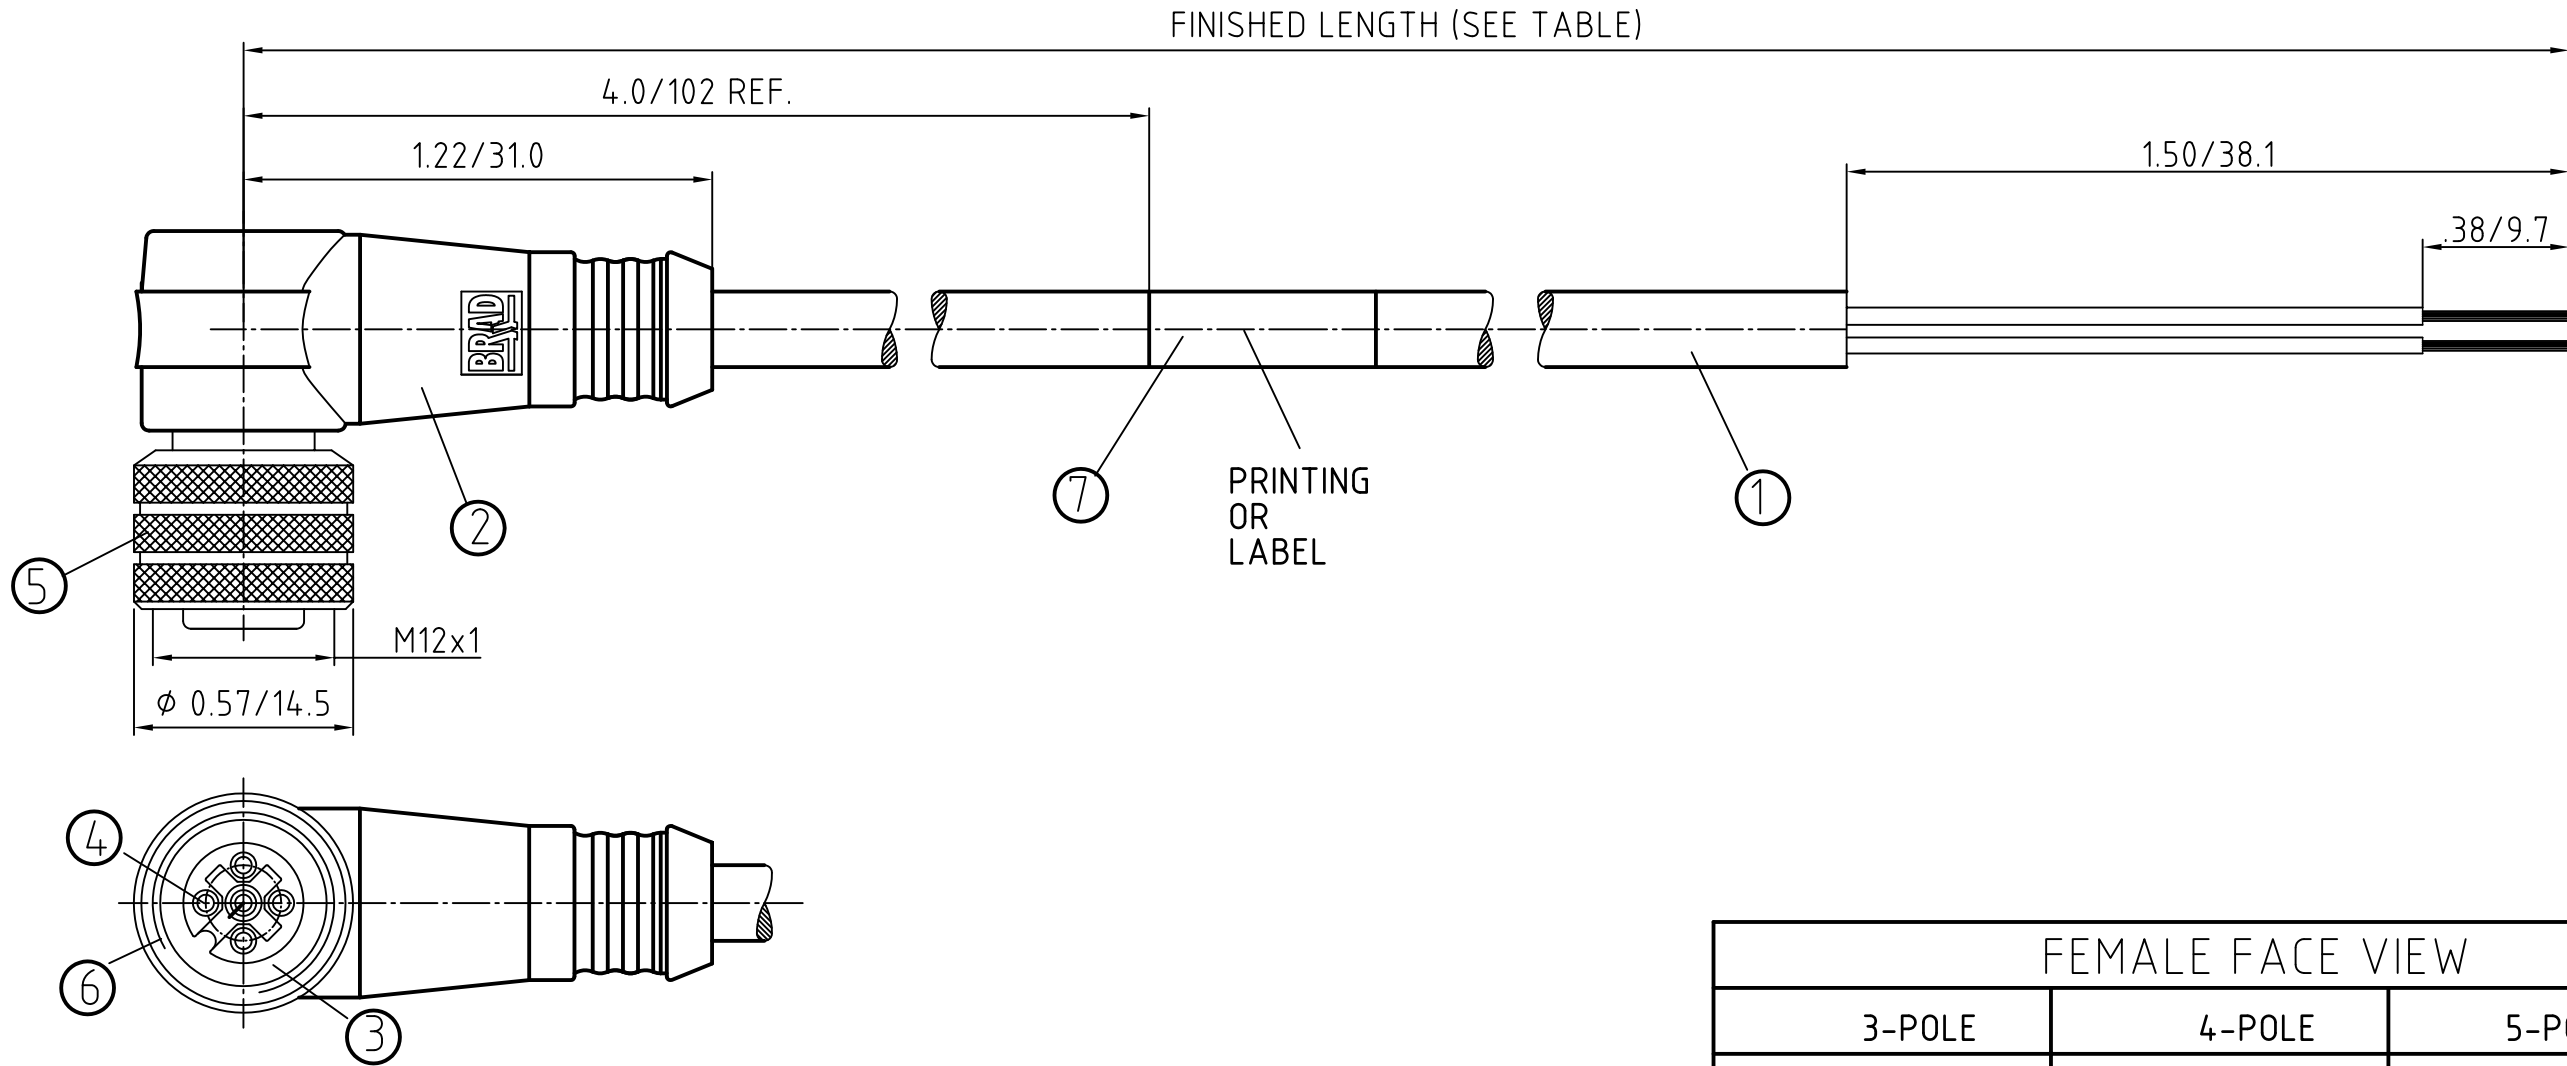

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

FEMALE FACE VIEW		
3-POLE	4-POLE	5-POLE
WIRING DIAGRAM		
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHK'D: NS APPR: NSTAUDIG 2010/01/25	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			 = 0  = 0		mm	INCH	DRAWN BY _____ DATE _____		MICRO-CHANGE CORDSET 3/4/5-POL FEMALE 90 SE 22/3-5 YELLOW PVC CABLE		
		4 PLACES		±---	±---	CHECKED BY _____ DATE _____					
		3 PLACES		±---	±---	RE _____ 2010/01/21					
		2 PLACES		±---	±.01	APPROVED BY _____ DATE _____					
		1 PLACE		±0.3	±---	NSTAUDIG 2010/01/25			MOLEX INCORPORATED		
		ANGULAR ± --- °			MATERIAL NO. _____		DOCUMENT NO. _____				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE SHEET 2		SD-120065-027			1 OF 1	
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

F

E

D

C

B

A

F

E

D

C

B

A

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651444	803001A09M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651551	804001A09M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651555	804001A09M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651558	804001A09M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651562	804001A09M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651567	804001A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200651697	805001A09M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200651700	805001A09M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651701	805001A09M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200651703	805001A09M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200651706	805001A09M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: NS APPR: NSTAUDIG 2010/01/25	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-POL FEMALE 90 SE 22/3-5 YELLOW PVC CABLE			
			4 PLACES	±---	±---	----					
			3 PLACES	±---	±---	CHECKED BY	DATE	MOLEX INCORPORATED			
			2 PLACES	±---	±.01	RE	2010/01/21				
			1 PLACE	±0.3	±---	APPROVED BY	DATE	SD-120065-027			
			ANGULAR ± --- °			NSTAUDIG	2010/01/25				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.	SHEET NO.		
						SEE TABLE		SD-120065-027		1 OF 1	
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				