RoHS Compliant
2002/95/EC

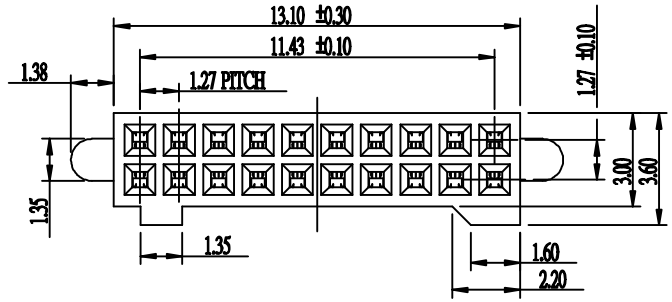

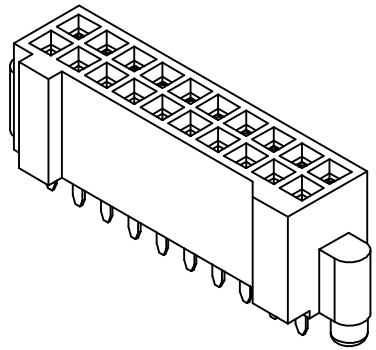

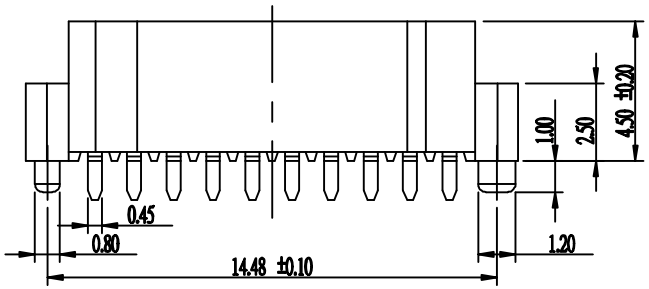



RECOMMENDED P.C.B LAYOUT(COMPONENT SIDE)
P.C.B THICKNESS=1.20mm(TOLERANCE=±0.05)

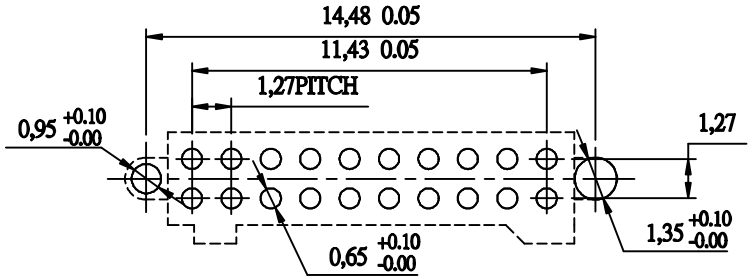

NOTE:
127150FS020GX51ZR
1
1: PLATING
G1-5U" GOLD OVER NICKEL.
G2-GOLD FLASH OVER NICKEL.
G3-10U" GOLD OVER NICKEL.
G4-15U" GOLD OVER NICKEL.
G5-30U" GOLD OVER NICKEL.
G6-50U" GOLD OVER NICKEL.

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
3				
2	TERMINAL	COPPER ALLOY	———	GOLD/TIN PLATED
1	PLASTIC	HIGH TEMP.PLASTIC	BLACK	UL 94V-0

SUYIN CONNECTOR

						Angle	±2°	DRAW	李振文	08'/04/15
						30 ~	±0.50	DESIGN	李振文	08'/04/15
	0		NEW RELEASE	李振文	鄭家奇	10 ~ 30	±0.30	CHECK	杜朝紅	08'/04/15
———	P0	07/11/08	NEW	朱歡	鄭家奇	~ 10	±0.15	APPRO.	鄭家奇	08'/04/15
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				

CUSTOMER COPY	TITLE: 1.27mmX1.27 PITCH SOCKET DIP TYPE
PART NO.	127150FS020GX51ZR
PRODUCT SPEC.	127150FS/12750S
FILE NAME.	D ING 127150FS020GX51ZR-C
SCALE 4:1	UNIT:mm A4 SHEET: 1 of 2

Original:Draw: 朱歡 Design: 朱歡 Check: 杜朝紅 Appro: 鄭家奇 發行日期: 07/11/08

071108-BB170