


1.27mm PITCH DUAL ROW HEADER DOUBLE PLASTIC (ADJUSTABLE FOR BOARD TO BOARD HEIGHT)

SUYIN
CONNECTOR

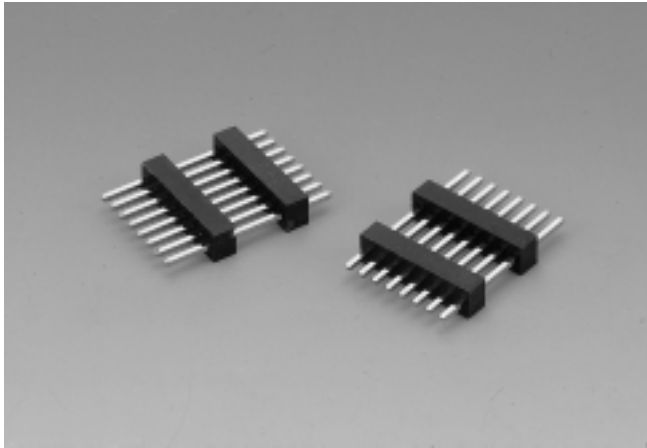


127231MH Series

Mates with 127214 Series

Specifications:

- **Insulator material** : Black High Temp . Plastic
- **Max.Processing Temp.** : -40°C to +105°C
- **Terminal Material** : Phosphor Bronze
- **Plating** : Full Gold Plated.
- **Max. Current Rating** : 1.0A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 seconds)

1.27
mm

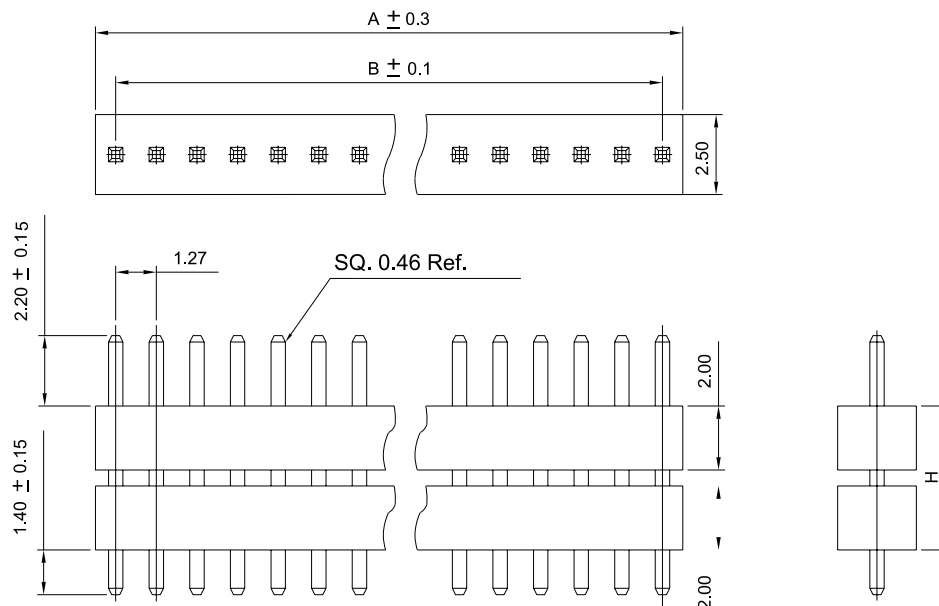


Order Information

127231MH□□□□□□ZO
1 2 3 6 45

1. 'H' : Pin Header With Straight Type
For Various Stacker Height
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
'O' : Slim Box Package Without CAP
6. Indicate Height :
For Example , 5.0 m/m is 50

Reference Page 11

Recommended P.C.B. Layout



Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B
127231MH002□□□□ZO	2.54	1.27
127231MH003□□□□ZO	3.81	2.54
127231MH004□□□□ZO	5.08	3.81
127231MH005□□□□ZO	6.35	5.08
127231MH006□□□□ZO	7.62	6.35
127231MH007□□□□ZO	8.89	7.62
127231MH008□□□□ZO	10.16	8.89
127231MH009□□□□ZO	11.43	10.16
127231MH010□□□□ZO	12.70	11.43
127231MH011□□□□ZO	13.97	12.70
127231MH012□□□□ZO	15.24	13.97
127231MH013□□□□ZO	16.51	15.24
127231MH014□□□□ZO	17.48	16.51
127231MH015□□□□ZO	19.05	17.48
127231MH016□□□□ZO	20.32	19.05
127231MH017□□□□ZO	21.59	20.32
127231MH018□□□□ZO	22.86	21.59
127231MH019□□□□ZO	24.13	22.86
127231MH020□□□□ZO	25.40	24.13
127231MH021□□□□ZO	26.67	25.40

SUYIN P/NO.	DIM.A	DIM.B
127231MH022□□□□ZO	27.94	26.67
127231MH023□□□□ZO	29.21	27.94
127231MH024□□□□ZO	30.48	29.21
127231MH025□□□□ZO	31.75	30.48
127231MH026□□□□ZO	33.02	31.75
127231MH027□□□□ZO	34.29	33.02
127231MH028□□□□ZO	35.56	34.29
127231MH029□□□□ZO	36.83	35.56
127231MH030□□□□ZO	38.10	36.83
127231MH031□□□□ZO	39.37	38.10
127231MH032□□□□ZO	40.62	39.37
127231MH033□□□□ZO	41.91	40.62
127231MH034□□□□ZO	43.18	41.91
127231MH035□□□□ZO	44.45	43.18
127231MH036□□□□ZO	45.72	44.45
127231MH037□□□□ZO	46.99	45.72