

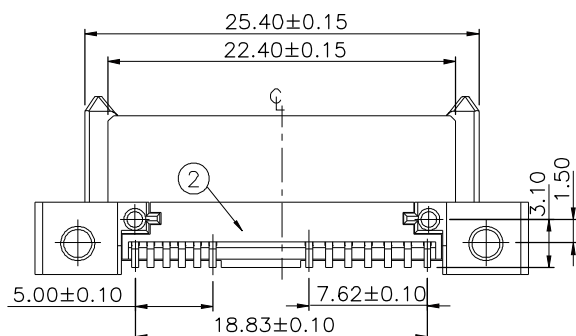

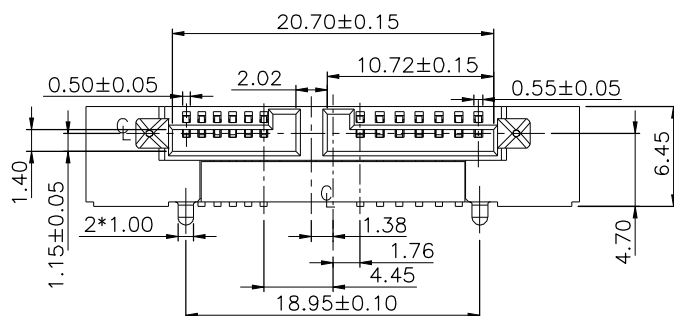
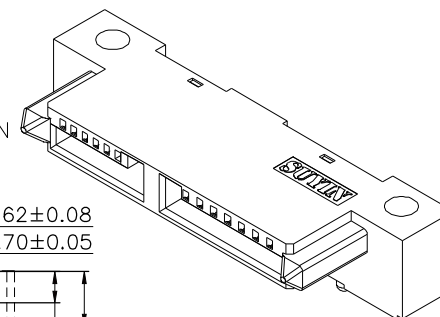


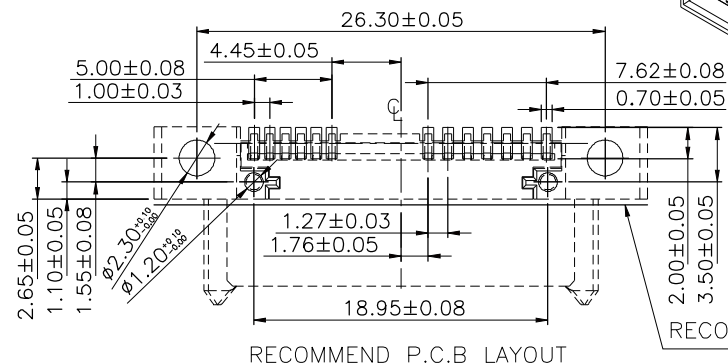

RoHS Compliant
2002/95/EC
HSF


Level-1 Controlled Substances are banned

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.20mm WITH LOCKING FUNCTION

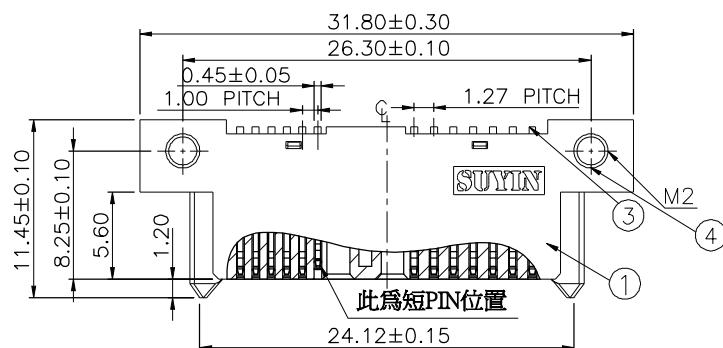

NOTE :
127382FB013SX02R

1
S1-05u" MIN.GOLD IN CONTACT AREA/
100u" MIN.TIN IN SOLDER AREA
S2-GOLD FLASH IN CONTACT AREA/
100u" MIN.TIN IN SOLDER AREA
S3-10u" MIN.GOLD IN CONTACT AREA/
100u" MIN.TIN IN SOLDER AREA
S4-15u" MIN.GOLD IN CONTACT AREA/
100u" MIN.TIN IN SOLDER AREA
S5-30u" MIN.GOLD IN CONTACT AREA/
100u" MIN.TIN IN SOLDER AREA
S6-50u" MIN.GOLD IN CONTACT AREA/
100u" MIN.TIN IN SOLDER AREA



4	NUT	COPPER ALLOY	—	NICKEL PLATED
3	TERMINAL	COPPER ALLOY	—	GOLD PLATED
2	HOUSING	HIGH TEMP	BLACK	UL 94V-0
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY	TITLE: 1.27 mm PITCH SERIAL ATA			
PART NO.		127382FB013SX02ZR		
PRODUCT SPEC.		127382FB SERIES		
FILE NAME.	DWG	127382FB013SX02ZR-C		
SCALE	2:1	UNIT:mm	A4	SHEET: 1 of 2

					Angle	±2°	DRAW	馬文杰	08'/07/27	
					30 ~	±0.50	DESIGN	馬文杰	08'/07/27	
					10 ~ 30	±0.30	CHECK	唐毅	08'/07/27	
					~ 10	±0.15	APPRO.	張裕奇	08'/07/27	
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				

Original: Draw: 阮冲 DeslgN: 阮冲 Check: 唐毅 Appro: 鄭家奇 發行日期: 07'/09/07

070907-BB070