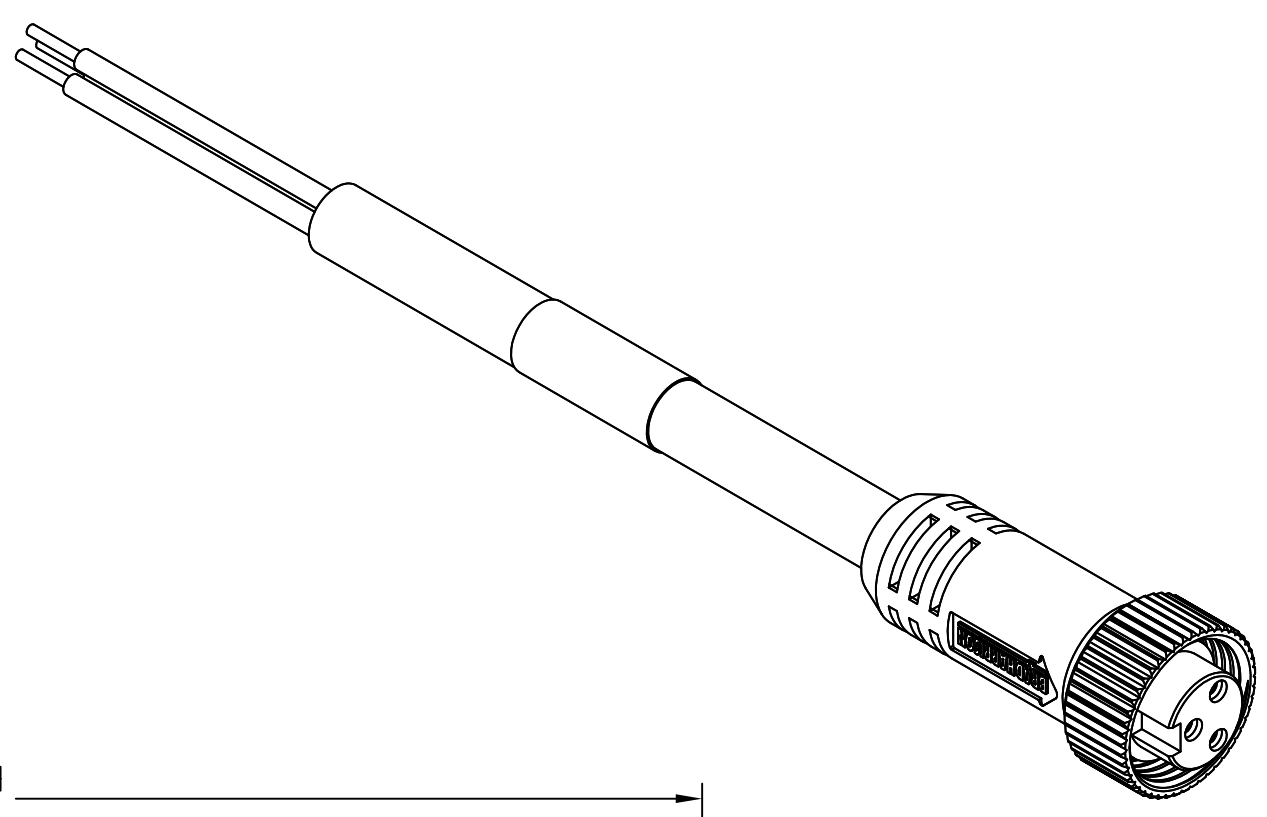
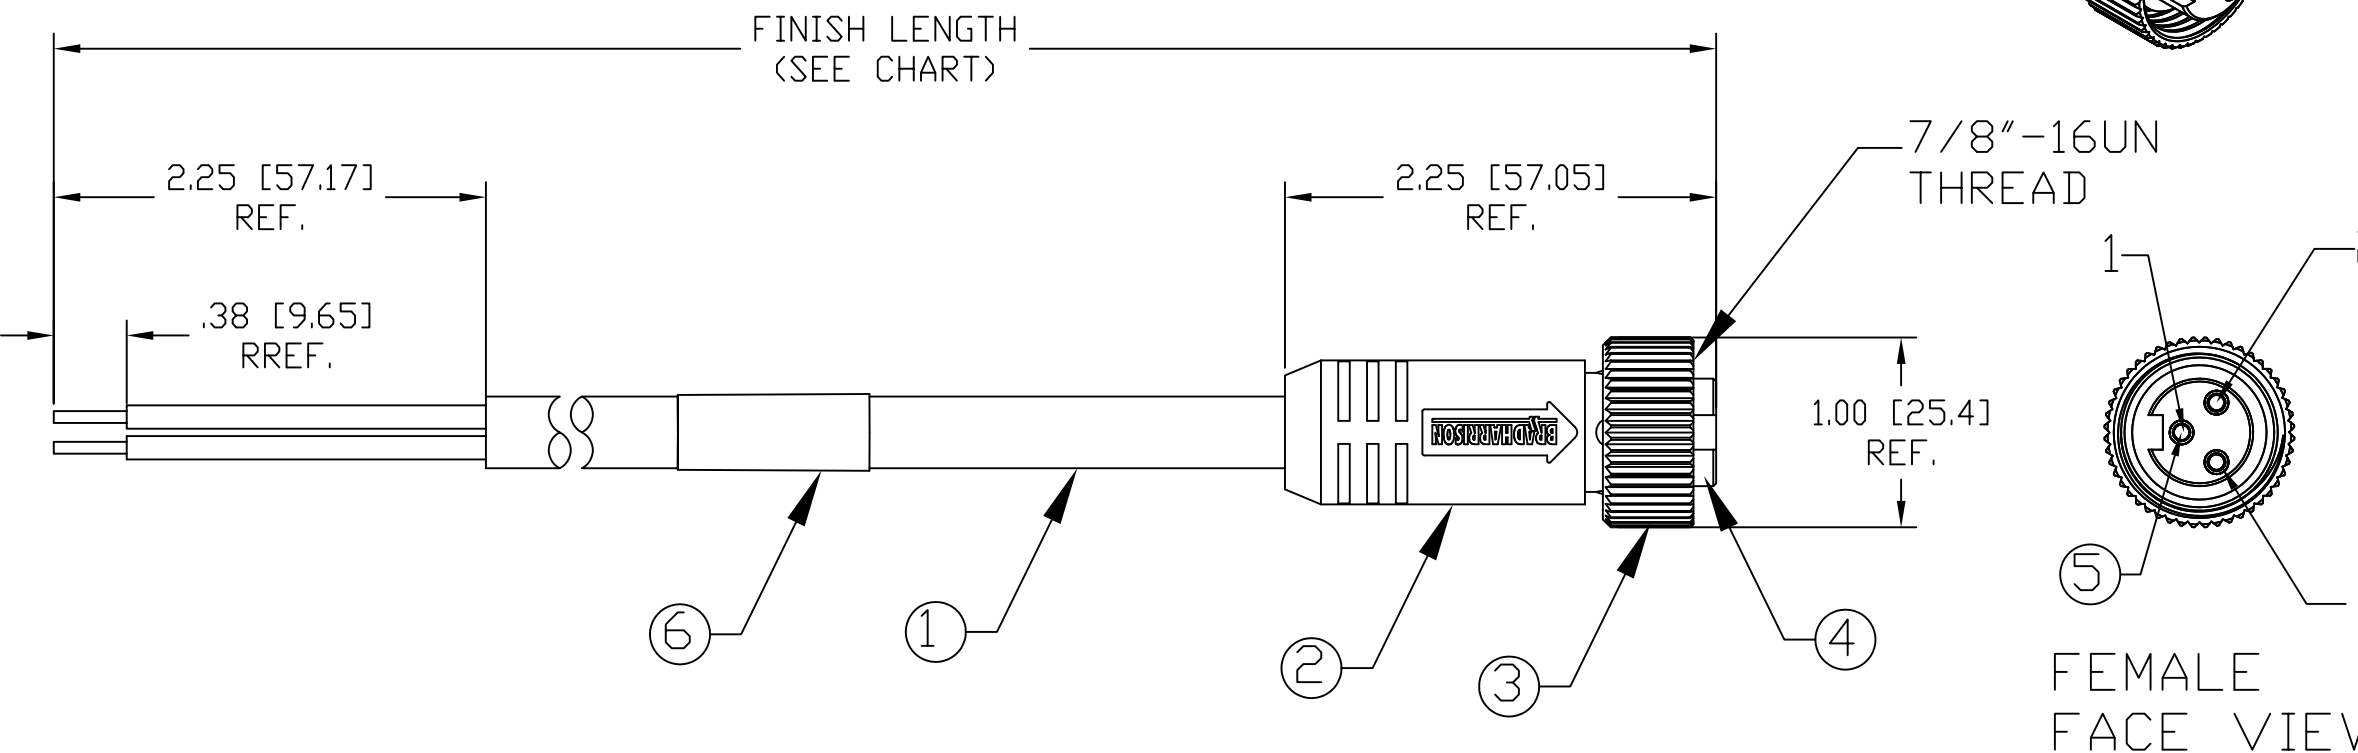


	13	12	11	10	9	8	7	6	5	4	3	2	1																	
J	PART NUMBER	ENGINEERING NUMBER	FINISH LENGTH			PART NUMBER	ENGINEERING NUMBER	FINISH LENGTH						J																
	1300060217	103000A01F030	3.00' +1.75" -0 [.9M +44.5 -0]			1300060257	103000A01F450	45.00' +12.50" -0 [13.7M +317.5 -0]						I																
	1300060221	103000A01F060	6.00' +3.50" -0 [1.8M +88.9 -0]			1300060258	103000A01F500	50.00' +24.50" -0 [15.2M +622.3 -0]						H																
I	1300060229	103000A01F090	9.00' +3.50" -0 [2.7M +88.9 -0]											G																
	1300060232	103000A01F120	12.00' +6.50" -0 [3.7M +165.1 -0]																	F										
	1300060237	103000A01F150	15.00' +6.50" -0 [4.6M +165.1 -0]																	E										
H	1300060241	103000A01F200	20.00' +6.50" -0 [6.1M +165.1 -0]																	D										
	1300060246	103000A01F250	25.00' +12.50" -0 [7.6M +317.5 -0]																	C										
	1300060250	103000A01F300	30.00' +12.50" -0 [9.1M +317.5 -0]																	B										
	1300060253	103000A01F350	35.00' +12.50" -0 [10.7M +317.5 -0]																	A										
G	1300060254	103000A01F400	40.00' +12.50" -0 [12.2M +317.5 -0]																											
F	NOTE 1) MATERIAL: SEE TABLE 2) FINISHES: SEE TABLE 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE 4) MATES WITH: MINI CHANGE, 3 POLE RECEPTACLE 5) ELECTRICAL DATA: INLINE CORDSET FEMALE A-SIZE WITH FLYING LEADS 16AWG UNSHIELDED POLES: 3 MAX. VOLTAGE: 600V MAX. CURRENT 13A PROTECTION IP67 TEMPERATURE RANGE: -20°C TO 105°C 6) PACKAGING: CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG. 7>ASSEMBLY IS RoHS COMPLIANT. 8>CERTIFICATION UL RECOGNIZED, FILE NO. E152210 CSA CERTIFIED, FILE NO. LR6837													 WIRING DIAGRAM <table><tr><th colspan="2">P1</th></tr><tr><td>1</td><td>GREEN/YELLOW-GRD</td></tr><tr><td>2</td><td>BLACK</td></tr><tr><td>3</td><td>WHITE</td></tr></table>								P1		1	GREEN/YELLOW-GRD	2	BLACK	3	WHITE	
P1																														
1						GREEN/YELLOW-GRD																								
2	BLACK																													
3	WHITE																													
E																														
D																														
C																														
B	6	1	LABEL	PLASTIC FILM	BLACK/YELLOW	CORRECT COLOR ROTATION EC NO: WNA2010-0389 DRWN: TWOLDEGE 12/17/09 CH'KD: BWOODMAN APPR: JFMURPHY 2010/01/04 REV QUALITY SYMBOL ▼=0 ▽=0 GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>±----</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±.005</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±.013</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±.025</td><td>±.020</td></tr></table> ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DIMENSION STYLE IN/MM DRAWN BY DATE TWOLDEGE 2009/07/10 CHECKED BY DATE BWOODMAN 2009/07/10 APPROVED BY DATE JFMURPHY 2010/01/04 MATERIAL NO. SEE CHART SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION TITLE MINI CHANGE ASSEMBLY 3-POLE FEMALE ST 16/3AWG PVC MOLEX INCORPORATED DOCUMENT NO. SD-130006-008 SHEET NO. 1 OF 1									mm	INCH	4 PLACES	±----	±---	3 PLACES	±.005	±.005	2 PLACES	±.013	±.010	1 PLACE	±.025	±.020		
	mm	INCH																												
4 PLACES	±----	±---																												
3 PLACES	±.005	±.005																												
2 PLACES	±.013	±.010																												
1 PLACE	±.025	±.020																												
	5	3	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED								B																	
	4	1	INSERT	PVC	YELLOW																									
	3	1	COUPLING NUT	ZINC DIE CAST	BLACKE-COATED																									
A	2	1	OVERMOLD	PVC	YELLOW																									
	1	1	CABLE, 16AWG-3 TYPE STOOD	PVC	YELLOW																									
	ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH																									
	13	12	11	10	9	8	7	6	5	4	3	2	1																	