

6

5

4




3

2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480161	E11A06303M010	3' 3" +2.19"/-0" [1M +55.6/-0 mm]
1300480164	E11A06303M050	16' 4" +6.5"/-0" [5M +165.0/-0 mm]


AUX VIEW
SCALE 1:4

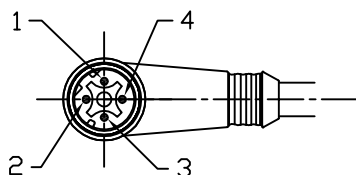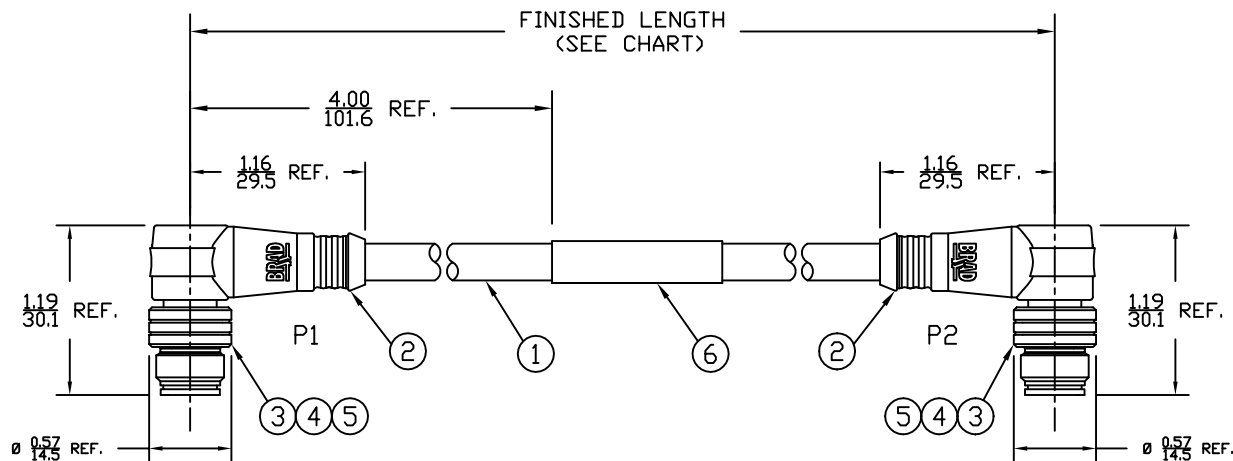

MALE- FACE VIEW



WIRING DIAGRAM

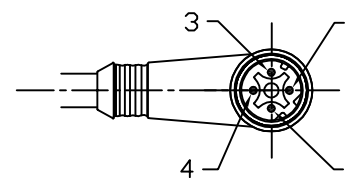

MALE- FACE VIEW

NOTES:

- MATERIAL: SEE TABLE
- FINISHES: SEE TABLE
- CABLE: #24/4 UNSHIELDED PVC
- ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT: 1.5A
- ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 75°C
- WRAP LABEL IS MARKED WITH P/N, DATE CODE,
VOLTAGE & AMPERAGE.
- ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	2	INSERT	PUR	BLACK
4	8	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	2	M12 COUPLING NUT	BRASS	NICKEL
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5E	PVC JACKET	TEAL

SD RELEASE EC NO: WEL2010-0005 7/13/09 DRWN: YOU CHKD: BWOODMAN APPR: JFMURPHY 2009/07/20	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			mm	INCH	IN/MM	3:4	INCH	
		4 PLACES	±----	±----	DRAWN BY	DATE	TITLE	
		3 PLACES	±----	±.005	VOU	2009/07/06	MICRO-CHANGE CABLE ASSY 4P M/MP 90/90 D-CODE #24/4 UNSHIELDED PVC	
2 PLACES	±----	±.010	CHECKED BY	DATE	MOLEX INCORPORATED			
1 PLACE	±----	±.020	APPROVED BY	DATE	DOCUMENT NO.		SHEET NO.	
ANGULAR ± 1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-120108-024	1 OF 1	
MATERIAL NO.		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
1		A						

6

5

4

3

2

1