

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

	F
--	---

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

	APVD
--	------

C1

REV PER ECR 07-015095

25JUN07

	JR
--	----

	TM
--	----

1 STAMP "AMP 12-10*", LOCATION
APPROX AS SHOWN.

2 TONGUE THICKNESS IS 1.0 ± 0.05

3 APPLIES TO EDGE OF METAL WIRE
BARREL TO CENTER OF STUD HOLE.

△₄ WIRE INSULATION DIA RANGE 3.8-6.4


5 BODY - COPPER PER ASTM B-152
SLEEVE - COPPER PER ASTM B-152
INSULATION - NYLON

6 BODY - TIN PL PER ASTM B-545
SLEEVE - TIN PL PER ASTM B-545
INSULATION - COLOR - YELLOW


7 105°C MAX OPERATING TEMPERATURE.

8 300 VOLT MAX

9 2.62-6.64mm2 [5,180 - 13,100 CMA]
SOLID OR STRANDED

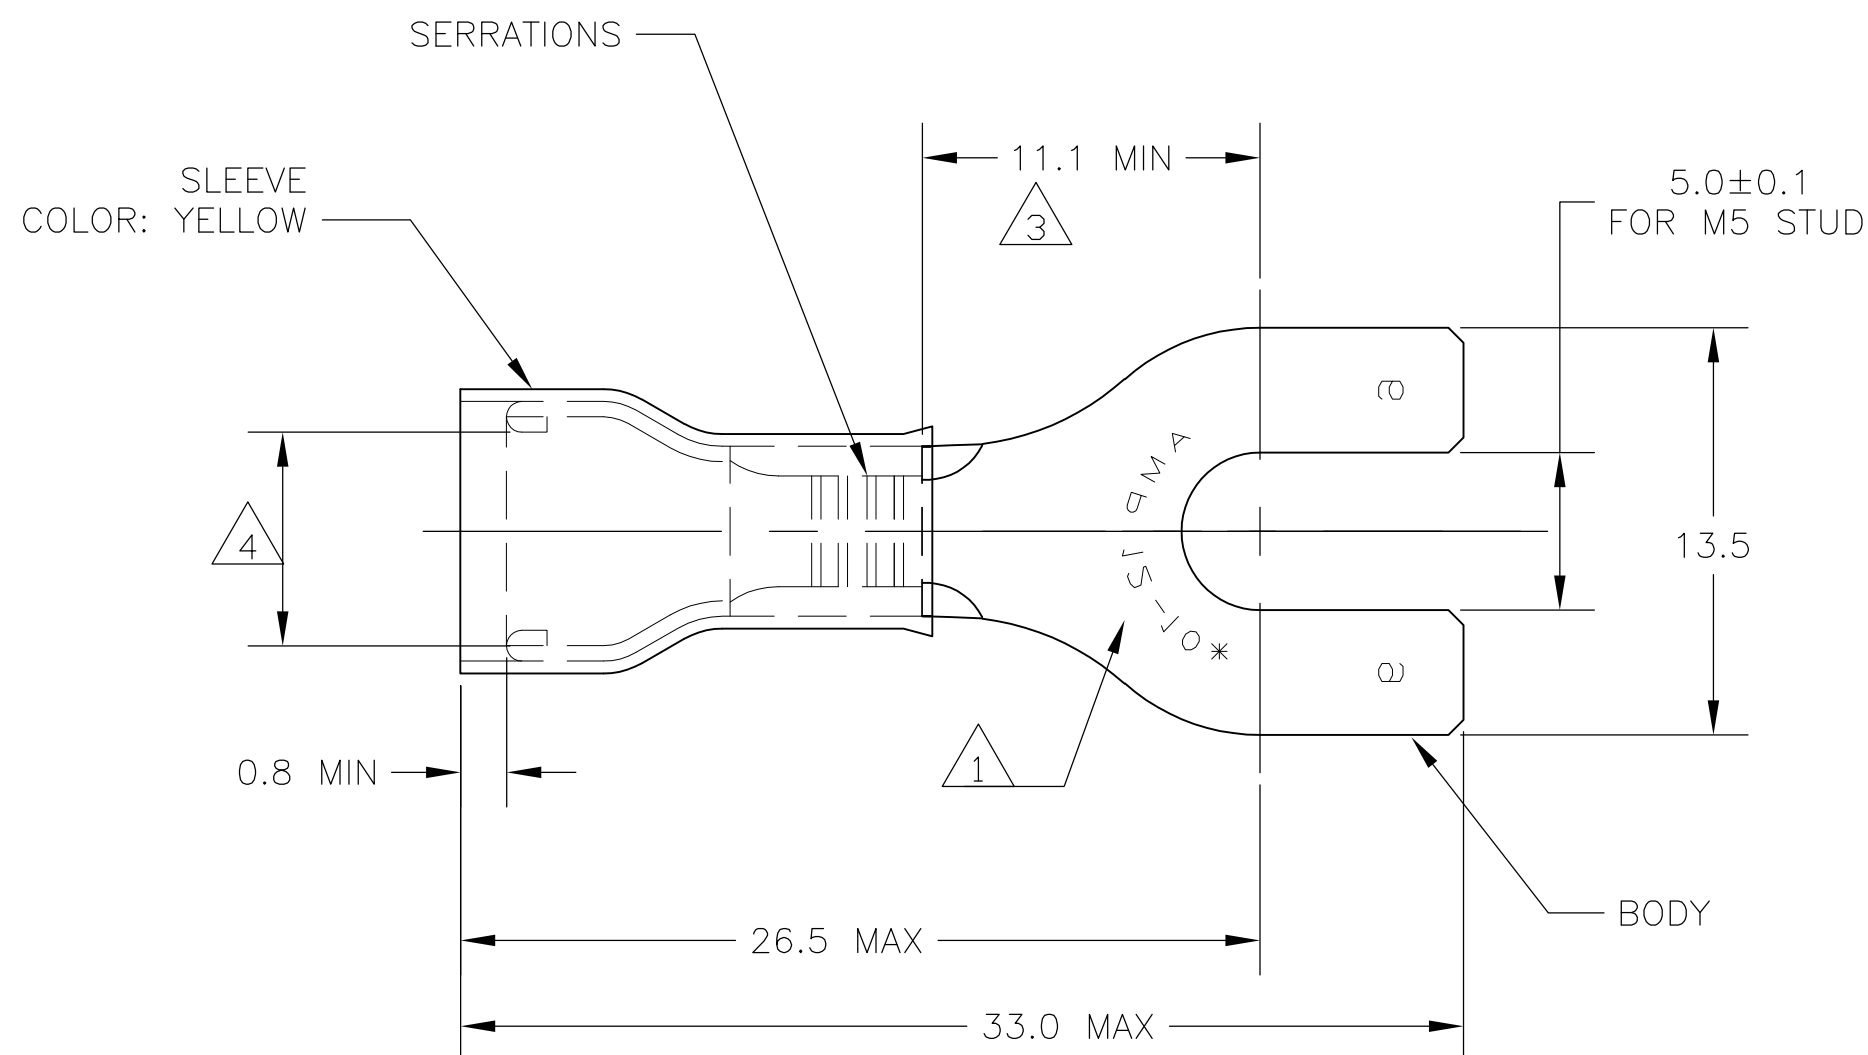

500	LOOSE PIECE	130620
QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth 13APR07		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		T MICHELUTTI APVD 13APR07		TERMINAL, SPADE, RECTANGULAR TONGUE, PIDG, WIRE SIZE 12-10	
		PRODUCT SPEC —		—	
		APPLICATION SPEC —		—	
MATERIAL		WEIGHT		SIZE	CAGE CODE
FINISH		—		A3	00779
				DRAWING NO	
				C-130620	
CUSTOMER DRAWING				SCALE	SHEET
				4:1	1 OF 1
				REV	C.1