


4

3

2

1

used for: D-SUB COMBINATION

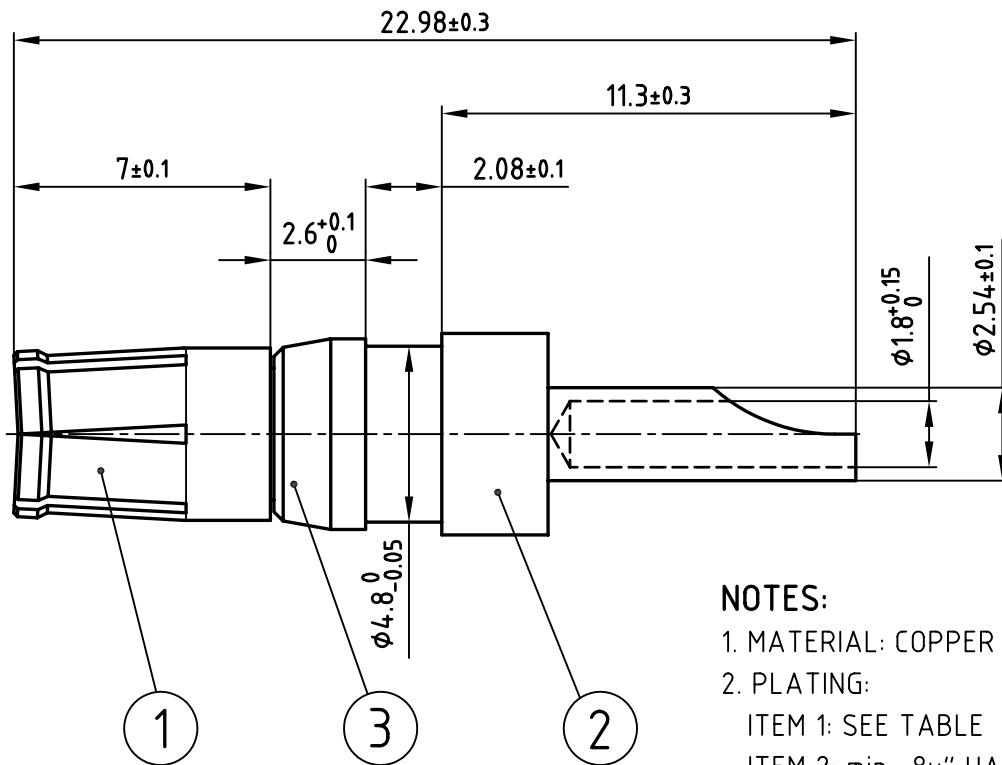

NOTES:


1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: SEE TABLE

ITEM 2: min. 8µ" HARD GOLD
OVER min. 50µ" NICKEL

ITEM 3: NICKEL PLATED

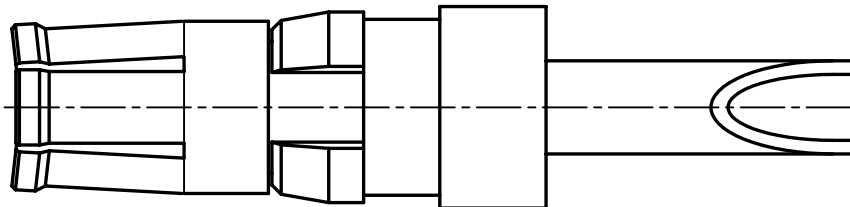

Plating item 1	Part-NO. CONEC
min. 30µ" HARD GOLD OVER min. 50µ" NICKEL	132C10019X
min. 50µ" HARD GOLD OVER min. 50µ" NICKEL	132J10019X

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance ISO 2768-m		
rev.	description	date	name	1998	date	
				drawn	23.03.	Barcinski
				appd.	23.03.	Mickenbecker
				norm		
				d-old	SK211H10	

scale: 5:1
material: SEE NOTES

title:
HIGH POWER CONTACT FEMALE
SOLDER CUP 10A
D-SUB COMBINATION

dwg no: CAD/ REL.13 DIN-A
13K11E3A 4
sh: 1/1

product no: SEE TABLE

4

3

2

1