


4

3

2



1

used for: D-SUB COMBINATION




(c)

Selector settings	Crimp height A
7 for AWG 10	2.19 - 2.41
6 for AWG 12	1.94 - 2.05

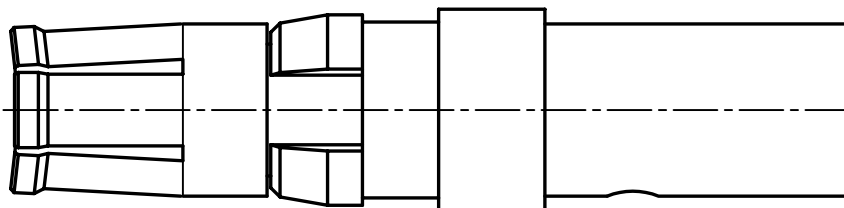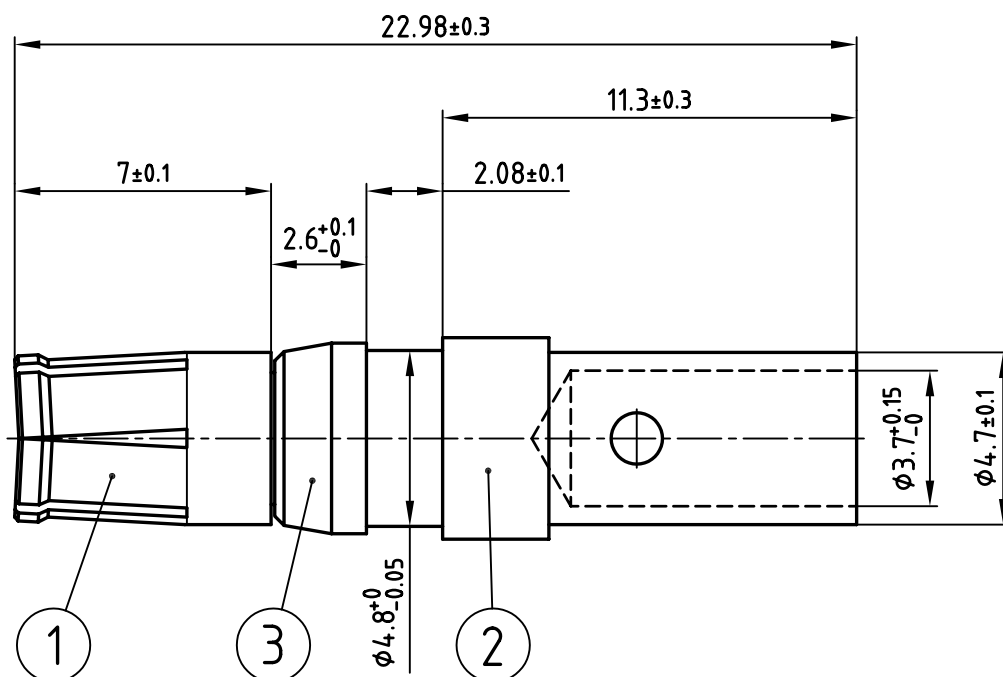

Directive 2002/95/EC
"RoHS"
Compliant

(b) STRIPPING DIMENSIONS

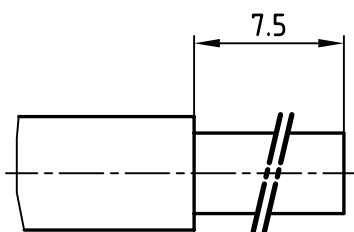

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 3: NICKEL PLATED

(b) 3. CRIMPING: USE CRIMP TOOL 360X10409X WITH
TOOL INSERT 360X20029X
SELECTOR SETTINGS: 7 FOR AWG 10; 6 FOR AWG 12

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				1998	date		name
				drawn	23.03.		Barcinski
				appd.	23.03.		Mickenbecker
				norm			
				d-old			
1 x c	Ä 2197	01.04.2005	Lehmen				
2 x b	Ä 2177	02.03.2005	Lehmen				
rev.	description	date	name				

CONEC®

scale:	5:1		
material:	SEE NOTES		
title:	HIGH POWER CONTACT FEMALE CRIMP VERSION 30A D-SUB COMBINATION		
dwg no:	AutoCAD/REL.13	DIN-A	
13K1IE9A		4	sh: 1/1
part no:	132C11039X		

4

3

2

1