


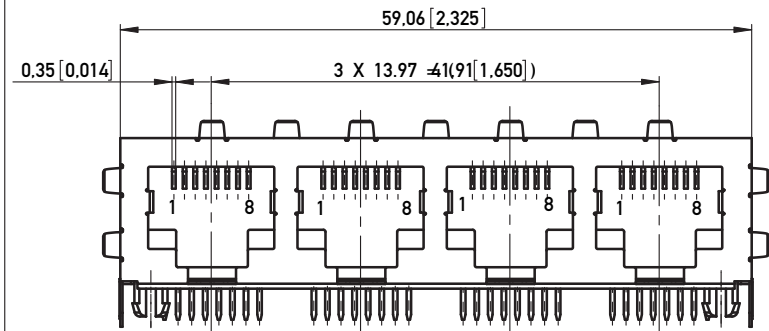
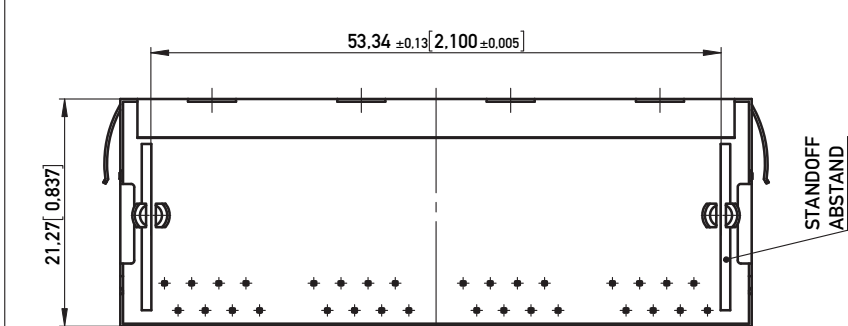


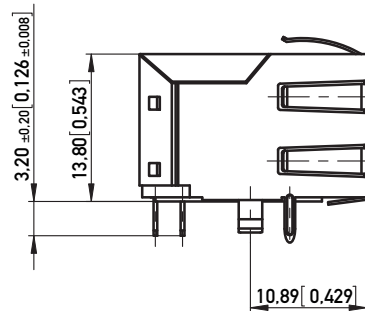



RECOMMENDED PANEL CUTOUT EMPFOHLENER FRONTPLATTEN-AUSSCHNITT

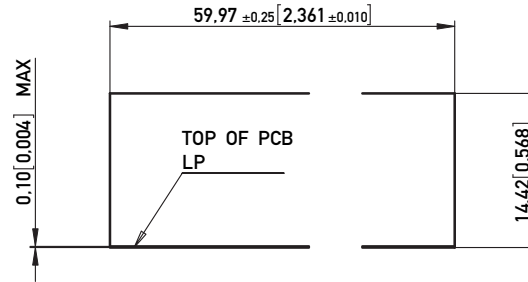

RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW) EMPFOHLENES LEITERPLATTEN-LAYOUT (BESTUECKUNGSSEITE) TOL. ±0.05 [0.002] UNLESS NOTED

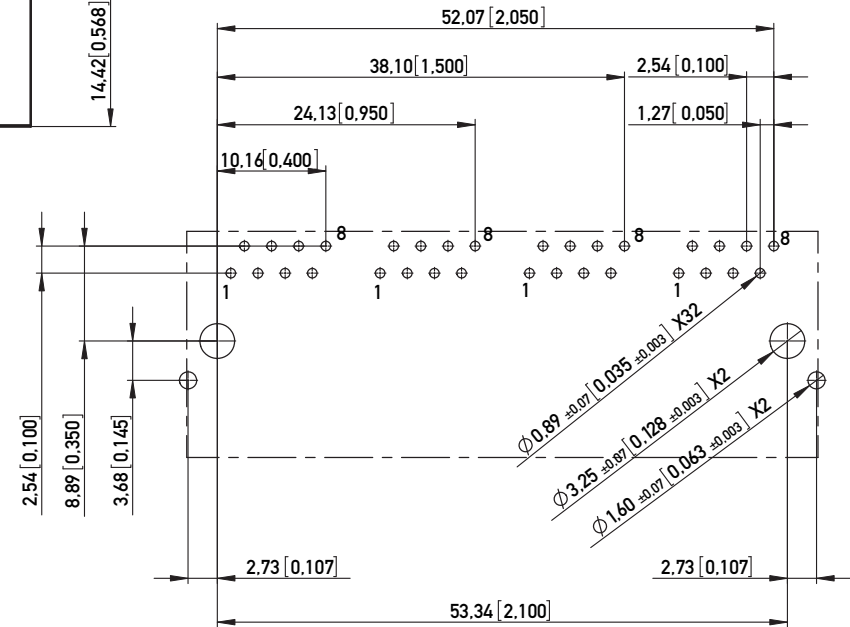

IMPROVED CONTACT DESIGN (PRE BEND)

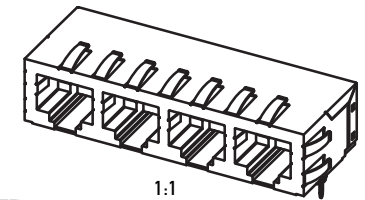

1:1

Technical specifications

Materials & Finish

Standard applic.	Value
Insulation body	Standard description PBT 30%
Contact material	Standard description C5210 (acc. JIS)
Contact finish, mating zone	Thickness of plating 30 µin Au over 50 µin Ni
Contact finish termination zone	Thickness of plating 80 µin matte Sn over 50 µin Ni
Shell/shield material	Standard description C2680 (acc. JIS)
Shell/shield plating	Thickness of plating 50 µin Ni

Assembly process

Packaging	Tray
Solder temperature	235°C at 3-5s
Suitable assembly process	wave

Approvals

UL insulation body	UL 94	V0
UL File No.	E145613	
RoHS compliant	Yes	

Test Data

Mechanical properties

Insertion/withdrawal force	IEC 603-7	max. 20 N
Mechanical operations	IEC 512-5, 9a	min. 1.000
Effectiveness of connector coupling device	IEC 512-8, 15f	50 N

Electrical properties

Creepage / clearance distances

a) Contact - contact	IEC 807-3	0.52 mm
b) Contact - shell	IEC 807-3	N.A.

Voltage proof (Dielectric Withstand Voltage)

a) Contact - contact	IEC 512-2, 4a	min. 1.000 V AC/DC
b) Contact - shell/testpanel	IEC 512-2, 4a	min. 1.500 V AC/DC
Current carrying capacity	IEC 512-3, 5b	1.5 A @ 25° C
Contact resistance	IEC 512-2, 2a	max. 30 mOhm
Insulation resistance	IEC 512-2, 3a	min. 500 MOhm

Environmental properties

Operation temperature	0 - 70° C
-----------------------	-----------

NOTE 1: PANEL GROUND FLANGES TOP, BOTTOM, SIDES (GF5)

NOTE 2: C-UL APPROVED E145613 AND MEETS FCC REQUIREMENTS

NOTE 3: RoHS COMPLIANT

Copyright © by ERNI GmbH
Proprietary notice pursuant to ISO 16016 is to be observed.

Information:		Tolerances ISO 2768-m DIN 7167		Scale 2:1
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation MOD JACK - MJR 8P8C, 1X4, CATEGORY 5
www.ERNI.com		133726		I (1/1) A3
A	28.06.2007	Class		MJ
Index	Date			