


Mutter / nut
max. Einschraubtiefe 6,4 mm
thread depth max. 6,4 mm


Bolzen / bolt
max. Einschraubtiefe 5,5 mm
thread depth max. 5,5 mm



Beschriftung nach Bedruckungsvorschrift 174538
Part marking according to specification 174538




	194078		X			
	194079				#4-40	
	194080				M3	
	194081			#4-40		
	194082			M3		
Ident.-Nr. <i>part-no.</i> <i>tape & reel</i> Variante 1 <i>version 1</i>	Ident.-Nr. <i>part-no.</i> <i>tray</i> Variante 1 <i>version 1</i>	Ident.-Nr. <i>part-no.</i> <i>tray</i> Variante 2 <i>version 2</i>	<i>ohne</i> <i>without</i>	<i>Mutter</i> <i>thread</i>	<i>Bolzen</i> <i>bolt</i>	<i>Bemerkung</i> <i>remark</i>

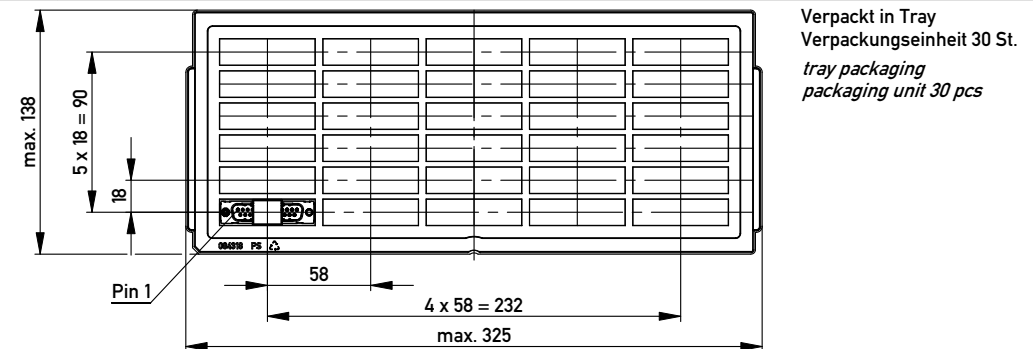


Sonstige Angaben siehe Zeichnung 204628 / *Additional indications according to drawing 204628*

Verpackt in Gurtverpackung - *Tape on Reel Packaging*
Verpackungseinheit: 75 Stück - *Packaging unit: 75 pcs*

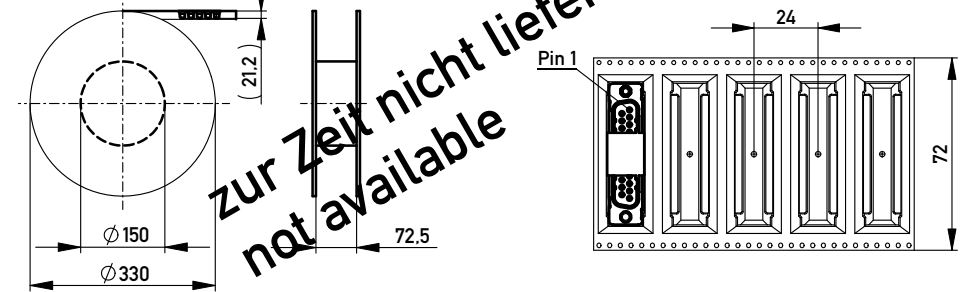

Layoutvorschlag:
recommended layout:

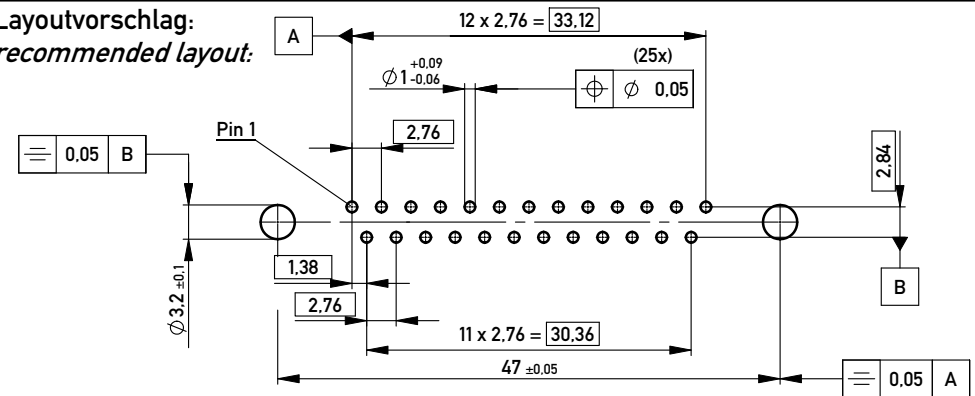

Sonstige Angaben siehe Zeichnung 204625 / Additional indications according to drawing 204625

Fehlende Masse und Angaben siehe DIN 41652 / *Missing information and dimensions according to DIN 41652*
Sonstige Angaben siehe Fertigungsunterlagen / *Additional indications according to the production documentation*

Copyright by ERNI GmbH Proprietary notice pursuant to ISO 14016 to be observed	Information:			Tolerances		 All Dimensions in mm		Scale 2:1	
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation			
						TMC-P 25-THR-2,6-9,0-BA8 <i>TMC-P 25-THR-2,6-9,0-type 8</i>			
						144903			
	C		26.11.2009			www.ERNI.com			I
Index		Date					Class	TMCP	A3