

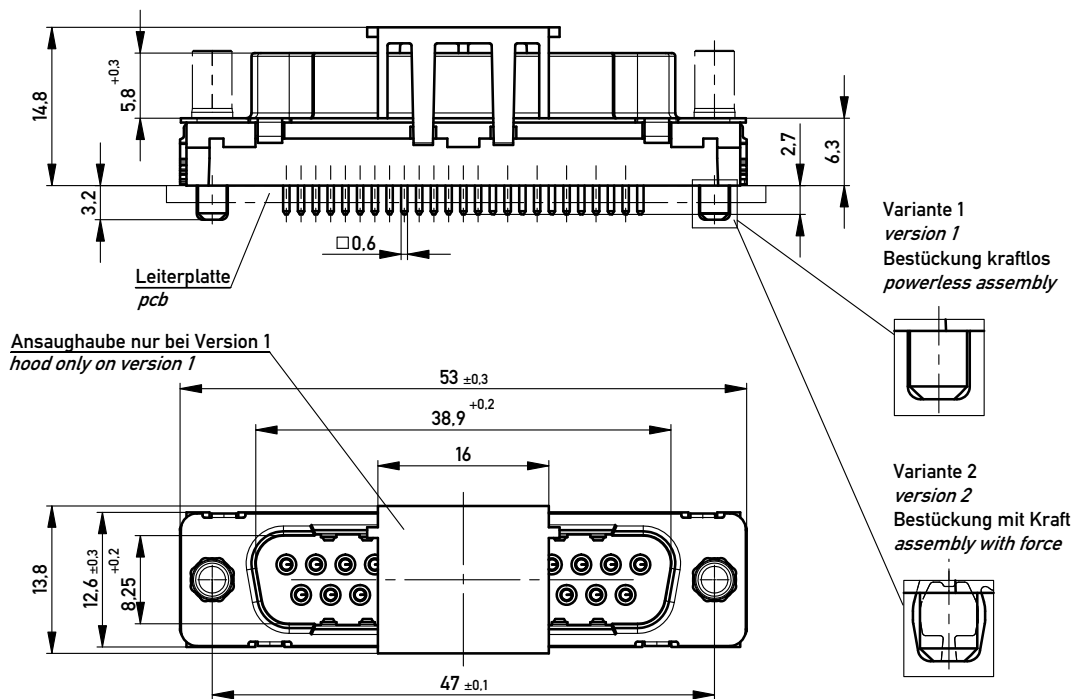






ohne / without

Mutter / nut
max. Einschraubtiefe 3.7 mm
thread depth max. 3.7 mm


Bolzen / bolt
max. Einschraubtiefe 5.5 mm
thread depth max. 5.5 mm



Anschlussbereich verzinnt
terminal area tin plating

Anforderungsstufe: 2
class: 2

234870	234875	234880	X			
234874	234567	224603			#4-40	
234873	234878	234882			M3	
234872	234877	234172		#4-40		
234871	234876	234881		M3		
Ident.-Nr. part-no. tape & reel Variante 1 version 1	Ident.-Nr. part-no. tray Variante 1 version 1	Ident.-Nr. part-no. tray Variante 2 version 2	ohne without	Mutter thread	Bolzen bolt	Bemerkung remark


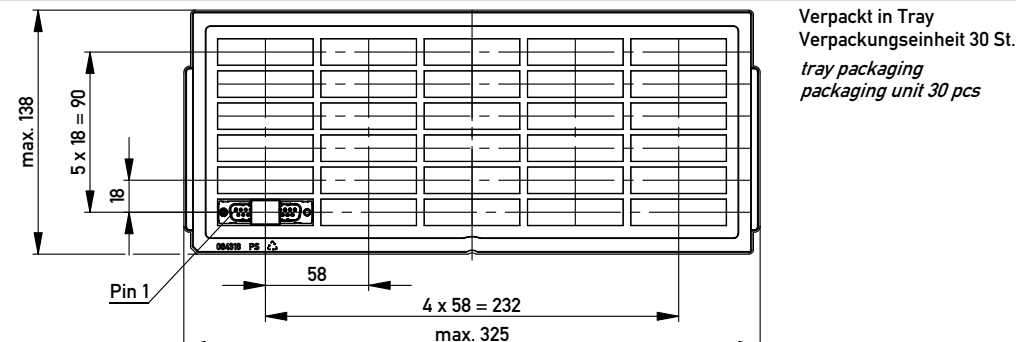


Verpackt in Tray
Verpackungseinheit 30 St.
tray packaging
packaging unit 30 pcs


Sonstige Angaben siehe Zeichnung 204628 / Additional indications according to drawing 204628

Verpackt in Gurtverpackung - Tape on Reel Packaging
Verpackungseinheit: 75 Stück - Packaging unit: 75 pcs

Abspulrichtung - Reel off Direction

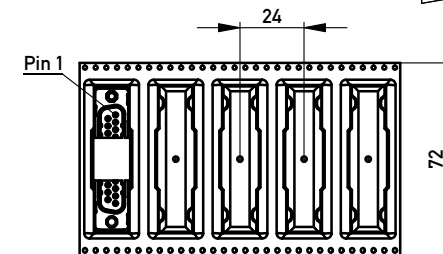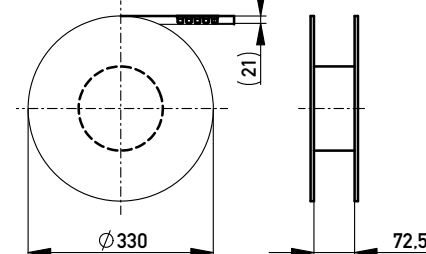

Layoutvorschlag:
recommended layout:

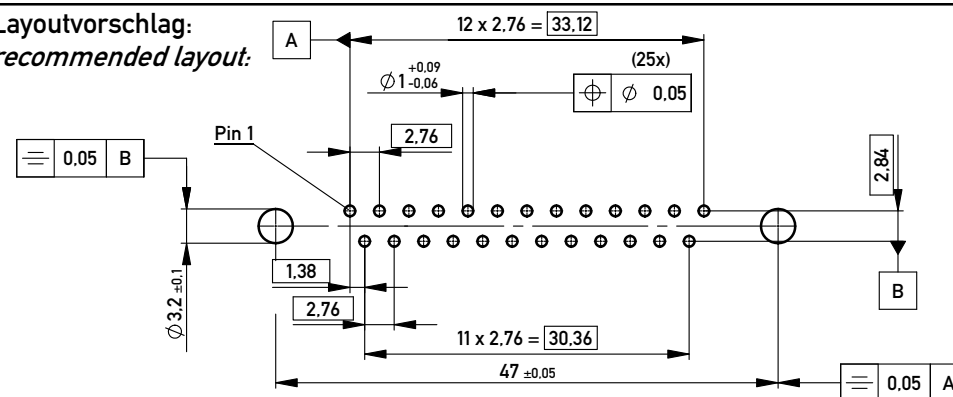

Sonstige Angaben siehe Zeichnung 204625 / Additional indications according to drawing 204625

Fehlende Masse und Angaben siehe DIN 41652 / Missing information and dimensions according to DIN 41652

Sonstige Angaben siehe Fertigungsunterlagen / Additional indications according to the production documentation

Copyright by ERNI GmbH Proprietary notice pursuant to ISO 16016 to be observed.	Information:			Tolerances	 All Dimensions in mm	Scale	2:1	
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation TMC-P 25-THR-2.7-6.3-BA8 <i>TMC-P 25-THR-2.7-6.3-type 8</i>		
	e		07.09.2011			www.ERNI.com	144976	
Index		Date				Class	TMCP	A3