


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1511175064](#)
Status: **Active**
Overview: [Milli-Grid™ Connector System](#)
Description: 2.00mm Pitch Milli-Grid™ Header, Through Hole, Dual Row, Vertical, 2.00µm Tin (Sn) Plating, with Peg, 4.60mm PC Tail Length, without Pick and Place Cap, 14 Circuits, Low-Halogen, Tube

Documents:

| | |
|--|--|
| Drawing (PDF) | Packaging Specification PK-151117-3000 (PDF) |
| Product Specification PS-151117-0001-001 (PDF) | RoHS Certificate of Compliance (PDF) |
| Packaging Specification PK-151117-0001 (PDF) | Product Literature (PDF) |

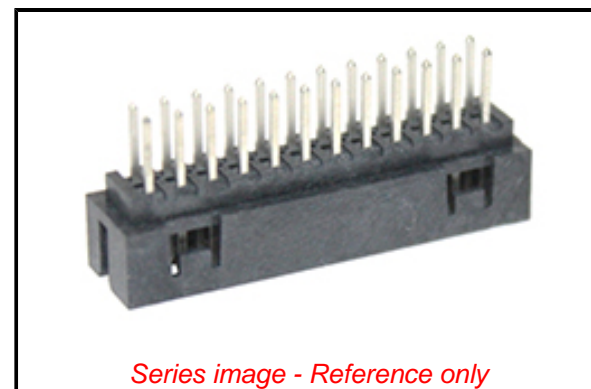

Series image - Reference only

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|-----------------------------|--|
| Product Family | PCB Headers |
| Series | 151117 |
| Application | Board-to-Board, Signal, Wire-to-Board |
| Overview | Milli-Grid™ Connector System |
| Product Literature Order No | 987651-5501 |
| Product Name | Milli-Grid™ |
| UPC | 889056812429 |

Physical

| | |
|--------------------------------|------------------------|
| Breakaway | No |
| Circuits (Loaded) | 14 |
| Circuits (maximum) | 14 |
| Color - Resin | Black |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Compliant | Under Evaluation |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Tin over Nickel |
| Material - Plating Termination | Tin over Nickel |
| Material - Resin | Liquid Crystal Polymer |
| Net Weight | 0.731/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PC Tail Length | 4.60mm |
| PCB Locator | No |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 3.60mm |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.00mm |
| Pitch - Termination Interface | 2.00mm |
| Plating min - Mating | 2.000µm |
| Plating min - Termination | 2.000µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Yes |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

| | |
|-----------------|---------------|
| China ROHS | Green Image |
| ELV | Not Relevant |
| RoHS Phthalates | Not Contained |

Search Parts in this Series

[151117 Series](#)

Mates With

Milli-Grid™ Receptacle Housing (Low-Halogen) [151192](#)
Milli-Grid™ Receptacle Housing [51110](#)
Milli-Grid™ PCB Receptacles [78787](#) , [78788](#) , [79107](#) , [79109](#)

| | |
|-------------------------------|-----------------|
| Temperature Range - Operating | -55°C to +105°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|---------|
| Current - Maximum per Contact | 2.0A |
| Voltage - Maximum | 125V AC |

Solder Process Data

| | |
|--|----------|
| Duration at Max. Process Temperature (seconds) | 011 |
| Lead-free Process Capability | SMC&WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 265 |

Material Info**Reference - Drawing Numbers**

| | |
|-------------------------|--------------------------------|
| Packaging Specification | PK-151117-0001, PK-151117-3000 |
| Product Specification | PS-151117-0001-001 |
| Sales Drawing | SD-151117-0001 |

This document was generated on 08/02/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION