



15N50

Power MOSFET

15A, 500V N-CHANNEL POWER MOSFET

■ DESCRIPTION



The UTC **15N50** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with planar stripe and DMOS technology. This technology allows a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **15N50** is generally applied in high efficiency switch mode power supplies.

■ FEATURES

- * $R_{DS(ON)} < 0.35\Omega @ V_{GS}=10V$
- * High Switching Speed

■ SYMBOL

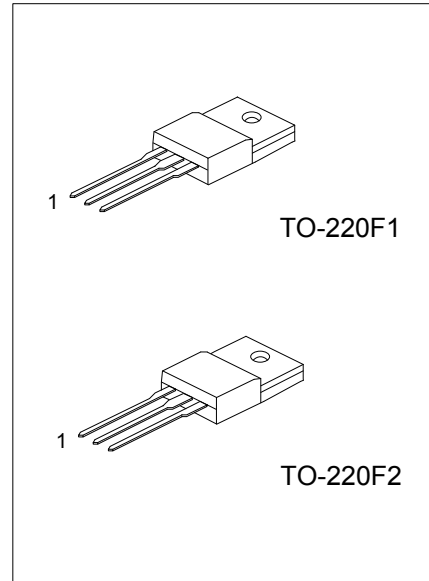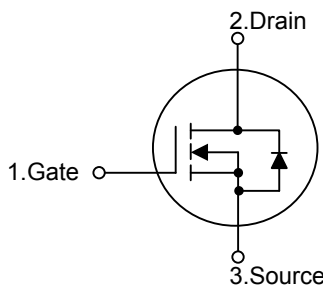

■ ORDERING INFORMATION

| Ordering Number | | Package | Pin Assignment | | | Packing |
|-----------------|--------------|----------|----------------|---|---|---------|
| Lead Free | Halogen Free | | 1 | 2 | 3 | |
| 15N50L-TF1-T | 15N50G-TF1-T | TO-220F1 | G | D | S | Tube |
| 15N50L-TF2-T | 15N50G-TF2-T | TO-220F2 | G | D | S | Tube |

Note: Pin Assignment: G: Gate D: Drain S: Source

| | |
|--|--|
| <p>15N50L-TF1-T</p> <ul style="list-style-type: none"> (1)Packing Type (2)Package Type (3)Lead Free | <ul style="list-style-type: none"> (1) T: Tube (2) TF1: TO-220F1, TF2: TO-220F2 (3) L: Lead Free, G: Halogen Free |
|--|--|

■ MARKING INFORMATION

| PACKAGE | MARKING |
|----------------------|---------|
| TO-220F1 TO-220F2 | |

■ ABSOLUTE MAXIMUM RATINGS ($T_C=25^\circ\text{C}$, unless otherwise specified.) (Note 5)

| PARAMETER | | SYMBOL | RATINGS | UNIT | |
|--|------------------------|-----------|-------------------------|---------------------|----|
| Drain to Source Voltage | | V_{DSS} | 500 | V | |
| Gate-Source Voltage | | V_{GSS} | ± 30 | V | |
| Drain Current | Continuous | I_D | $T_C=25^\circ\text{C}$ | 15 | A |
| | | | $T_C=100^\circ\text{C}$ | 9 | A |
| | Pulsed (Note 2) | | I_{DM} | 60 | A |
| Avalanche Current (Note 2) | | I_{AR} | 15 | A | |
| Avalanche Energy | Single Pulsed (Note 3) | | E_{AS} | 731 | mJ |
| | Repetitive (Note 2) | | E_{AR} | 17 | mJ |
| Peak Diode Recovery dv/dt (Note 4) | | dv/dt | 15 | V/ns | |
| Power Dissipation ($T_C=25^\circ\text{C}$) | TO-220F1 | P_D | 48 | W | |
| | TO-220F2 | | 52 | | |
| Derate above 25°C | TO-220F1 | | 0.384 | W/ $^\circ\text{C}$ | |
| | TO-220F2 | | 0.416 | | |
| Junction Temperature | | T_J | +150 | $^\circ\text{C}$ | |
| Storage Temperature | | T_{STG} | -55~+150 | $^\circ\text{C}$ | |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating; Pulse width limited by maximum junction temperature.

3. $L=6.5\text{mH}$, $I_{AS}=15\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$

4. $I_{SD}\leq 15\text{A}$, $di/dt\leq 200\text{A}/\mu\text{s}$, $V_{DD}\leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$

5. Drain current limited by maximum junction temperature

■ THERMAL DATA

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|---------------------|----------|---------------|---------|---------------------------|
| Junction to Ambient | | θ_{JA} | 62.5 | $^\circ\text{C}/\text{W}$ |
| Junction to Case | TO-220F1 | θ_{JC} | 2.6 | $^\circ\text{C}/\text{W}$ |
| | TO-220F2 | | 2.4 | |


■ ELECTRICAL CHARACTERISTICS

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|------------------------------|---|-----|------|------|---------------|
| OFF CHARACTERISTICS | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $I_D=250\mu A, V_{GS}=0V, T_J=25^\circ C$ | 500 | | | V |
| Breakdown Voltage Temperature Coefficient | $\Delta BV_{DSS}/\Delta T_J$ | Reference to $25^\circ C, I_D=250\mu A$ | | 0.5 | | V/ $^\circ C$ |
| Drain-Source Leakage Current | I_{DSS} | $V_{DS}=500V, V_{GS}=0V,$ | | | 1 | μA |
| | | $V_{DS}=320V, T_C=125^\circ C$ | | | 10 | μA |
| Gate- Source Leakage Current | Forward | $V_{GS}=+30V, V_{DS}=0V$ | | | +100 | nA |
| | Reverse | $V_{GS}=-30V, V_{DS}=0V$ | | | -100 | nA |
| ON CHARACTERISTICS | | | | | | |
| Gate Threshold Voltage | $V_{GS(TH)}$ | $V_{GS}=V_{DS}, I_D=250\mu A$ | 2.0 | | 4.0 | V |
| Static Drain-Source On-State Resistance | $R_{DS(ON)}$ | $V_{GS}=10V, I_D=7.5A$ | | 0.3 | 0.35 | Ω |
| DYNAMIC PARAMETERS | | | | | | |
| Input Capacitance | C_{ISS} | $V_{DS}=25V, V_{GS}=0V, f=1.0MHz$ | | 2300 | 2600 | pF |
| Output Capacitance | C_{OSS} | | | 250 | 270 | pF |
| Reverse Transfer Capacitance | C_{RSS} | | | 26 | 30 | pF |
| SWITCHING PARAMETERS | | | | | | |
| Total Gate Charge | Q_G | $V_{DS}=320V, V_{GS}=10V, I_D=15A$ (Note 1, 2) | | 210 | 240 | nC |
| Gate to Source Charge | Q_{GS} | | | 35 | | nC |
| Gate to Drain ("Miller") Charge | Q_{GD} | | | 60 | | nC |
| Turn-ON Delay Time | $t_{D(ON)}$ | $V_{DD}=200V, I_D=15A, R_G=25\Omega$ (Note 1, 2) | | 100 | 120 | ns |
| Rise Time | t_R | | | 150 | 170 | ns |
| Turn-OFF Delay Time | $t_{D(OFF)}$ | | | 460 | 500 | ns |
| Fall-Time | t_F | | | 180 | 210 | ns |
| SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS | | | | | | |
| Maximum Body-Diode Continuous Current | I_S | | | | 15 | A |
| Maximum Body-Diode Pulsed Current | I_{SM} | | | | 60 | A |
| Drain-Source Diode Forward Voltage | V_{SD} | $I_{SD}=15A, V_{GS}=0V$ | | | 1.4 | V |
| Body Diode Reverse Recovery Time | t_{rr} | $I_{SD}=15A, V_{GS}=0V, di_F/dt=100A/\mu s$ | | 333 | | ns |
| Body Diode Reverse Recovery Charge | Q_{RR} | (Note 1) | | 3.24 | | μC |


Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$; Duty Cycle $\leq 2\%$.

2. Essentially Independent of Operating Temperature Typical Characteristics


■ TEST CIRCUITS AND WAVEFORMS

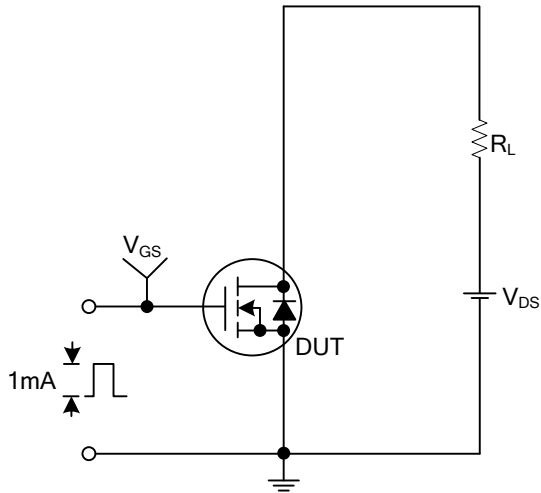


Gate Charge Test Circuit

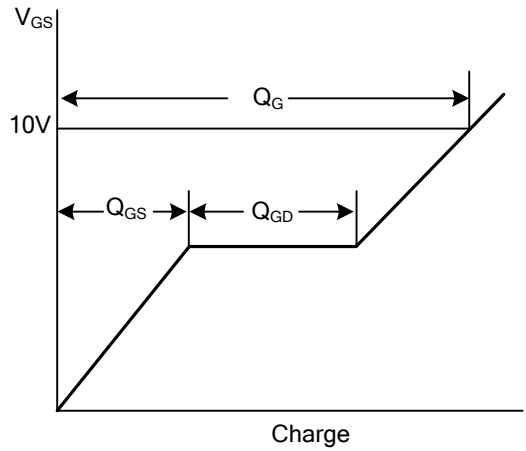


Gate Charge Waveforms

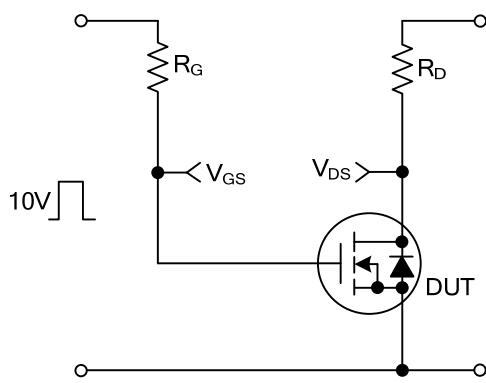


Resistive Switching Test Circuit

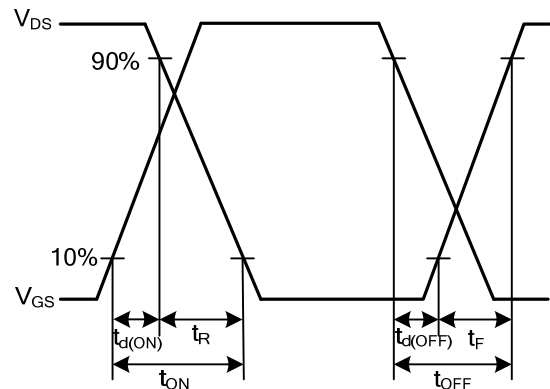

Resistive Switching Waveforms

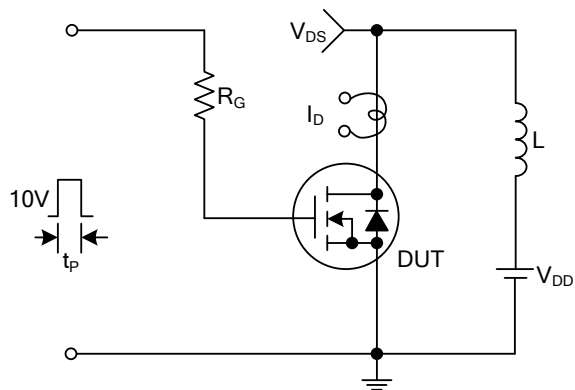





Unclamped Inductive Switching Test Circuit

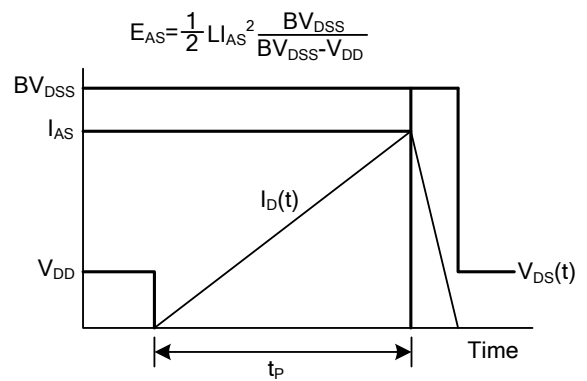





Unclamped Inductive Switching Waveforms

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

Peak Diode Recovery dv/dt Test Circuit & Waveforms

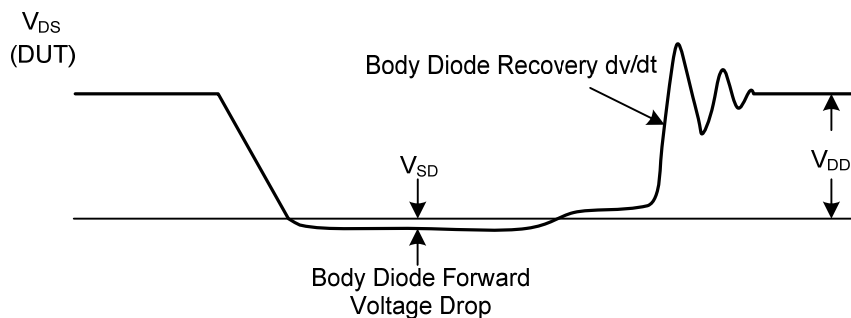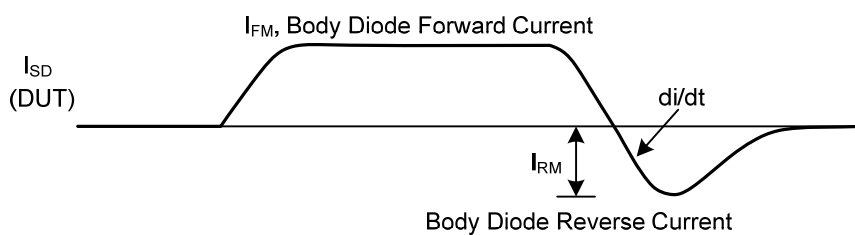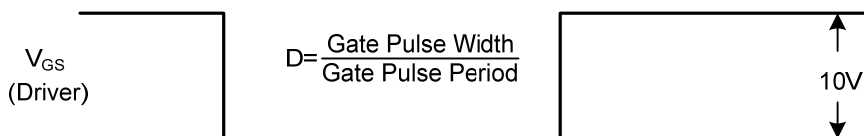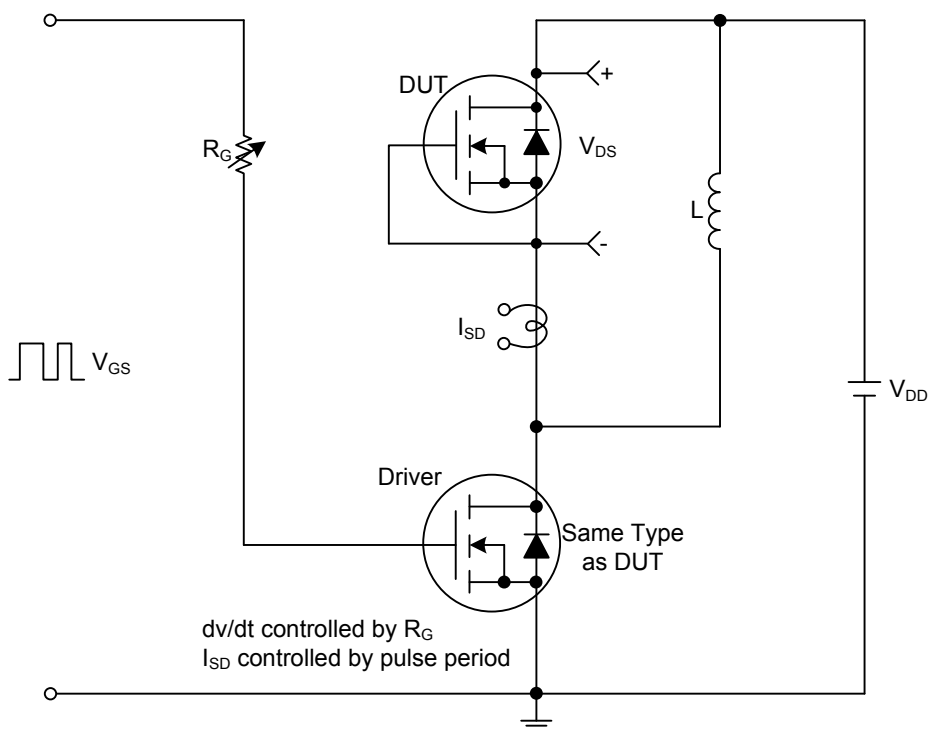

TYPICAL CHARACTERISTICS

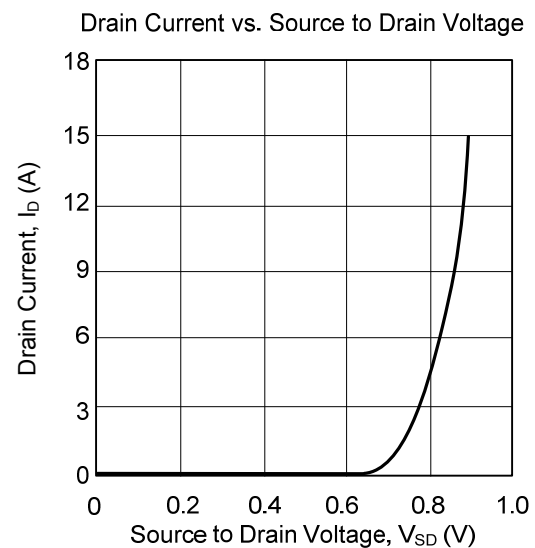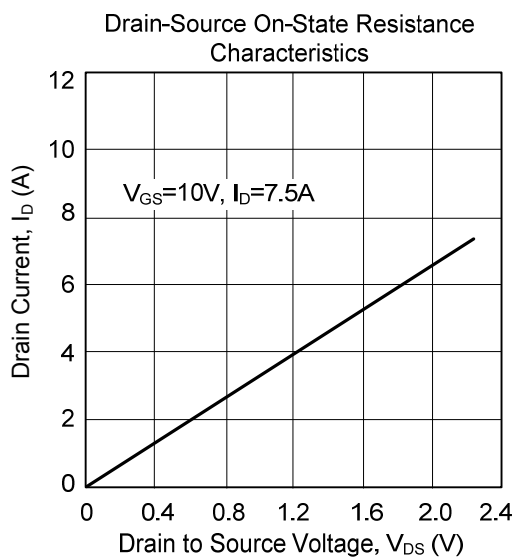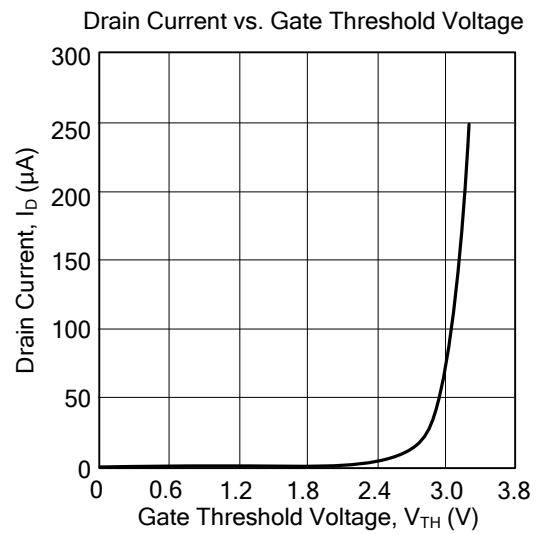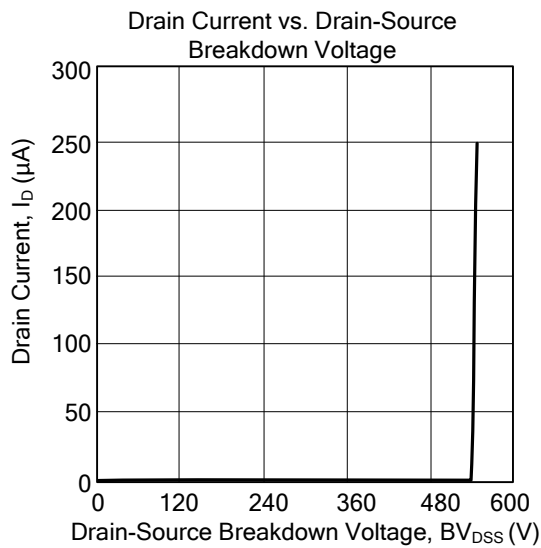

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.