



# 15TQ060 15TQ060S

SCHOTTKY RECTIFIER

15 Amp

$I_{F(AV)} = 15 \text{ Amp}$   
 $V_R = 60V$

### Major Ratings and Characteristics





Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	15	A
$V_{RRM}$	60	V
$I_{FSM}$ @tp = 5 $\mu$ s sine	1000	A
$V_F$ @15 Apk, $T_J = 125^\circ\text{C}$	0.56	V
$T_J$ range	-55 to 150	$^\circ\text{C}$

### Description/Features

The 15TQ060 Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C  $T_J$  operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

### Case Styles

<p>15TQ060</p>   <p>TO-220AC</p>	<p>15TQ060S</p>   <p>D<sup>2</sup>PAK</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Voltage Ratings

Part number	15TQ060
$V_R$ Max. DC Reverse Voltage (V)	60
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

## Absolute Maximum Ratings

Parameters	15TQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	15	A	50% duty cycle @ $T_C = 104^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	1000	A	Following any rated load condition and with rated $V_{RRM}$ applied
	260		
$E_{AS}$ Non-Repetitive Avalanche Energy	6	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1.50\text{Amps}$ , $L = 11.5\text{mH}$
$I_{AR}$ Repetitive Avalanche Current	1.50	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

## Electrical Specifications

Parameters	15TQ	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1) * See Fig. 1	0.62	V	@ 15A $T_J = 25^\circ\text{C}$
	0.82	V	@ 30A
	0.56	V	@ 15A $T_J = 125^\circ\text{C}$
	0.71	V	@ 30A
$I_{RM}$ Max. Reverse Leakage Current (1) * See Fig. 2	0.80	mA	$T_J = 25^\circ\text{C}$
	45	mA	$T_J = 125^\circ\text{C}$ $V_R = \text{rated } V_R$
$C_T$ Max. Junction Capacitance	720	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0	nH	Measured lead to lead 5mm from package body
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000	V/ $\mu\text{s}$	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters	15TQ	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	3.25	$^\circ\text{C/W}$	DC operation * See Fig. 4
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	
Marking Device	15TQ060	Case Style TO-220	
	15TQ060S	Case Style D <sup>2</sup> Pak	

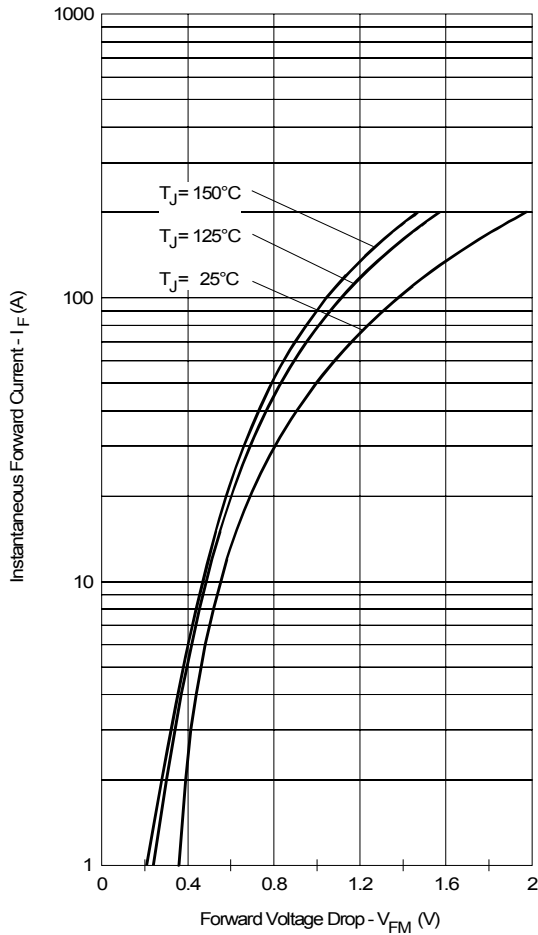


Fig. 1 - Maximum Forward Voltage Drop Characteristics

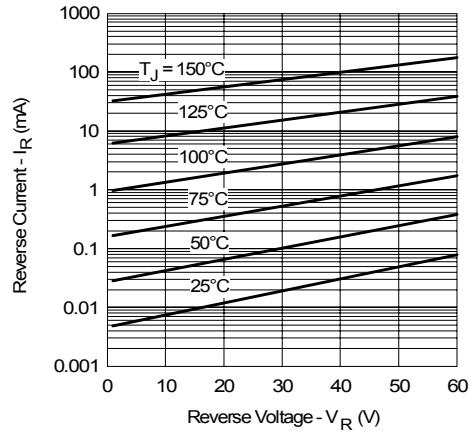


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

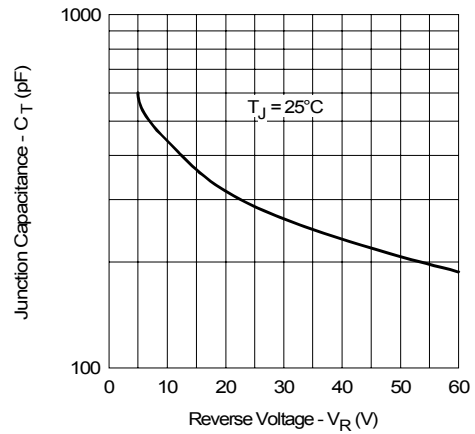


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

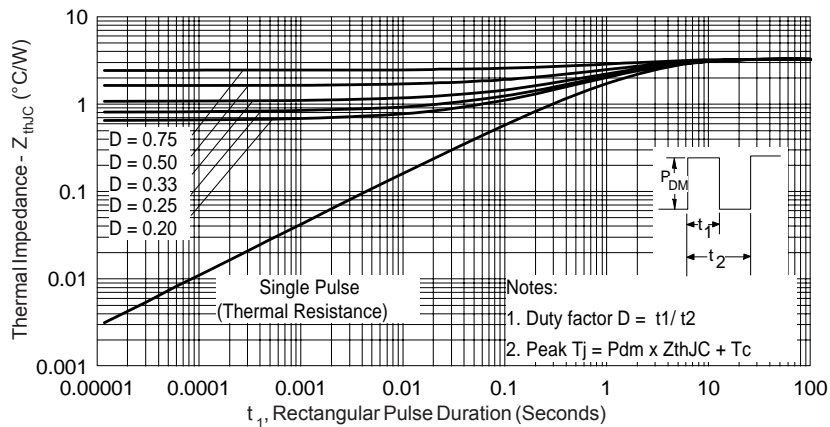


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

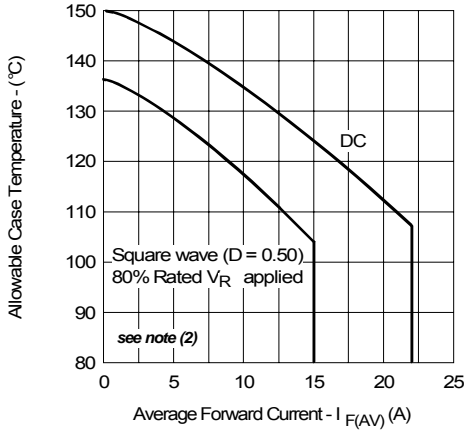


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

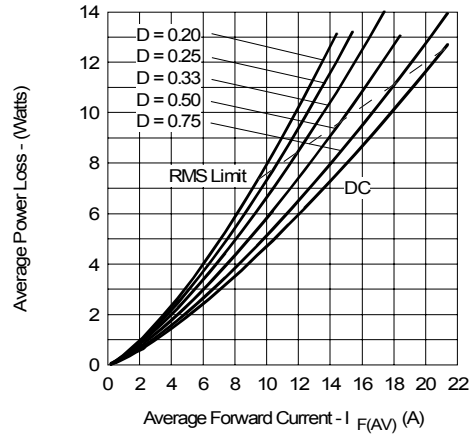


Fig. 6 - Forward Power Loss Characteristics

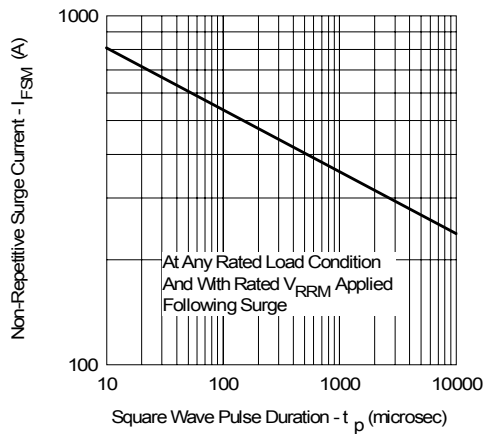


Fig. 7 - Maximum Non-Repetitive Surge Current

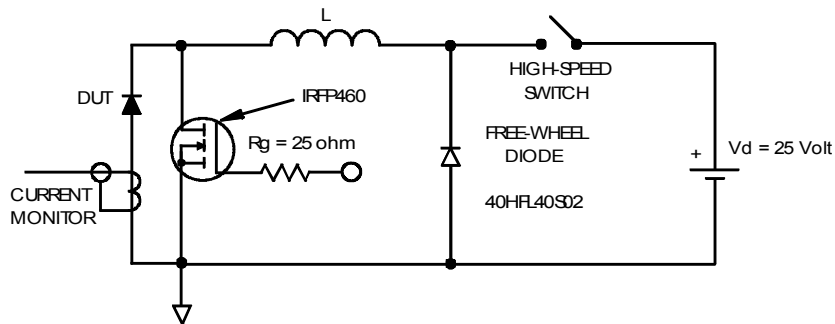




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

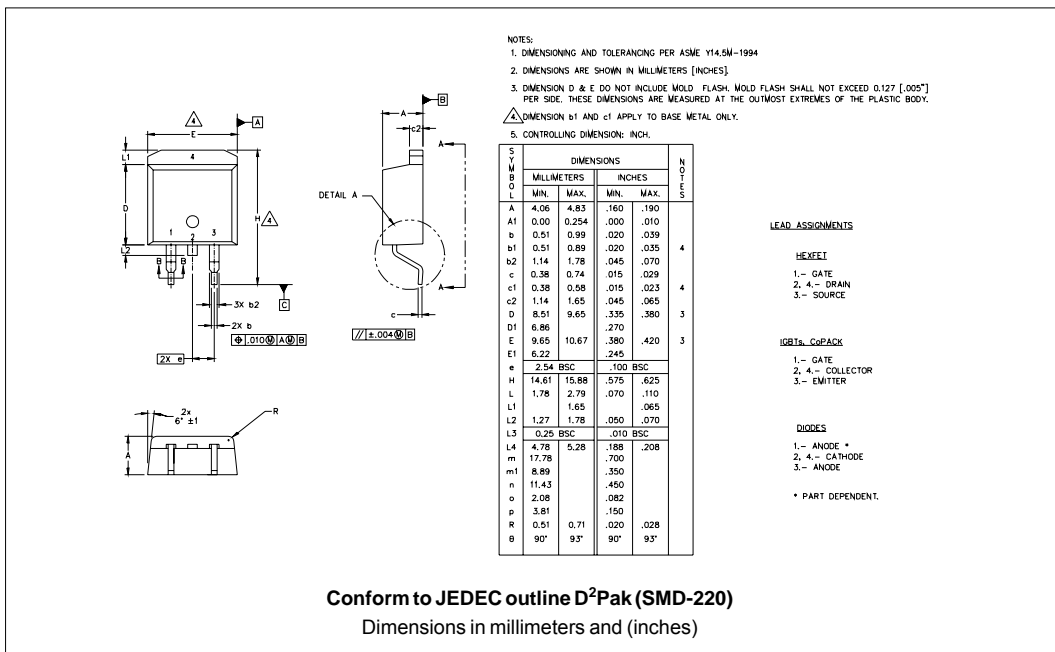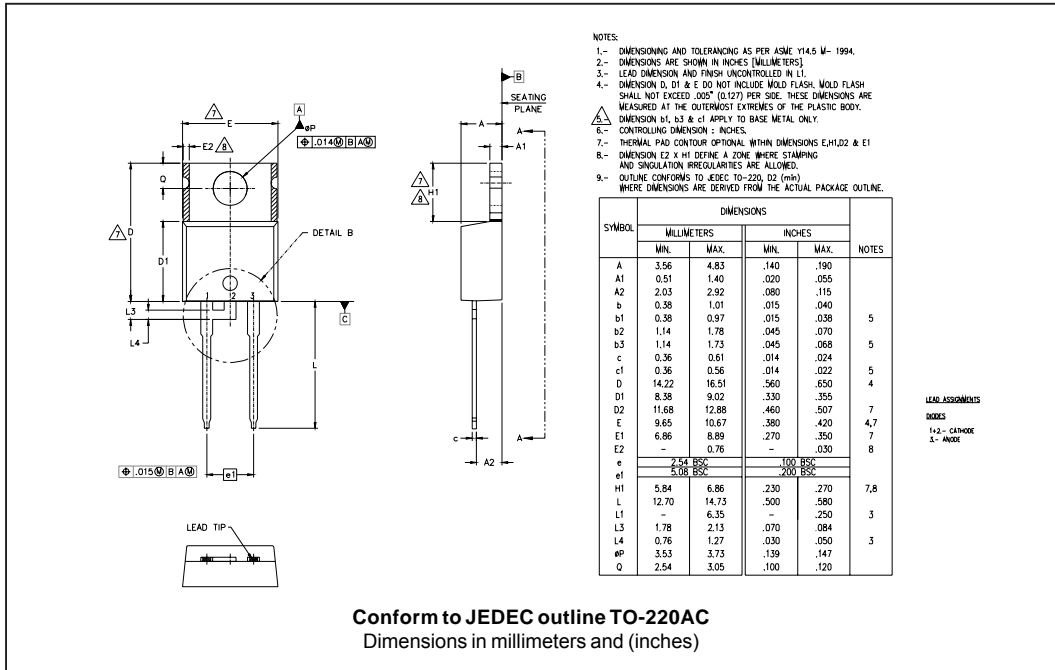

Part Marking Information

**TO-220AC**

EXAMPLE: THIS IS A 15TQ060  
 LOT CODE 1789  
 ASSEMBLED ON WW 19, 2001  
 IN THE ASSEMBLY LINE "C"

**D<sup>2</sup>Pak**

EXAMPLE: THIS IS A 15TQ060S  
 LOT CODE 8024  
 ASSEMBLED ON WW 02, 2000

Tape & Reel Information

SECTION Y-Y

NOTES:

- 1.0 10 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ±.02
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENE ALLOY
- 4.0 K<sub>0</sub> MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10<sup>6</sup> OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 © CRITICAL

A <sub>0</sub>	10.50 +/- 0.1
B <sub>0</sub>	15.80 +/- 0.1
B <sub>2</sub>	10.25 +/- 0.1
K <sub>0</sub>	4.90 +/- 0.1
F	11.50 +/- 0.1
P <sub>1</sub>	16.00 +/- 0.1
W	24.00 +/- 0.3

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code	
<b>15</b>	<b>T</b>
①	②
<b>Q</b>	<b>060</b>
③	④
<b>S</b>	<b>-</b>
⑤	⑥

<b>1</b>	- Current Rating (15 = 15A)
<b>2</b>	- Package T=TO-220
<b>3</b>	- Schottky "Q" Series
<b>4</b>	- Voltage Rating (060 = 60V)
<b>5</b>	- • none = TO-220 • S = D <sup>2</sup> Pak
<b>6</b>	- • none = Standard Production • PbF = Lead-Free

Tube Standard Pack Quantity : 50 pieces

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.