

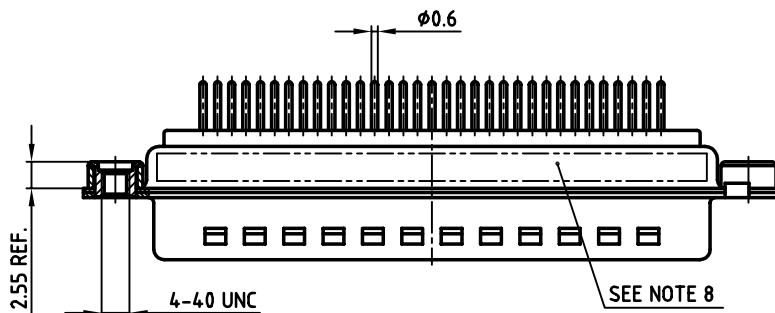
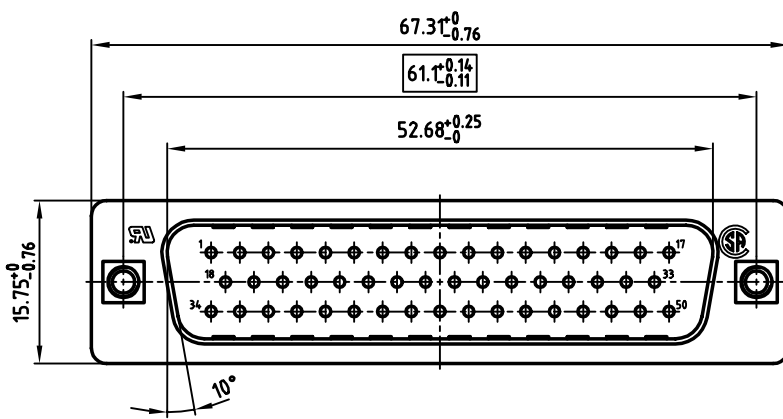


used for:	D-SUB
-----------	-------

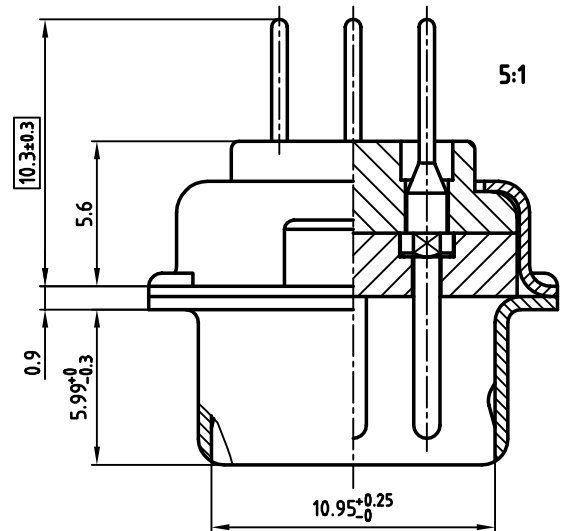

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
 PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
5. COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
7. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
8. CONNECTOR IS PART MARKED: 163A11409X CONEC Y/W/W
9. = CRITICAL DIMENSION

**Directive 2002/95/EC
„RoHS“
Compliant**

APPROVAL # FREGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

				tolerance			
				2002	date	name	
				drawn	28.06.	Parei	
				appd.	28.06.	E. Mickenbecker	
				norm	DIN 41652		
				d-old			
							
rev.	description	date	name				



scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB MALE 50pos. SOLDER PIN STRAIGHT with threaded insert	
dwg no:	AutoCAD 2000	DIN-A
16K1A697		3
		sh: 1/1
part no:	163A11409X	