

4

3

2

1

used for:

D - SUB

F

F

E

E

D

D

C




C

B

B

A

A

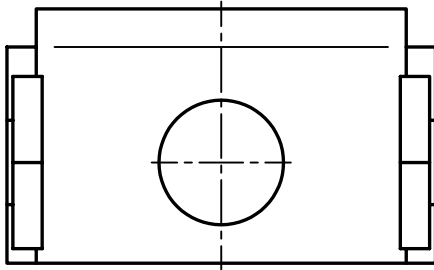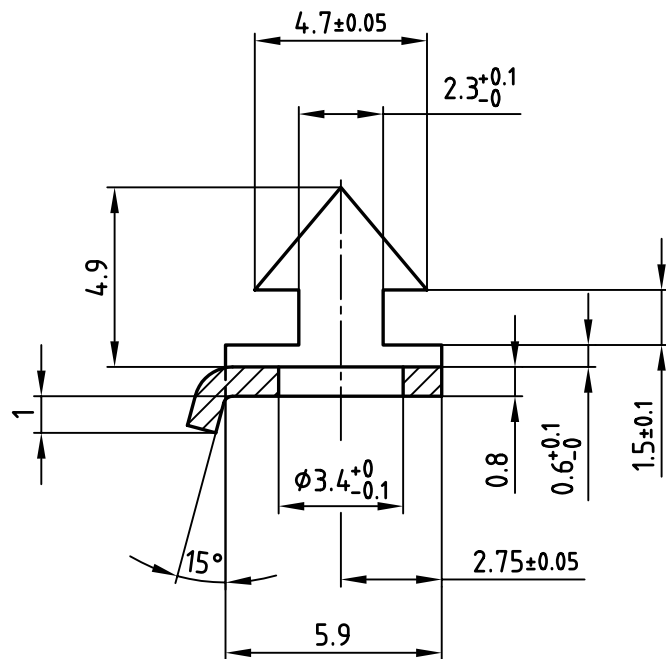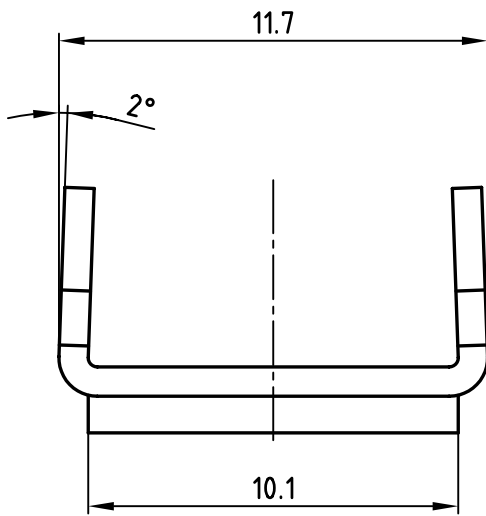


NOTES:

1. Part is splint and burrfree
3. Excellent adhesion of surface to the base material
3. radius without dimensions = R 0.25

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

finish:
nickel plated

tolerance
ISO 2768-m



scale: 5:1
material: STEEL

rev.	description	date	name
		1993	date
		drawn	05.07. Barcinski
		appd.	05.07. Mickenbecker
		norm	
		d-old	

CONEC®

title:	
LOCK ø3.4 for slide lock	
dwg no:	AutoCADREL.13
16V1EE6A	
part no:	165X10119X

DIN-A
4
sh: 1/1

4

3

2

1