


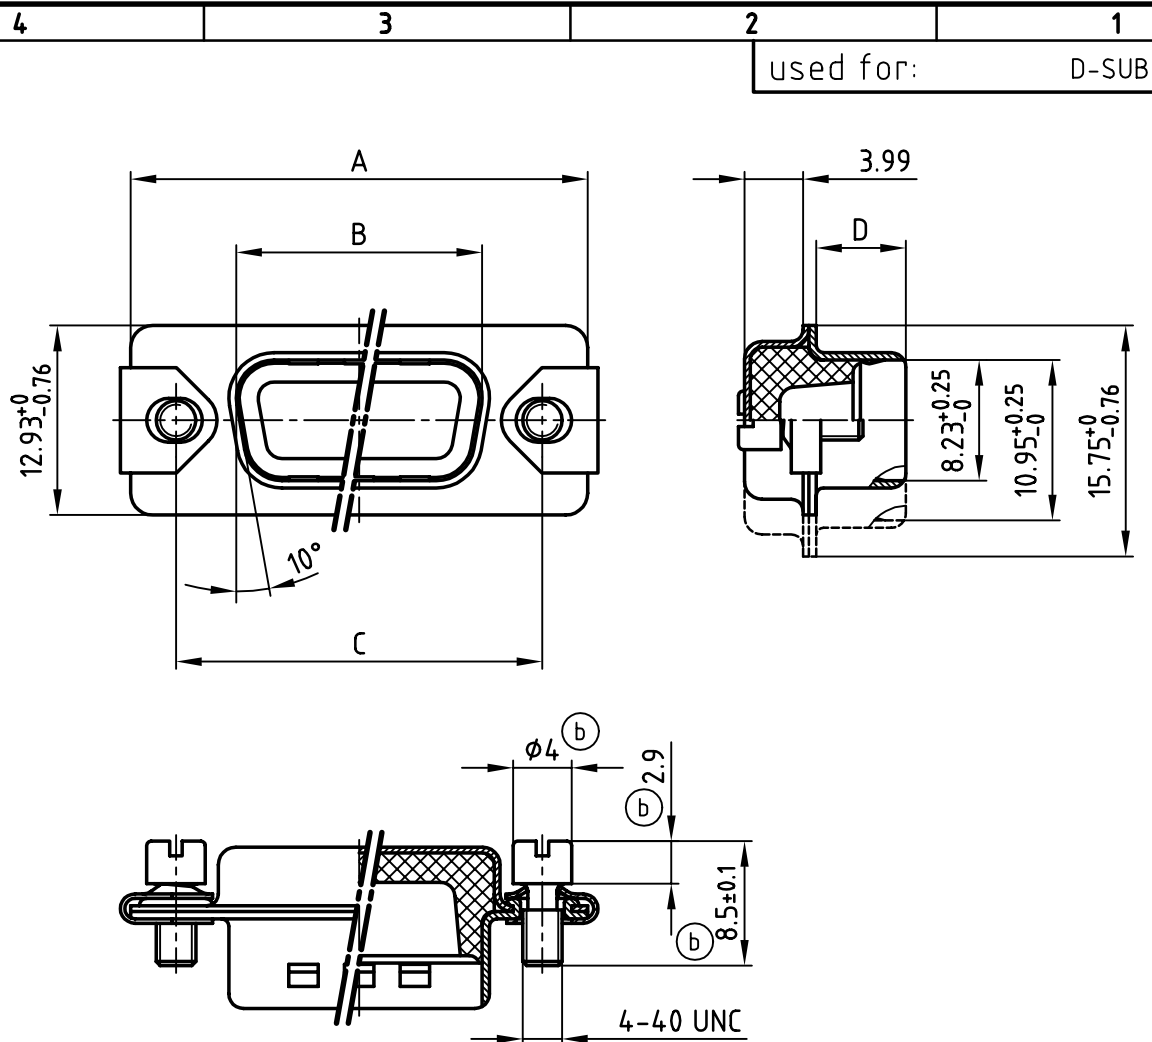

Part No.	Shellsize	A _{-0.76}	B _{+0.25}	C	D _{-0.3}
165X14719X	1	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12
165X14729X	2	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12
165X14739X	3	53.42	38.84	47.04 ^{+0.13}	5.99
165X14749X	4	69.70	55.30	63.50 ^{+0.13}	5.99
165X14759X	5	67.31	52.68	61.10 ^{+0.14} _{-0.11}	5.99

NOTES:

1. METAL SHELLS: COPPER ALLOY; min. 320µ" TIN
2. INSULATOR: TPE
3. CLAMPS: STAINLESS STEEL
4. SCREWS: STAINLESS STEEL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2001	date	name	
				drawn	10.09.	E. Mickenbecker	
				appd.	10.09.	A. Mickenbecker	
				norm	DIN 41652		
				d-old			
1 x c	Ä 1912	06.01.2004	Lehmen				
3 x b	Ä 1788	06.06.2003	Lehmen				
rev.	description	date	name				

CONEC®

scale:	2:1
material:	SEE NOTES
title:	HOOD 9-50pos. for socket connector water resistant, shielded for EMI/RFI
dwg no:	AutoCAD 2000
part no:	SEE TABLE

DIN-A
4
sh: 1/1