

4




3

2

1

used for:

D-SUB

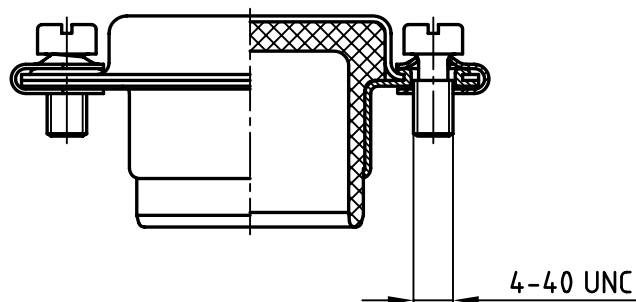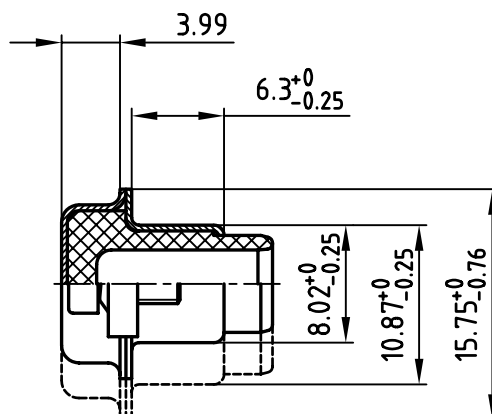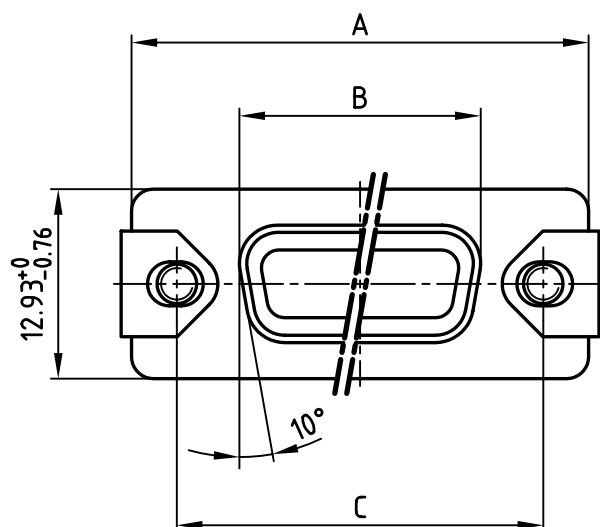

Part No:	Shellsize	A -0.76	B -0.25	C
165X14769X	1	31.19	16.46	25.00 $^{+0.12}_{-0.13}$
165X14779X	2	39.52	24.79	33.30 $^{+0.15}_{-0.1}$
165X14789X	3	53.42	38.50	47.04 ± 0.13
165X14799X	4	69.70	54.96	63.50 ± 0.13
165X14809X	5	67.31	52.55	61.10 $^{+0.14}_{-0.11}$

NOTES:

1. METAL SHELLS: STEEL; min. 320 μ " TIN
2. INSULATORS: TPE
3. CLAMPS: STEEL NICKEL PLATED
4. SCREWS: STEEL NICKEL PLATED

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
				2001	date	name
				drawn	10.09.	E. Mickenbecker
				appd.	10.09.	A. Mickenbecker
				norm	DIN 41652	
				d-old		
						
rev.	description	date	name			

scale:	2:1	
material:	SEE NOTES	
title:	HOOD 9-50pos. for plug connector water resistant, shielded for EMI/RFI	
dwg no:	AutoCAD 2000	DIN-A
	16K1A290A	4
part no:	SEE TABLE	
		sh: 1/1

4

3

2

1